

Application Server Report Pack

Software Version: 1.1

HP OpenView Performance Insight

User Guide

June 2007



Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notices

© Copyright 2005 - 2007 Hewlett-Packard Development Company, L.P.

Trademark Notices

Oracle® is a registered U.S. trademark of Oracle Corporation, Redwood City, California.

Windows® is a U.S. registered trademark of Microsoft Corporation.

UNIX® is a registered trademark of The Open Group.

Documentation Updates

This guide's title page contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.

To check for recent updates, or to verify that you are using the most recent edition of a document, go to:

http://ovweb.external.hp.com/lpe/doc_serv/

You will also receive updated or new editions if you subscribe to the appropriate product support service. Contact your HP sales representative for details.

The following table indicates changes made to this document since the last released edition.

Chapter	Changes
Chapter 1	Version number changes, added information about what's new in this version
Chapter 2	Added new upgrade chapter
Chapter 3	Version number changes
Chapter 4	New procedures to configure distributed system using LIR (location independent reporting) and copy policies

Support

You can visit the HP software support web site at:

<http://support.openview.hp.com/support.jsp>

HP Software online support provides an efficient way to access interactive technical support tools. As a valued support customer, you can benefit by using the support site to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Download software patches
- Manage support contracts
- Look up HP support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and sign in. Many also require a support contract.

To find more information about access levels and HP Passport, go to:

http://support.openview.hp.com/new_access_levels.jsp

Contents

1 Overview	7
OVPI and Application Server Reporting	7
Enhancements in Version 1.1	8
SPIs and Datapipes	8
Packages and Reports	9
Ways to Customize Reports	9
Group Filters	9
Editing Parameters	10
Sources for Additional Information	10
2 The Upgrade Install	11
Guidelines for a Smooth Upgrade	11
Prerequisites for the Application Server Report Pack	11
Upgrading Common Property Tables	12
Datapipes and Remote Pollers	12
Custom Table Views	13
Upgrading Application Server in a Distributed Environment	13
Upgrading to Version 1.1	13
Post-Upgrade Steps	16
Package Removal	16
3 The New Install	19
Guidelines for a Smooth Installation	19
OVO Prerequisites	19
OVPI Prerequisites	20
Upgrading Common Property Tables	20
Distributed Systems	20
Installing Application Server Report Pack 1.1	21
Accessing Deployed Reports	23
Seeing Performance Data in Reports	23
Package Removal	24
4 Setting Up a Distributed System	25
Verifying Correct Package Installation	25
Configuring the Central Server	25
Configuring Satellite Servers	28
5 Thresholds for OVO	29
Modifying Thresholds	29

Update Server Details	29
Integration with OVO	30
6 Generic Application Server Reports	31
7 WebLogic Application Server Reports	37
8 WebSphere Application Server Reports	45
A Version History	53
B Editing Tables and Graphs	55
View Options for Tables	55
View Options for Graphs	56
Style Options	57
Display Data Table	61
View in New Frame	61
Index	63

1 Overview

This chapter covers the following topics:

- [OVPI and Application Server Reporting](#)
- [Enhancements in Version 1.1](#)
- [SPIs and Datapipes](#)
- [Packages and Reports](#)
- [Ways to Customize Reports](#)
- [Sources for Additional Information](#)

OVPI and Application Server Reporting

HP Performance Insight is a performance management application that is well known for its ability to collect data from many sources, perform in-depth trend analysis, maintain performance baselines, and provide users with convenient, web-based reporting. People who are interested in OVPI are usually attracted to some or all of the following features:

- Distributed architecture
- Easy to scale (supports data collection from thousands of agents)
- CODA/OVPA agent support
- Multi-company security model
- Data warehousing
- Near Real Time reporting
- Forecasting
- Extensive aggregation (by day, week, month; by location, by customer)
- Thresholding and alerting
- Easy identification of bottlenecks
- Easy assessment of capacity trends
- Accurate and timely documentation for management
- Integration with NNM and OVO

The Application Server Report Pack installs on OVPI. This report pack is designed to monitor the performance of BEA WebLogic servers and IBM WebSphere servers. You can use the reports in this package to:

- Verify that a server is executing requests
- Monitor availability

- Compare availability to the transaction rate
- Measure EJB pool utilization
- Measure connection pool utilization
- Measure servlet request rate
- Measure servlet response time

Enhancements in Version 1.1

Version 1.1 includes new features, new upgrade packages, and a defect fix. In addition, there is a new version of the WebSphere datapipe. (For details about the enhancements that were made to previous releases, see [Appendix A, Version History](#).)

New Features in Version 1.1

- Supports **Management Console > LIR Configuration**
- Supports **Management Console > Copy Policy Manager**
- Rate data removed from the top table in NRT reports

New Upgrade Packages

- UPGRADE_ApplicationServer_to_11.ap
- UPGRADE_ApplicationServer_WebLogic_to_11.ap
- UPGRADE_ApplicationServer_WebSphere_to_11.ap

New Version of the WebSphere Datapipe

- AppServer WebSphere SPI Datapipe 1.1

Defect Fix

- QXCR1000378911

SPIs and Datapipes

In order to use this report pack, you must install one of the following Smart Plug-ins (SPIs) on each application server you want to monitor:

- OpenView Operations SPI for BEA WebLogic Server
- OpenView Operations SPI for WebSphere Application Server

When you install the Application Server Report Pack, you must install at least one of the following datapipes:

- AppServer WebLogic SPI Datapipe 1.1
- AppServer WebSphere SPI Datapipe 1.1

Both datapipes have the same collection interval, 45 minutes, and both datapipes collect data from EPC, the Embedded Performance Component of OVO.

Packages and Reports

The Application Server Report Pack includes a main package and two sub-packages. Reports in the main package are generic, while reports in the sub-packages are customized for the brand. The following table provides a list of the reports in each package.

Package	Reports
Main/Generic	<ul style="list-style-type: none">• Server Availability — Throughput• EJB Pool Utilization• JDBC Throughput — Utilization• Near Real Time Server Availability — Throughput• Servlet Request Rate — Response Time
WebLogic	<ul style="list-style-type: none">• EJB Cache Utilization• EJB Transactions• Execute Queue Throughput — Utilization• JMS Throughput — Utilization• Near Real Time Execute Queue Throughput — Utilization• Server Transaction Rollback
WebSphere	<ul style="list-style-type: none">• EJB Load-Stores Rate• EJB Method Calls Rate• EJB Top 20• JDBC Connection Pool Details• Servlet Sessions• Thread Pool Activity• Transaction Throughput

Ways to Customize Reports

You can change the contents of reports by applying group filters, by editing parameters, and by changing view options for tables and graphs. Although group filters are usually used by service providers to produce customer-specific reports, anyone can edit a constraint or modify the look of a table or graph. For details about table and graph view options, see [Appendix B, Editing Tables and Graphs](#).

Group Filters

If you want to share reports with your customers, you must configure OVPI to produce customer-specific reports. Here is an overview of the steps involved:

- Use Common Property Tables to import customer names and device locations.
- Create a group account for all the users affiliated with each customer.
- Create a group filter for each group account.

For more information about how to create filters for group accounts, refer to the *OVPI Administration Guide*.

Editing Parameters

When you edit a parameter, you apply a constraint that eliminates the data you are not interested in seeing. For example, if you edit the Customer parameter, data for all customers except the customer you typed in the Customer field drops from the report.

You can apply multiple constraints at once. Application Server supports these parameters:

- Customer
- Device
- Location
- Vendor
- Server Name

If you are viewing the report on the web, edit parameters by clicking the edit parameters icon at the bottom right-hand corner of the report. When the Edit Parameters window opens, enter the constraint in the field and click **Submit**.

If you are using Report Viewer, select **Edit > Parameter Values** from the menu bar. When the Modify Parameter Values window opens, click the **Current Value** field. Type a new value and click **OK**.

Sources for Additional Information

The demo package that comes with Application Server contains a sample of each report in the package. If you have access to the demo package and you want to know what fully-populated reports look like, install the demo package. Like real reports, demo reports are interactive. Unlike real reports, demo reports are static.

The following documents are related to this manual:

- *Application Server Report Pack Release Notes*
- *AppServer WebLogic SPI Datapipe Release Notes*
- *AppServer WebSphere SPI Datapipe Release Notes*
- *Common Property Tables User Guide*
- *Thresholds Module User Guide*

Manuals for OVPI, and manuals for the reporting solutions that run on OVPI, are posted to the following web site:

http://ovweb.external.hp.com/lpe/doc_serv/

User guides for the core product are listed under **Performance Insight**. User guides for OVPI report packs and datapipes are listed under **Performance Insight Report Packs**. Each manual indicates a date. If a manual is revised and reposted, the date will change. Since we post revised manuals on a regular basis, you should compare the date on your PDF to the date of the PDF on the web and download the web edition if it is newer.

2 The Upgrade Install

This chapter covers the following topics:

- [Guidelines for a Smooth Upgrade](#)
- [Upgrading to Version 1.1](#)
- [Package Removal](#)

If you are installing the Application Server Report Pack for the first time, this chapter does not apply to you. See [Chapter 3, The New Install](#).

Guidelines for a Smooth Upgrade

When you insert the report pack CD in the CD-ROM drive and launch the package extraction program, the install script extracts every package from the CD and copies the results to the Packages directory on your system. When the extract finishes, the install script prompts you to launch Performance Insight and start Package Manager. Before running Package Manager, review the following guidelines:

- [Prerequisites for the Application Server Report Pack](#)
- [Upgrading Common Property Tables](#)
- [Datapipes and Remote Pollers](#)
- [Custom Table Views](#)
- [Upgrading Application Server in a Distributed Environment](#)

Prerequisites for the Application Server Report Pack

Make sure the following software is already installed before upgrading to version 1.1:

- OVPI 5.2
- All service packs available for OVPI
- Application Server Report Pack 1.0
- Common Property Tables 3.6

Upgrading Common Property Tables

If you are running an older version of Common Property Tables, you must upgrade that package to version 3.6 or higher. If you are not running any version of Common Property Tables, Package Manager will install the latest version of Common Property Tables for you, automatically.

Do not install the upgrade for Common Property Tables *and* other packages at the same time. Install the upgrade package for Common Property Tables and *only* the upgrade package for Common Property Tables. For more information about installing and using Common Property Tables, refer to the *Common Property Tables User Guide*.

Datapipes and Remote Pollers

If you uninstall an existing datapipe, the following information is lost:

- Single polling policy for a remote poller
- Cloned polling policies for multiple remote pollers
- Customized polling groups

To prevent this information from being lost, you can use the following commands to export existing polling policy configurations and customized polling groups:

- `collection_manager`
- `group_manager`

Exporting Polling Policy Configurations

If your environment contains polling policies for remote pollers, use the `collection_manager` command to export existing policy configurations to a file.

UNIX: As user `trendadm`, run the following command:

```
cd $DPIPE_HOME  
./bin/collection_manager -export -file /tmp/savePollingPolicy.lst
```

Windows: As Administrator, launch a command window. Navigate to the OVPI install directory and execute the following command:

```
bin\collection_manager -export -file \temp\savePollingPolicy.lst
```

Exporting Polling Group Configurations

If your environment contains customized polling groups, use the `group_manager` command to export groups to individual `.xml` files.

UNIX: As user `trendadm`, execute the following command:

```
cd $DPIPE_HOME  
./bin/group_manager -export_all -outfile /tmp/savePollingGroups
```

Windows: As Administrator, launch a command window, then navigate to the OVPI install directory and execute the following command:

```
bin\group_manager -export_all -outfile \temp\savePollingGroups
```

Custom Table Views

If you are using table views you created yourself, the views you created may interfere with the report pack upgrade, causing the upgrade to fail. Whether or not your views interfere with the upgrade process depends on how you created them. If you used SQL to create them, the upgrade will succeed, however, your custom views will not be available once the upgrade is complete. If you used Datapipe Manager to create them, the upgrade is likely to fail. To prevent the upgrade from failing, delete custom table views before you upgrade the report pack, then recreate those views after the report pack is upgraded.

Upgrading Application Server in a Distributed Environment

Following is an overview of the installation procedure for a distributed environment:

- 1 Disable trendcopy on the central server.
- 2 For the central server:
 - Upgrade to Common Property Tables 3.6; deploy reports
 - Upgrade to Application Server 1.1 (including any sub-packages); deploy reports
- 3 For each satellite server:
 - Upgrade to Common Property Tables 3.6 or higher
 - Upgrade to Application Server 1.1 (including any sub-packages)
 - Remove AppServer WebSphere SPI Datapipe 1.0
 - Install AppServer WebSphere SPI Datapipe 1.1
- 4 Re-enable trendcopy on the central server.
- 5 Reconfigure your central and satellite servers.

When Application Server 1.0 was installed, the person who installed that version had to set up connections with satellite server databases, configure trendcopy commands, and switch off aggregations above the hourly level at each satellite server. If you just upgraded to OVPI 5.2, server configuration changes that were made when Application Server 1.0 was installed must be redone. You must reconfigure your central and satellite servers. For details, see [Chapter 4, Setting Up a Distributed System](#).

Upgrading to Version 1.1

Perform the following tasks to upgrade from any earlier version to version 3.1:

- Task 1: [Stop OVPI Timer and extract packages from the report pack CD](#)
- Task 2: [Upgrade to Common Property Tables 3.6](#)
- Task 3: [Install the upgrade packages](#)
- Task 4: [Remove AppServer WebSphere SPI Datapipe 1.0 \(if installed\)](#)
- Task 5: [Install AppServer WebSphere SPI Datapipe 1.1](#)
- Task 6: [Restart OVPI Timer](#)

Task 1: Stop OVPI Timer and extract packages from the report pack CD

- 1 Log in to the system. On UNIX systems, log in as root.
- 2 Stop OVPI Timer and wait for processes to terminate.
On Windows, do the following:
 - a Select **Control Panel > Administrative Tools > Services**.
 - b Select OVPI Timer from the list of services.
 - c From the Action menu, select **Stop**.On UNIX, as root, do one of the following:
HP-UX: **sh /sbin/init.d/ovpi_timer stop**
Sun: **sh /etc/init.d/ovpi_timer stop**
- 3 Insert the report pack CD in the CD-ROM drive. On Windows, a Main Menu opens automatically; on UNIX, mount the CD if the CD does not mount automatically, navigate to the top level directory on the CD, and run the **./setup** command.
- 4 Type **1** in the choice field and press **Enter**. The install script displays a percentage complete bar. When the copy is complete, the install script starts Package Manager. The Package Manager welcome window opens.

If you navigate to the Packages directory on your system, you will see the following folders under the Application Server folder:

- ApplicationServer.ap
- ApplicationServer_Threshold.ap
- ApplicationServer_WebLogic.ap
- ApplicationServer_WebSphere.ap
- ApplicationServer_Demo.ap
- UPGRADE_ApplicationServer_to_11.ap
- UPGRADE_ApplicationServer_WebLogic_to_11.ap
- UPGRADE_ApplicationServer_WebSphere_to_11.ap

Task 2: Upgrade to Common Property Tables 3.6

Follow these rules:

- Do not install any other package with the CPT upgrade package; install the CPT upgrade package and *only* the CPT upgrade package.
- When prompted to accept or disable the option to Deploy Reports, accept the default. If you do not deploy reports, you will not deploy the change forms that come with Common Property Tables.
- When the install finishes, click **Done** to return to the Management Console.

If you need more help with this task, refer to the *Common Property Tables User Guide*.

Task 3: Install the upgrade packages

- 1 From the Management Console, select **Tools > Package Manager**. The Package Manager welcome window opens.
- 2 Click **Next**. The Package Location window opens.

- 3 Click **Install**.
- 4 Click **Next**. The Report Deployment window opens. Accept the defaults for Deploy Reports, Application Server, and Port. Type your user name and password for the OVPI Application Server.
- 5 Click **Next**. The Package Selection window opens.
- 6 Click the check box next to the following packages (depending on which packages you are upgrading):
 - UPGRADE_ApplicationServer_to_11.ap*
 - UPGRADE_ApplicationServer_WebLogic_to_11.ap*
 - UPGRADE_ApplicationServer_WebSphere_to_11.ap*
- 7 Click **Next**. The Type Discovery window opens. Disable the default.
- 8 Click **Next**. The Selection Summary window opens
- 9 Click **Install**. The Installation Progress window opens and the install begins. When the install finishes, a package install complete message appears.
- 10 Click **Done**.



Do not be surprised if the UPGRADE package you just installed has disappeared from view. Package Manager will display what you just installed as *Application Server Report Pack 1.1*. This is not an error.

Task 4: Remove AppServer WebSphere SPI Datapipe 1.0 (if installed)

The AppServer WebSphere SPI Datapipe cannot be upgraded. You must remove AppServer WebSphere SPI Datapipe 1.0, then install AppServer WebSphere SPI Datapipe 1.1. Start Package Manager and follow the on-screen instructions for package removal. When Package Manager tells you that removal is complete, click **Done** to return to the Management Console.

Task 5: Install AppServer WebSphere SPI Datapipe 1.1

- 1 Start Package Manager. The Package Manager welcome window opens.
- 2 Click **Next**. The Package Location window opens.
- 3 Click **Install**.
- 4 Click **Next**. The Report Deployment window opens; disable the default for Deploy Reports.
- 5 Click **Next**. The Package Selection window opens.
- 6 Click the check box next to the following package:
 - AppServer WebSphere SPI Datapipe 1.1*
- 7 Click **Next**. The Type Discovery window opens.
- 8 Click **Next**. The Selection Summary window opens.
- 9 Click **Install**. The Installation Progress window opens and the install begins. When the install finishes, the package installation complete message appears.
- 10 Click **Done**.

Task 6: Restart OVPI Timer

On Windows, do the following:

- a Select **Control Panel > Administrative Tools > Services**.
- b Select OVPI Timer from the list of services.
- c From the Action menu, select **Start**.

On UNIX, as root, do one of the following:

HP-UX: **sh /sbin/init.d/ovpi_timer start**

Sun: **sh /etc/init.d/ovpi_timer start**

Post-Upgrade Steps

Reconfigure any polling policies and customized group definitions that need to be restored. Do not re-import the configurations you exported. Since the old datapipe may be incompatible with the new datapipe you just installed, re-importing the configurations you exported could lead to data corruption. In addition, if you removed any custom table views before upgrading the report pack, you can recreate those custom table views now.

Package Removal

Follow these steps to uninstall the Application Server Report Pack. Removing this package automatically removes the associated datapipe and sub-packages. You can also use this procedure to remove a single sub-package only.

- 1 Log in to the system. On UNIX systems, log in as root.
- 2 Stop OVPI Timer and wait for processes to terminate.

Windows: Select **Settings > Control Panel > Administrative Tools > Services**.

UNIX: As root, do one of the following:

HP-UX: **sh /sbin/init.d/ovpi_timer stop**

Sun: **sh /etc/init.d/ovpi_timer stop**

- 3 Start Package Manager. The Package Manager welcome window opens.
- 4 Click **Next**. The Package Location window opens.
- 5 Click **Uninstall**.
- 6 Click **Next**. The Report Undeployment window opens.
- 7 If Application Server reports were deployed from this server, accept the defaults for Undeploy Reports, Application Server Name, and Port. If Application Server reports were **not** deployed from this server, clear the check box and skip to step 9.
- 8 Type the username and password for the OVPI Application Server.
- 9 Click **Next**. The Package Selection window opens.

- 10 Click the check boxes next to the following packages, if they appear in the list:
 - a *Application Server 1.1*
 - b *ApplicationServer_WebLogic 1.1*
 - c *ApplicationServer_WebSphere 1.1*
 - d *Application Server Thresholds 1.1*
 - e *Application Server Demo 1.1*
- 11 Click **Next**. The Selection Summary window opens.
- 12 Click **Uninstall**. The Progress window opens and the removal process begins. When the uninstall process is complete, a package removal complete message appears.
- 13 Click **Done** to return to the Management Console.
- 14 Restart OVPI Timer.

Windows: Select Settings > Control Panel > Administrative Tools > Services.

UNIX: As root, do one of the following:

HP-UX: `sh /sbin/init.d/ovpi_timer start`

Sun: `sh /etc/init.d/ovpi_timer start`

- 15 Restart OVPI Timer.

On Windows, do the following:

- a Select **Control Panel > Administrative Tools > Services**.
- b Select OVPI Timer from the list of services.
- c From the Action menu, select **Start**.

On UNIX, as root, do one of the following:

HP-UX: `sh /sbin/init.d/ovpi_timer start`

Sun: `sh /etc/init.d/ovpi_timer start`

3 The New Install

This chapter covers the following topics:

- [Guidelines for a Smooth Installation](#)
- [Installing Application Server Report Pack 1.1](#)
- [Accessing Deployed Reports](#)
- [Seeing Performance Data in Reports](#)
- [Package Removal](#)

If you have already installed an earlier version of the Application Server Report Pack, go to [Chapter 2, The Upgrade Install](#), for information on how to upgrade your software.

Guidelines for a Smooth Installation

An OVPI reporting solution has two ingredients, a report pack and a datapipe. Some reporting solutions include multiple datapipes. When you install the datapipe, you configure OVPI to collect performance data at a specific interval. When you install the report pack, you configure OVPI to summarize and aggregate the data collected by the datapipe.

The report pack CD contains report packs, datapipes, shared packages, and documentation. If you, or someone else, extracted packages from the report pack CD, every package, including the Application Server Report Pack, was copied to the Packages directory on your system and is ready to install. If you have not extracted packages from the report pack CD, follow the package extract procedure later in this chapter.

OVO Prerequisites

The OVO prerequisites are:

- [OV Operations for Windows 7.21](#)
- [OV Operations for UNIX 8.1](#)

The application servers monitored by OVO must have one of the following SPIs:

- [OpenView Smart Plug-in for BEA WebLogic Server \(WebLogic SPI\)](#)
 - for Windows, version B.02.09
 - for UNIX, version A.03.50
- [OpenView Smart Plug-in for IBM WebSphere Server \(WebSphere SPI\)](#)
 - for Windows, version B.02.09
 - for UNIX, version A.03.50

OVPI Prerequisites

- OVPI 5.2
- Any and all service packs available for OVPI 5.2
- Common Property Tables 3.6 or higher
- OVPA Collection Datapipe 1.0

Upgrading Common Property Tables

If you are running an older version of Common Property Tables, you must upgrade that package to version 3.6 or higher. If you are not running any version of Common Property Tables, Package Manager will install the latest version of Common Property Tables for you, automatically.

Do not install an upgrade for Common Property Tables *and* other packages at the same time. Install the upgrade package for Common Property Tables and *only* the upgrade package for Common Property Tables. For more information about installing and using Common Property Tables, refer to the *Common Property Tables User Guide*.

Distributed Systems

If your system is distributed, the installation procedure is more complicated. Following is a summary of the installation procedure for a distributed system:

- 1 Verify that every server is running OVPI 5.2 and all available service packs for the installed version of OVPI.
- 2 On the central server:
 - a Disable trendcopy.
 - b Upgrade Common Property Tables to version 3.6.
 - c Install Application Server Report Pack 1.1; deploy reports.
 - d Install the Thresholds sub-package.
- 3 For each satellite server:
 - a Upgrade Common Property Tables to version 3.6.
 - b Install these packages:
 - Application Server Report Pack 1.1
 - One or both of the following sub-packages, depending on the server type(s) you want to monitor.
 - Application Server WebLogic sub-package 1.1
 - Application Server WebSphere sub-package 1.1
 - One or both of the following datapipes, depending on the server type(s) you want to monitor.
 - AppServer WebLogicSPI Datapipe 1.1
 - AppServer WebSphereSPI Datapipe 1.1

- 4 Re-enable trendcopy on the central server.

When installation is complete, you must set up connections with satellite server databases, configure trendcopy pull commands, and switch off aggregations at each satellite server. These steps are covered in [Chapter 4, Setting Up a Distributed System](#).

Installing Application Server Report Pack 1.1

This section covers the following tasks:

- Task 1: Extract packages from the report pack CD
- Task 2: If necessary, upgrade Common Property Tables
- Task 3: Install these packages:
 - Application Server Report Pack
 - One or both of the following sub-packages:
 - Application Server WebLogic sub-package
 - Application Server WebSphere sub-package
 - One or both of the following datapipes:
 - AppServer WebLogicSPI Datapipe
 - AppServer WebSphereSPI Datapipe

Task 1: Extract packages from the report pack CD

- 1 Log in to the system. On UNIX systems, log in as root.
- 2 Stop OVPI Timer and wait for processes to terminate.

Windows: Select **Settings > Control Panel > Administrative Tools > Services**.

UNIX: As root, type one of the following:

```
HP-UX: sh /sbin/init.d/ovpi_timer stop
```

```
Sun: sh /etc/init.d/ovpi_timer stop
```

- 3 Insert the report pack CD in the CD-ROM drive. On Windows, a Main Menu displays automatically; on UNIX, mount the CD, navigate to the top-level directory for the CD drive, and type the setup command.
- 4 Select OVPI report packs by typing **1** in the choice field and pressing Enter. The install script displays a percentage complete bar. When extraction finishes, the install script starts Package Manager. The Package Manager welcome window opens.

If you navigate to the Packages directory on your system, you will see the following folders under the Application Server folder:

- ApplicationServer.ap
- ApplicationServer_Threshold.ap
- ApplicationServer_WebLogic.ap
- ApplicationServer_WebSphere.ap
- ApplicationServer_Demo.ap

- UPGRADE_ApplicationServer_to_11.ap
- UPGRADE_ApplicationServer_WebLogic_to_11.ap
- UPGRADE_ApplicationServer_WebSphere_to_11.ap

Installing the demo package is optional. You may install the demo package and only the demo package, or you can install the demo package along with everything else (except the upgrade packages).

Task 2: [Upgrade to Common Property Tables 3.6](#)

When performing this upgrade, observe these rules:

- Do not install anything else at the same time; install the upgrade package and *only* the upgrade package.
- When prompted to accept or disable the option to Deploy Reports, accept the default. If you do not deploy reports, you will not have access to the forms that come with Common Property Tables.
- When the install finishes, click **Done** to return to the Management Console.

If you need help with the upgrade, refer to the *Common Property Tables User Guide*.

Task 3: [Install the report pack and the datapipe](#)

- 1 From the Management Console select **Tools > Package Manager**. The Package Manager welcome window opens.
- 2 Click **Next**. The Package Location window opens.
- 3 Click **Install**. Approve the default installation directory or use the browse feature to select a different directory if necessary.
- 4 Click **Next**. The Report Deployment window opens. Accept the default for Deploy Reports; accept the default for application server name and port. Type your username and password for the OVPI Application Server.
- 5 Click **Next**. The Package Selection window opens.
- 6 Click the check box next to the following packages:
 - a *ApplicationServer 1.1*
 - b One or both of the following:
 - *ApplicationServer_WebLogic 1.1*
 - *ApplicationServer_WebSphere 1.1*
 - c One or both of the following:
 - *AppServerWebLogicSPI_Datapipe 1.1*
 - *AppServerWebSphereSPI_Datapipe 1.1*
 - d *ApplicationServer_Thresholds 1.1* (optional)
 - e *ApplicationServer_Demo* (optional)
- 7 Click **Next**. The Type Discovery window opens.

- 8 Disable the default to run Type Discovery immediately after package installation.
 - ▶ The Application Server package does not require Type Discovery. However, if you are installing other report packs in addition to Application Server, you may need to run Type Discovery for those packages.
- 9 Click **Next**. The Selection Summary window opens.
- 10 Click **Install**. The Installation Progress window opens and the install process begins. When the install finishes, a package install complete message appears.
- 11 Click **Done** to return to the Management Console.
- 12 Restart OVPI Timer.

Windows: Select **Settings > Control Panel > Administrative Tools > Services**.

UNIX: As root, type one of the following:

HP-UX: `sh /sbin/init.d/ovpi_timer start`

Sun: `sh /etc/init.d/ovpi_timer start`

Accessing Deployed Reports

When you installed the Application Server package, you enabled the Deploy Reports option. As a result, the reports in this package (as well as any forms that come with the package) were deployed to the OVPI Application Server. Once reports reside on the OVPI Application Server, you have two ways to view them:

- OVPI client applications
- Web browser

If the client applications are installed on your system, you have access to Report Viewer, Report Builder, and the Management Console. If the client applications are not installed on your system, using a web browser is the only way you can view reports.

For more information about the clients, refer to the *OVPI Installation Guide*. For details about the Management Console, including how to use the Object/Property Management view to launch reports specific to a selected object, refer to the *OVPI Administration Guide*.

Seeing Performance Data in Reports

Some reports populate with data sooner than others. The first report to populate with data are the Near Real Time (NRT) reports. You will begin to see data in this report immediately after the first data collection completes. Any report that begins with an analysis of yesterday's performance will need at least one full day's worth of data before results are viewable.

All the reports other than the NRT reports have graphs that display data on an hourly, daily, and monthly basis. If the data you collected includes data for any part of the previous calendar month, the monthly graphs will be populated. If the data you collected has no data for the previous month, the graphs will remain empty until you begin collecting data on the first day of the next month.

Package Removal

Follow these steps to uninstall the Application Server Report Pack. Removing this package automatically removes the associated datapipe and sub-packages. You can also use this procedure to remove a single sub-package only.

- 1 Log in to the system. On UNIX systems, log in as root.
- 2 Stop OVPI Timer and wait for processes to terminate.
Windows: Select **Settings > Control Panel > Administrative Tools > Services**.
UNIX: As root, do one of the following:
 HP-UX: `sh /sbin/init.d/ovpi_timer stop`
 Sun: `sh /etc/init.d/ovpi_timer stop`
- 3 Start Package Manager. The Package Manager welcome window opens.
- 4 Click **Next**. The Package Location window opens.
- 5 Click **Uninstall**.
- 6 Click **Next**. The Report Undeployment window opens.
- 7 If Application Server reports were deployed from this server, accept the defaults for Undeploy Reports, Application Server Name, and Port. If Application Server reports were **not** deployed from this server, clear the check box and skip to step 9.
- 8 Type the username and password for the OVPI Application Server.
- 9 Click **Next**. The Package Selection window opens.
- 10 Click the check boxes next to the following packages, if they appear in the list:
 - a *Application Server 1.1*
 - b *ApplicationServer_WebLogic 1.1*
 - c *ApplicationServer_WebSphere 1.1*
 - d *Application Server Thresholds 1.1*
 - e *Application Server Demo 1.1*
- 11 Click **Next**. The Selection Summary window opens.
- 12 Click **Uninstall**. The Progress window opens and the removal process begins. When the uninstall process is complete, a package removal complete message appears.
- 13 Click **Done** to return to the Management Console.
- 14 Restart OVPI Timer.

Windows: Select Settings > Control Panel > Administrative Tools > Services.

UNIX: As root, do one of the following:

HP-UX: `sh /sbin/init.d/ovpi_timer start`

Sun: `sh /etc/init.d/ovpi_timer start`

4 Setting Up a Distributed System

If you intend to run the Application Server Report Pack in a distributed system, you configure all the servers in the system. Before doing that, make sure that you have the right packages installed on each server. This chapter covers the following topics:

- [Verifying Correct Package Installation](#)
- [Configuring the Central Server](#)
- [Configuring Satellite Servers](#)

Verifying Correct Package Installation

Verify that you have the right packages installed on each server.

[Packages on the Central Server](#)

- Application Server Report Pack, with reports deployed
- Common Property Tables, with forms deployed
- ApplicationServer_WebLogic sub-package, with reports deployed
- ApplicationServer_WebSphere sub-package, with reports deployed

[Packages on Each Satellite Server](#)

- Application Server Report Pack
- Common Property Tables
- ApplicationServer_WebLogic sub-package and AppServerWebLogicSPI_Datapipe, *or*
- ApplicationServer_WebSphere sub-package and AppServerWebSphereSPI_Datapipe

Typically, the central server does not poll. If you want the central server in your system to poll, install a datapipe on the central server. If you want to view reports on satellite servers (local reporting), accept the Deploy Reports option when you install report packs at each satellite server. If central server reporting is the only reporting you want, you do not need to deploy reports and forms when you install report packs at satellite servers.

Configuring the Central Server

To configure the central server, perform the following tasks:

- Task 1: Register the satellite server by setting the database role
- Task 2: Enable LIR (location independent reporting)

- Task 3: Add LIR mappings
- Task 4: Verify the automatically generated copy policies

For more information about LIR and copy policies, refer to the *HP OpenView Performance Insight Administration Guide*.

Task 1: Register the satellite server by setting the database role

- 1 Start the Management Console (log on with Administrator privileges).
- 2 Click the **Systems** icon in the navigation pane.
- 3 Navigate to the OVPI Databases folder and select the database system.
- 4 Click **Database Properties**.
- 5 From the Database Role list, select the Satellite Server role.
- 6 Enter any information necessary to configure the Satellite Server role.



To add a new database reference, you can use the Add Database Reference Wizard in the System and Network Administration application.

Task 2: Enable LIR

- 1 Start the Management Console (log on with Administrator privileges).
- 2 Click the **Systems** icon in the navigation pane.
- 3 Navigate to the OVPI Databases folder and select the central server.
- 4 Click **LIR Configuration**.
- 5 Select the **LIR enabled** check box.

Task 3: Add LIR mappings

Configure LIR mappings for the following categories (for the application server and sub-packages you have installed): ApplicationServer, AppServerWebLogic_Reporting, and ApplicationServer_WebSphere.

- 1 Start the Management Console (log on with Administrator privileges).
- 2 Click the **Systems** icon in the navigation pane.
- 3 Navigate to the OVPI Databases folder and select the central server.
- 4 Click **LIR Configuration**.
- 5 Click **Add Mapping**.
- 6 From the Select Satellite Server list, select a satellite server to which to add a mapping.
- 7 Select the **Category** data table option.
- 8 Select **ApplicationServer** from the drop down list.
- 9 Select the **rate** data type.
- 10 Click **Add to List**.
- 11 To add additional LIR mappings for the WebLogic and/or WebSphere sub-packages, click **Add to list** and repeat [step 6](#) through [step 10](#).
- 12 Click **OK**.
- 13 Click **Apply**.

A copy policy is automatically generated for the hourly data and for each LIR mapping that you add. The data type selected when adding an LIR mapping (in step 9 above) determines the type of data copied (defined in the generated copy policy). The type of data copied (defined in the generated copy policy) is one greater than the data type selected in the LIR mapping. For example, if you select an hourly data type, a daily data copy policy is generated.

Task 4: Verify the automatically generated copy policies

Verify that a copy policy has been generated for the following tables and that the copy type is set correctly (to Property and Data):

- 1 Start the Management Console (log on with Administrator privileges).
- 2 Click the **Copy Policy** icon in the navigation pane to start the Copy Policy Manager.
- 3 Find the following tables (for the application server and sub-packages you have installed) and verify the copy type is set to Property and Data for each table:

Application Server	WebLogic Sub-package	WebSphere Sub-package
SHAPPSRVR_SERVER	SHWLS_SERVER	SHWBS_SERVER
SHAPPSRVR_EJB	SHWLS_EJB	SHWBS_EJB
SHAPPSRVR_SERVLET	SHWLS_JMS	SHWBS_JDBC
SHAPPSRVR_JDBC	SHWLS_QUEUE	SHWBS_THREAD
SHAPPSRVR_JDBC_SERVER		SHWBS_EJB_SERVER
		SHWBS_JDBC_SERVER
		SHWBS_THREAD_SERVER

If a copy policy has not been generated for a table, do the following:

- 1 Click the **New Copy Policy** icon or select **File > New Copy Policy** from the Copy Policy Manager. The Copy Policy Wizard displays.
- 2 Click **Next**. The Satellite Server and Copy Policy Selection Page displays.
- 3 Select a satellite server from the pull down list. This is the satellite server from which data is copied to the central server.
- 4 Select **Single Table** and select the table from the pull down list.
- 5 Click **Next**. The Copy Type Selection Page displays.
- 6 Select **Property and Data**.
- 7 Click **Next**. The Summary page displays.
- 8 Verify the information in the summary window. If the information is not correct, you can modify it by clicking **Back**.
- 9 Click **Finish**.
- 10 Repeat [step 1](#) - [step 9](#) for all missing tables.

If only the copy type is not set to Property and Data, do the following:

- 1 Double-click the copy policy.
- 2 Select the **Property and Data** copy type.
- 3 Click **OK**.

Configuring Satellite Servers

You want the satellite server to maintain NRT data, but you do not want it to run aggregations at the hourly level or above. Those aggregations are handled by the central server. To disable the higher-level aggregations on the satellite server, comment out the aggregation commands in the `trendtimer.sched` file. You also need to enable copy commands that are disabled by default. These copy commands appear in hourly process files in the `Scripts` directory.

Follow these steps to configure a satellite server:

- 1 Disable aggregations at the hourly level and above.
 - a Open the `{DPIPE_HOME}/lib/trendtimer.sched` file (where `{DPIPE_HOME}` is the directory in which OVPI is installed)
 - b Find and comment out the following lines:

```
24:00+3:00 - - {DPIPE_HOME}/bin/trend_proc -f
{DPIPE_HOME}/scripts/AppServer_Reporting_DMF.pro

24:00+3:00 - - {DPIPE_HOME}/bin/trend_proc -f
{DPIPE_HOME}/scripts/WLS_Reporting_DMF.pro

24:00+3:00 - - {DPIPE_HOME}/bin/trend_proc -f
{DPIPE_HOME}/scripts/WBS_Reporting_DMF.pro
```
- 2 Edit copy commands in hourly process files for the main package and each sub-package that you installed.
 - a Modify the `{DPIPE_HOME}/scripts/AppSrvr_Reporting_Hourly.pro` file (where `{DPIPE_HOME}` is the directory in which OVPI is installed):
 - Uncomment the `DB_1` block, including the begin and end lines.
 - b If you installed the `WebLogic` sub-package, modify the `{DPIPE_HOME}/scripts/WLS_Reporting_Hourly.pro` file:
 - Uncomment the `DB_1` block, including the begin and end lines.
 - c If you installed the `WebSphere` sub-package, modify the `{DPIPE_HOME}/scripts/WBS_Reporting_Hourly.pro` file:
 - Uncomment the `WBS_1` block, including the begin and end lines.

5 Thresholds for OVO

This chapter covers the following topics:

- [Modifying Thresholds](#)
- [Update Server Details](#)
- [Integration with OVO](#)

Modifying Thresholds

If you install the optional thresholds sub-package (`ApplicationServer_Thresholds`), the Thresholds Module will monitor your application servers for threshold conditions and send threshold traps to your OVO management station as needed.


This is the default threshold:

Server availability = 50%

Update Server Details

You can use the Update Server Details form ([Figure 1](#) on page 30) to modify the default threshold and to assign Customer/Location properties.

Figure 1 Update Server Details form

Application Server Report Pack 
invent

Update Server Details

This form allows Application Server information to be updated. Click the Apply button to save any changes. Click the Cancel button to cancel any changes. Click the OK button to save changes and close the form.

System	Server Name	Availability Threshold	Customer Name	Location Name
ovpint7	server1	50.00	Customer Unassigned	Location Unassigned

Availability Threshold

Customer Name

Location Name

Integration with OVO

You can improve your fault isolation and problem diagnosis abilities by integrating the Application Server Report Pack with HP OpenView Operations (OVO). To do that, install the thresholds sub-package that comes with the report pack. The thresholds sub-package supplies default thresholds to the Thresholds Module. The Thresholds Module uses the defaults to monitor the OVPI database for threshold conditions. When the Thresholds Module detects a threshold condition, it takes one of several possible actions. The default action is to send breach and clear traps to Network Node Manager (NNM).

Although NNM is the default destination for traps, you can easily configure the Thresholds Module to send traps to OVO. From the Management Console, open the SNMP Trap Action Definition form, fill in the necessary information, and save your changes. In addition to using the form to configure a new destination for traps, someone (probably the OVO administrator) will need to prepare a trap template definition for OVO. The *Thresholds Module User Guide* contains the information you need to prepare the template.

6 Generic Application Server Reports

The generic application server reports provide information that is not specific to the type of server that is being monitored. Each report is summarized below.

Server Availability — Throughput

The server availability chart plots the availability status of the application server on an hourly, daily, and monthly basis. The transaction throughput chart displays the number of transactions processed by the application server per second.

EJB Pool Utilization

This report shows the percentage of EJB pool utilization. When the maximum pool size is reached, the server passivates (transfers from memory to secondary storage) some EJBs (Enterprise Java Beans) that have not been recently used by a client. This could result in performance degradation.



When using the SPI for BEA WebLogic Server, this report is only available if the SPI for BEA WebLogic Server is running on Windows. This report is not available for the SPI for BEA WebLogic Server running on UNIX.

JDBC Throughput — Utilization

This report shows the percentage of available JDBC (Java Database Connectivity) connections in a connection pool (utilization) and the number of clients serviced by this connection pool per second (throughput). Without available connections, the system cannot service requests that require access to a database. If this report indicates that there are not enough available JDBC connections and if the database can support additional connections, the administrator should add more database connections.

Near Real Time Server Availability — Throughput

This report portrays the server status for the last six hours.

Servlet Request Rate — Response Time

The servlet request rate measures the number of requests for a servlet per second. System administrators can analyze this value over time to help with capacity planning. The servlet response time chart shows the average execution time for an individual servlet. Analysis over time will give administrators clear indications of how each servlet is performing under different loads.

Application Server Report Pack

Server Availability - Throughput



This report contains a histogram showing the percentages of uptime on an hourly basis. The availability for the server highlighted in the table is shown in the graph. The table shows the daily average availability. A lower than expected number of measurements may indicate unrecorded system downtime, but it may also reveal issues with the availability monitoring service, which may or may not affect actual availability. The Server transaction throughput report shows the average number of transactions processed per second for each server.



Server Availability - Throughput

Tue, Apr 12, 2005

System Name	Server Name	Avg. Availability	Avg. Transaction Throughput
APPSRVR_01	Server1	45.03	15.65
APPSRVR_02	Server2	65.21	16.51
WEBSPHERE_01	WebSphereServer1	52.26	697.24
WEBSPHERE_02	WebSphereServer2	52.39	740.93

Application Server Details for APPSRVR_01

Vendor	Location Name	Customer Name	Availability Threshold
WebLogic	Reston-AppSrvr	HP-AppSrvr	50.00

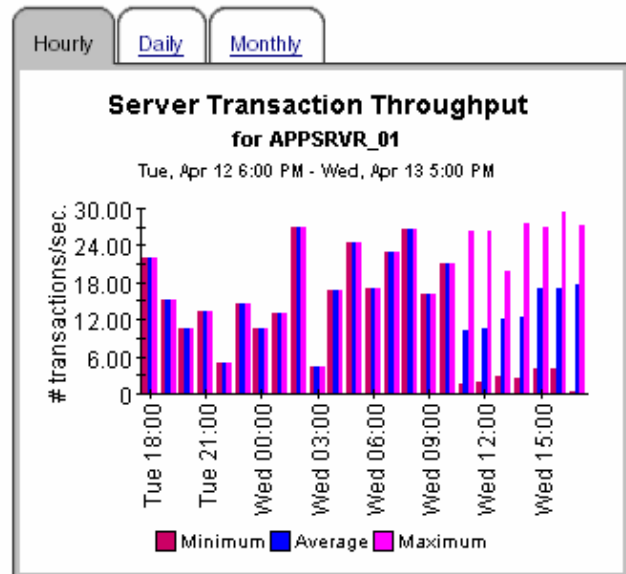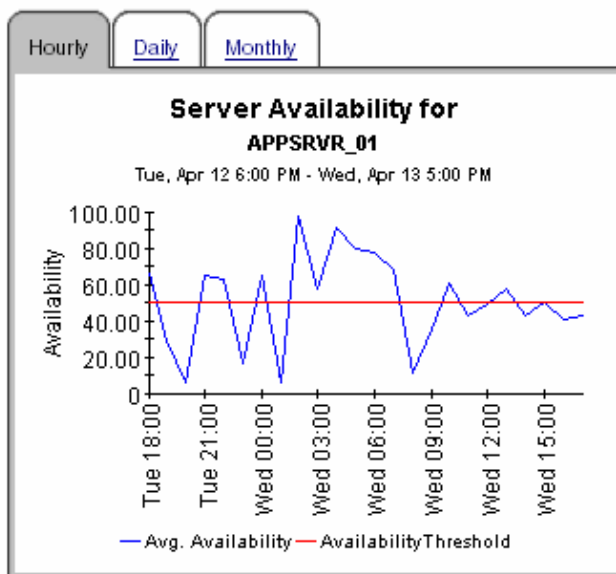

Application Server Report Pack

EJB Pool Utilization



This report shows the utilization of an EJB pool as a percent of the number of EJB instances configured for the pool on the selected server. The EJBs are sorted based on the highest average pool utilization for yesterday.

EJB Pool Utilization

Tue, Apr 12, 2005

System Name	Server Name	EJB Name
WEBSPHERE_02	WebSphereServer2	beanModule.PlantsByWebSphere#PlantsByWebSphereEJB.jar,ejb.stateless.Catalog
APPSRVR_01	Server1	Server1_Server1EAR_SessionEJB_RecordSessionEJB
WEBSPHERE_02	WebSphereServer2	beanModule.PlantsByWebSphere#PlantsByWebSphereEJB.jar,ejb.stateless.Mailer
WEBSPHERE_01	WebSphereServer1	beanModule.PlantsByWebSphere#PlantsByWebSphereEJB.jar,ejb.stateless.Mailer
WEBSPHERE_01	WebSphereServer1	beanModule.PlantsByWebSphere#PlantsByWebSphereEJB.jar,ejb.stateless.BackOrderStock
WEBSPHERE_01	WebSphereServer1	beanModule.PlantsByWebSphere#PlantsByWebSphereEJB.jar,ejb.stateless.Catalog

Application Server Details for

WEBSPHERE_02

Vendor

WebSphere

Location Name

Reston-WebSphere

Customer Name

NetRadix-WebSphere

Hourly


Daily

Monthly

Pool Utilization for

beanModule.PlantsByWebSphere#PlantsByWebSphereEJB.jar,ejb.stateless.Catalog

Tue, Apr 12 6:00 PM - Wed, Apr 13 5:00 PM

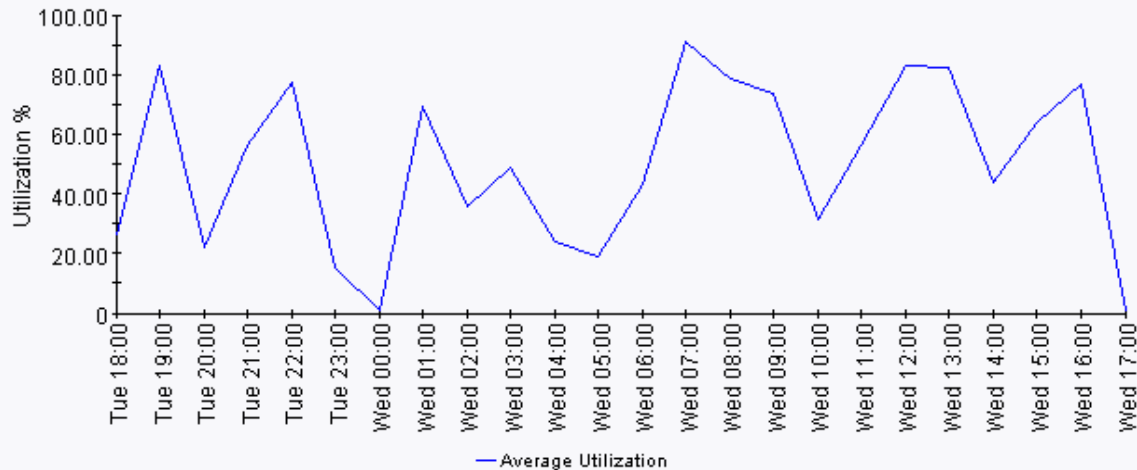

Application Server Report Pack

JDBC Throughput - Utilization



This report compares the throughput vs. the utilization of the DB connection pools on the selected server. Throughput is the number of connections allocated by a DB connection pool per second, and is shown in blue according to the scale on the left. The utilization of a connection pool is the number of connections being used as a percent of the maximum capacity configured for the pool and is shown in red according to the scale on the right.

Server JDBC Throughput - Utilization

Tue, Apr 12, 2005

System Name	Server Name	Avg. JDBC Throughput	Avg JDBC Utilization
APPSRVR_01	Server1	13.49	48.59
APPSRVR_02	Server2	16.39	52.61

Application Server Details for

APPSRVR_01

Vendor
WebLogic

Location Name
Reston-AppSrvr


Customer Name
HP-AppSrvr

JDBC Pool Throughput - Utilization

APPSRVR_01_Server1

Tue, Apr 12, 2005

JDBC Pool	Avg. Throughput	Avg. Utilization
Server1Pool-PointBase	14.70	40.94
Server1XAPool-PointBase	12.28	56.24

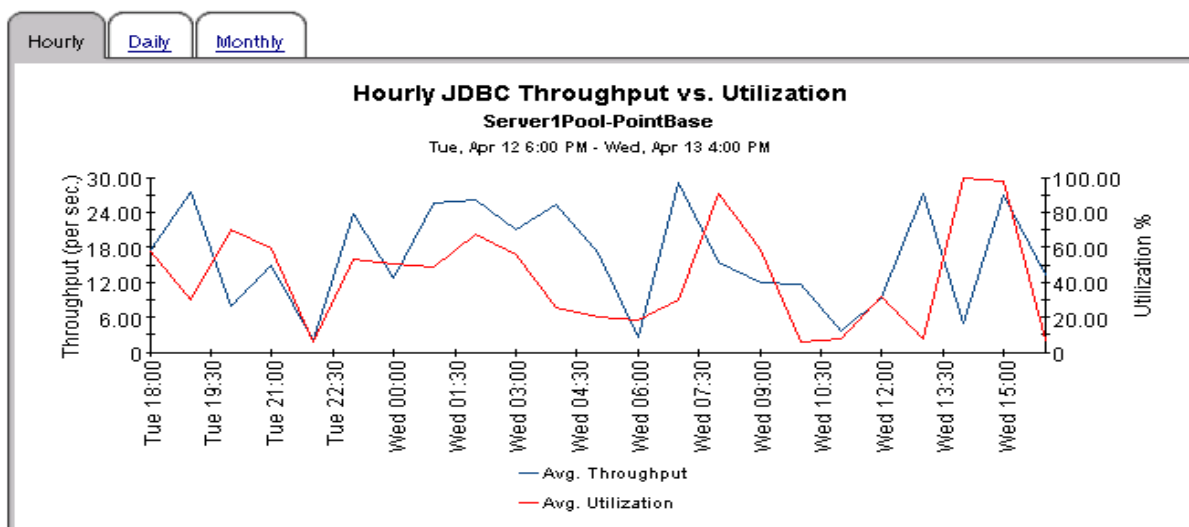

Application Server Report Pack

Near Real Time Server Availability - Throughput



The near real time server availability report contains a graph showing the percentages of application server uptime. The top table shows the near real time availability and transaction throughput. A lower than expected number of measurements may indicate unrecorded system downtime, but it may also reveal issues with the availability monitoring service, which may or may not affect actual availability. The Server transaction throughput graph shows the average number of transactions processed per second for each server.

NRT Server Availability - Throughput

Wed, Apr 13 12:45 PM

Averages over the last six hours

Target Name	Server Name	Server Availability	Transaction throughput
APPSRVR_01	Server1	47.08	15.14
APPSRVR_02	Server2	47.00	14.00
WEBSPHERE_01	WebSphereServer1	46.12	743.30
WEBSPHERE_02	WebSphereServer2	76.94	721.75


Application Server Details for

APPSRVR_01

Vendor	Location Name	Customer Name	Availability Threshold
WebLogic	Reston-AppSrvr	HP-AppSrvr	50.00


NRT Server Availability for APPSRVR_01

Wed, Apr 13 12:45 PM - Wed, Apr 13 2:50 PM

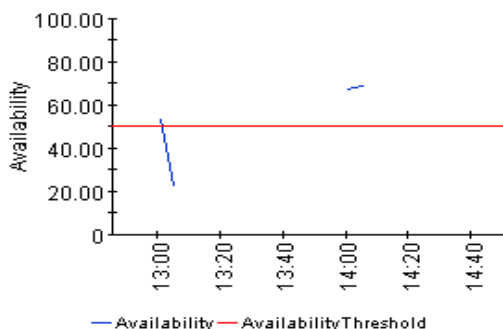

NRT Server Transaction Throughput for APPSRVR_01

Wed, Apr 13 12:45 PM - Wed, Apr 13 2:50 PM

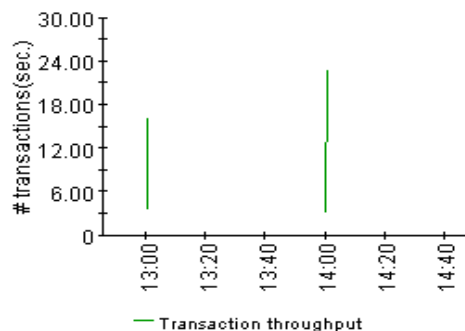

Application Server Report Pack

Servlet Request Rate - Response Time



The Servlet request rate report shows the number of servlet requests per second by a server. The servlet response time report shows the average response time for the top 20 servlets. The top 20 servlets are selected based on the highest average response time over the reporting period.

Servlet Request Rate - Response Time



Tue, Apr 12, 2005

System	Server Name	Servlet Name
WEBSPPHERE_02	WebSphereServer2	webAppModule,MDBSamples#MDBGalleryFR/Web_war_webAppModule.servlets,SimpleFileServlet
WEBSPPHERE_01	WebSphereServer1	webAppModule,adminconsole#adminconsole.war_webAppModule.servlets,action
WEBSPPHERE_02	WebSphereServer2	webAppModule,adminconsole#adminconsole.war_webAppModule.servlets,SimpleFileServlet
WEBSPPHERE_02	WebSphereServer2	webAppModule,adminconsole#adminconsole.war_webAppModule.servlets,action
WEBSPPHERE_02	WebSphereServer2	1.2_Processor
WEBSPPHERE_01	WebSphereServer1	webAppModule,adminconsole#adminconsole.war_webAppModule.servlets,SimpleFileServlet

Application Server Details for

WEBSPPHERE_02 : WebSphereServer2

Vendor WebSphere	Location Name Reston-WebSphere	Customer Name NetRadix-WebSphere
----------------------------	--	--

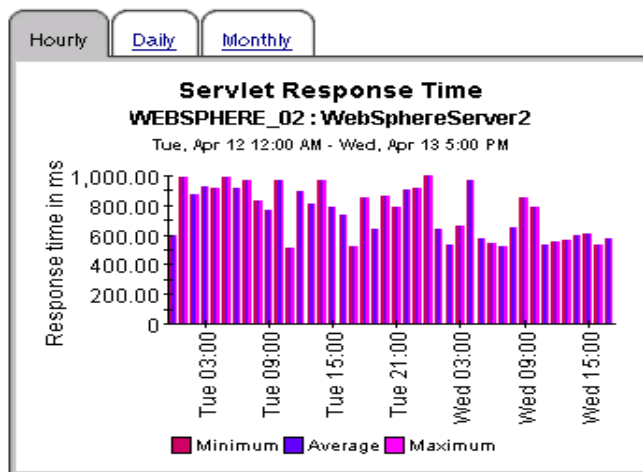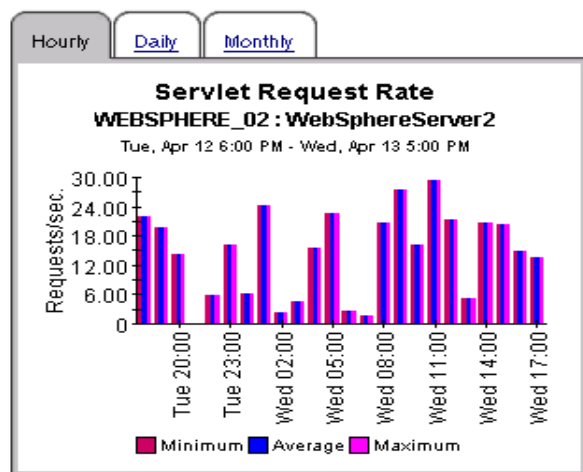

7 WebLogic Application Server Reports

The WebLogic Application Server reports provide information that is specific to WebLogic servers. Each report is summarized below.

EJB Cache Utilization

This report shows the percentage of the EJBs in the cache in use. When the maximum cache size is reached, the WebLogic Server passivates (transfers from memory to secondary storage) some EJBs that have not been recently used by a client. This could result in performance degradation.

EJB Transaction Reports

The EJB Free Pool Wait Rate measures the number of times per minute that no stateless session beans were available from the free pool. This means the client must wait for an available bean, impacting response time.

The EJB Load Timeout Rate measures the number of times a client timed out waiting for an EJB. This could result in new clients requesting the EJB class being blocked until an active EJB completes a method call.

The EJB Transaction Throughput measures the number of EJB transactions per second.

Execute Queue Throughput — Utilization

This report measures the number of requests serviced by an execute queue per second. The Queue Utilization chart shows the percentage of threads used for a server's execute queue. At 100% utilization, the WebLogic server will not have any threads available to service incoming requests. System administrators can increase the total number of execute threads via the administrator's console.

JMS Throughput — Utilization

This report measures the number of messages/bytes that have passed through this JMS (Java Message Service) Server per second.

The JMS Utilization report indicates what percentage of a JMS queue is filled based on the number of messages/bytes. If the value reaches the threshold, the administrator should consider increasing the size of the queue so that users will still be able to deliver messages.

Near Real Time Execute Queue Throughput — Utilization

This report provides the throughput/utilization trend of execute queues for the last six hours.

Server Transaction Rollback

This report plots, using a stacked bar graph, the percentage of transactions that are rolled back due to Resource error/Application error/Timeout error/System error.

Application Server Report Pack

EJB Cache Utilization




This report shows the percent of time a request to access a bean from an EJB's cache succeeded for the selected server. The EJBs are sorted based on the highest average cache hit percent over the reporting period. Stateful and entity EJBs are included in this data. This report is available for WebLogic Server versions 7.0 and higher.

EJB Selection List

Tue, Apr 12, 2005

System	Server Name	EJB Name	Avg. Cache Util.
APPSRVR_01	Server1	Server1EAR_SessionEJB_RecordSessionEJB	49.64
APPSRVR_01	Server1	Server1EAR_WebServicesEJB_Server1WebServicesEJB	52.15
APPSRVR_01	Server1	PhysicianEAR_PhysicianSessionEJB_PhysicianSessionEJB	47.44
APPSRVR_02	Server2	ProjectBeans_SyncDispatcher	51.53
APPSRVR_02	Server2	HelloWorldAsync_1h6zn35qieh7z_StatelessContainer	40.43

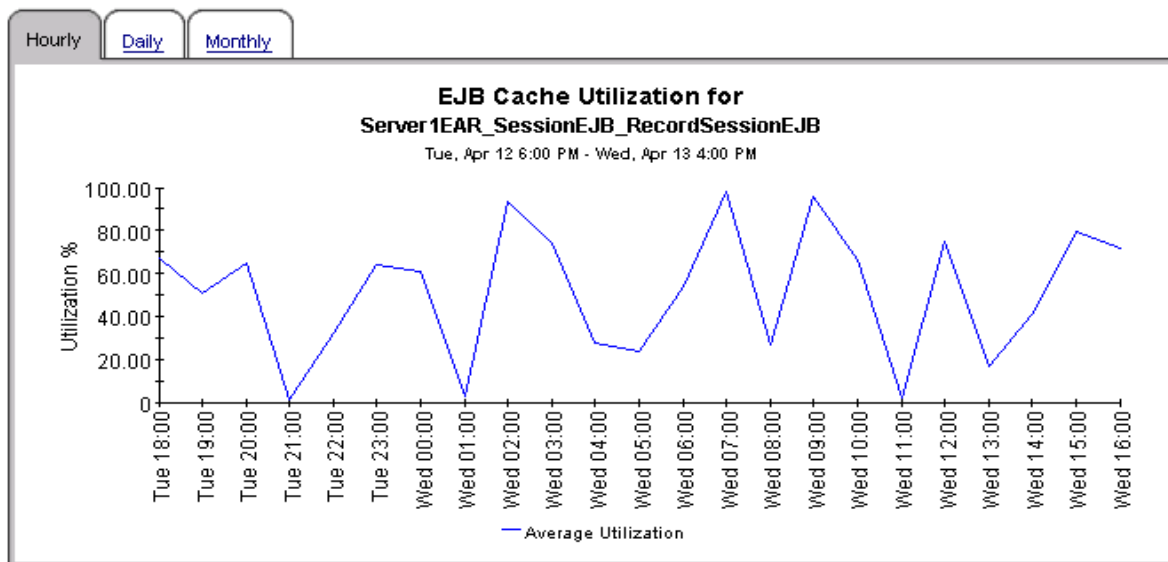

Application Server Report Pack

EJB Transaction Reports

The EJB free pool wait rate graph shows the number of requests per minute that had to wait for an instance of the EJB to become available from the EJB's free pool. The servers were sorted based on the average wait rate (number of requests that had to wait per minute) during the reporting period.




The EJB Load Timeout rate graph shows the number of requests for an EJB that timed out per minute while waiting for an instance of the EJB to become available from this EJB's free pool.

The EJB Transaction throughput graph shows the minimum, average and maximum number of transactions processed per second by EJBs. This report is available only for WebLogic version 6.1

EJB Transaction

Tue, Apr 12, 2005

System Name	Server Name	Avg. Pool Wait Rate	Avg. Timeout Rate	Avg. Transaction Throughput	Customer	Location
APPSRVR_01	Server1	29.67	28.76	6.52	HP-AppSrvr	Reston-AppSrvr
APPSRVR_02	Server2	31.99	36.11	4.89	NetRadix-AppSrvr	Bangalore-AppSrvr

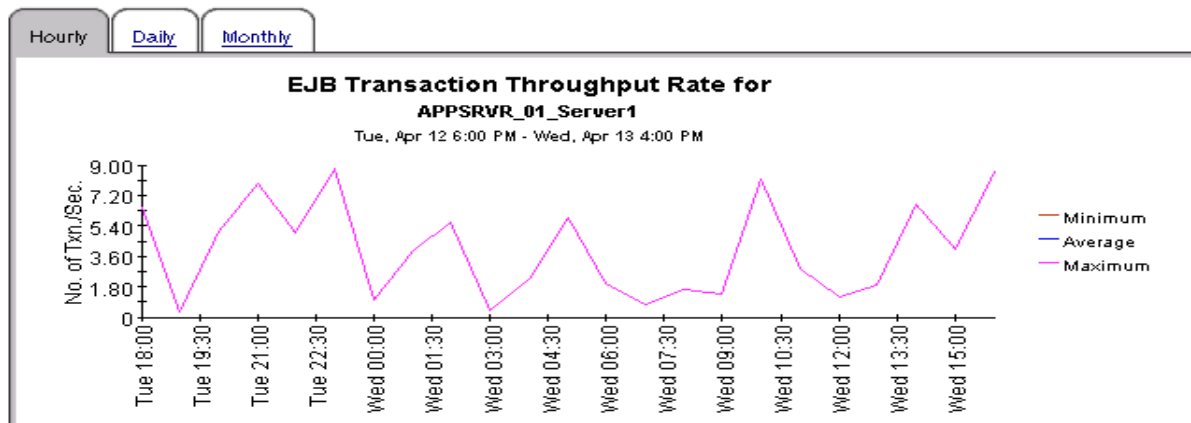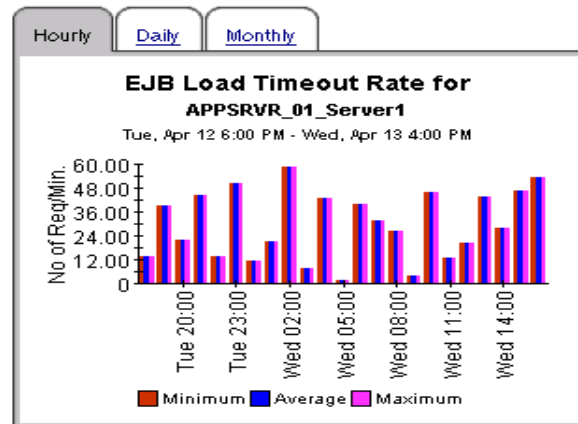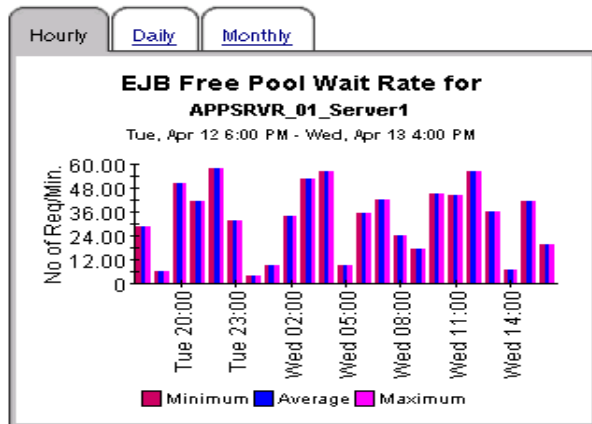

Application Server Report Pack

Execute Queue Throughput - Utilization






The Execute Queue throughput graph shows the average number of requests processed by a server's executing queue per second. The Execute Queue Utilization graph shows the utilization of the server execute queue thread pool as a percent of the number of threads configured for the pool.

The WebLogic Server queue throughput vs. utilization graph compares the throughput vs. the utilization of the execute queues on the selected server.

Execute Queue Throughput - Utilization

Tue, Apr 12, 2005

System Name	Server Name	Queue Name	Avg. Throughput	Avg. Utilization
APPSRV_01	Server1	weblogic.admin.RMI	50.53	46.00
APPSRV_01	Server1	weblogic.admin.HTTP	51.90	45.57
APPSRV_01	Server1	weblogic.admin.System	62.11	48.63
APPSRV_02	Server2	weblogic.admin.RMI	32.90	47.42
APPSRV_02	Server2	weblogic.admin.HTTP	64.40	55.46
APPSRV_02	Server2	weblogic.admin.System	49.01	46.57

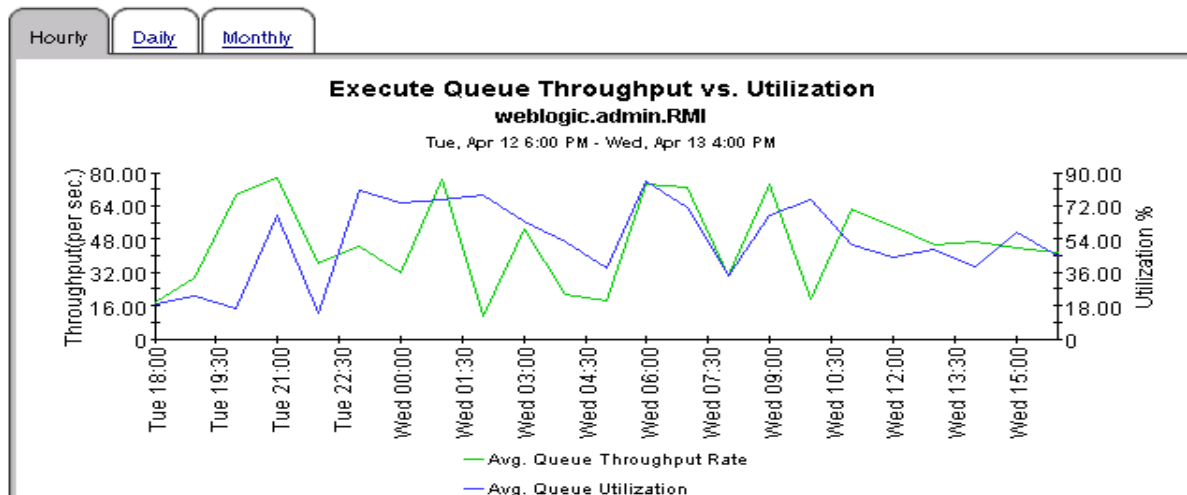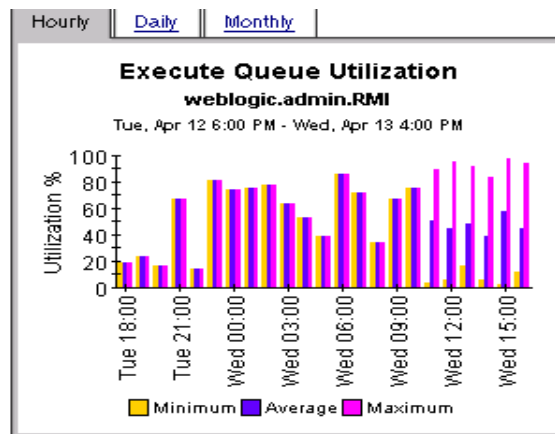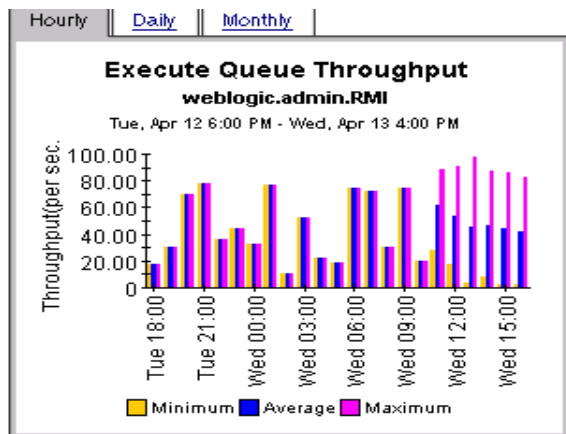

Application Server Report Pack

JMS Throughput - Utilization





The JMS Server throughput vs. utilization by Message graph compares the throughput vs. utilization of the JMS Servers on the selected server based on the size of JMS messages. The throughput is the number of JMS messages processed by a JMS server per second. The utilization of the message queue is the total size of the messages being processed as a percent of the maximum size configured for the queue. The JMS Server throughput vs. utilization by Bytes graph compares the throughput vs. utilization of the JMS Servers on the selected server based on the number of JMS messages.

JMS Server Throughput vs. Utilization

Tue, Apr 12, 2005

System Name	Server Name	JMS Server Name	Avg. Tput by Msg.	Avg. Util. by Msg.	Avg. Tput by Byte	Avg. Util. by Byte
APPSRVR_01	Server1	Server1JMS Server	30.23	53.73	30.63	44.11
APPSRVR_01	Server1	WSStoreForwardInternalJMS ServerServer1	29.82	47.86	28.01	46.57
APPSRVR_02	Server2	Server2JMS Server	30.54	47.57	32.24	48.86

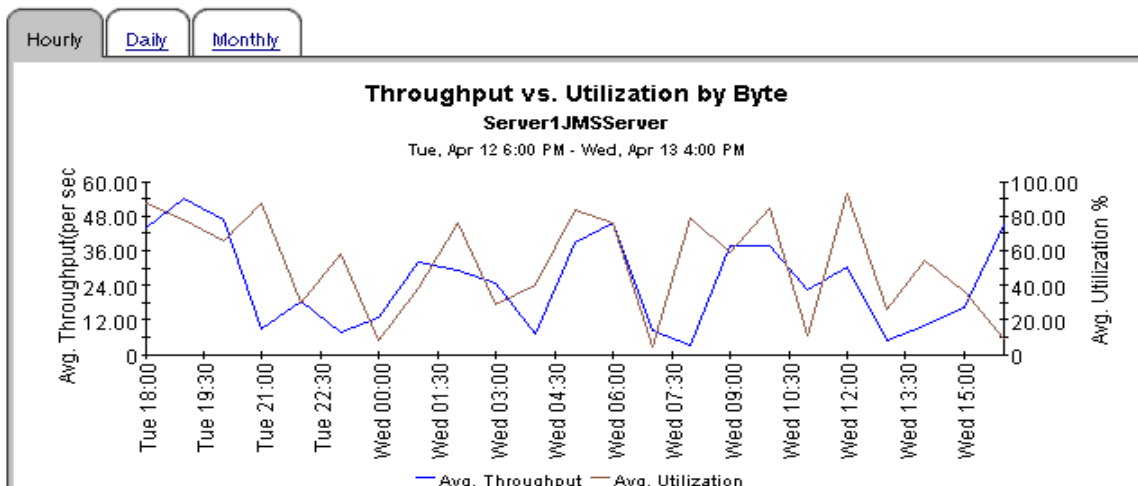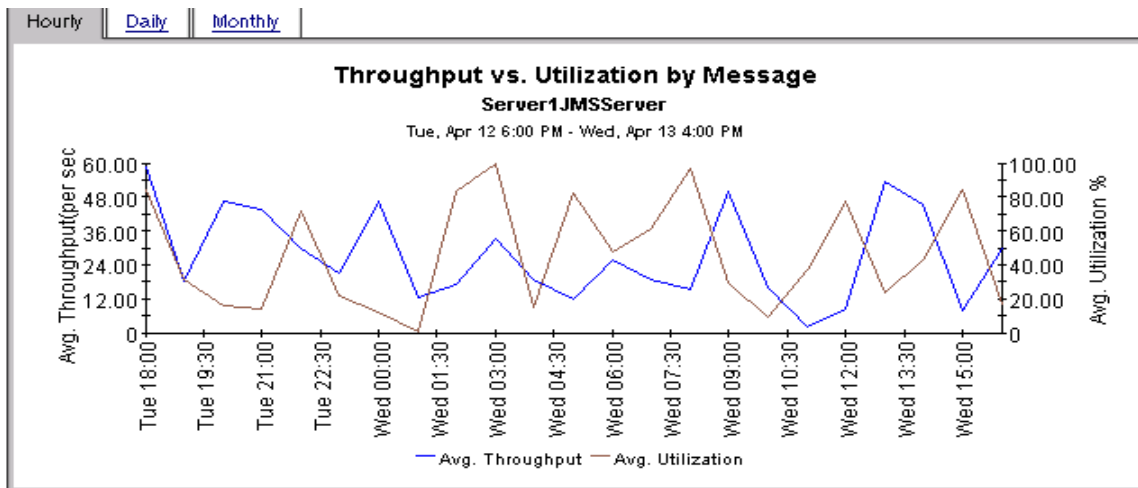

Application Server Report Pack



Near Real Time Execute Queue Throughput - Utilization

The NRT Execute Queue Throughput graph shows the average number of requests processed by a server's executing queue per second. The NRT Execute Queue Utilization graph shows the utilization of the server execute queue thread pool as a percent of the number of threads configured for the pool.


NRT Execute Queue Throughput - Utilization

Wed, Apr 13, 2005


Averages over the last 6 hours

System Name	Server Name	Queue Name	Queue Utilization	Queue Throughput
APPSRV_01	Server1	weblogic.admin.System	49.92	46.26
APPSRV_02	Server2	weblogic.admin.RMI	47.44	53.35
APPSRV_02	Server2	weblogic.admin.System	47.20	50.72
APPSRV_01	Server1	weblogic.admin.RMI	46.82	45.14


NRT Execute Queue Throughput Rate for APPSRV_01

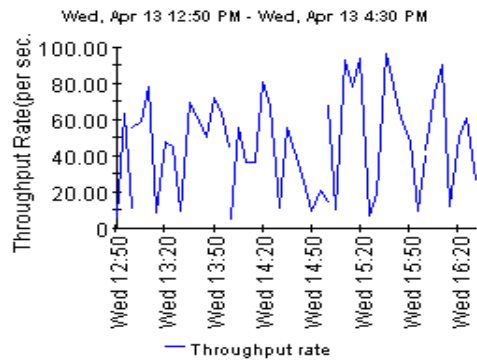

NRT Execute Queue Utilization for APPSRV_01

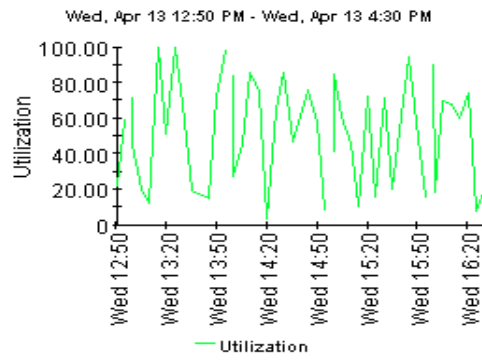

NRT Execute Queue Throughput vs. Utilization for APPSRV_01

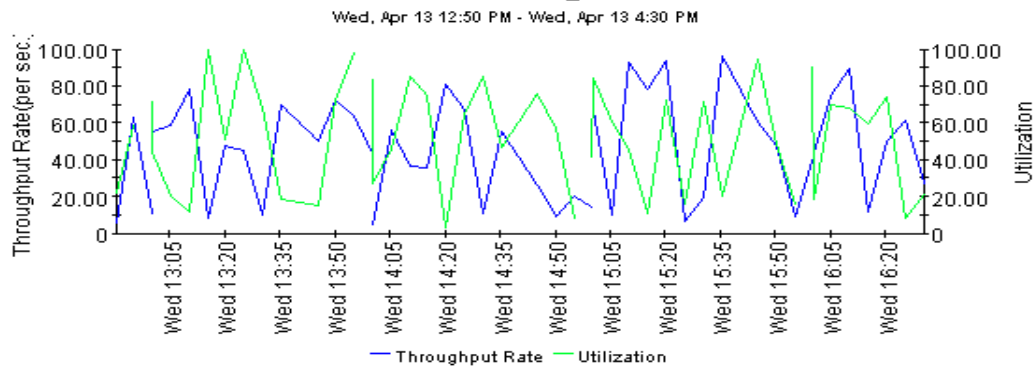

Application Server Report Pack


Server Transaction Rollback



This report shows the percentage of transactions that have been rolled back for the selected server.

Server Transaction Rollback

Tue, Apr 12, 2005


System Name	Server Name	System Error	Resource Error	Application Error	Timeout Error
APPSRVR_01	Server1	27.79	30.52	31.17	32.73
APPSRVR_02	Server2	22.89	30.87	32.02	27.50 

Application Server Details for

APPSRVR_01_Server1

Vendor: WebLogic Customer Name: HP-AppSrvr Location Name: Reston-AppSrvr

Hourly Daily Monthly

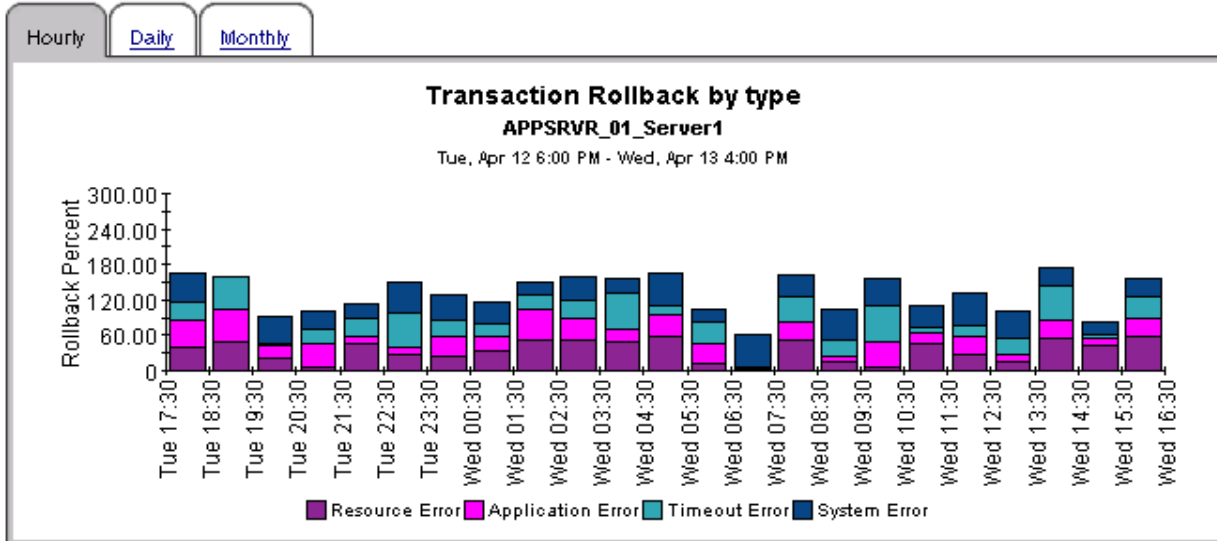

8 WebSphere Application Server Reports

The WebSphere Application Server reports provide information that is specific to WebSphere servers. See below for a summary of report contents.

EJB Load-Stores Rate

Displays the number of all entity EJB loads and stores to and from the database per minute for the top 20 servers. For the selected server it lists the top 20 EJBs; the EJB is shown along with the number of all EJB loads and stores to and from the database per minute.

EJB Method Calls Rate

Displays the number of all EJB method calls per minute for the top 20 servers. The EJB is shown along with the number of all EJB method calls per minute. The top 20 EJBs are selected based on the highest average method calls per minute over the reporting period.

EJB Top 20

This report contains statistics for:

- Percentage of EJB retrievals that were not successful during the collection interval
- Average pool size for the top 20 EJBs
- Average response time in milliseconds for the top 20 EJBs

JDBC Connection Pool Details

Shows the average number of connections allocated per day for the top 20 servers. The top 20 servers are selected based on the highest average number of connections allocated over the reporting period. The DB Pool is shown along with Clients Waiting, Client Timeout Rate, Average Pool Size, and Average Wait Time.

Servlet Sessions

Shows the total number of servlet sessions being handled by the top 20 servers.

Thread Pool Activity

Compares the average size of thread pools with the average number of active threads on the selected server.

Transaction Throughput

Displays the average number of transactions processed per second by the top 20 servers for the previous day. The top 20 servers are selected based on the highest average number of transactions processed per second over the reporting period. For the selected server it displays hourly data points representing the average number of transactions processed; this extends back 7 days and forward up to the last hour for which data was summarized.

Application Server Report Pack

EJB Load-Stores Rate



This report shows the number of all entity EJB loads and stores to/from the database per minute for the top 20 servers. The top 20 servers are selected based on the highest average loads and stores per minute.

EJB Load-Stores (Server)

Tue, Apr 12, 2005


System Name	Server Name	Avg. Load-Stores
WEBSPHERE_01	WebSphereServer1	7.72
WEBSPHERE_02	WebSphereServer2	7.59

EJB Load-Stores (EJB)

WEBSPHERE_01 : WebSphereServer1

Mon, Apr 11, 2005

EJB Name	Avg. Load-Stores
PlantsByWebSphere#PlantsByWebSphereEJB.jar_Mailer	8.45
PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	8.36
petstore#catalog-ejb.jar_CatalogEJB	8.15
TechnologySamples#MovieReviewEJB.jar_MovieReview	7.81
MDBSamples#PSSampleMDB.jar_PSSampleMDB	7.51
PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	7.44

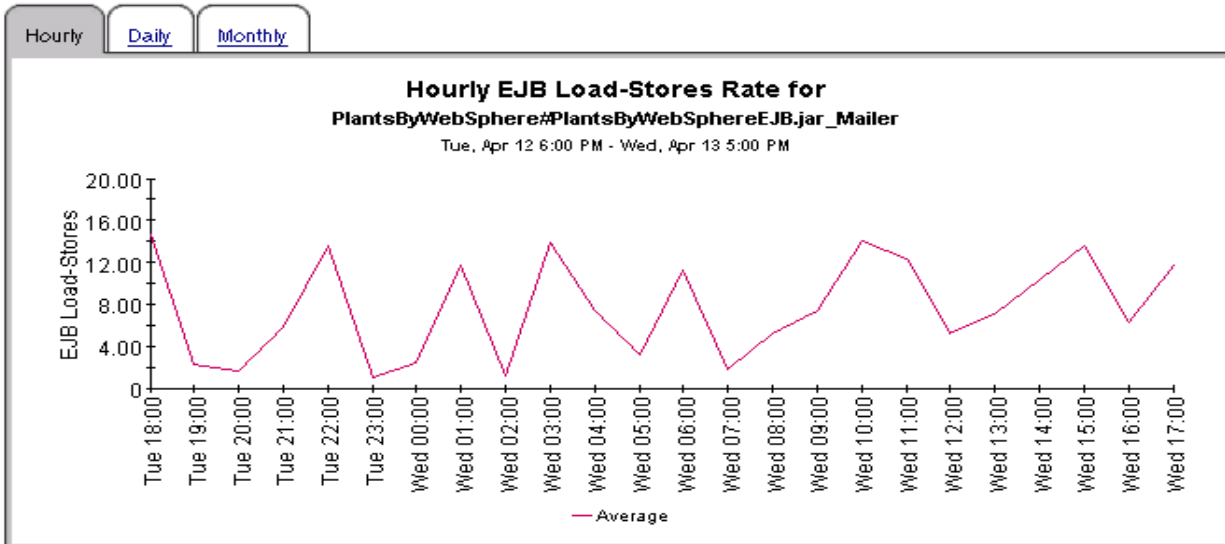

Application Server Report Pack

EJB Method Calls Rate



This report shows the number of all EJB method calls per minute for the top 20 EJBs. The top 20 EJBs are selected based on the highest average method calls per minute over the reporting period.

EJB Method Calls (Server)

Tue, Apr 12, 2005

System Name	Server Name	Avg. Method Calls
WEBSPHERE_01	WebSphereServer1	7.35
WEBSPHERE_02	WebSphereServer2	6.91


EJB Method Calls (EJB)

WEBSPHERE_01 : WebSphereServer1

Tue, Apr 12, 2005

EJB Name	Minimum	Average	Maximum
MDBSamples#PSSampleMDB.jar_PSSampleMDB	0.11	7.02	14.89
PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	0.57	6.58	14.56
PlantsByWebSphere#PlantsByWebSphereEJB.jar_Mailer	1.26	8.36	14.79
TechnologySamples#MovieReviewEJB.jar_MovieReview	0.80	7.76	13.01
petstore#catalog-ejb.jar_CatalogEJB	0.01	7.02	13.65

Hourly [Daily](#) [Monthly](#)

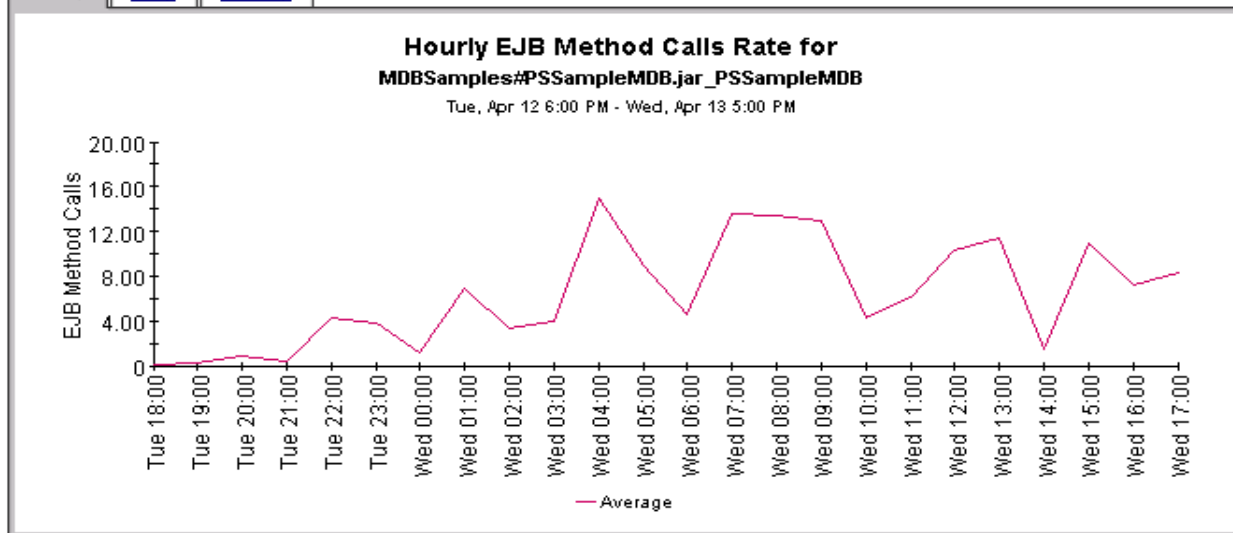

Application Server Report Pack

EJB Top 20



This report shows the average EJB pool misses for the top 20 EJBs. The top 20 EJBs are selected based on the highest average pool misses over the reporting period. This report also shows the average pool size for the top 20 EJBs. The top 20 EJBs are selected based on the highest average pool size over the reporting period. This report also shows the average response time in milliseconds for the top 20 EJBs. The top 20 EJBs are selected based on the highest average response time over the reporting period.

EJB Pool Misses

Tue, Apr 12, 2005

System Name	Server Name	EJB Name	Avg. Pool Misses
WEBSPHERE_02	WebSphereServer2	petstore#catalog-ejb.jar_CatalogEJB	54.40
WEBSPHERE_02	WebSphereServer2	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Mailer	53.11
WEBSPHERE_02	WebSphereServer2	TechnologySamples#MovieReviewEJB.jar_MovieReview	51.60
WEBSPHERE_01	WebSphereServer1	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Mailer	51.45
WEBSPHERE_02	WebSphereServer2	MDBSamples#PSSampleMDB.jar_PSSampleMDB	51.38
WEBSPHERE_01	WebSphereServer1	TechnologySamples#MovieReviewEJB.jar_MovieReview	50.07
WEBSPHERE_02	WebSphereServer2	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	49.21
WEBSPHERE_01	WebSphereServer1	MDBSamples#PSSampleMDB.jar_PSSampleMDB	47.77
WEBSPHERE_01	WebSphereServer1	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	46.65
WEBSPHERE_01	WebSphereServer1	petstore#catalog-ejb.jar_CatalogEJB	44.71

EJB Pool Size

Tue, Apr 12, 2005

System Name	Server Name	EJB Name	Avg. Pool Size
WEBSPHERE_01	WebSphereServer1	petstore#catalog-ejb.jar_CatalogEJB	19.19
WEBSPHERE_02	WebSphereServer2	petstore#catalog-ejb.jar_CatalogEJB	17.10
WEBSPHERE_01	WebSphereServer1	MDBSamples#PSSampleMDB.jar_PSSampleMDB	16.38
WEBSPHERE_02	WebSphereServer2	MDBSamples#PSSampleMDB.jar_PSSampleMDB	15.53
WEBSPHERE_01	WebSphereServer1	TechnologySamples#MovieReviewEJB.jar_MovieReview	15.30
WEBSPHERE_02	WebSphereServer2	TechnologySamples#MovieReviewEJB.jar_MovieReview	14.43
WEBSPHERE_02	WebSphereServer2	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	14.42
WEBSPHERE_01	WebSphereServer1	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Mailer	13.73
WEBSPHERE_02	WebSphereServer2	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Mailer	11.44
WEBSPHERE_01	WebSphereServer1	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	10.03

EJB Response Time

Tue, Apr 12, 2005

System Name	Server Name	EJB Name	Avg. Response Time
WEBSPHERE_01	WebSphereServer1	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	816.18
WEBSPHERE_01	WebSphereServer1	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Mailer	787.40
WEBSPHERE_02	WebSphereServer2	TechnologySamples#MovieReviewEJB.jar_MovieReview	762.73
WEBSPHERE_02	WebSphereServer2	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Mailer	754.13
WEBSPHERE_01	WebSphereServer1	TechnologySamples#MovieReviewEJB.jar_MovieReview	745.70
WEBSPHERE_02	WebSphereServer2	PlantsByWebSphere#PlantsByWebSphereEJB.jar_Login	737.57
WEBSPHERE_02	WebSphereServer2	petstore#catalog-ejb.jar_CatalogEJB	729.35
WEBSPHERE_01	WebSphereServer1	petstore#catalog-ejb.jar_CatalogEJB	723.26
WEBSPHERE_01	WebSphereServer1	MDBSamples#PSSampleMDB.jar_PSSampleMDB	719.84

Application Server Report Pack

JDBC Connection Pool Details



This report shows the average number of connections allocated per day for the top 20 servers. The top 20 servers are selected based on the highest average number of connections allocated over the reporting period. For the selected server it displays DB Connection Pools Details.

Connection Pool Throughput

Tue, Apr 12, 2005



System Name	Server Name	Connections Allocated
WEBSHERE_02	WebSphereServer2	766.33
WEBSHERE_01	WebSphereServer1	754.57

Connection Pool Details

WEBSHERE_02 : WebSphereServer2

Tue, Apr 12, 2005

Connection Pool	Clients Waiting	Client Timeout Rate	Avg. Pool Size	Avg. Wait Time
Cloudscape_JDBC_Provider_DefaultDatasource	2.27	15.62	806.99	15.12
Samples_Cloudscape_JDBC_Provider_(XA)_jdbc/CatalogDB	2.57	16.80	764.57	13.94
Samples_Cloudscape_JDBC_Provider_(XA)_jdbc/petstore/PetStoreDB	2.57	14.33	796.71	11.90
Samples_Cloudscape_JDBC_Provider_VWSsamples/TechSampDatasource	2.16	13.50	723.17	12.47
Samples_Cloudscape_JDBC_Provider_jdbc/PlantB/MkSampleDataSouce	2.00	14.44	693.63	15.05

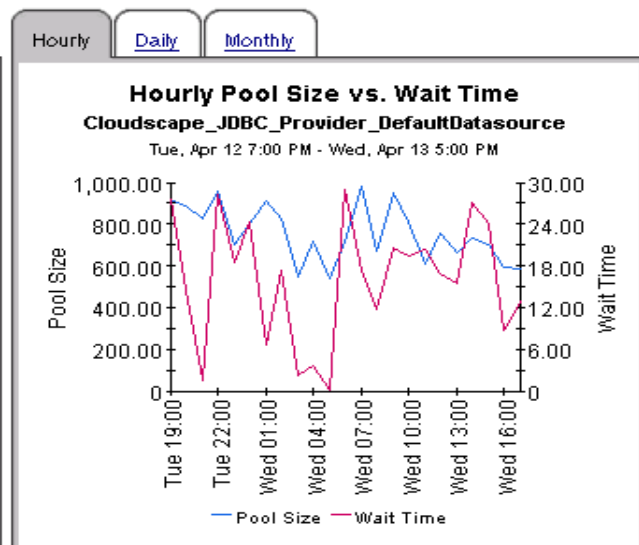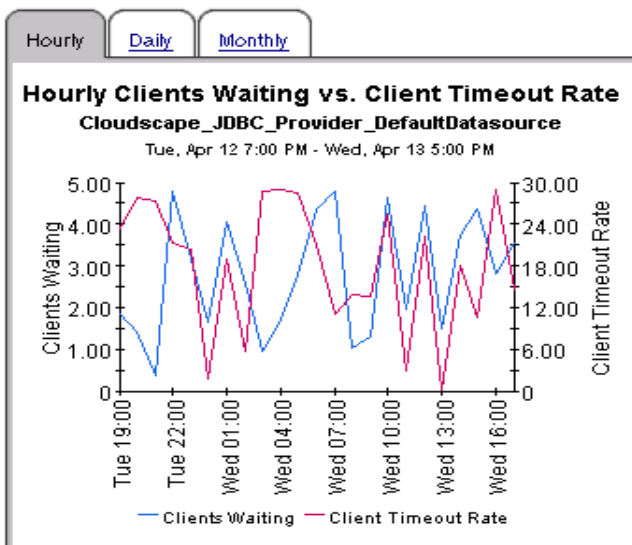

Application Server Report Pack


Servlet Sessions




This report shows the total number of servlet sessions being handled by the top 20 servers. The top 20 servers are selected based on the highest average number of sessions over the reporting period.

Servlet Sessions

Tue, Apr 12, 2005

System Name	Server Name	Avg. Servlet Sessions
WEBSPHERE_01	WebSphereServer1	746.07
WEBSPHERE_02	WebSphereServer2	743.47 

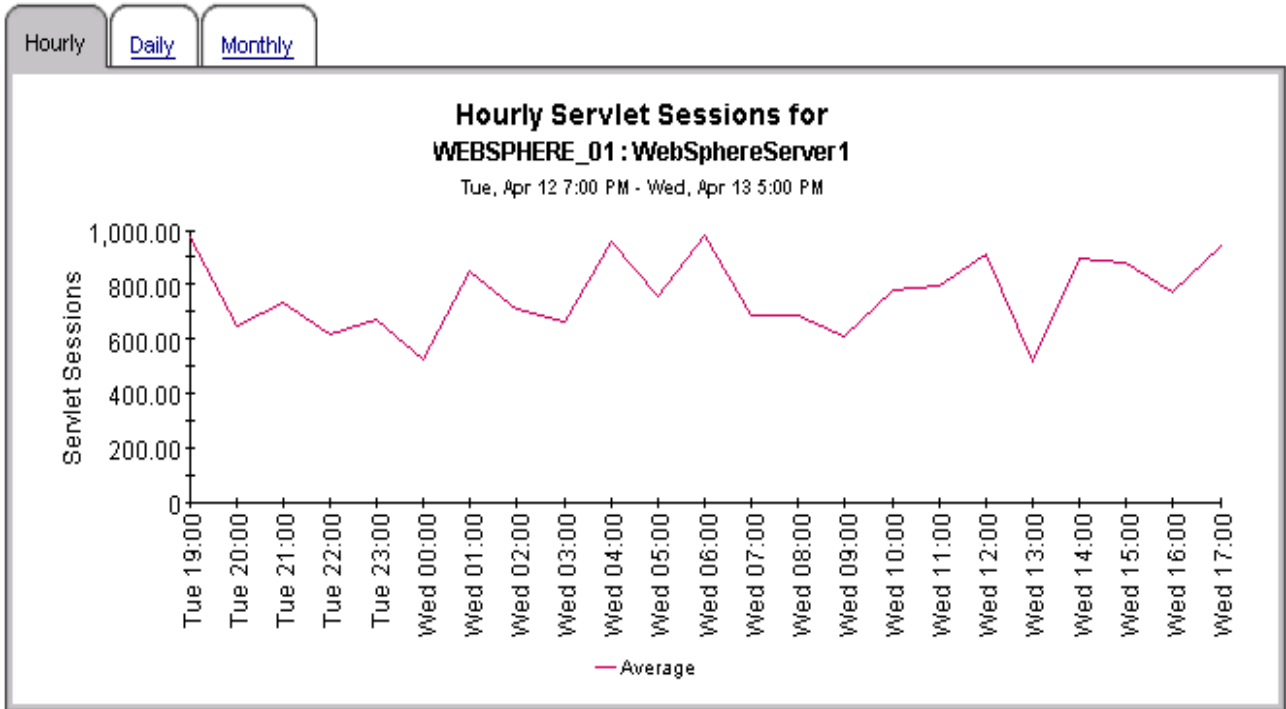

Application Server Report Pack


Thread Pool Activity



This report compares the average size of thread pools with the average number of active threads on the selected server.

Thread Pool Activity (Server)




Tue, Apr 12, 2005


System Name	Server Name	Thread Pool Size	Active Threads
WEBSPPHERE_02	WebSphereServer2	24.84	14.96
WEBSPPHERE_01	WebSphereServer1	24.66	14.94 

Thread Pool Activity (Thread Pool)

WEBSPPHERE_02 : WebSphereServer2

Tue, Apr 12, 2005

Thread Pool Name	Thread Pool Size	Active Threads
MessageListenerThreadPool	24.11	15.54
ORB.thread.pool	25.90	14.79 
Servlet.Engine.Transports	24.90	14.41 
SoapConnectorThreadPool	24.43	15.11 

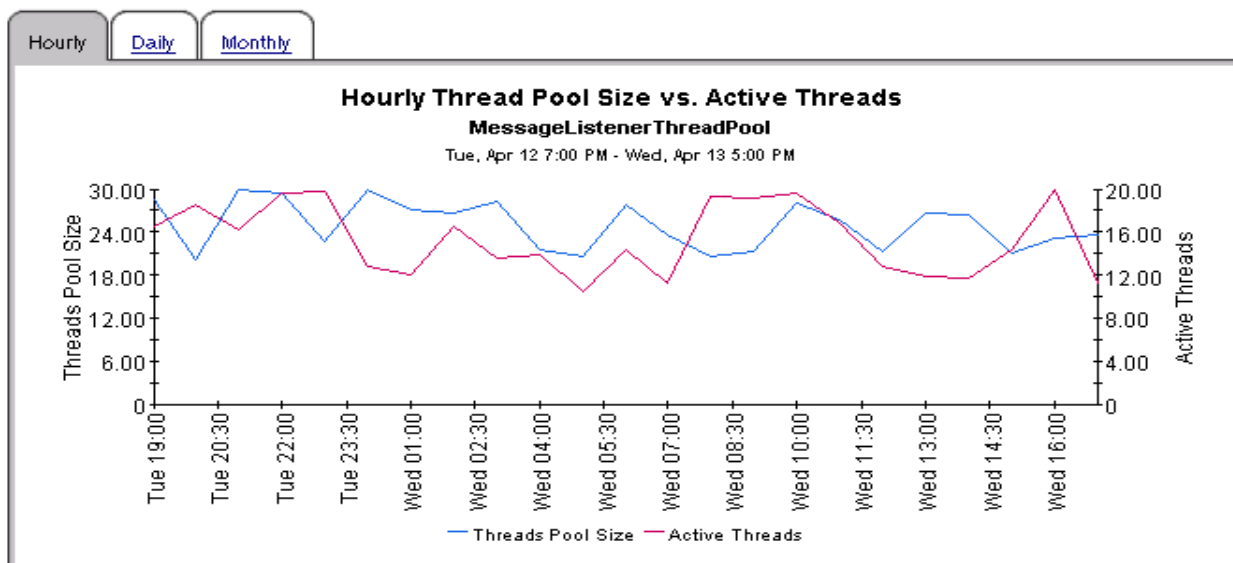

Application Server Report Pack

Transaction Throughput




This report shows the average number of transactions processed per second by top 20 servers. The top 20 servers are selected based on the highest average number of transactions processed per second over the reporting period.

Transaction Throughput

Tue, Apr 12, 2005

System Name	Server Name	Minimum	Average	Maximum
WEBSPHERE_02	WebSphereServer2	544.21	740.93	989.87
WEBSPHERE_01	WebSphereServer1	504.33	697.24	998.74

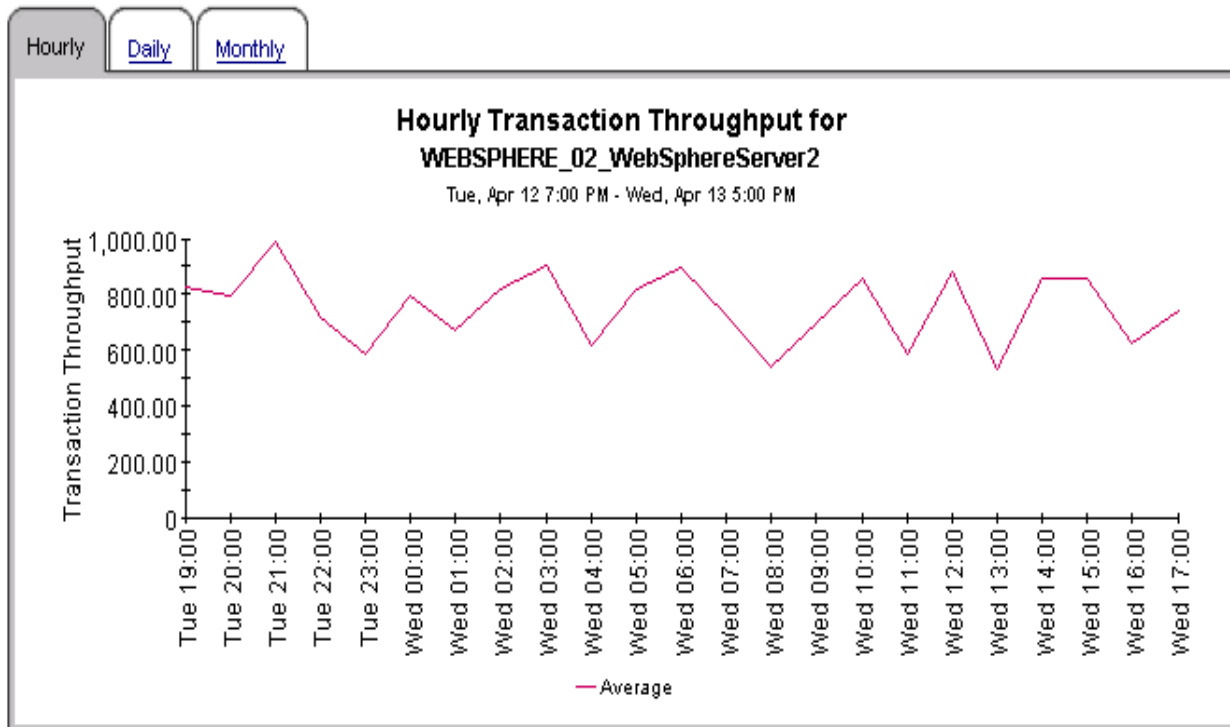

A Version History

Version	Release Date	Enhancements
1.0	March 2005	<p>18 reports, 2 datapipes; requires Oracle <i>packages</i>:</p> <ul style="list-style-type: none"> • ApplicationServer • ApplicationServer_Threshold • ApplicationServer_WebLogic • ApplicationServer_WebSphere • ApplicationServer_Demo <p><i>datapipes</i>:</p> <ul style="list-style-type: none"> • AppServer WebLogic SPI Datapipe 1.0 • AppServer WebSphere SPI Datapipe 1.0
1.0	May 2006	<p>ApplicationServer_Threshold 1.1: <i>fixes the following defect</i>:</p> <ul style="list-style-type: none"> • QXCR1000296384 <p>AppServer WebLogic SPI Datapipe 1.1 <i>fixes the following defects</i>:</p> <ul style="list-style-type: none"> • QXCM1000294696 • QXCR1000320737
1.1	April 2007	<p><i>new features</i>:</p> <ul style="list-style-type: none"> • Location Independent Reporting • Supports Management Console > Copy Policy Manager • Rate data removed from NRT reports, top table <p><i>new upgrade packages</i>:</p> <ul style="list-style-type: none"> • UPGRADE_ApplicationServer_to_11.ap • UPGRADE_ApplicationServer_WebLogic_to_11.ap • UPGRADE_ApplicationServer_WebSphere_to_11.ap <p><i>new version of the WebSphere datapipe</i>:</p> <ul style="list-style-type: none"> • AppServer WebSphere SPI Datapipe 1.1 <p><i>defect fix</i>:</p> <ul style="list-style-type: none"> • QXCR1000378911


B Editing Tables and Graphs

Any table or graph can be viewed in several ways. Although the default view is usually adequate, you can easily change to a different view. If you are using Report Viewer, right-click the object to open a list of view options. If you are using the Web Access Server, follow these steps to change the default view of a table or graph:

- 1 Click **Preferences** on the links bar.
- 2 Expand **Reports** in the navigation frame.
- 3 Click **Viewing**.
- 4 Select the **Allow element editing** box.
- 5 Click **Apply**.
- 6 Click the Edit icon next to the table or graph.

View Options for Tables

Right-clicking a table, or selecting the Edit Table icon if you are using the Web Access Server, opens a list of table view options.

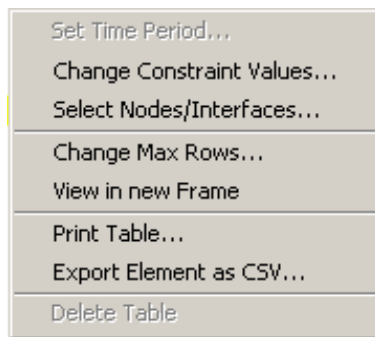

Select **Set Time Period** to alter the relative time period (relative to now) or set an absolute time period. The Set Time Period window opens.

You may shorten the period of time covered by the table from, for example, 42 days to 30 days or to 7 days. If you are interested in a specific period of time that starts in the past and stops *before* yesterday, click **Use Absolute Time** and select a Start Time and an End Time.

Select **Change Constraint Values** to loosen or tighten a constraint, thereby raising or lowering the number of elements that conform to the constraint. The Change Constraint Values window opens. To loosen a constraint, set the value lower; to tighten a constraint, set the value higher.

The **Select Nodes/Interfaces** allows you to change the scope of the table by limiting the table to specific nodes, specific interfaces, or a specific group of nodes or interfaces. The Select Node Selection Type window opens.


Change Max Rows increases or decreases the number of rows in a table. The default is 50. If you expand the default, the table may take more time to open. If you are trending a large network, using the default ensures that the table opens as quickly as possible.

View in new Frame opens the table in a Table Viewer window, shown below. If necessary, make the data in the table more legible by resizing the window.

Polled IP QoS Statistics Data - Input Over Previous 6 Hours					
Direction	IpPrecedence	Switched Bytes	Switched Pkts	Time Period	
Input	0	105,888	675	Tue Oct 29 07:00 AM	
Input	1	0	0	Tue Oct 29 07:00 AM	
Input	2	0	0	Tue Oct 29 07:00 AM	
Input	3	0	0	Tue Oct 29 07:00 AM	
Input	4	0	0	Tue Oct 29 07:00 AM	
Input	5	0	0	Tue Oct 29 07:00 AM	
Input	6	600	5	Tue Oct 29 07:00 AM	
Input	7	0	0	Tue Oct 29 07:00 AM	
Input	0	98,334	638	Tue Oct 29 06:45 AM	
Input	1	0	0	Tue Oct 29 06:45 AM	
Input	2	0	0	Tue Oct 29 06:45 AM	
Input	3	0	0	Tue Oct 29 06:45 AM	
Input	4	0	0	Tue Oct 29 06:45 AM	

View Options for Graphs

Right-clicking a graph, or clicking the Edit Graph icon if you are using the Web Access Server, opens the following list of view options.

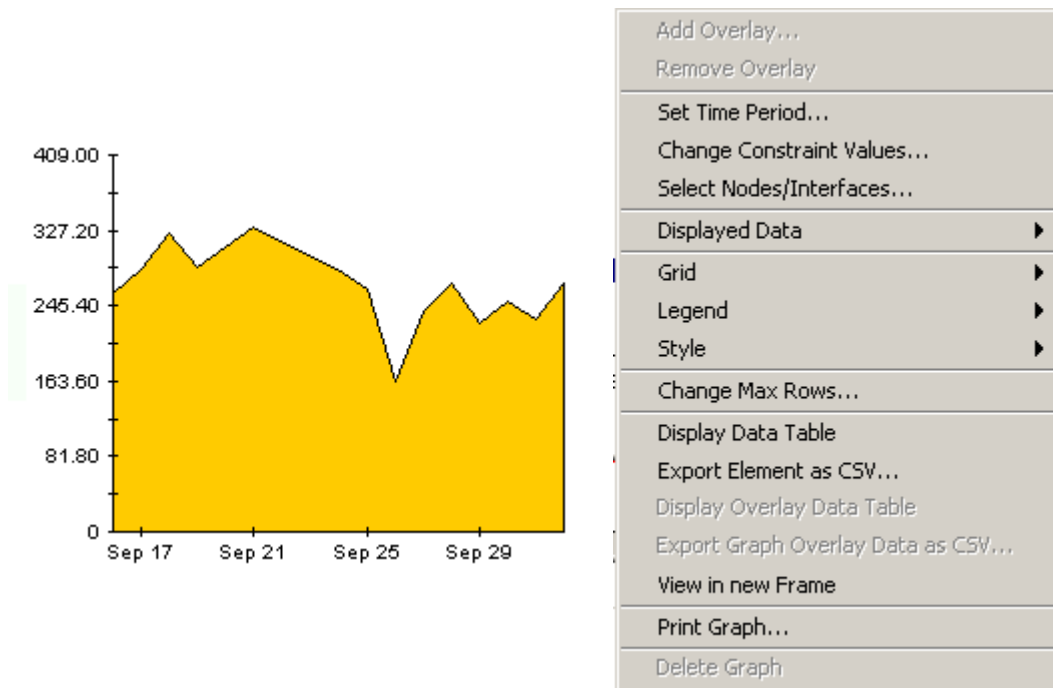


The following table provides details about each option.

Option	Function
Set Time Period	Same as the table option shown above.
Change Constraint Values	Same as the table option shown above.
Select Nodes/Interfaces	Same as the table option shown above.
Displayed Data	For every point on a graph, display data in a spreadsheet.
Grid	Add these to the graph: X axis grid lines Y axis grid lines X and Y axis grid lines
Legend	Delete or reposition the legend.
Style	See the illustrations below.
Change Max Rows...	Same as the table option shown above.
Display Data Table	See below.
Export Element as CSV...	Same as the table option shown above.
View in New Frame	Opens graph in a Graph Viewer window.
Print Graph	Same as the table option shown above.


Style Options

Select **Style** to display a list of seven view options for graphs.

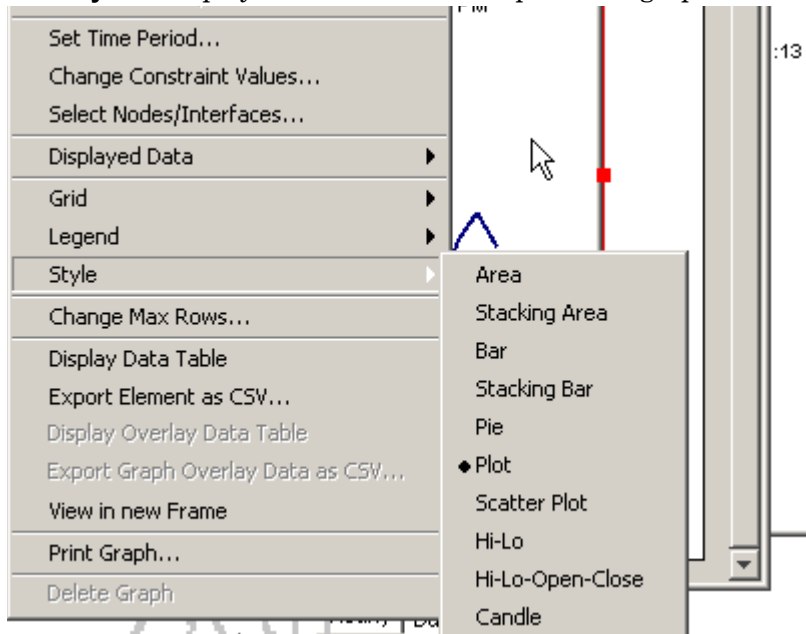

Style > Area


The plot or bar chart changes to an area graph. While relative values and total values are easy to view in this format, absolute values for smaller data types may be hard to see. Click anywhere within a band of color to display the exact value for that location

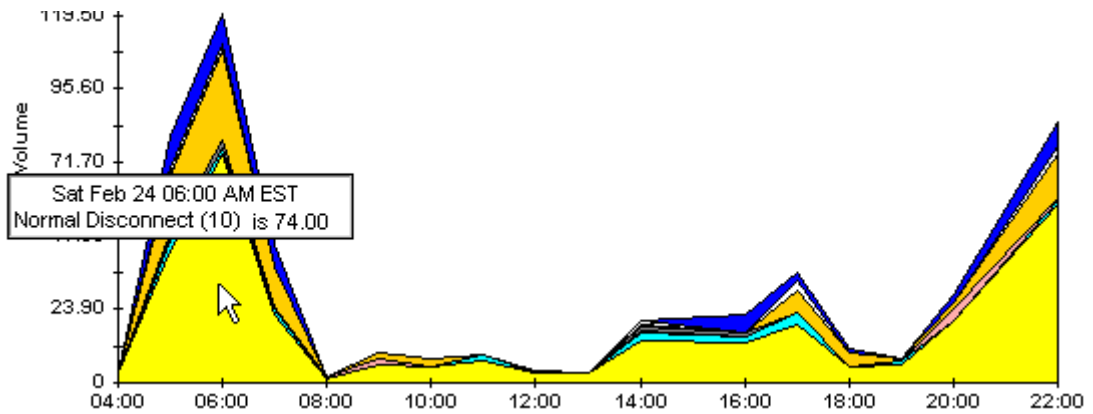

To shorten the time span of a graph, press SHIFT+ALT and use the left mouse button to highlight the time span you want to focus on. Release the mouse button to display the selected time span.


Style > Stacking Area

The area or plot graph changes to a stacking area graph. This view is suitable for displaying a small number of variables.

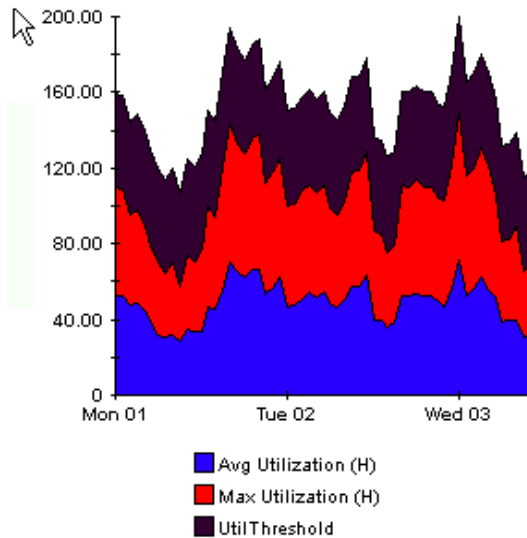


Style > Bar

The graph changes to a bar chart. This view is suitable for displaying relatively equal values for a small number of variables. There are three variables in the graph below.

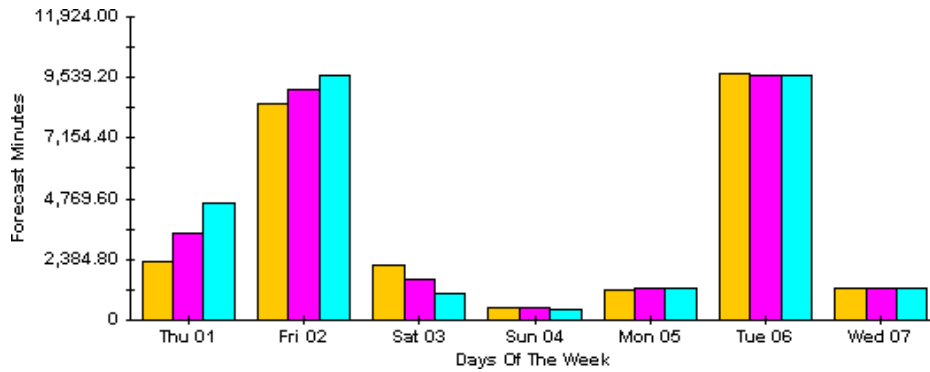


Style > Stacking Bar

The plot or area graph changes to a stacking bar chart. If you increase the width of the frame, the time scale becomes hourly. If you increase the height of the frame, the call volume shows in units of ten.

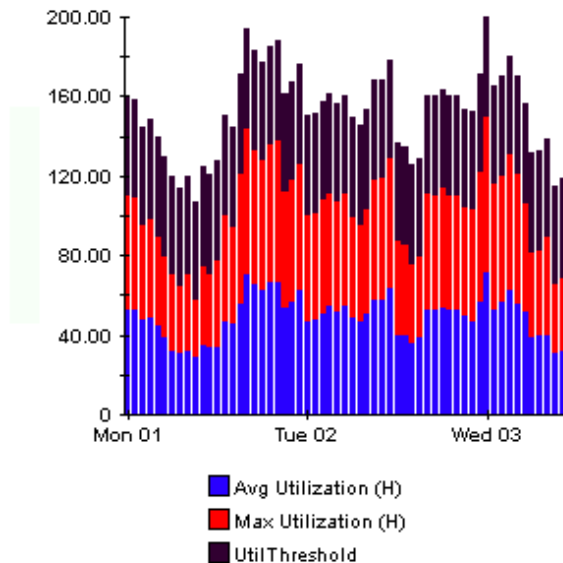


Style > Plot

Bands of color in an area graph change to lines. If you adjust the frame width, you can make the data points align with hour; if you adjust the frame height, you can turn call volume into whole numbers.

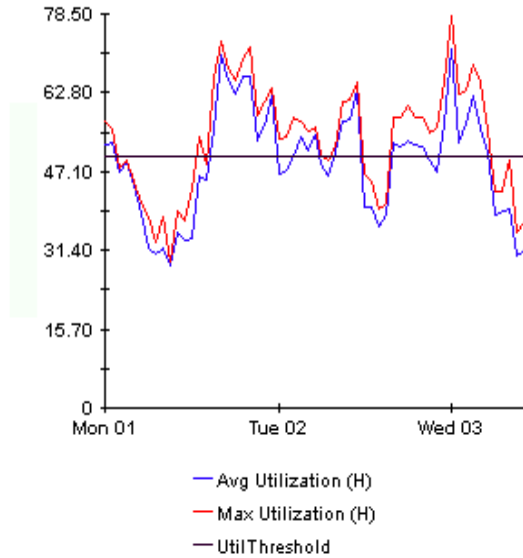

Style > Pie


An area graph becomes a pie chart. Bands in an area graph convert to slices of a pie and the pie constitutes a 24-hour period. This view is helpful when a small number of data values are represented and you are looking at data for one day.

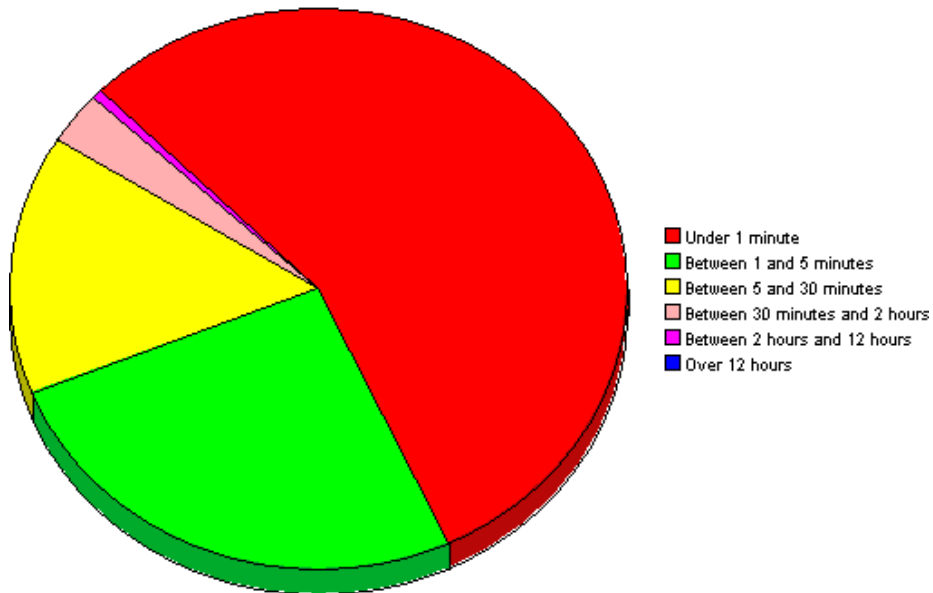

If you are looking at data for more than one day, you will see multiple pie graphs, one for each day.

Display Data Table


This option changes a graph into a spreadsheet.

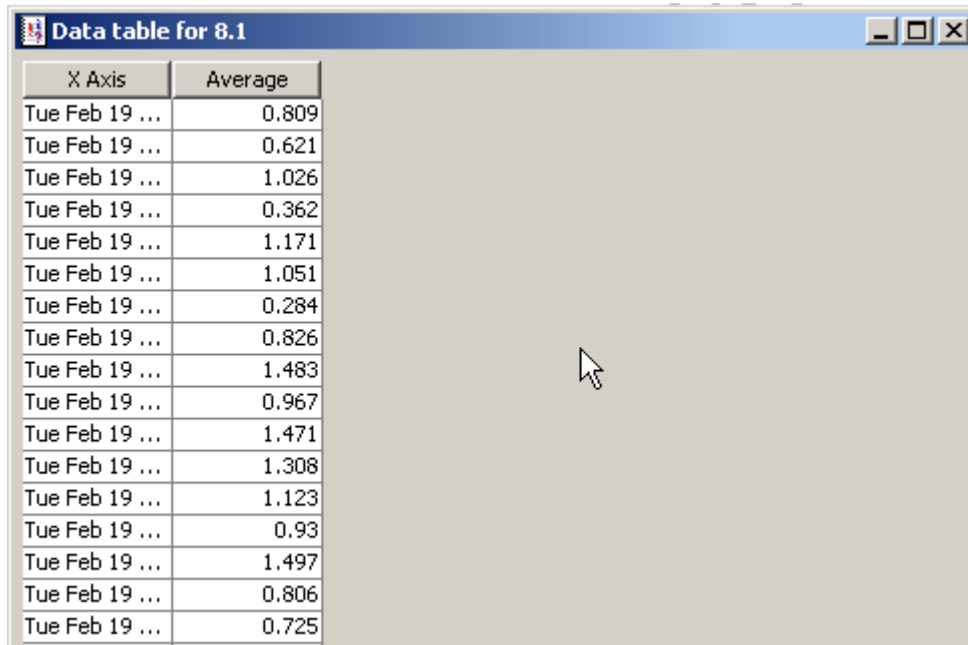

X Axis	Average
Tue Feb 19 ...	0.809
Tue Feb 19 ...	0.621
Tue Feb 19 ...	1.026
Tue Feb 19 ...	0.362
Tue Feb 19 ...	1.171
Tue Feb 19 ...	1.051
Tue Feb 19 ...	0.284
Tue Feb 19 ...	0.826
Tue Feb 19 ...	1.483
Tue Feb 19 ...	0.967
Tue Feb 19 ...	1.471
Tue Feb 19 ...	1.308
Tue Feb 19 ...	1.123
Tue Feb 19 ...	0.93
Tue Feb 19 ...	1.497
Tue Feb 19 ...	0.806
Tue Feb 19 ...	0.725

View in New Frame

The graph opens in a Graph Viewer window. Improve legibility by resizing the window.

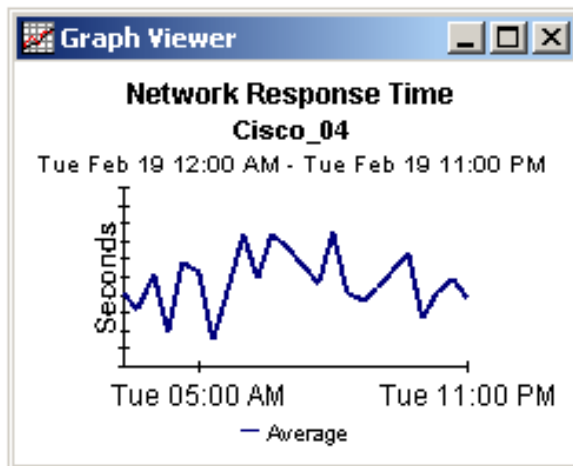

Index

A

- accounts, group, 9
- AppServer_Reporting_DMF.pro file, 28
- AppSrvr_Reporting_Hourly.pro, 28
- availability, default threshold, 29

B

- BEA WebLogic Server
 - OV SPI for, 19

C

- CD containing report packs, 19
 - extracting packages, 21
- central server
 - packages, 25
- change max rows option, 57
- client components, 23
- collection_manager (command), 12
- Common Property Tables, 14
 - customizing reports, 9
 - required version, 20
 - upgrade rules, 22
 - upgrading, 12, 20
- constraints
 - applying, 10
- Copy Policy Manager, 27
- Copy Policy Wizard, 27
- customized data table views, 16
- customizing reports, 9
- custom views of data or property tables, 13

D

- Datapipe Manager, 13
- defect fixes
 - QXCM1000294696, 53
 - QXCR1000296384, 53
 - QXCR1000320737, 53
 - QXCR1000378911, 53

- demo package, 10
 - installing, 22
- deployed reports, accessing, 23
- Display Data Table, 57
- displayed data option, 57
- distributed systems
 - installation overview, 20

E

- EJB Cache Utilization report, 38
- EJB Load-Stores Rate report, 46
- EJB Method Calls Rate report, 47
- EJB Pool Utilization report, 33
- EJB Top 20 report, 48
- EJB Transaction report, 39
- Execute Queue Throughput - Utilization report, 40
- extracting packages from distribution CD, 21

F

- filters, group, 9
- forms
 - SNMP Trap Action Definition, 30
 - Update Server Details, 29

G

- generic reports, 31
- grid options, 57
- group_manager (command), 12
- group accounts, 9
- group filters, 9

I

- IBM WebSphere Server
 - OV SPI for, 19
- installation of report pack, 21
- installation verification, 25
- integration with OVO, 30

J

JDBC Connection Pool Details report, 49
JDBC Throughput - Utilization report, 34
JMS Throughput - Utilization report, 41

L

legend options, 57
LIR Configuration, 26
local reporting, 25

M

Management Console, 23

N

Near Real Time Execute Queue Throughput -
Utilization report, 42
Near Real Time reports, 23
Near Real Time Server Availability - Throughput
report, 35
Network Node Manager, 30

O

OpenView Operations, sending traps to, 30
OpenView SPI for BEA WebLogic Server, 8
OpenView SPI for IBM WebSphere Server, 8
OV Operations for UNIX, 19
OV Operations for Windows, 19
OVPI, required version, 20
OVPI Timer
 restarting, 23
 starting, 16
 stopping, 14, 21

P

Package Manager, 22
package removal, 16, 24
Packages directory, 19
performance data, viewing, 23
polling, 25
polling policies, 12, 16

R

removing packages, 16, 24
Report Builder, 23

reporting, local, 25
report pack CD, 19
 extracting packages, 21
report parameters, editing, 10
reports
 accessing, 23
 customizing, 9
 deployed on satellite servers, 25
 deploying, 22
 generic Application Server, 31
 uninstalling, 16, 24
 viewing performance data, 23
 WebLogic Application Server, 37
 WebSphere Application Server, 45
Report Viewer, 23
 using to edit report parameters, 10

S

satellite servers
 deploying reports, 25
 packages, 25
server availability, default threshold, 29
Server Availability - Throughput report, 32
Server Transaction Rollback report, 43
Servlet Request Rate - Response Time report, 36
Servlet Sessions report, 50
SNMP Trap Action Definition form, 30
style options for graphs, 57

T

Thread Pool Activity report, 51
thresholds
 modifying, 29
 sub-package, 20, 30
Thresholds Module, 30
Transaction Throughput report, 52
traps, sending to OVO, 30
trendcopy
 disabling and re-enabling, 20

U

uninstalling report pack, 16, 24
Update Server Details form, 29
upgrading Common Property Tables, 12, 20
 rules, 22
Use Absolute Time, 55

V

verifying package installation, 25

version history

- version 1.0, 53

- version 1.1, 53

view in new frame, 56

W

WBS_Reporting_DMF.pro file, 28

WBS_Reporting_Hourly.pro, 28

WebLogic

- reports specific to this server type, 37

WebSphere

- reports specific to this server type, 45

WLS_Reporting_DMF.pro file, 28

WLS_Reporting_Hourly.pro, 28

