



# Standardize Microsoft SQL Server Standalone Provisioning Using HP DMA

HP Database and Middleware Automation version 10.21

## Table of Contents

Purpose .....	2
Prerequisites .....	4
Process Overview .....	5
Workflow 1: MS SQL - Install Standalone SQL Instance .....	6
Workflow 2: MS SQL Create Database .....	8
Appendix A: Alternative methods for specifying input files .....	9
Appendix B: How to import a file into the software repository .....	10
Appendix C: How to run an HP DMA workflow .....	11
Appendix D: How to expose hidden parameters .....	12

## Purpose

This paper describes how to use HP Database and Middleware Automation (HP DMA) to create a repeatable, standardized “gold image” for provisioning Microsoft SQL Server, including the SQL Server standalone instance and database.

**Tip:** To provision more complex SQL Server clustered environments, see *Standardize Microsoft SQL Server Cluster Provisioning Using HP DMA*, available at: [support.openview.hp.com/selfsolve/manuals](https://support.openview.hp.com/selfsolve/manuals)

## Benefits of HP DMA

HP DMA automates many of the daily administrative tasks required to manage the lifecycle of relational databases and J2EE application servers. These tasks are complex, often manual, typically time-consuming, and frequently error-prone. HP DMA improves the efficiency of these administrative tasks, enabling administrators to deliver change faster with higher quality, better consistency, and improved reliability.

HP DMA equips you to do the following:

- Define and enforce standards for software installation
- Define an installation process once and reuse it repeatedly
- Leverage knowledge enterprise-wide
- Avoid human error


## What SQL Server does

Microsoft SQL Server provides the following:

- Database management and system analysis for e-commerce, line-of-business, and data warehousing solutions.
- High availability and disaster recovery: Gain greater uptime, faster failover, improved manageability, and better use of hardware resources through failover clustering.
- Security and compliance: Help secure data with transparent data encryption, robust auditing, extensible key management and encrypted backups. It is even easier to manage permissions for data access to support separation of duties across various users.

**Goal**

This paper describes how to create the following configuration, a simple SQL Server standalone with two instances:

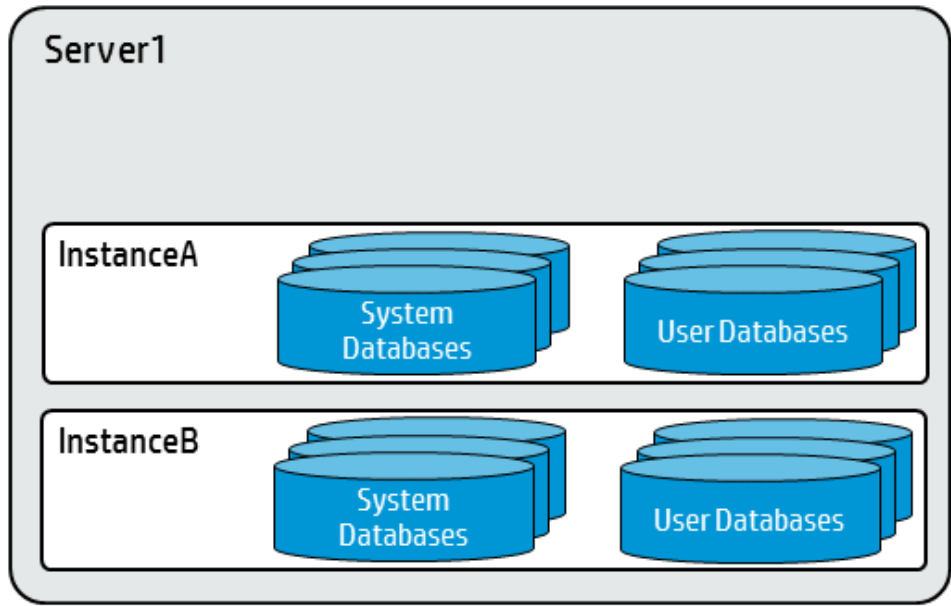

## Prerequisites

Before performing the procedures in this paper, your environment must meet the following minimum requirements:

- A server running Windows 2008, 2008 R2, or 2012.
- Installation software:
  - The SQL Server 2008, 2008 R2, 2012, or 2014 software installation files, obtained from Microsoft.
  - The installation media must be mounted or available for download from the software repository.<sup>1</sup>
- Storage: A staging directory with 4 gigabytes available to unzip the SQL Server software
- Permissions to create an SQL Server database:
  - System Stored Procedures (SP)
  - CREATE LOGIN
  - If using a non-default database owner, the `sp_changedbowner` process is available
  - If a non-default database owner is specified and does not exist, permission to create the appropriate login
- If you plan to run as a Windows domain user, .NET 3.5 is installed.

**Note:** For additional information, see "Run as a Windows Domain User" in the *HP DMA Installation Guide*, available at: [support.openview.hp.com/selfsolve/manuals](http://support.openview.hp.com/selfsolve/manuals)

- Licenses for SQL Server and HP DMA.


For additional requirements, see the following Microsoft documentation:

SQL Server version	Microsoft documentation
2008	<a href="#">Hardware and Software Requirements for Installing SQL Server 2008</a>
2008 R2	<a href="#">Hardware and Software Requirements for Installing SQL Server 2008 R2</a>
2012	<a href="#">Hardware and Software Requirements for Installing SQL Server 2012</a>
2014	<a href="#">Hardware and Software Requirements for Installing SQL Server 2014</a>

<sup>1</sup>For additional information, see [Alternative methods for specifying input files](#).

## Process Overview


Use the following HP DMA workflows to standardize the process of provisioning SQL Server Standalone instance and database:

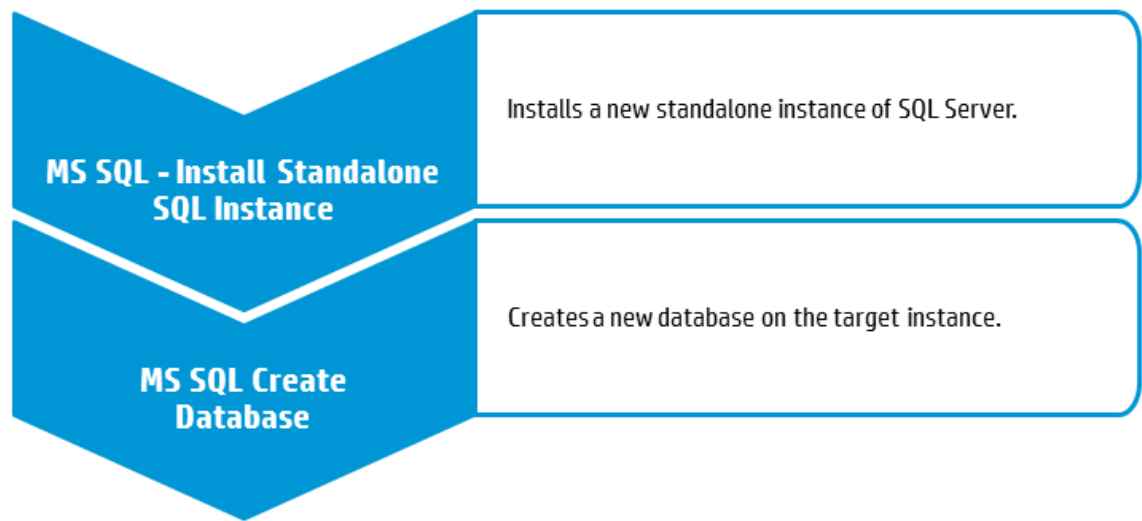

The following sections provide detailed information required to run each workflow.

**Note:** For additional information, see [How to run an HP DMA workflow](#).

## Workflow 1: MS SQL - Install Standalone SQL Instance



This section provides detailed information required to run the MS SQL - Install Standalone SQL Instance workflow.

**Tip:** To provision multiple SQL Server standalone instances, run MS SQL - Install Standalone SQL Instance once for each.

To create the configuration depicted in [Goal](#), you will run this workflow once to create InstanceA and a second time to create InstanceB. All other parameter values should be identical.

### Solution pack

This workflow requires the HP DMA Database Provisioning Solution Pack.

### Parameters to expose

None

### Input parameters

When you deploy the MS SQL - Install Standalone SQL Instance workflow, specify input parameter values for the following steps.

**Note:** Bold text in the following tables indicates that you must specify a value for the parameter.

### Step: MS SQL - Parameters - Install Standalone

Parameter	Description	Example Value
<b>Download From Software Directory</b>	Optional: The name of the ZIP file that contains the SQL Server installation software files obtained from Microsoft. <sup>1</sup>  <b>Note:</b> If necessary, manually zip the installation software files up.	SQL12.zip

<sup>1</sup>If the file is not found on the target server(s), it will be downloaded from the software repository. For additional information, see [Alternative methods for specifying input files](#).

### Step: MS SQL - Parameters - Install Standalone, continued


Parameter	Description	Example Value
<b>Download Target Destination</b>	<p>Required: The local directory where the SQL Server setup files are stored:<sup>1</sup></p> <ul style="list-style-type: none"> <li>- If source files are in the software repository: Location where Download From Software Directory will be downloaded and extracted</li> <li>- If source files are on the target: Location where the Microsoft SQL Server installation files already exist—not zipped up</li> </ul> <p>Upon a successful workflow completion, all downloaded and extracted files are cleaned up.</p>	C:\temp
<b>Instance Name</b>	<p>Required: The name of the newly created instance. Use MSSQLSERVER for the default instance and any other alphanumeric value for a named instance.</p>	<p>InstanceA</p> <p><i>When you run the workflow again for the second instance use the value InstanceB.</i></p>

### Step: Discover SQL Databases

Parameter	Description	Example Value
<b>Web Service Password</b>	Required: Password for the HP DMA Discovery web service API.	●●●
<b>Web Service User</b>	Required: User who is capable of modifying the managed environment by using the HP DMA Discovery web service API.	dmawebuser

<sup>1</sup>For additional information, see [Alternative methods for specifying input files](#).

## Workflow 2: MS SQL Create Database



This section provides detailed information required to run the MS SQL Create Database workflow.

### Solution pack

This workflow requires the HP DMA Database Provisioning Solution Pack.

### Parameters to expose

None

### Input parameters

When you deploy the MS SQL Create Database workflow, specify input parameter values for the following step.

**Note:** Bold text in the following table indicates that you must specify a value for the parameter.

### Step: MS SQL Parameters Create Database

Parameter	Description	Example Value
<b>Database Name</b>	Required: Name of the new database.	NewDatabase
<b>Web Service Password</b>	Required: Password for the HP DMA Discovery web service API.	●●●
<b>Web Service User</b>	Required: User who is capable of modifying the managed environment by using the HP DMA Discovery web service API.	dmawebuser



## Appendix A: Alternative methods for specifying input files

HP DMA provides alternative methods for specifying input files, either downloaded from the software repository or stored directly on the target server(s).

### Method 1: The input files are in the software repository

1. Obtain the pertinent input files.

For example, download the SQL Server installation software files from Microsoft and create a ZIP file with setup.exe at the root of the ZIP file.

2. Import the files into the software repository. For additional information, see [How to import a file into the software repository](#).
3. When you create the workflow deployment, specify the filenames and/or directory names for the pertinent input parameters—the files should not exist on the target server(s).
4. When the deployment is executed, HP DMA determines that the input files do not exist on the target server(s) in the specified (or default) download location and then downloads them from the software repository. If the input files need to be processed (for example, unzipped), the new files are placed in the specified (or default) extract location.
5. All downloaded, extracted, and staged files are removed upon successful completion of the workflow.

### Method 2: The input files are stored on each target server

1. Obtain the pertinent input files.

For example, download the SQL Server installation software files from Microsoft.

2. Copy the files to each target server into the specified (or default) download location.
3. When you create the workflow deployment, specify the filenames and/or directory names for the pertinent input parameters.
4. When the deployment is executed, HP DMA determines that the input files exist on the target server(s) in the specified (or default) download location. If the input file needs to be processed (for example, unzipped), the new files are placed in the specified (or default) extract location.
5. All extracted and staged files (and any downloaded files) are removed upon successful completion of the workflow.

## Appendix B: How to import a file into the software repository

Many HP DMA workflows are capable of downloading files from the software repository on the HP DMA server to the target server(s) where the workflow is running. The following procedure shows how to import a file into the software repository so that it can be downloaded and deployed by a workflow.

HP DMA uses the HP Server Automation (SA) Software Library as its software repository.

**Tip:** Be sure to use unique file names for all files that you import into the software repository.

To import a file into the SA Software Library:

1. Launch the SA Client from the Windows Start Menu.

By default, the SA Client is located in Start → All Programs → HP Software → HP Server Automation Client.

If the SA Client is not installed locally, follow the instructions under “Download and Install the HP SA Client Launcher” in the *HP Server Automation Single-Host Installation Guide* available at:

[support.openview.hp.com/selfsolve/manuals](http://support.openview.hp.com/selfsolve/manuals)

2. In the navigation pane in the SA Client, select Library → By Folder. Select (or create) the folder where you want to store the file. Click **Import Software**.
3. In the Import Software dialog, browse to the file (or files) to import, select the character encoding, and then click **Open**. For the Type, select **Unknown**. Select (or browse to) the folder where you want to store the files. For the Platform, select all the operating systems. Click **Import**.
4. Click **Close** after the import completes.

## Appendix C: How to run an HP DMA workflow

The following steps outline the general instructions to run an HP DMA workflow:

1. Import the specified HP DMA solution pack (if it is not already available).
2. Create a deployable copy of the workflow: Specify a name, add roles, optionally expose parameters (for additional information, see [How to expose hidden parameters](#)), and then **Save**.
3. Create a deployment: Specify a name, schedule, targets, and input parameters, and then **Save**.
4. Execute the deployment to run the workflow.
5. View the results to verify that the workflow ran correctly (refer to the online workflow documentation).

**Note:** For more information about running HP DMA workflows, see the *HP DMA Quick Start Tutorial* available at: [support.openview.hp.com/selfsolve/manuals](https://support.openview.hp.com/selfsolve/manuals)

## Appendix D: How to expose hidden parameters

If you need to expose any hidden parameters, perform the following additional steps when you create a deployable copy of the workflow:

- 1. Click the Workflow tab.
- 2. Click the blue arrow ▶ next to the pertinent step to expand the list of input parameters.
- 3. For the parameter that you want to expose, select - **User selected** - from the drop-down list. For example:



- 4. Repeat steps 2 and 3 for all the parameters that you would like to expose.
- 5. Save the copy of the workflow.

**To learn more about HP Database and Middleware Automation visit**  
**[go.hp.com/dma](http://go.hp.com/dma)**

---

© Copyright 2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft® and Windows® are U.S. registered trademarks of Microsoft Corporation.

July 2014

