

# HP RUM 9.26 for Mobile Apps



The importance of measuring application end user experience is significant when it comes to mobile usage. Mobile users are much less tolerant to application errors, slow response times, or poor usability. RUM answers this need by providing performance and availability status and crash reports for your mobile application.

## Motivation: Monitor What Matters

### Importance of Network Performance, Availability and Application Crashes

Applications are often required to exchange information with back-end servers. For example, getting the status of a user's bank account, receiving updates from friends, or posting a new picture to a blog. In all cases, the response time of such network communication has a direct effect on the overall user experience and satisfaction with the application. Various parameters can affect these response times, from the network load of the mobile carrier to hardware problems on back-end servers.

Availability is also an important characteristic of a network, since even a 30 minute outage can have a significant impact on revenue and productivity of your business.

Application crashes impact the confidence of users in the application and reduces overall satisfaction from the vendor.

Identifying slow response times and the cause of the lack of availability and application crashes are the first step in improving users' satisfaction and increasing brand loyalty.

### Measuring on Device

Measuring a mobile application's latency accurately requires measuring the latency on the device itself in the same way a user experiences it.

Eliminate the blind spots by getting visibility to the performance of third party services such as CDN and ads, which cannot be monitored otherwise as well as to the characteristics of the user device.

In order to determine the exact impact performance and availability problems have on users, RUM collects various user statistics such as device type, operating system, mobile carrier, installed application version, and crash data. See the New "Mobile Health" report section below.

### Improve user experience for mobile app

One of the most important factors affecting user experience of mobile applications is the responsiveness of back-end servers. The Network for Mobile Apps solution enables you to measure this time from the device, breaking it down to mobile network and server performance components.

### See how different devices perform

Mobile applications are installed on various devices, each one running on certain operating systems, equipped with different hardware resources, and connected via one of many network carriers. Application performance and availability may vary on each device and RUM can help you identify where performance or availability needs to be improved.

## HP RUM for Mobile Apps

On top of the above, application crashes are captured along with the mobile user statistics allowing a mobile developer the ability to pinpoint problematic code on a specific device, operating system, etc.

## Introduction

### Simple Instrumentation Process


RUM Mobile monitors native applications on an end user's device. The application is usually installed from the Apple/Google Stores and comes with embedded RUM Mobile capabilities, being pre-instrumented prior to publishing in the store. For Android applications, we developed a simple utility that embeds instrumentation in the application in a very intuitive way. The main advantage is that no code changes are required and the development process is not affected. With iOS applications, a special library needs to be added to the project, but no code change is required.

### Native and Hybrid Support

Mobile applications that are developed using both Native (iOS/Android) and HTML/JavaScript technologies (Hybrid) can also be monitored by RUM. Moreover, the same *instrument-once* process is used for all types of applications and you do not need to perform a different process for Hybrid applications.

### Deployment

Mobile devices running an instrumented application report relevant information to a RUM Client Monitor Probe. This requires a network configuration that enables Mobile users to connect to a predefined RUM Client Monitor Probe URL for data reporting. The RUM Engine also connects to the Client Monitor Probe to pull data; no connections are opened from the Probe to the Engine. You can also locate the Client Monitor Probe outside an organization (for example, on a cloud hosted machine). The following diagram shows both deployment options:

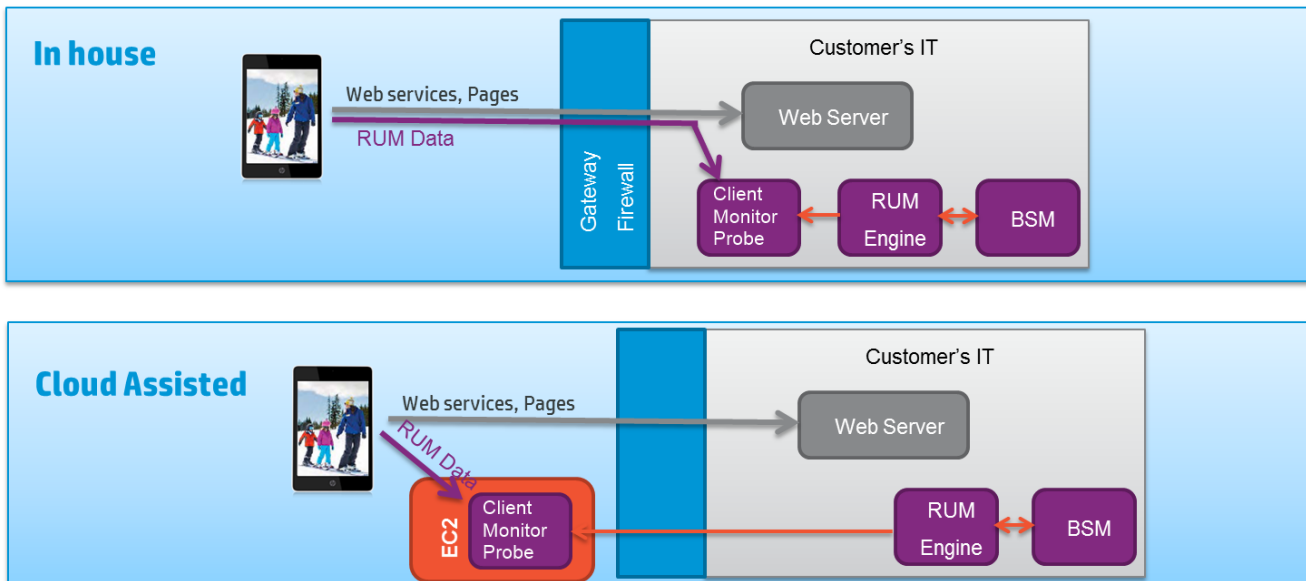

### No Impact on the Application

The instrumentation added by RUM to an application does not change the way the application functions and performs; it only measures the duration of certain operations and HTTP errors and crashes. The data is sent to the RUM Client Monitor Probe in chunks by a background process, so user experience is not affected. Moreover, there are fuses on the amount of memory used by the RUM background process, as well as network usage for the data channel between the mobile device and the Client Monitor Probe. These parameters can be configured during instrumentation.

## Security

Monitoring the user experience from a mobile device requires sending data to the RUM Client Monitor Probe. Only the URLs that the application has accessed are reported, no personal information is collected. The data from the mobile device is sent over an HTTPS (secured) channel. By default, the RUM Engine communicates with the RUM Client Monitor Probe over HTTPS connections with bi-directional authentication using server and client certificates.

## Mobile Health Report

The RUM Mobile data is available in all RUM reports in BSM. For a quick and intuitive overview of the status of a mobile app, a new Mobile Health report slices the information by different dimensions: user's location, operating system, application version, device type, mobile network carrier and mobile crashes.

### Mobile Health Report – Performance

The *Mobile Health Performance* overview displays locations with the slowest response time.

The geo map provides an indication of the mobile application users along with a volume and status indication.

A red icon indicates users experiencing performance problems.

A tooltip on a selected location shows the overall number of sessions along with the average response time.

The table on the right displays the 10 worst locations according to performance.



HP RUM for Mobile Apps

The lower pane of the Mobile Health report shows requests, domains and session breakdown.

The *Requests and Domains* – *HTTP Requests* table lists the 10 slowest requests. This list reveals a specific request that suffers from high response time. You can drill down from here to display the *Action Summary* report.

Requests and Domains | Kansas, Wichita

HTTP Requests		Domains	
HTTP Requests	Avg. Response Time	Total	
25% ads.tokens	10.04 sec	1151 hits	
79% http://activeadds.php?method=ads.tokens&*	6.06 sec	4604 hits	
85% getComments	5.72 sec	6906 hits	
95% getOptions	5.06 sec	2302 hits	
96% getUsersBlogs	5.05 sec	2302 hits	
96% Home Page	5.06 sec	2302 hits	
96% getPostFormats	5.06 sec	4604 hits	
96% deletePost	5.06 sec	2302 hits	
96% getRecentPosts	5.06 sec	4604 hits	
100% ads.getads	3.03 sec	1151 hits	

The worst results for the sort criteria are displayed (up to 10)

The *Action Summary* report displays the root cause of the long response time.

RUM Action Summary 01/12/2015 12:00:00 AM-01/19/2015 12:00:00 AM (GMT-07:00) Mountain Time (US & Canada)

Action	Tier	Total Action Hits	Performance (%)	Total Time (sec)	Server Time (sec)	Server Time to First Buffer (sec)	Network Time (sec)	Connect Time (sec)	SSL Handshake Time (sec)	Retransmit Time (sec)	Client Time (sec)
ads.tokens	Mobile Application	1,151	25.37	10.04	4.60	4.60	5.44	0.00	0.00	0.00	0.00
http://activeadds.php?method=ads.tokens&*		1,151	25.37	10.04	4.60	4.60	5.44	0.00	0.00	0.00	0.00

The action's raw data reveals the slow response time occurrences.

Action Raw Data 01/12/2015 12:00:00 AM-01/19/2015 12:00:00 AM (GMT-07:00) Mountain Time (US & Canada)

Action	Start Time	Application	Server	Running Software	Client	Events	Total Time (sec)	Server Time (sec)	Network Time (sec)	Client Time (sec)	Total Traffic (KB)	Snapshot
ads.tokens	1/12/2015 12:09:31 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.6	-	10.040	2.993	8.804	0.000	1.5	No
ads.tokens	1/12/2015 12:09:50 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.6	-	5.225	1.999	3.269	0.000	0.8	No
ads.tokens	1/12/2015 12:10:10 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.6	-	10.018	3.173	5.708	0.000	9.8	No
ads.tokens	1/12/2015 12:30:55 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.2	-	11.868	4.231	7.727	0.000	1.0	No
ads.tokens	1/12/2015 12:41:35 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.4	-	11.093	3.305	4.738	0.000	0.9	No
ads.tokens	1/12/2015 12:41:21 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.4	-	4.977	1.246	3.731	0.000	0.9	No
ads.tokens	1/12/2015 12:41:48 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.2	-	8.868	2.838	6.130	0.000	1.5	No
ads.tokens	1/12/2015 12:51:59 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.3	-	6.193	1.522	4.635	0.000	1.3	No
ads.tokens	1/12/2015 12:52:25 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.3	-	12.011	4.661	7.528	0.000	1.2	No
ads.tokens	1/12/2015 01:02:36 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.4	-	15.947	6.901	7.846	0.000	1.3	No
ads.tokens	1/12/2015 01:13:20 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.3	-	7.244	2.993	4.331	0.000	1.3	No
ads.tokens	1/12/2015 01:23:42 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.1	-	6.505	1.468	5.095	0.000	0.8	No
ads.tokens	1/12/2015 01:34:31 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.6	-	10.208	3.782	4.299	0.000	0.5	No
ads.tokens	1/12/2015 01:34:42 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.3	-	11.461	3.643	7.609	0.000	1.0	No
ads.tokens	1/12/2015 01:44:55 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.1	-	8.198	3.744	4.376	0.000	1.3	No
ads.tokens	1/12/2015 01:55:37 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.3	-	8.030	3.309	2.735	0.000	1.3	No
ads.tokens	1/12/2015 01:55:52 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.5	-	10.266	3.914	6.493	0.000	0.5	No
ads.tokens	1/12/2015 01:56:04 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.1	-	6.570	1.978	3.997	0.000	1.4	No
ads.tokens	1/12/2015 02:06:16 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.3	-	9.258	4.653	4.385	0.000	1.2	No
ads.tokens	1/12/2015 02:06:26 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.4	-	13.073	6.468	6.608	0.000	1.3	No
ads.tokens	1/12/2015 02:17:00 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.4	-	8.539	0.179	8.360	0.000	1.3	No
ads.tokens	1/12/2015 02:27:58 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.5	-	10.788	3.988	4.966	0.000	0.8	No
ads.tokens	1/12/2015 02:49:02 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.3	-	6.864	1.733	7.535	0.000	0.9	No
ads.tokens	1/12/2015 02:59:45 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.6	-	11.868	5.968	5.738	0.000	1.0	No
ads.tokens	1/12/2015 03:09:58 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.2	-	14.007	2.831	5.476	0.000	0.5	No
ads.tokens	1/12/2015 03:10:12 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.5	-	8.929	3.973	4.735	0.000	0.7	No
ads.tokens	1/12/2015 03:31:27 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.3	-	8.542	3.989	2.959	0.000	0.3	No
ads.tokens	1/12/2015 03:31:38 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.4	-	6.978	1.744	3.492	0.000	0.8	No
ads.tokens	1/12/2015 03:41:49 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.4	-	11.056	2.963	8.476	0.000	0.5	No
ads.tokens	1/12/2015 03:52:35 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv)	12.20.44.6	-	14.261	6.788	6.497	0.000	0.6	No

## HP RUM for Mobile Apps


The *Requests and Domains – Domains* table lists the domains used from a specific location. This list can reveal if a third-party component is impacting the overall response time. The table also displays the total number of requests for this specific domain which can provide a hint about the magnitude of the effect of the slow domain.

**Requests and Domains** | Kansas, Wichita


HTTP Requests Domains

Domains	Avg. Response Time	Total
63% advertisingprovider.com	6.54 sec	2302 hits
90% www.financecenter.org	5.37 sec	29926 hits

The *Sessions Breakdown – Carriers* graph provides a view of the distribution of all sessions coming from a specific location. This reveals a list of the slowest cellular carriers along with the volume of sessions from each carrier. You can also slice by application versions, operating systems, and devices.

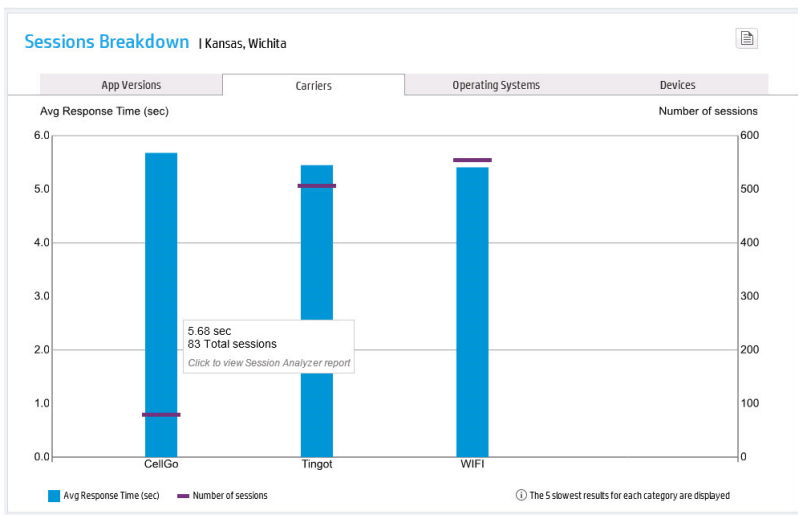


## Sessions Breakdown – App Versions graph

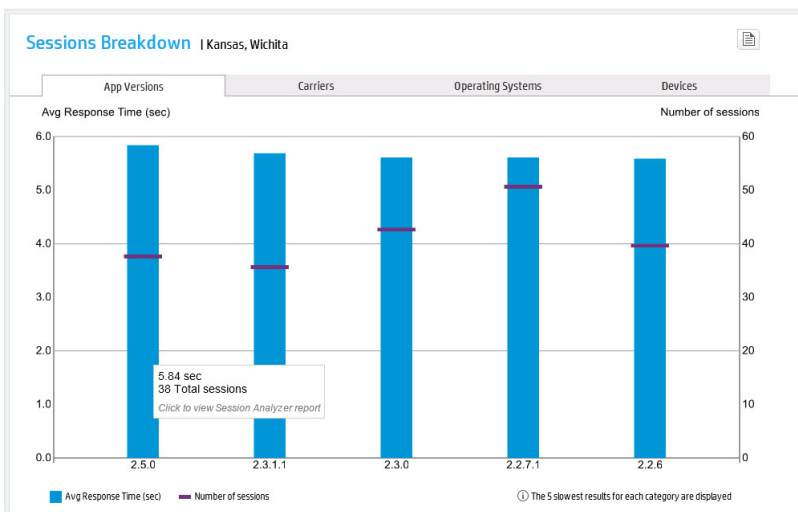


HP RUM for Mobile Apps

Sessions Breakdown – Operating Systems graph

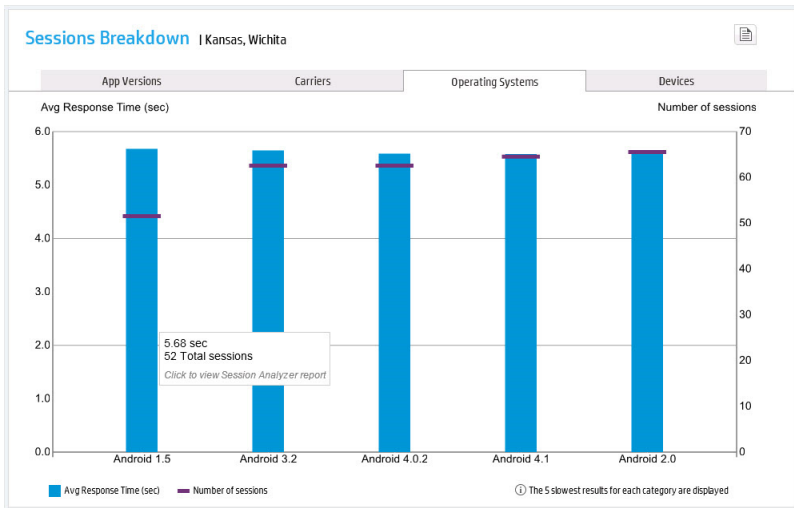

Sessions Breakdown – Devices graph

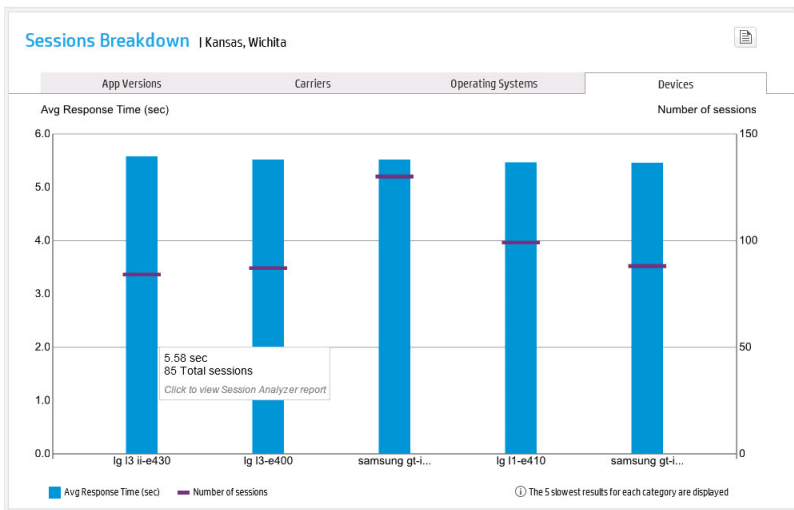

## HP RUM for Mobile Apps

The *Session Analyzer* report displays a list of sessions from a specific location and a specific carrier. This list reveals all sessions with an indication of the number of total actions and number of slow actions. You can drill down on each of the sessions to view additional details.

Start Time	Tier	End User Subgroup	Client	User Name	Location	Active	Duration (hh:mm:ss)	Latency (ms)	Error Events	Informational Events	Slow Actions	Actions	Has Data for VuGen Scripts
1/18/2015 6:00 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.5	jjo	Wichita	No	00:00:15	0	0	0	1	28	No
1/18/2015 6:07 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.1	robna	Wichita	No	00:00:17	0	0	0	1	28	No
1/18/2015 12:10 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.3	cassieh	Wichita	No	00:00:09	0	0	0	4	28	No
1/18/2015 11:59 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.6	maryh	Wichita	No	00:00:13	0	0	0	7	28	No
1/18/2015 11:38 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.5	dennisc	Wichita	No	00:00:16	0	0	0	9	28	No
1/18/2015 11:08 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.3	cassieh	Wichita	No	00:00:18	0	0	0	2	28	No
1/18/2015 10:55 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.1	maryh	Wichita	No	00:00:11	0	0	0	0	28	No
1/18/2015 7:45 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.4	randym	Wichita	No	00:00:18	0	0	0	3	28	No
1/18/2015 7:34 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.4	dennisc	Wichita	No	00:00:12	0	0	0	0	28	No
1/18/2015 6:09 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.5	dennisc	Wichita	No	00:00:22	0	0	0	3	28	No
1/18/2015 2:48 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.2	jjo	Wichita	No	00:00:14	0	0	0	4	28	No
1/18/2015 1:01 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.1	maryh	Wichita	No	00:00:13	0	0	0	0	28	No
1/18/2015 10:33 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.6	cassieh	Wichita	No	00:00:15	0	0	0	5	28	No
1/18/2015 8:46 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.6	randym	Wichita	No	00:00:16	0	0	0	8	28	No
1/18/2015 6:50 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.3	randym	Wichita	No	00:00:14	0	0	0	1	28	No
1/18/2015 2:46 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.1	robna	Wichita	No	00:00:17	0	0	0	5	28	No
1/18/2015 1:10 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.4	randym	Wichita	No	00:00:15	0	0	0	0	28	No
1/17/2015 11:45 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.3	dennisc	Wichita	No	00:00:16	0	0	0	3	28	No
1/17/2015 6:37 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.3	randym	Wichita	No	00:00:14	0	0	0	11	28	No
1/17/2015 1:40 PM	Mobile Application	Others [0.0.0-255.255	12.20.44.2	cassieh	Wichita	No	00:00:12	0	0	0	2	28	No
1/17/2015 11:12 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.6	robna	Wichita	No	00:00:16	0	0	0	15	28	No
1/17/2015 10:16 AM	Mobile Application	Others [0.0.0-255.255	12.20.44.5	jjo	Wichita	No	00:00:17	0	0	0	2	28	No

The *Session Details* report displays the user name and all mobile attributes (App version, connection type, device, OS and carrier). The bottom pane displays a list of requests that the device sent to the backend server with an indication of slow requests along with the total time, server time, and network time breakdown.

Start Time	Application	Events	Total Time (sec)	Server Time (sec)	Network Time (sec)	Client Time (sec)	Think Time (sec)	Total Traffic (KB)
15:59:29 3/8/2015	Tamir Mobile	-	0.844	0.738	0.208	0.000	0.000	2.3
15:59:28 3/8/2015	Tamir Mobile	-	0.216	0.214	0.004	0.000	0.707	72.0
15:59:29 3/8/2015	Tamir Mobile	-	0.657	0.652	0.005	0.000	0.592	0.8
15:59:29 3/8/2015	Tamir Mobile	-	0.696	0.659	0.039	0.000	0.000	1.3
15:59:30 3/8/2015	Tamir Mobile	-	0.183	0.182	0.001	0.000	1.429	5.8
15:59:31 3/8/2015	Tamir Mobile	-	0.228	0.225	0.003	0.000	1.618	109.6
15:59:33 3/8/2015	Tamir Mobile	-	0.803	0.801	0.002	0.000	4.892	5.8
15:59:38 3/8/2015	Tamir Mobile	-	0.044	0.041	0.003	0.000	4.860	5.8
15:59:43 3/8/2015	Tamir Mobile	-	1.243	0.994	0.249	0.000	0.000	2.3
15:59:42 3/8/2015	Tamir Mobile	-	0.825	0.813	0.012	0.000	0.892	72.0
15:59:43 3/8/2015	Tamir Mobile	-	0.650	0.647	0.003	0.000	0.895	0.8
15:59:44 3/8/2015	Tamir Mobile	-	0.678	0.564	0.112	0.000	3.451	1.3
15:59:48 3/8/2015	Tamir Mobile	-	0.600	0.588	0.012	0.000	0.000	2.4
15:59:47 3/8/2015	Tamir Mobile	-	0.382	0.299	0.003	0.000	2.384	194.1
15:59:50 3/8/2015	Tamir Mobile	-	0.447	0.369	0.078	0.000	0.616	0.8

### Mobile Health Report – Availability

The *Mobile Health Availability* report overview displays locations with the worst availability.

The geo map provides an indication of the mobile application users along with a volume and status indication.

A red icon indicates users experiencing availability problems.

A tooltip on a selected location shows the overall number of sessions along with the total availability from the location.

The table on the right displays the 10 worst locations according to availability.



The lower pane of the *Mobile Health* report shows requests, domains and session breakdown.

The *Requests and Domains – HTTP Requests* table lists the slowest requests. This list reveals a specific request that suffers from errors.

#### Requests and Domains | Tlaquepaque

HTTP Requests		Domains	
HTTP Requests	Pages with errors	Total	
0% ads.tokens	787	787 hits	
97% getCol... <a href="http://*/activeadds.php?method=ads.tokens&amp;">http://*/activeadds.php?method=ads.tokens&amp;</a>	61	1926 hits	
100% getUsersBlogs	0	697 hits	
100% getPages	0	1394 hits	
100% deletePost	0	697 hits	
100% getRecentPosts	0	1394 hits	
100% getPostFormats	0	1394 hits	
100% getOptions	0	697 hits	
100% Home Page	0	697 hits	
100% ads.getads	0	787 hits	

The worst results for the sort criteria are displayed (up to 10)



## HP RUM for Mobile Apps

The *RUM Action Summary* displays a request that is not available along with the number of error events. You can drilldown from this report to an action's raw data to view more information.

Action	Tier	Total Action Hits	Availability (%)	Error Events	Info Events	Stopped Action Hits
ads tokens	Mobile Application	787	0.00	787	0	0
http://activeadds.php?method=ads.tokens&*						

Action	Start Time	Application	Server	Running Software	Client	Events	Total Time (sec)	Server Time (sec)	Network Time (sec)	Client Time (sec)	Total Traffic (KB)	Snapshot
ads tokens	1/12/2015 12:42:21 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv_148.201.1.55)	148.201.1.55	Request not found	3.626	0.203	3.422	0.000	0.0	No
ads tokens	1/12/2015 12:42:23 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv_148.201.1.55)	148.201.1.55	Request not found	2.276	1.070	1.197	0.000	1.3	No
ads tokens	1/12/2015 12:50:41 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv_148.201.1.58)	148.201.1.58	Request not found	2.505	1.397	1.108	0.000	0.8	No
ads tokens	1/12/2015 12:59:02 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv_148.201.1.55)	148.201.1.55	Request not found	4.960	1.306	3.654	0.000	1.1	No
ads tokens	1/12/2015 01:07:17 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv_148.201.1.50)	148.201.1.50	Request not found	5.528	1.935	3.593	0.000	0.9	No
ads tokens	1/12/2015 01:40:45 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv_148.201.1.50)	148.201.1.50	Request not found	6.417	1.819	4.598	0.000	1.3	No
ads tokens	1/12/2015 01:49:06 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv_148.201.1.50)	148.201.1.50	Request not found	4.137	1.707	2.430	0.000	1.4	No
ads tokens	1/12/2015 02:39:03 AM	Finance Center App	advertisingprovider.com	advertisingprovider.com (adv_148.201.1.55)	148.201.1.55	Request not found	5.373	2.595	2.778	0.000	1.1	No

The *Requests and Domains – Domains* table lists the domains used from a specific location. This list can reveal if a third- party component is impacting the overall availability.


The table also displays the total number of requests for this specific domain which can provide a hint about the magnitude of the effect of the overall availability from this location.

Requests and Domains   Tlaquepaque		
HTTP Requests		Domains
Domains	Pages with errors	Total
50% advertisingprovider.com	787	1574 hits
99% www.financecenter.org	61	8896 hits

## HP RUM for Mobile Apps

The *Sessions Breakdown* graph shows only sessions with availability problems.

A tooltip reveals the number of sessions with errors compared to the overall number of sessions with a specific application version.

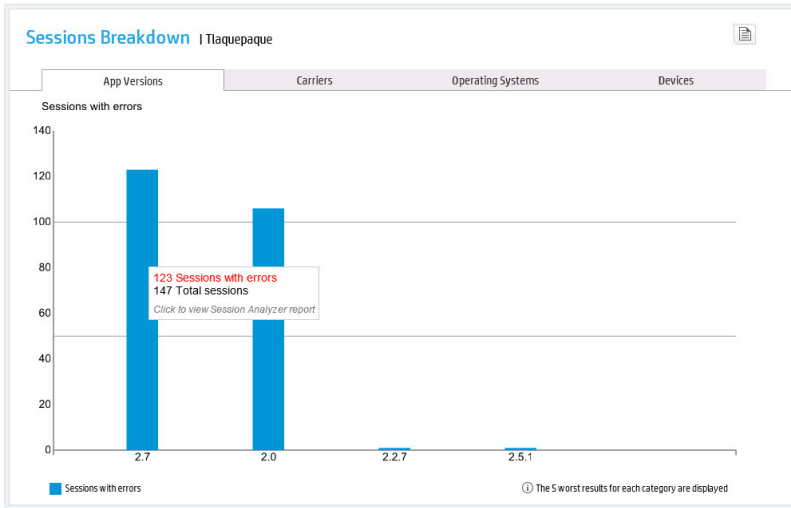

The *Session Analyzer* displays a list of sessions from a specific location and a specific carrier.

This list reveals all sessions with an indication of the number of total actions and number of slow actions.

Start Time	Tier	End User Subgroup	Client	User Name	Location	Active	Duration (hh:mm:ss)	Latency (ms)	Error Events	Informational Events	Slow Actions	Actions	Has Data for VuGen Scripts
1/19/2015 4:57 AM	Mobile Application	Others [0.0.0-255.255]	148.201.1.50	robina	Tlaquepaque	No	00:00:06	0	1	0	0	15	No
1/19/2015 2:35 AM	Mobile Application	Others [0.0.0-255.255]	148.201.1.55	desnicc	Tlaquepaque	No	00:00:06	0	1	0	0	15	No
1/19/2015 2:27 AM	Mobile Application	Others [0.0.0-255.255]	148.201.1.58	randym	Tlaquepaque	No	00:00:04	0	1	0	0	14	No
1/19/2015 1:03 AM	Mobile Application	Others [0.0.0-255.255]	148.201.1.50	jojo	Tlaquepaque	No	00:00:04	0	1	0	0	15	No
1/19/2015 12:05 AM	Mobile Application	Others [0.0.0-255.255]	148.201.1.55	maryh	Tlaquepaque	No	00:00:03	0	1	0	0	14	No
1/19/2015 11:48 PM	Mobile Application	Others [0.0.0-255.255]	148.201.1.50	robina	Tlaquepaque	No	00:00:03	0	1	0	0	15	No
1/19/2015 9:27 PM	Mobile Application	Others [0.0.0-255.255]	148.201.1.50	jgp	Tlaquepaque	No	00:00:03	0	1	0	0	15	No
1/19/2015 7:13 PM	Mobile Application	Others [0.0.0-255.255]	148.201.1.55	jgp	Tlaquepaque	No	00:00:06	0	2	0	0	15	No

## HP RUM for Mobile Apps

The *Session Details* report displays the user name and all mobile attributes (App version, connection type, device, OS and carrier).

The bottom pane displays a list of requests that the device sent to the backend server with an indication of the requests with *Request not found* availability problem.

Session Details 1/18/2015 7:12 PM 7:14 PM (GMT-07:00) Mountain Time (US & Canada)

Refresh

Properties

Start time: 1/18/2015 7:13 PM

Application: Finance Center App Client host name: N/A

End user: Others (0.0.0.0-255.255.255.255) User name: jjo

Location: Tlaquepaque Server IP: N/A

Total Traffic (KB): 16.7 Application Version: 2.7

Duration (hh:mm:ss): 00:00:06 Connection Type: Cellular

Operating system: Android Device: samsung gt-i8205

Mobile Carrier: Leapard Go

Latency (ms): 0.00 OS Version: Android 1.5

Client IP: 148.201.1.55

General Events

No data was found.

Actions

Action	Start Time	Application	Events	Total Time (sec)	Server Time (sec)	Network Time (sec)	Client Time (sec)	Think Time (sec)	Total Traffic (KB)
Home Page	1/18/2015 07:13:44 PM	Finance Center App	-	3.127	0.664	2.463	0.000	0.000	0.6
getUsersBlogs	1/18/2015 07:13:43 PM	Finance Center App	-	3.050	1.202	1.848	0.000	0.000	1.0
getOptions	1/18/2015 07:13:43 PM	Finance Center App	-	2.898	0.691	1.807	0.000	0.000	1.1
getComments	1/18/2015 07:13:44 PM	Finance Center App	-	2.980	1.095	1.885	0.000	0.000	1.0
getPostFormats	1/18/2015 07:13:44 PM	Finance Center App	-	3.596	1.475	2.117	0.000	0.000	0.9
getPosterPosts	1/18/2015 07:13:44 PM	Finance Center App	-	3.180	0.598	2.591	0.000	0.000	0.8
getPages	1/18/2015 07:13:44 PM	Finance Center App	-	2.846	0.691	2.155	0.000	0.000	1.0
deletePost	1/18/2015 07:13:44 PM	Finance Center App	-	3.170	0.912	2.258	0.000	0.000	1.7
getComments	1/18/2015 07:13:43 PM	Finance Center App	-	2.827	1.575	1.252	0.000	0.000	1.4
getPosterPosts	1/18/2015 07:13:44 PM	Finance Center App	-	3.549	1.454	2.095	0.000	0.000	0.6
getPostFormats	1/18/2015 07:13:44 PM	Finance Center App	-	2.291	0.977	1.314	0.000	0.000	1.9
getPages	1/18/2015 07:13:44 PM	Finance Center App	-	3.097	1.538	1.558	0.000	0.000	1.3
getComments	1/18/2015 07:13:44 PM	Finance Center App	Request not found	2.704	1.527	1.177	0.000	0.000	1.0
get http://www.financecenter.org/rmtpc.php?method=Fnnce-getComments	1/18/2015 07:13:45 PM	Finance Center App	-	4.823	1.114	3.809	0.000	0.000	0.8
ads30k0re	1/18/2015 07:13:45 PM	Finance Center App	Request not found	5.583	2.034	3.549	0.000	0.000	1.6

The *Session Summary* report gives you the ability to slice and dice your sessions according to different attributes (Carrier, connection type, Application version, device, operating system, and user name)

RUM Session Summary 01/12/2015 12:00:00 AM-01/19/2015 12:00:00 AM (GMT-07:00) Mountain Time (US & Canada)

RUM

Session Groups

Group session by: Application Version

Value	Number of Sessions	Number of Subgroups	Error Events	Info Events	Performance Events	Total Actions	Unavailable Actions	Latency (ms)	Total Traffic (KB)
Undefined Value	419	0	512	0	0	6,305	548	0.00	6,773.5
2.7	147	10	175	0	0	2,197	175	0.00	2,361.5
2.0	126	10	159	0	0	1,825	159	0.00	2,059.5
2.5.1	1	1	1	0	8	43	1	0.00	45.6
2.2.7	1	1	1	0	0	41	1	0.00	46.1
2.4.0	1	1	0	0	0	39	0	0.00	40.1
	697		848	0	8	10,550	1,184	0.00	11,326.3

Detailed Subgroups

Group session by: Device

Value	Number of Sessions	Error Events	Info Events	Performance Events	Total Actions	Unavailable Actions	Latency (ms)	Total Traffic (KB)
lg nexus-e960	130	155	0	0	1,952	155	0.00	2,075.0
samsung gt-i8205	72	99	0	8	1,149	99	0.00	1,225.4
lg t1-e410	74	92	0	0	1,122	92	0.00	1,187.6
lg l3-e400	63	94	0	0	952	94	0.00	1,023.9
samsung gt-i8300	69	81	0	0	1,033	81	0.00	1,110.0
lg s-e460	64	75	0	0	980	75	0.00	1,062.4
samsung gt-i8150	56	71	0	0	853	71	0.00	917.5
lg l3-e430	57	67	0	0	849	67	0.00	925.8
lg d-c-p990	57	64	0	0	847	64	0.00	917.5
samsung gt-i8152	55	60	0	0	813	60	0.00	882.3
	697	848	0	8	10,550	848	0.00	11,326.3

### Mobile Health Report – Application Crashes

In the *Mobile Health* report, you can see the number of crashes that occurred during a defined time frame.



In the *Event Log*, you can view a list of mobile crashes in a defined time frame. For each crash the exception name, message, and the beginning of the stack trace including the line number in the code is displayed. From each line you can drill to *Session Details* report

Time	Event Name	Tier	Server	End User Group	Event Details
1/12/2015 7:11 AM	Application Crash	Mobile Application	Finance Center App_Crashes	Others	java.lang.ArithmeticException: "divide by zero" at com.example.crashme.MainActivity.onCreate(MainActivity.java:108) at com.example.crashme.MainActivity.onCreate(MainActivity.java:55) ... 14 more
1/12/2015 7:11 AM	Application Crash	Mobile Application	Finance Center App_Crashes	Others	java.lang.NullPointerException: "divide by zero" at onoops.crashme.ui.activities.LoginActivity.onCreate(LoginActivity.java:81) at android.app.Activity.performCreate(Activity.java:5194) at android.app.Instrumentation.callActivityOnCreate(Instrum
1/12/2015 7:41 AM	Application Crash	Mobile Application	Finance Center App_Crashes	Others	java.lang.ArithmeticException: "divide by zero" at com.example.crashme.MainActivity.onCreate(MainActivity.java:108) at com.example.crashme.MainActivity.onCreate(MainActivity.java:55) ... 14 more
1/12/2015 8:12 AM	Application Crash	Mobile Application	Finance Center App_Crashes	Others	java.lang.ArithmeticException: "divide by zero" at onoops.crashme.ui.activities.LoginActivity.onCreate(LoginActivity.java:81) at android.app.Activity.performCreate(Activity.java:5194) at android.app.Instrumentation.callActivityOnCreate(Instrum
1/12/2015 8:12 AM	Application Crash	Mobile Application	Finance Center App_Crashes	Others	java.lang.NullPointerException: "divide by zero" at android.graphics.NinePatch.getWidth(NinePatch.java:138) at android.graphics.drawable.NinePatchDrawable.computeBitmapSize(NinePatchDrawable.java:196) at android.graphics.drawable.NinePatchDrawable

In the *Session Details* report, you can view a user session that experienced a crash. This report includes the user name and all mobile attributes (application version, connection type, device, operating system, and carrier).

Below this information, you can see the crash details including the exception name, message, and the beginning of the stack trace including the line of the code where the exception was thrown.


This information is followed by a list of requests that the device sent to the backend server before the crash occurred.

The screenshot shows the 'Session Details' for a user session on 1/12/2015 at 7:11:00 AM. It includes properties like application name, user name, location, and device. Below, it shows the 'General Events' section with an 'Application Crash' event. At the bottom, an 'Actions' table lists the requests made by the device before the crash.

Action	Start Time	Application	Events	Total Time (sec)	Server Time (sec)	Network Time (sec)	Client Time (sec)	Think Time (sec)	Total Traffic (KB)
Home Page	1/12/2015 07:11:22 AM	Finance Center App	-	1.893	1.075	0.808	0.000	0.000	0.4
getUsersBlogs	1/12/2015 07:11:22 AM	Finance Center App	-	2.803	1.923	1.000	0.000	0.000	1.1
getOptions	1/12/2015 07:11:22 AM	Finance Center App	-	1.354	0.537	0.817	0.000	0.000	1.4
getComments	1/12/2015 07:11:22 AM	Finance Center App	-	2.327	0.935	1.392	0.000	0.000	0.8
getPostFormats	1/12/2015 07:11:22 AM	Finance Center App	-	2.506	1.607	0.899	0.000	0.000	0.3
getRecentPosts	1/12/2015 07:11:22 AM	Finance Center App	-	2.127	0.708	1.419	0.000	0.000	0.8
getPages	1/12/2015 07:11:22 AM	Finance Center App	-	2.122	0.946	1.176	0.000	0.000	1.4
deletePost	1/12/2015 07:11:22 AM	Finance Center App	-	2.131	1.427	0.704	0.000	0.000	0.9
getComments	1/12/2015 07:11:22 AM	Finance Center App	-	2.076	1.305	0.768	0.000	0.000	1.6
getRecentPosts	1/12/2015 07:11:22 AM	Finance Center App	-	3.492	1.089	2.394	0.000	0.000	1.3
getPostFormats	1/12/2015 07:11:22 AM	Finance Center App	-	1.543	0.996	0.957	0.000	0.000	0.9
getPages	1/12/2015 07:11:22 AM	Finance Center App	-	2.805	1.304	1.486	0.000	0.000	1.5
getComments	1/12/2015 07:11:22 AM	Finance Center App	-	3.360	0.700	2.651	0.000	0.000	1.2

### Common User Flow

The *Common User Flow* analyzes all traffic and displays the most used flows. You can use this information to create business transactions for your applications.

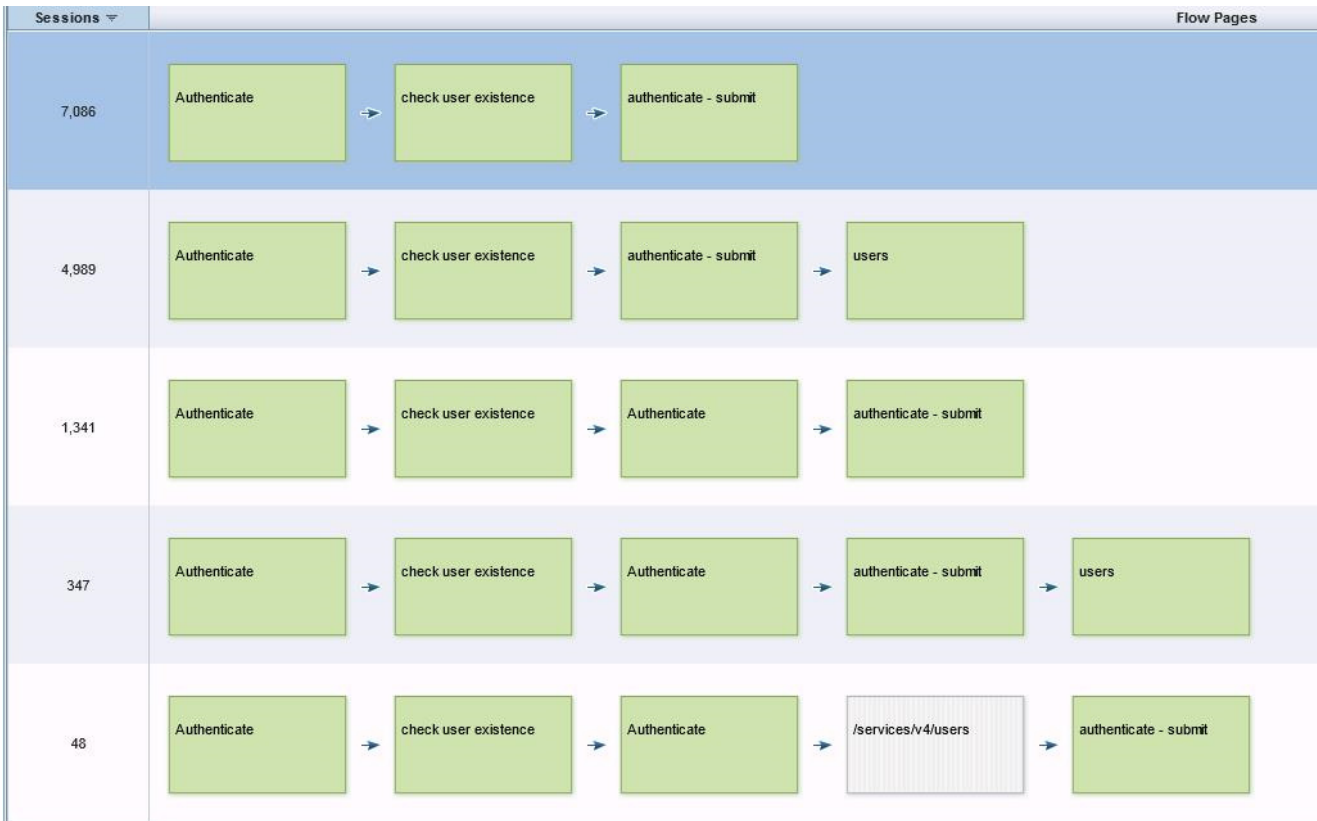

## How to Configure RUM Monitoring for Your Mobile App

### Install

Install BSM, RUM Engine, or RUM Client Monitor Probe. We recommend you allocate different hardware for each probe and a separate hardware for the RUM Engine. Refer to the *Deployment* paragraph above when choosing the location for the Client Monitor Probe. Consider both “In house” and “Cloud” options.

**Note:** Do not install both the Client Monitor Probe and the Sniffer Probe on the same server. You can install one of the probe types on the same server as the RUM Engine if limited capacity is required (for POC purposes, for example). However, you should expect lower capacity on all modules that are installed on the same server. If you do encounter capacity issues, do not install the probes on the same server as the RUM Engine.

### Create Applications in BSM

Create a new RUM application in BSM End User Management (EUM) Administration, using the new “Mobile Application” template. As part of an application creation, a unique *Application Key* is generated, which is used when instrumenting the mobile applications. Do not forget to assign a RUM Engine and RUM Client Monitor Probe for the new application in the BSM EUM Administration.

### Instrument Mobile Applications - Android

In order to instrument Android applications, open the *Mobile Application Instrumentation* tool, from the *Tools* menu in the RUM Engine web console. Provide the APK (compiled Android application) you want to instrument.

**Mobile Application Instrumentation for Android**

Use this tool to instrument Android applications.  
For iOS instrumentation instructions refer to the Real User Monitor Installation and Upgrade Guide.

\* APK file:  No file chosen

---

**Instrument for Production** (use this option to enable you to upload the instrumented application to the Play Store)

\* Application:

\* RUM Client Monitor Probe URL:

(Example: [http://www.example.com/monitor](#))

Application Signing (leave blank if you want to sign the application later using Javas jarsigner.exe utility)

Keystore file:  No file chosen

Keystore password:

Key alias:

Key password:

Add "Access Network State" permission to the application (required for RUM to determine the user connection type: WiFi or Mobile)

**Allow access to http content** (parameters extraction, user name extraction, unhide query parameters)

Do not allow content extraction

Apply content extraction configuration change at instrumentation time only

Apply any configuration changes to the mobile device even after instrumentation

---

**Instrument for Testing** (use this option to test monitoring functionality without uploading the application to the Play Store)

\* Application:

\* RUM Client Monitor Probe URL:

(Example: [http://www.example.com/monitor](#))

---

**Instrument for Offline Testing and Data Collection** (In this mode the instrumented application will not report data to the RUM Client Monitor probe)

Store monitored data locally Monitored data will be saved to "Android/data/app\_package\_name/data" folder on the mobile device. This data includes POST content of requests, which can assist you in defining Extracted Parameters in BSM.

---

## HP RUM for Mobile Apps

The URL you specify in the “RUM Client Monitor Probe URL” field is the URL that will be accessed by the users’ mobile devices. It may be different from the internal host name/URL that is used for communication with the RUM Engine. It is recommended to use the “https://” connection scheme.

Select the application that you previously defined in BSM. The *Application Key* is fetched automatically and embedded in the instrumented application.

If you select *Instrument for Testing*, the instrumented application is signed with a temporary certificate that can be used for testing purposes.

**Note:** RUM Mobile uses a third-party tool called ACRA for Crash Reports for Android. This third-party tool is embedded as part of the instrumentation process. However, if the application already uses a crash reporting module that uses ACRA, a warning message will appear during instrumentation and crash reporting for android will be disabled.

## Instrument Mobile Applications – iOS

For iOS application instrumentation, you need to add the RUM Monitoring library to your project, along with couple of dependency frameworks. You also need to add a PLIST file to your project, which will configure the URL of the Probe, Application Key, and other optional parameters. Refer to the *RUM Installation and Upgrade* guide for complete information.

## Test

As with any change to your application, it is recommended that you verify the user experience of the application after the instrumentation process. You can see how the data is reflected in BSM reports and enhance the configuration if needed.

## Extract Additional Content

By default, RUM will only report the URLs of HTTP requests made by the application. In some cases you may want to extract additional information from the HTTP headers or POST content in order to identify the requests and understand the user flow in the application. You can define content extraction in the *Extracted Parameters* section, and add rules to extract the *Username*.

The configuration is dynamically pushed to all monitored devices, so you can continue making changes to the configuration of the extracted parameters after shipping the application to the Play/App Store. For security and privacy considerations, while instrumenting the app, you can instruct the application to ignore such dynamic configuration.

In order to define the Extracted Parameters, you should be familiar with the internal format of the POST content that your application sends to the server, as well as with special HTTP headers. In order to get this information, you can use the special instrumentation mode, which stores content of all requests in a local file instead of sending data to the Client Monitor Probe. For Android, you select “Instrument for Offline Testing” mode and check “Store monitored data locally”. For iOS you add a special flag to the PLIST file in your project. You install the instrumented application on a testing device, perform the usual business process within the application, and collect the resulting textual file (Android\data\\files\hp-app-network-data.txt) for content analysis. Note that in this mode whole content is saved, including sensitive data if such was sent by the application to the server. Do not distribute the application instrumented in this mode to your users.

## Distribute

The last step is uploading the instrumented version of the application to the Store. For Android, you use the “Instrument for Production” mode, providing the certificate to sign the APK file (alternatively, you can sign it later). With iOS applications, you need to build the project in production configuration.

## Mobile Resources Utilization

As mentioned above, RUM monitored data is collected and reported by a background process, without affecting the user experience. There are a number of types of mobile device resources used by the RUM data collection of which you should be aware.

**Network bandwidth.** The volume of the network used by RUM to transfer the collected data to the Client Monitor Probe depends on the type of monitored application. For a typical mobile application, RUM monitoring adds up to 7% overhead to the total network usage. For applications that make a relatively low number of network requests, the overhead is up to 15KB for a 10-minute session. You can configure the maximal network bandwidth that RUM is allowed to consume during the instrumentation process.

**Battery.** The main parameter that affects battery usage by RUM monitoring is the frequency of HTTP communication to the RUM Client Monitor Probe. When the application is not generating any network activity, RUM has no data to report to the Client Monitor Probe. In order to reduce the number of HTTP requests made by RUM monitoring, we delay the information on the device, and send it to the Client Monitor Probe in larger chunks. By default, the maximal delay is 2 minutes. In case a large amount of data is accumulated, it is delivered earlier, but the minimal interval between two subsequent reports is 30 seconds. Both minimal and maximal time intervals can be changed during the instrumentation.

**Performance.** There is no visible performance degradation in an instrumented application (or in an application with RUM embedded) relative to the original application.

**Memory.** Memory usage is less than 100k.

## End-to-End Monitoring

Monitoring the application on device is important for validating end user experience and isolation problems. In order to gain visibility to the health of the backend of the application, we recommend combining mobile client monitoring with monitoring application backend components.

### Application Tiers

Combined with the RUM Network/Sniffer functionality, you can define Web and Backend tiers for your mobile application, as you do for any application monitored by RUM. Additional application tiers can be configured in the *Application Tiers* tab of the application in End User Management Administration.

With *Web Tiers*, you can follow the same HTTP request through multiple components:

Action	Tier ▲	Total Action Hits	Availability (%)	Total Time (sec)	Server Time (sec)	Requests per Action Hit
Confirm Payment	1-RUM Browser	3,166	100.00	4.62	0.09	22.00
Confirm Payment	2-Reverse Proxy	3,154	100.00	4.83	3.66	34.99
Confirm Payment	3-Load Balancer	3,520	100.00	4.69	4.59	1.00
Confirm Payment	4-Ajax Application Servers	1,740	100.00	8.56	8.15	1.00
		<b>11,580</b>	<b>100.00</b>	<b>5.29</b>	<b>3.64</b>	<b>16.00</b>

*Backend Tiers* can provide visibility to additional application components:

Running Softwares						
Name	Host	IP Address	Availability (%)	Response Time (sec)	Total Actions Hits	
Ajax Application Server (mydvm0639)	mydvm0639	16.59.56.85	100.00	0.09	7,668	
Ajax Application Server (vmamrnd35)	vmamrnd35	16.55.244.192	99.83	0.32	77,093	
mysql_database (vmamrnd38.devlab.ad)	vmamrnd38.devlab.ad	16.59.63.17	100.00	0.03	2,810,671	
Web Server (labm3rum05.devlab.ad)	labm3rum05.devlab.ad	16.59.57.43	99.93	0.23	153,892	
Web Server (LABM3RUM06.devlab.ad)	LABM3RUM06.devlab.ad	16.59.56.209	99.92	0.42	153,783	



## Integration with HP Diagnostics

To enable quick isolation and pinpointing of the cause of a performance problem, you can drill down from a request monitored by RUM into Diagnostics to understand the application server behavior at the time, or view a full call profile to identify a problematic method.

## Privacy and Security

The information collected on the mobile device is transferred to the RUM Client Monitor Probe over a secure HTTPS channel.

By default, RUM only collects URLs of HTTP requests and general device information, such as the OS version, device model, and mobile carrier.

The *Extracted Parameters* that are manually configured for the application may potentially include a user's sensitive information, so be extra careful when defining these parameters. In BSM, only a Secure User has permissions to modify sensitive configurations including Extracted Parameters and Username extraction. In addition, as part of the instrumentation process, you can instruct the application to ignore any extracted parameters that are defined in BSM, and not to do any POST content extraction.

The location of the users is determined by the Client Monitor Probe based on the visible IP address of the reporting device. GPS or other location services available on a device are not used by RUM.