



**Hewlett Packard
Enterprise**

HPE Enterprise Maps

Software Version: 3.10
Windows and Linux Operating System

Report Editor User Guide

Document Release Date: April 2016
Software Release Date: April 2016

Legal Notices

Warranty

The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HPE shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HPE required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notice

© Copyright 2015 Hewlett Packard Enterprise Development LP

Trademark Notices

Adobe™ is a trademark of Adobe Systems Incorporated.

Microsoft® and Windows® are U.S. registered trademarks of Microsoft Corporation.

UNIX® is a registered trademark of The Open Group.

This product includes an interface of the 'zlib' general purpose compression library, which is Copyright © 1995-2002 Jean-loup Gailly and Mark Adler.

Documentation Updates

The title page of this document contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.
- Software Release Date, which indicates the release date of this version of the software.

To check for recent updates or to verify that you are using the most recent edition of a document, go to:

<https://softwaresupport.hp.com>

This site requires that you register for an HPE Passport and sign in. To register for an HPE Passport ID, go to: <https://hpp12.passport.hpe.com/hppcf/createuser.do>

Or click the **Register** link at the top of the HPE Software Support page.

You will also receive updated or new editions if you subscribe to the appropriate product support service. Contact your HPE sales representative for details.

Support

Visit the HPE Software Support Online web site at: <https://softwaresupport.hp.com>

This website provides contact information and details about the products, services, and support that HPE Software offers.

HPE Software online support provides customer self-solve capabilities. It provides a fast and efficient way to access interactive technical support tools needed to manage your business. As a valued support customer, you can benefit by using the support website to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Download software patches
- Manage support contracts
- Look up HPE support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HPE Passport user and sign in. Many also require a support contract. To register for an HPE Passport ID, go to:

<https://hpp12.passport.hpe.com/hppcf/createuser.do>

To find more information about access levels, go to:

<https://softwaresupport.hp.com/web/softwaresupport/access-levels>

HPE Software accesses the HPE Software to explore Enterprise Solutions that meet your business needs, and a full list of Enterprise Software Products and Services. The URL for this website is

<https://www.hpe.com/us/en/software.html>.

About this PDF Version of Online Help

This document is a PDF version of the online help. This PDF file is provided so you can easily print multiple topics from the help information or read the online help in PDF format. Because this content was originally created to be viewed as online help in a web browser, some topics may not be formatted properly. Some interactive topics may not be present in this PDF version. Those topics can be successfully printed from within the online help.

Contents

Chapter 1: Report Editor Guide	7
Chapter 2: Report Editor	8
HPE EM Workbench Suite	8
Overview	8
User Interface	9
Data Explorer	9
Project Explorer	10
Server Explorer	11
Use Cases	11
Chapter 3: Getting Started	13
Installing HPE EM Workbench	13
SSL Configuration	15
Installing a Report Development Environment	16
Java Environment Setup	16
Oracle XE Account Setup	16
Configuring a Reporting Project	17
Creating a Reporting Project	17
Importing a Reporting Project	18
Importing Report Definitions	18
Rebranding HPE EM Reports	19
Configuring the Model	19
Configuring the Reporting Logging Level	19
Chapter 4: Designing Reports	20
Creating a Report Definition	20
Adding a Data Source to a Report	20
Creating a Data Set	21
Designing a Report Layout	22
Shared and User-Specific Reports	22
Modifying Existing Report Definitions	22
Chapter 5: Using DQL	23
Introduction to DQL	23
Artifact Inheritance	23

Categorization Properties	24
Complex Properties	25
Embedding SQL Queries	25
Fixing Multiple Properties	26
Modifiers	27
Primitive Properties	27
Relationships	28
Virtual Properties	29
 DQL Reference	30
Properties in DQL	30
DQL and SQL	33
DQL Grammar	33
Select	34
FROM Clause	35
Conditions	35
Expressions	37
Lexical Rules	38
DQL with 3rd Party Products	39
DQL JDBC Driver	39
DQL in SQL Designers	40
DQL in MS Access	40
 Chapter 6: Exploring the Database	42
SDM to Database Mapping Tool	42
Adding a JDBC Driver	42
Changing the Data Collection Settings	43
Optimizing the Database	43
Writing SQL Queries	43
Joining Tables in Queries	44
Example: Business Service SELECT	44
Example: Contract SELECT	44
Example: Combined Business Service and Contract SELECT	45
Example: Accepted Contract Count for a Business Service	46
 Chapter 7: Deploying Reports	48
Accessing Reports	48
Creating a Reporting Extension	48
Deploying a Report to HPE EM	49
Applying Extensions	50
Decoupled DB Scenario	51
Single-Step Scenario	51
Redeploying EAR File	52

Removing Report Definitions from HPE EM	52
Chapter 8: Example: Failure Impact Report for the Reports Tab	54
Example: Failure Impact Data Set	54
Example: Failure Impact Report Layout	55
Appendix A: Dialog Boxes	57
Build Extension Wizard	57
New Data Set	57
New Report Project Wizard	57
New Report Project Wizard: Default Library Configuration - Create a new data source	58
New Report Project Wizard: New Server	58
Appendix B: Troubleshooting	59
Incomplete Table List	59
The Platform Perspective is Missing Views	59
The Report Result does not Appear	59
Oracle Developer Queries Cause Errors in HPE EM Workbench	60
SQL Error on Report Previews	60
HPE EM Workbench Looks Different from the Pictures in the Documentation	61
HPE EM Workbench Displays Scrambled Table Names	61

Chapter 1: Report Editor Guide

Welcome to the *Report Editor User Guide*. This guide explains how to use Report Editor as part of HPE Enterprise Maps (HPE EM).

This guide contains the following chapters:

- ["Report Editor" on page 8](#)

Provides an overview of the main features of Report Editor.

- ["Getting Started" on page 13](#)

Describes the installation of the main features, and shows you how to create an reporting project in Report Editor.

- ["Designing Reports" on page 20](#)

Explains how to create, edit, and add data to reports usingReport Editor.

- ["Using DQL" on page 23](#)

Shows how to use DQL to creates queries in Report Editor.

- ["Exploring the Database" on page 42](#)

Shows how to setup and access your database in Report Editor.

- ["Deploying Reports" on page 48](#)

Shows how to create and apply extensions to deploy reports created in Report Editor.

- ["Example: Failure Impact Report for the Reports Tab" on page 54](#)

Demonstrates how to build the report shown in the Report Editor use case.

- ["Dialog Boxes" on page 57](#)

Dialog boxes reference.

- ["Troubleshooting" on page 59](#)

Tips for resolving common problems in Report Editor.

Chapter 2: Report Editor

Workbench includes Report Editor enabling you to create and deployment new reports easily and simply. The relationship between Report Editor and the HPE EM Reporting Service is shown in “HPE EM Reporting Framework”.

HPE EM Reporting Framework

Tip: HPE EM Report Editor is an implementation of the Built-In Reporting Tool (BIRT), an open source Eclipse-based reporting system. The Help menu includes the BIRT documentation. The *BIRT Report Developer Guide* describes the general use of BIRT to create reports. The Report Editor Guide adds to this by explaining how to use this functionality in conjunction with HPE EM.

This chapter introduces Report Editor in the following sections:

- "HPE EM Workbench Suite" below
- "Overview " below
- "User Interface " on the next page
- "Use Cases " on page 11

HPE EM Workbench Suite

HPE EM Workbench is a suite of editor tools enabling you to customize your deployment of HPE EM.

HPE EM Workbench consists of the following editor tools, distributed as a single Eclipse development platform:

- Customization Editor
Customizes the underlying System Data Model (SDM) within HPE EM.
- Taxonomy Editor
Customizes the taxonomies used to categorize artifacts in HPE EM.
- Assertion Editor
Customizes the conditions applied by your business policies within HPE EM.
- Report Editor
Customizes report definitions for use with HPE EM.

Overview

Report Editor interacts with HPE EM, enabling you to access existing report definitions, create customized reports, and deploy them to the HPE EM server.

To access, create, and deploy reports with HPE EM, follow this process:

1. Create a reporting project.
For details, see "[Configuring a Reporting Project](#)" on page 17.
2. Create and modify reports.
For details, see "[Designing Reports](#)" on page 20.
3. Deploy your reports to HPE EM.
For details, see "[Deploying Reports](#)" on page 48.
4. Access your reports in HPE EM.
For details, see:
 - "[Use Cases](#)" on page 11
 - "[Accessing Reports](#)" on page 48
 - "[Example: Failure Impact Report for the Reports Tab](#)" on page 54
 - *HPE Enterprise Maps User Guide*

User Interface

The default platform perspective is split into a number of views as following:

- **Project Explorer**
The tree view of your reporting project. For details, see "[Project Explorer](#)" on the next page.
- **Data Explorer**
The view of the data sources and data sets for a particular report. For details, see "[Data Explorer](#)" below.
- **Server Explorer**
A list of HPE EM servers connected to HPE EM Workbench. For details, see "[Server Explorer](#)" on page 11.
- **Editor Views**
The main area of the perspective contains report editor views. In this view you can edit the layout and properties of your report definition.

Data Explorer

The Data Explorer displays the sources and sets of data used by the particular report you are working with, as shown in the Data Explorer View.

Data Explorer contains the following elements:

- **Data Sources**
Open the context menu and select **New Data Source** to access a database.
For details, see "[Adding a Data Source to a Report](#)" on page 20.
- **Data Sets**
Open the context menu and select **New Data Set** to define the data used by the report.

For details, see "[Creating a Data Set](#) " on page 21.

Project Explorer

The Project Explorer, as shown below, is a view of the projects in your workspace and the report definitions they contain. This view is also an interaction point with HPE EM.

Each project contains a set of report definitions and the HPE EM library.

Each report definition contains the following sections:

- **Overview**

Double-click to open a properties editor view enabling you to change the name and description, and to mark the report as **Shared** to all users or leave the report as user specific.

- **Report Design**

Double-click to open a layout editor view enabling you to change the appearance and content of the report definition.

The Project Explorer contains additional context menu options enabling you to interact with a running HPE EM server. Right-click the project name or a particular report definition, and select **HPE EM** to view the options listed in “Project Context Menu Options” and “Report Definition Context Menu Options”.

Project Context Menu Options

Option	Function
Download Reports	Import report definitions from HPE EM. For details, see " Importing Report Definitions " on page 18.
Upload to Server	Export a report to the default HPE EM server. For details, see " Deploying a Report to HPE EM " on page 49.
Update from Server	Update report definitions from HPE EM.
Remove from Server	Delete reports from HPE EM.
Upload To Other Server	Export a report to a specified HPE EM server.
Build Extension	Create a reporting extension for HPE EM containing all the reports in your project. For details, see " Creating a Reporting Extension " on page 48.

Report Definition Context Menu Options

Option	Function
Upload to Server	Export a report to the default HPE EM server. For details, see " Deploying a Report to HPE EM " on page 49.
Update from Server	Update report definitions from HPE EM. For details, see " Importing Report Definitions " on page 18.
Remove from	Delete the report from HPE EM.

Option	Function
Server	
Upload To Other Server	Export a report to a specified HPE EM server.
Build Extension	Create a reporting extension for HPE EM containing all the reports in your project. For details, see " Creating a Reporting Extension " on page 48.

Server Explorer

The Server Explorer displays the HPE EM servers connected to HPE EM Workbench, as shown in "Server Explorer View". The functionality is shared by all the HPE EM Workbench editors.

Right-click a server in the Server Explorer to open the context menu described in "Server Explorer Context Menu Options".

Server Explorer Context Menu Options

Option	Function
New Server	Add a server for downloading assertions and taxonomies (Assertion Editor, Taxonomy Editor, and Customization Editor).
Remove Server	Delete a server from the Server Explorer.
Download Taxonomy	Download a taxonomy from a platform server (Taxonomy Editor and Customization Editor).
Download Assertion	Download assertions from a platform server (Assertion Editor).
Download Report	Download reports from a reporting server (Report Editor).
Properties	View and edit the server name, URL, username, and password.

Use Cases

HPE EM enables you to add custom BIRT reports created in Report Editor to the Reports tab.

To create and use a custom BIRT report in HPE EM:

1. Create a new report definition.
For details, see "[Creating a Report Definition](#)" on page 20.
2. Add a data source for the report.
For details, see "[Adding a Data Source to a Report](#)" on page 20.
3. Create a data set for the report,

For details, see "[Creating a Data Set](#)" on page 21.

4. Deploy the report to HPE EM.

For details, see "[Deploying a Report to HPE EM](#)" on page 49.

5. Add the report to the HPE EM Reports Tab.

For details, see the "Custom Birt Reports" section of the *HPE Enterprise Maps User Guide*.

For a step-by-step walkthrough demonstrating this use case, see "[Example: Failure Impact Report for the Reports Tab](#)" on page 54.

Chapter 3: Getting Started

HPE EM is distributed with a set of predefined reports and various ways to access them.

Report Editor provides a mechanism to customize these existing reports, and also enables you to create new report definitions from scratch.

This chapter describes the setup of Report Editor in the following sections:

- "Installing HPE EM Workbench" below
- "SSL Configuration" on page 15
- "Installing a Report Development Environment" on page 16
- "Configuring a Reporting Project" on page 17

Installing HPE EM Workbench

HPE EM is an Eclipse development platform distributed as a zip file, hpe-em-workbench-3.10-win64.zip.

Note: HPE EM requires Java SE Development Kit (JDK) 1.8.0 (64 bit version only) or higher. You must include the path to this version of the JDK in the JAVA_HOME environment variable.

To install Enterprise Maps as a new Eclipse platform:

- Extract the archive to your required location, referred to in this document as WB_HOME.

Note: The path must not be longer than 97 characters.

To Start HPE EM:

- Execute WB_HOME/workbench/start.exe.

The first time you start HPE EM Workbench, the welcome screen opens.

Select one of the options to open one of the editor tools, start a new editing project, or view the documentation set.

You can return to the welcome screen from any of the editor tools by selecting **Help > Welcome** from the menu options.

Tip: By default, HPE EM Workbench runs in 'normal' mode which prevents users from uploading system taxonomies (IDs start with uddi:systinet.com:soa:model:taxonomies) and the Report Editor .rptlibrary file to HPE EM servers. If you need to work with system taxonomies or want to upload the .rptlibrary file you can switch HPE EM Workbench into 'admin' mode.

Caution: Be extremely careful when working with system taxonomies, HPE EM uses some hard-coded values from system taxonomies. Changing or removing them may cause errors.

To Switch HPE EM Workbench to Admin Mode

1. Open WB_HOME/configuration/config.ini with a text editor.
2. Add mode=admin to config.ini.
3. Restart HPE EM Workbench.

Tip: HPE Enterprise Maps is memory-intensive. If you experience performance issues, HPE recommends increasing the memory allocation.

To increase the memory allocation for HPE Enterprise Maps:

1. Open WB_HOME/workbench/start.ini for editing.
2. Set these new values:
 - -Xms128m
 - -Xmx1024m
3. Save your changes.
4. Restart HPE EM Workbench.

Tip: HPE Enterprise Maps downloads from HPE EM may time out. If you experience issues, HPE recommends increasing the time out.


To increase the time out for HPE Enterprise Maps:

1. Open WB_HOME/workbench/start.ini (or eclipse.ini for stand-alone installation) for editing.
2. Set the new value:
`-Dorg.em.platform.rest.Client.timeout=200000`
The value is in milliseconds with a default value of 120000 (2 minutes).
3. Save your changes.
4. Restart HPE EM Workbench.

Tip: HPE EM Workbench may fail to store saved credentials of servers. In such cases, HPE recommends clearing the secure storage.

To reset the secure storage for Enterprise Maps server credentials:

1. In Enterprise Maps, go to **Windows > Preferences > General > Security > Security Storage > Contents** tab.
2. Click root node **Default Secure Storage** and then click **Delete** button.

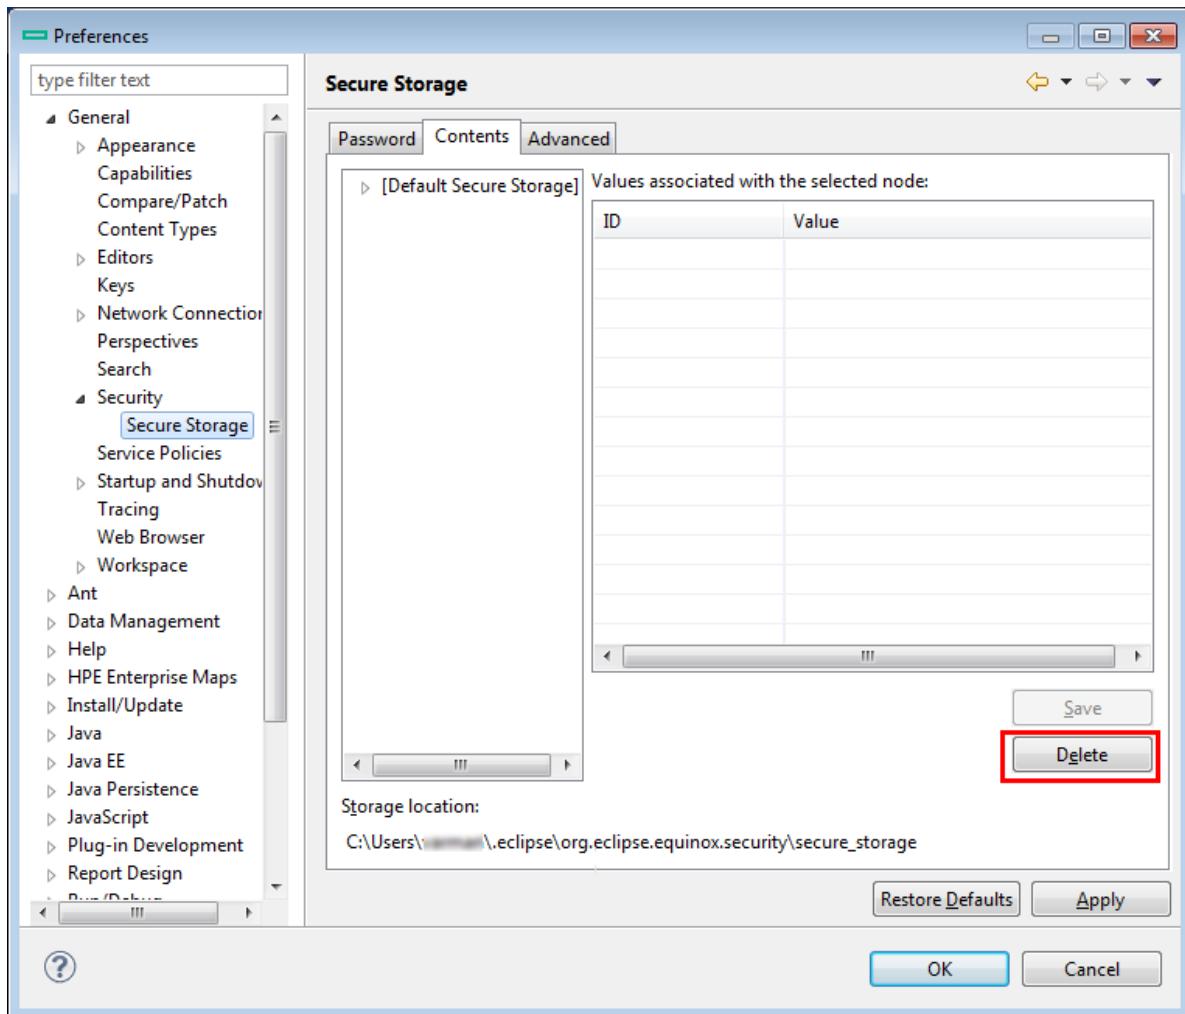

3. Restart the Workbench.

SSL Configuration

By default, HPE EM Workbench trusts all HPE EM server certificates. You may want HPE EM Workbench to verify HPE EM certificates.

To Verify HPE EM Server Certificates:

- Add the following options to `WB_HOME/workbench/start.ini`:

```
-Dcom.hp.em.security.ssl.verifyCert=true
-Djavax.net.ssl.trustStore=USER_TRUSTSTORE
-Djavax.net.ssl.trustStorePassword=TRUSTSTORE_PASS
-Djavax.net.ssl.trustStoreType=TRUSTSTORE_FORMAT
```

If HPE EM is configured for 2-way SSL, you must provide HPE EM Workbench certificates to HPE EM.

To Provide HPE EM Workbench Client Certificates to HPE EM:

- Add the following options to `WB_HOME/workbench/start.ini`:

```
-Djavax.net.ssl.keyStore=USER_KEYSTORE
```

```
-Djavax.net.ssl.keyStorePassword=KEYSTORE_PASS  
-Djavax.net.ssl.keyStoreType=KEYSTORE_FORMAT
```

Installing a Report Development Environment

This section describes a setup to develop and test reports on a single computer.

For supported platforms, see `readme.txt` in the installation folder.

A typical report development environment consists of the following:

- PC or notebook with at least 2GB RAM and at least 5GB free disk space
- Windows XP or Windows 2000
- Oracle eXpress Edition (XE)

For deployment details, see "[Oracle XE Account Setup](#)" below.

You do not need to install XE if you have dba-level access to deployed HPE EM environment using Oracle 10g.

- Java 1.5_9 or higher
For deployment details, see "[Java Environment Setup](#)" below.
- HPE EM deployed to JBoss
You do not need to install HPE EM if you have access to a test environment.
- Oracle Developer
HPE Software recommends this tool for tuning SQL queries.

Java Environment Setup

After installing Java, you must set an environment variable, `JAVA_HOME`.

To set the `JAVA_HOME` environment variable:

1. In Windows, click through **Control Panel > System > Advanced > Environment Variables**.
The Environment Variables dialog box opens.
2. In the User Variables section, click **New**.
3. Input Variable Name, `JAVA_HOME`, and set Variable Value to the installation folder for Java.
4. Click **OK** to exit each dialog box.

Oracle XE Account Setup

If you install Oracle XE, you must create a user account.

To create an Oracle XE account:

1. Open the XE web console and log on as the system user.
2. Create a new user, `platform`, with the password `changeit`, then grant the new user all available privileges.

Configuring a Reporting Project

To use Report Editor with HPE EM, you must create or import a project, and import any report definitions you want to modify.

These procedures are described in the following sections:

- "[Creating a Reporting Project](#)" below
- "[Importing a Reporting Project](#)" on the next page
- "[Importing Report Definitions](#)" on the next page

In addition you can configure Report Editor in the following ways:

- "[Rebranding HPE EM Reports](#)" on page 19
- "[Configuring the Model](#)" on page 19
- "[Configuring the Reporting Logging Level](#)" on page 19

Creating a Reporting Project

The Report Editor organizes your work into project folders in your workspace.

To create a reporting project:

1. Do one of the following:
 - In the HPE EM Workbench Welcome page, select **Create Report Project**.
 - From the menu, select **File > New > Report Project**.
 - Press **Alt+Shift+N**, and then press **R**. Expand **HPE EM**, select **Report Project**, and then click **Next**.

The New Report Project Wizard opens.

2. In the New Report Project dialog box, enter the following parameters:

Parameter	Definition
Project Name	The name of your report project.
Create from Existing Extension	Select this option if you want to create a new project from a previous report extension. If selected, input the path or browse for the location of the report extension.
Use Default Location	If selected, Report Editor stores the project in your default workspace. If unselected, input the path or browse for an alternative workspace.

3. Do one of the following:
 - Select **Create a New Server**, and then click **Next**.
Continue to Step 4.
 - Select **Use an Existing Server**, select the server from the list and input its credentials, and then click **Next**.

Continue to Step 5.

4. In the New Server dialog box, add the parameters you require, and then click **Next**.
For parameters descriptions, see "[New Report Project Wizard: New Server](#)" on page 58.
5. If needed, in the New Data Source dialog box, click **Manage Drivers** to add a JDBC driver.
For details, see "[Adding a JDBC Driver](#)" on page 42.
6. In the New Data Source dialog box, add the parameters you require.
For parameters descriptions, see "[New Report Project Wizard: Default Library Configuration - Create a new data source](#)" on page 58.
If your database server is running, click **Test Connection** to check if your settings are correct.
7. Click **Next** to set project options.
8. Do one of the following:
 - To create a generalized reporting project, click **Finish** and exit the wizard.
 - To create a project associated with a specific report category, click **Next** and continue this procedure.
The HPE EM server must be running to access report definitions.
9. Select a report category for your reporting project, and then click **Next**.
10. Select report definitions from the selected category to download to the Report Editor, and then click **Finish**.

Importing a Reporting Project

You can import a reporting project created elsewhere into your HPE EM Workbench installation.

To import a reporting project:

1. Copy the project folder to your local files ystem.
2. From the menu, select **File > Import**.
The Import dialog box opens.
3. Expand **General** and select **Existing Projects into Workspace**.
4. Use **Browse**, select the project from your local file system, and then click **OK**.
5. Click **Finish** to import the reporting project.

Importing Report Definitions

The HPE EM server contains all the report definitions for HPE EM. To modify existing reports, you must import their definitions from the HPE EM server.

To import HPE EM report definitions:

1. In the Project Explorer, open the context menu for the project, and do one of the following:
 - Select **HPE EM > Download Reports** to import from the current HPE EM server.
 - Select **Import > Report**, and then select a reporting server.

The HPE EM server must be running.

2. Select the report category, and then click **Next**.
3. Select the report definitions you require, and then click **Finish**.

Rebranding HPE EM Reports

By default, most HPE EM reports include an HPE branded logo. You can replace this image with your own company-specific image.

To rebrand HPE EM reports:

1. Open `s2_default.rptlibrary` for editing.
2. In the Outline view, expand Embedded Images.
3. Open the context menu for `logoHP.gif` and select **Delete**.
4. Open the context menu for Embedded Images, and select **New Embedded Image**.
5. Upload your new company branded image which must be named `LogoHP.gif`.
6. Save `s2.default.rptlibrary`.
7. Redeploy all reports that use this image to HPE EM. For details, see "[Deploying Reports](#)" on page 48.

Configuring the Model

HPE EM divides the architecture model into a public and system model. By default, Report Editor accesses the public model which means that you can only create reports that access these public artifact types.

If you need to access system artifact types in your reports then you must modify the library.

To Extend the Reporting Model to access System Artifacts:

1. Open the `s2_default.rptlibrary` file in your workspace in a text editor.
2. Locate the `oda-data-source` element with `name="dqlDatabase"` in the file.
3. Edit the property `name="odaURL"` element, adding `|model=sys` to the property value.
4. Save `s2.default.rptlibrary`.

Configuring the Reporting Logging Level

HPE EM reporting uses the BIRT engine for report execution which uses standard JDK logging with root logger `org.eclipse.birt`. You can configure the logging in that same way as any other component that uses JDK logging, typically using a configuration file passed with the `-Djava.util.logging.config=` switch.

The default logging level is set to SEVERE, but this is overridden if you specify the logging level in a logging configuration file..

For details about JDK logging, see <http://java.sun.com/j2se/1.5.0/docs/guide/logging/overview.html>.

Chapter 4: Designing Reports

This chapter describes the functionality of Report Editor in conjunction with HPE EM.

This chapter contains the following sections:

Creating a report:

- "[Creating a Report Definition](#)" below
- "[Adding a Data Source to a Report](#)" below
- "[Creating a Data Set](#)" on the next page
- "[Designing a Report Layout](#)" on page 22
- "[Shared and User-Specific Reports](#)" on page 22
- "[Modifying Existing Report Definitions](#)" on page 22

Creating a Report Definition

The first step in defining a report is to create the report definition.

To create a report definition:

1. Select **File > New > Report** from the menu.
2. Input a name and description for the report, and then click **Next**.
3. Select the project folder, and then click **Finish** to create the report definition.
4. Press **Ctrl+S** to save the report definition.

See Step 1 of "[Example: Failure Impact Report Layout](#)" on page 55 for an example of this procedure.

Adding a Data Source to a Report

By default, new reports contain DQL and SQL data sources setup during project creation. If you need to use a different one, you must add it to the report.

HPE EM only supports the default datasources. Reports using user-created datasources work within Report Editor but do not display when the report executes on the HPE EM server.

To add a data source to a report:

1. Open the report definition editor view.
2. In the Data Explorer, open the Data Sources context menu and select **New Data Source**.
The New Data Source dialog box opens.
3. Do one of the following:
 - To add a datasource for DQL queries, select **DQL JDBC Data Source**.

- To add a datasource for SQL queries, select **JDBC Data Source..**

Click **Next**.

4. If required, in the Data Source dialog box, click **Manage Drivers** to add a JDBC driver (the DQL driver is pre-installed and there should never be a requirement to add one).

For details, see "[Adding a JDBC Driver](#)" on page 42.

5. In the Data Source dialog box, add the parameters you require.

For parameter descriptions, see "[New Report Project Wizard: Default Library Configuration - Create a new data source](#)" on page 58.

If your database server is running, click **Test Connection** to check if your settings are correct.

6. Click **Finish** to add the data source to your report.

7. Press **Ctrl+S** to save your changes to the report definition.

Creating a Data Set

Each report is associated with one or more queries that each return a data set.

To create a data set:

1. From the Report Design perspective, open the report definition view for the report requiring the new data set.

If you need to use an alternative data source, see "[Adding a Data Source to a Report](#)" on the previous page.

2. In the Data Explorer, open the Data Sets context menu, and select **New Data Set**.

The **New Data Set** dialog opens.

3. In the New Data Set dialog box, add the parameters you require.

For parameters descriptions, see "[New Data Set](#)" on page 57.

4. Click **Next** to open the **Query** dialog box.

5. Do one of the following:

- Copy a query from your development tool to the query editor.

Skip to Step 8.

- Create your query in Report Editor as described in Step 6 to Step 7.

6. Use **Schema** (SQL only), **Filter**, and **Type**, and then click **Apply Filter** to focus on the data you require in Available Items.

For SQL queries, HPE EM Workbench limits the amount of data collected. To change the settings, see "[Changing the Data Collection Settings](#)" on page 43.

7. Browse Available Items to find the data items you require. Drag and drop items from Available Items to the query editor and construct your query.

For portability to different HPE EM installations using different schemas, remove the schema name from the variables in your query if your database schema does not require them.

8. Click **Finish** to add the data set to the report definition.

9. Press **Ctrl+S** to save your changes.

For details about writing DQL queries, see "[Using DQL](#)" on page 23.

For details about the database structure and writing SQL queries, see "[Exploring the Database](#)" on page 42.

For an example of this procedure, see "[Example: Failure Impact Data Set](#)" on page 54.

Note: If possible, use only one dataset per report definition. If you need more datasets in one report (for example, multiple properties in one table row), use JavaScript to build one table.

Designing a Report Layout

Select **Help > Help Contents** to view the guides included with HPE EM Workbench.

For an example, see "[Example: Failure Impact Report Layout](#)" on page 55.

Shared and User-Specific Reports

The Report Editor enables you to determine the security of report output. A report can be marked as shared to show the same data to all users or not shared. If a report is not shared, then each user only sees the data they have read permission for in the report output.

The default value for a new report is shared.

To mark a report as shared or user-specific:

1. In the **Project Explorer**, expand the report you want to categorize and double-click **Overview** to open a view of the report definition.
2. The General Information section displays a Shared check-box.
Select **Shared** to show the same report output to all users. De-select **Shared** to make the report output restricted according to the user read permissions.
3. Press **Ctrl+S** to save your changes.

Modifying Existing Report Definitions

Report definitions that already exist in HPE EM can be modified.

Procedure 5. To modify existing report definitions:

1. Import the report definition.
For details, see "[Importing Report Definitions](#)" on page 18.
2. To open the report definition, in the Project Explorer, double-click the report definition *rptdesign*.
3. Make your modifications, as described in "[Creating a Report Definition](#)" on page 20.
4. Press **Ctrl+S** to save your changes.
5. Redeploy the report definition to HPE EM.
For details, see "[Deploying a Report to HPE EM](#)" on page 49.

Chapter 5: Using DQL

The DQL query language provides a simple query solution for the System Data Model (SDM). It enables you to query all aspects of the model – artifacts, properties, relationships, governance, and compliance.

This chapter describes DQL in the following sections:

- ["Introduction to DQL" below](#)
- ["DQL Reference" on page 30](#)
- ["DQL with 3rd Party Products" on page 39](#)

Introduction to DQL

DQL is an SQL-like language that enables you to query the repository of artifacts in HPE EM defined by the SDM model. DQL preserves SQL grammar, but uses artifacts instead of tables, and artifact properties instead of table columns. As DQL is based on SQL you can apply your SQL knowledge to DQL.

A simple example is to return the name and description of all business service artifacts.

```
select name, description  
from businessServiceArtifact
```

In HPE EM, you can use DQL queries in the following use cases:

- To create reports in HPE EM Report Editor.
- To customize pages of the HPE EM user interface.
- You can also use DQL in any SQL designer using the DQL JDBC driver. For more details, see ["DQL in SQL Designers" on page 40](#)

The following sections contain DQL examples:

- ["Artifact Inheritance" below](#)
- ["Categorization Properties" on the next page](#)
- ["Complex Properties" on page 25](#)
- ["Embedding SQL Queries" on page 25](#)
- ["Fixing Multiple Properties" on page 26](#)
- ["Modifiers" on page 27](#)
- ["Primitive Properties" on page 27](#)
- ["Relationships" on page 28](#)
- ["Virtual Properties" on page 29](#)

Artifact Inheritance

Artifacts in HPE EM form a hierarchy defined by the SDM model. Artifacts lower in the hierarchy inherit properties from higher abstract artifact types. `artifactBase` is the root abstract artifact type in the SDM

hierarchy. All other artifacts are below it in the hierarchy and inherit its properties. You can query abstract artifacts and return a result set from all the instances of artifact types lower in the hierarchy.

Property groups function in a similar way, querying a property group returns results from all artifact types that inherit properties from the group.

The following query returns results from all implementation artifacts; SOAP Services, XML Services, and Web Applications.

```
select name, serviceName  
from implementationArtifact
```

Notice that in this query, serviceName is a specific property of SOAP Service artifacts. In the result set, name is returned for all implementation artifacts but serviceName is only returned for SOAP service artifacts. For other implementation types, the serviceName is NULL.

Caution: Different artifact types may define the same properties with different cardinalities. In cases where two artifact types define the same property with different cardinality, querying a shared parent abstract artifact for these properties may fail. Examples that fail include **SELECT environment FROM artifactBase** and **SELECT accessPoint FROM artifactBase**.

Categorization Properties

Categorization properties are a special case of complex properties.

Categorization properties have the following sub-properties:

- val - machine readable name of the category.
- name - human readable name of the category.
- taxonomyURI - identifies the taxonomy defining the category set.

Note: taxonomyURI is not defined for named category properties.

HPE EM uses categorization properties in the following ways:

- **Named category properties** (for example, business service criticality).

The following query returns the names, descriptions, and versions of all business service artifacts which are categorized using the named criticality categorization property with a high failure impact.

```
select name, description, version  
from businessServiceArtifact  
where criticality.val =  
'uddi:systinet.com:soa:model:taxonomies:impactLevel:high'
```

Note: taxonomyURI is not defined for named category properties. The name of the category property implies the taxonomy.

- **categoryBag**

categoryBag is a complex property that includes sub-property categories which is a categorization property and categoryGroups. categoryGroups also contains categorization sub-property categories and a taxonomyURI defining the meaning of the group. HPE recommends querying _category instead of categoryBag to ensure that all categories are queried.

The following query returns the names, descriptions, and versions of all business service artifacts which are categorized by the Gift certificate category (14111608) of the uddi:uddi.org:ubr:categorization:unspsc taxonomy.

```
select name, description, version
  from businessServiceArtifact
 where categoryBag.categories.taxonomyURI =
      'uddi:uddi.org:ubr:categorization:unspsc'
    and categoryBag.categories.val = '14111608'
```

- **identifierBag**

identifierBag is a complex property similar to categoryBag that includes sub-property categories. identifierBag does not contain the categoryGroups subproperty. HPE recommends querying _category instead of identifierBag to ensure that all categories are queried.

- **_category**

This generic categorization property holds all categorizations from categoryBag, identifierBag, and all named categorization properties from the given artifact type.

The following query returns the names, descriptions, and versions of all business service artifacts which are categorized with a high failure impact.

```
select name, description, version
  from businessServiceArtifact
 where _category.val =
      'uddi:systinet.com:soa:model:taxonomies:impactLevel:high'
    and _category.taxonomyURI =
      'uddi:systinet.com:soa:model:taxonomies:impactLevel'
```

Caution: When you use the generic _category property you must specify the taxonomy using the _category.taxonomyURI sub-property. When you use a named categorization property the taxonomy is implicitly known and does not need to be specified.

Complex Properties

Complex properties are composed of one or more single or multiple-valued sub-properties (for example, address contains sub-properties addressLines in multiple cardinality, country in single cardinality, and so on. The sub-property addressLines is also a complex sub-property, containing a value and useType.). It is only possible to query the sub-property components of primitive types. Components of sub-properties are separated by . (in MS Access you can use \$ as a separator).

```
select address.addressLines.value, address.country
  from personArtifact
 where address.city = 'Prague'
```

Embedding SQL Queries

DQL works with SDM entities (artifacts and properties) only and cannot directly access database tables. In some cases it is necessary to obtain values from outside the SDM (for example, system configuration). You

can use an SQL subquery in a NATIVE clause of a DQL query. By default, DQL expects SQL to return an unnamed single column of values.

The following example returns business services owned by the administrator using the name defined during installation:

```
select name,description, version
  from businessServiceArtifact
 where _owner in (
    native {select svalue from systemConfiguration
      where name='shared.administrator.username'})
```

You can use NATIVE clauses instead of expressions, as a condition in WHERE clauses, as a column in SELECT clauses, and as a artifact reference in FROM clauses. For details, see "["DQL Grammar" on page 33](#)

If you use a NATIVE clause to formulate part of a FROM clause, you must specify parameters to bind columns defined by SQL to properties used by DQL.

Each parameter consists of the following:

- The property name defines how DQL addresses columns returned from the NATIVE SQL statement.
- The property type which may be returned by the metadata of a column is optional and if not specified is assumed to be a text string.

The parameters are enclosed in brackets in the native clause, delimited by commas, and the type is separated from the name using whitespace.

The following example shows a query with NATIVE SQL in a DQL FROM clause.

```
select B.p_id, B.s_val, A.name, B.state_index
  from (
    native(s_val, s_name, state_index integer, p_name, p_id)
      {select S.val as s_val, S.name as s_name, S.state_index as state_index,
        P.name as p_name, P.id as p_id
       from rylf_state S, rylf_process P
      where S.fk_rylf_process=P.id and P.name='Application Lifecycle'}) B
 left join artifactBase A on A._currentStage.val = B.s_val
 order by B.p_id, B.state_index
```

The NATIVE statement returns the following columns; s_val, s_name, p_name, and p_id of type String, and state_index of type Integer.

Note: Native clauses can not contain variables (? or :<variable>).

Fixing Multiple Properties

Consider a business service with keywords, 'Finance' and 'Euro'. The intuitive query for finding a 'Euro Finance' service is as follows:

```
select name, description, version
  from businessServiceArtifact b
 where b.keyword.val = 'Finance'
   and b.keyword.val = 'Euro'
```

This query does not work as a single instance of keyword can never be both 'Finance' and 'Euro'

The solution is to fix instances of multiple properties as shown in the following query:

```
select name, description, version
  from businessServiceArtifact b, b.keyword k1, b.keyword k2
 where k1.val = 'Finance'
   and k2.val = 'Euro'
```

Modifiers

Modifiers define primary sets of objects (artifacts and their revisions) to query. If no modifier is specified, the last revisions of undeleted artifacts for which the user has read access are queried.

The following modifiers are available:

- Revision related modifiers (mutually exclusive):
 - **all_rev** - queries all revisions of artifacts.
 - **last_approved_revision** - queries the last approved revisions of artifacts.
- Security related modifiers (mutually exclusive):
 - **my** - queries artifacts belong to the user.
 - **writable** - queries artifact the user has write permission for.
 - **no_acl** - queries all artifacts regardless of security.
- Other modifiers:
 - **include_deleted** - queries all instances, including deleted artifacts.

You can use multiple comma-separated modifiers.

The following query returns all business services that you own that are marked as deleted.

```
select b.name, b.version, b.keyword.name
  from businessServiceArtifact b (my, include_deleted)
 where _deleted = '1'
```

Primitive Properties

Primitive properties are simple properties, such as numbers, characters, and dates, that may occur once or multiple times for an artifact depending on the cardinality as defined in the SDM.

For example, in the SDM Model, each person is represented by a person artifact. The person artifact includes a name property with single cardinality and an email property with multiple cardinality.

The following query returns the name and all emails for each person in the repository.

```
select name, email
  from personArtifact
```

Instances of primitive properties with multiple cardinality are all returned as comma separated values. For example, all the emails for a person return as a concatenated, comma-separated string. If there is no instance of the property for an artifact, a null value is returned.

The following query returns the name, description, and version of all business service artifacts whose version is 2.0.

```
select name, description, version from businessServiceArtifact where version = '2.0'
```

Note: By default, DQL queries return the latest revisions of artifacts unless you specify revision modifiers. For details, see "["Modifiers" on the previous page](#).

Relationships

A relationship is a special kind of complex property pointing to another artifact. HPE EM uses relationships to join artifacts.

The following queries are semantically identical and return all business services and the contact details of their provider. These queries do not return business services that do not have providers.

- The following query is an example of an *SQL92-like* join which uses the USING clause.

```
select b.name, b.version, b.keyword.name, p.name as contact, p.email
  from businessServiceArtifact b
  join personArtifact p using provides
```

The relationship property `provides` leads from person artifacts to business service artifacts is specified after the `using` keyword.

- The following query is an example of an *SQL92-like* join which uses the ON clause.

```
select b.name, b.version, b.keyword.name, p.name as contact, p.email
  from businessServiceArtifact b
  join personArtifact p on bind(provides)
```

The relationship property `provides` leads from person artifacts to business service artifacts is specified with the `bind` predicate in the WHERE clause.

- The following query is an example of an *old-style* join which uses the BIND predicate.

```
select b.name, b.version, p.name as contact, p.email
  from businessServiceArtifact b, personArtifact p
  where bind(p.provides, b)
```

The BIND predicate specifies that the `provides` relationship of the person artifact points to business service artifacts.

The following query also returns all business services and the contact details of their provider. This query is an example of a LEFT JOIN. The LEFT JOIN extends the previous queries by also returning business services that do not have providers.

```
select b.name, b.version, p.name as contact, p.email
  from businessServiceArtifact b
  left join personArtifact p using provides
```

Each relationship has the following sub-properties which you can query:

- `rType` - the SDM QNames of the relationship type.
- `useType` - the values of the `useType` relationship property
- `target` - the UUIDs of the artifact the relationship points to (deprecated).

It is possible to specify a particular provider type using `useType`. The following queries return all business services and their contact details where the provider is an architect.

```
select b.name, b.version, p.name as contact, p.email
  from businessServiceArtifact b, personArtifact p
 where bind(p.provides, b)
   and p.provides.useType = 'architect'
```

```
select b.name, b.version, p.name as contact, p.email
  from businessServiceArtifact b
 join personArtifact p on bind(p.provides, b)
   and p.provides.useType = 'architect'
```

It is possible to traverse several relationships using several old-style joins or SQL-92-like join clauses in the same query. The following example queries business services in applications, which are also part of a project.

```
select b.name, b.description, a.name as Application, p.name as Project
  from businessServiceArtifact b
 join hpsoaApplicationArtifact a using hpsoaProvidesBusinessService
 join hpsoaProjectArtifact p using contentRelationshipType
```

In cases where artifacts may be joined by multiple properties, you can use a generic `_relation` property together with the additional `rType` condition.

```
select A.name as A_name, B.name as B_name
  from hpsoaApplicationArtifact A left join artifactBase B on bind(A._relation)
  and A._relation.rType in (
    '{http://systinet.com/2005/05/soa/model/property}hpsoaProvidesBusinessService',
    '{http://systinet.com/2005/05/soa/model/property}r_providesBusinessProcess'
  );
```

You can use the target relationship sub-property to bind the source and target of a relationship.

```
select b.name, b.version, p.name as contact, p.email
  from businessServiceArtifact b, personArtifact p
 where p.provides.target = b._uuid
```

Caution: The target property and this style of comparison is deprecated and its use is not recommended. Use the bind predicate instead.

Virtual Properties

DQL defines virtual properties, that are not defined by the SDM. HPE EM stores or calculates these properties enabling DQL to query meta information about artifacts. These virtual properties provide information about lifecycle, compliance, domains, etc.

The following example returns lifecycle details from the last approved revisions of all business service artifacts, ordered by lifecycle stage.

```
select name, _lastApprovedStage.name Stage, _revision
  from businessServiceArtifact(last_approved_revision)
 order by Stage
```

The following example returns the name and compliance status of last approved revisions of all business services which a compliance status of at least 80%.

```
select b.name, b._complianceStatus
  from businessServiceArtifact b (last_approved_revision)
 where b._complianceStatus >= 80
```

HPE EM repository content exists within a domain structure where each artifact exists within only one domain. The default functionality of DQL queries all domains but HPE EM provides virtual properties enabling you to query artifacts within a particular domain. The following example returns business service names and the domain details of all business service artifacts that exist within the EMEA domain.

```
select A.name, A._domainId, A._domainName
  from businessServiceArtifact A
 where A._domainId="EMEA"
```

DQL provides the following macros for querying within domain hierarchies:

- **#SUBDOMAINS(*domainId*)**
Queries the specified domain and all its sub-domains.
- **#SUPERDOMAINS(*domainId*)**
Queries the specified domain and all its parent domains.

The following query returns all business services in the EMEA domain and any of all of its sub-domains.

```
select A.name
  from businessServiceArtifact A
 where A._domainId in #SUBDOMAINS('EMEA')
```

The following query returns the name and virtual properties artifactTypeName and owner from the latest revisions of consumer properties (the property group for all consuming artifact types).

```
select name, _artifactTypeName, _owner
  from consumerProperties
```

For details of all virtual properties, see "[Properties in DQL](#)" below.

DQL Reference

This section provides a reference to properties and DQL grammar in the following sections:

- "[Properties in DQL](#)" below
- "[DQL and SQL](#)" on page 33
- "[DQL Grammar](#)" on page 33

Properties in DQL

Artifact (property group) properties hold values which may be queried in DQL expressions.

DQL recognises the following properties:

- SDM Properties

Properties defined in the SDM Model. For details, see "System Data Model" in the *Reference Guide*.

- Virtual, System, and Other Properties

Properties holding metadata about artifact instances.

Properties may be one of the following:

Property Kind	Description
Primitive	Holds string, number, or boolean values. For example, name, description, version. A primitive property is defined in DQL statements by the artifact type name or alias, the property delimiter (. or \$), followed by the property name. For example, personArtifact.name. The artifact name or alias is optional (with the delimiter) when the property is specific to a single artifact type in the query.
Complex	Hold complex structures such as address. Only primitive sub-properties of complex properties may be queried. Properties and sub-properties are separated by . or \$. For example, personArtifact.address.city.
Categorization	Hold categorization data and are handled in a similar way to complex properties. Categories consist of name, val, and taxonomyURI components. For example, businessServiceArtifact.criticality.name.
Relationships	Properties that specify a directional relationship to other artifacts.

All values that you can query are of a particular data type. The following table describes these data types, and gives examples of how to use them in a query.

Data Type	Description	Example
Number	Numeric values	_revision = 1
String	Text values	_revisionCreator = 'admin'
Date Time	Date and Time (ms since 00:00 1/1/1970)	_revisionTimestamp > 1274447040124 /* revisions made since 15:04 21/5/2010 */
Boolean	True or False flags	_deleted = '1'

Properties may have the following cardinalities:

Property Cardinality	Description
Single	Only one instance of the property exists for an artifact and it may be optional or required.
Multiple	The property is a list of values and so occurs multiple times for an artifact. In WHERE clauses, using multiple properties returns particular artifacts if any instance of the multiple property matches the condition. In SELECT clauses, using multiple properties returns all instances of the multiple property as a concatenated, comma-separated string.

DQL uses the following system properties:

System Property	Description
_artifactTypeName	The human readable name of the artifact type (the SDM label of the artifact). HPE recommends using _sdmName in conditions, and _artifactTypeName in SELECT clauses.
_category	All categorizations for an artifact with name, val, and taxonomyURI components.
_deleted	The deletion marker flag (boolean).
_id	The database ID of an artifact instance (number, deprecated - use _uuid).
_longDescription	HPE EM supports a long description including HTML tags up to 25000 characters by default. HPE recommends using the description property in DQL queries instead as queries using _longDescription may affect performance and the HTML tags may corrupt report outputs. description contains only the first 1024 text characters of _longDescription (may vary according to your database type). Note: The platform.repository.max.description.length property determines the maximum length of _longDescription. You can modify this property in EM_HOME/conf/setup/configuration-properties.xml. DB2 has an absolute limit of 32672 characters which is sufficient for descriptions containing ASCII (single-byte encoding) characters but may be exceeded, for example by Japanese descriptions, leading to description truncation.
_owner	The user, group, or role designated as the artifact owner.
_ownerName	The human readable name of the user (taken from the user profile), group, or role artifact.
_path	Legacy REST path of the artifact (string, deprecated - use _uuid).
_relation	A generic virtual property that may be used to specify all outgoing relationships.
_revision	The revision number of an artifact instance.
_revisionCreator	The user who created the revision of the artifact.
_revisionTimestamp	The date and time the revision was created.
_sdmName	The local name of the artifact type. HPE recommends using _sdmName in conditions, and _artifactTypeName in SELECT clauses.
_uuid	The unique artifact identifier.

DQL uses the following virtual properties:

Property Class	Property	Description
UI Property	_isFavorite	Marked by the user as favorite flag (boolean).
	_rating	The average rating of the artifact (double).

Security Property	<code>_shared</code>	Indicates that the artifact is shared and visible to users in the Sharing Principal role (boolean). For more details, see "How to Share Artifacts" in the <i>User Guide</i> .
	<code>_writable</code>	User write permission flag (boolean). Note: Using this property may have a performance impact. If possible, use the writable modifier instead.
Contract Property	<code>_enabledConsumer</code>	The artifact is a valid consumer artifact type.
	<code>_enabledProvider</code>	The artifact is a valid provider artifact type. The artifact must also be marked as 'Ready for Consumption'.
Domain Property	<code>_domainId</code>	Value of the domainId property defined for the domain artifact that the artifact belongs to.
	<code>_domainName</code>	The readable name of the domain.
Lifecycle Property	<code>_currentStage</code>	Current working stage of an artifact.
	<code>_governanceProcess</code>	process applicable to the artifact.
	<code>_isApproved</code>	Lifecycle approval flag (boolean).
	<code>_lastApprovedRevision</code>	Revision number of the last approved revision (number).
	<code>_lastApprovedStage</code>	The name of the last approved stage.
	<code>_lastApprovalTimestamp</code>	Timestamp for the last approval (number, ms since 00:00 1/1/1970).
	<code>_lifecycleStatus</code>	The status of the current lifecycle stage.
Policy Manager Property	<code>_complianceStatus</code>	Compliance status as a percentage (number).

DQL and SQL

DQL supports most features of SQL with the following exceptions:

- `SELECT *` is not supported.
- `RIGHT` and `FULL OUTER JOIN` are not supported.
- It is not possible to use properties with multiple cardinality in `GROUP BY`, `HAVING`, or `ORDER BY` clauses.

DQL Grammar

A DQL query consists of the following elements with their grammar explained in the following sections:

- ["Select" on the next page](#)
- ["FROM Clause" on page 35](#)

- "Conditions" on the next page
- "Expressions" on page 37
- "Lexical Rules" on page 38

Typographical Conventions

Convention	Example	Description
KEYWORDS	SELECT	A reserved word in DQL (case-insensitive).
<i>parsing rules</i>	<i>expr</i>	Name of a parsing rule. A parsing defines a fragment of DQL which consists of keywords, lexical rules, and other parsing rules.
<i>LEXICAL RULES</i>	<i>ID</i>	Name of a lexical rule. A lexical rule defines a fragment of DQL which consists of letters, numbers, or special characters.
[]	[AS]	Optional content.
[...]	[, <i>select_item</i> , ...]	Iterations of optional content.
	ASC DESC	Alternatives.
{ }	{ + - }	Group of alternatives.
..	0..9	A range of allowable characters.

Select

```
select :  
    subquery [ ORDER BY                                order_by_item [, order_by_item ...]]  
  
subquery :  
    subquery [ set_operator subquery ...]  
    | (subquery)  
    | native_sql  
    | subquery_base  
  
subquery_base :  
    SELECT [ DISTINCT ] select_item [, select_item ...]  
    FROM          from_clause_list  
    [ WHERE        condition ]  
    [ GROUP BY    expression_list  
    [ HAVING      condition ]  
    ]  
  
select_item :  
    expr [ [ AS ] alias ]  
  
alias :  
    ID | QUOTED_ID
```

```
order_by_item :  
    expr [ ASC | DESC ]  
  
set_operator :  
    UNION ALL | UNION | INTERSECT | EXCEPT  
  
native_sql :  
    NATIVE [ (column_name [ column_type ] [ , ... ] ) ]  
    { sql_select }
```

Explanation:

- The {} around the sql_select are required and sql_select is an SQL query.
- The column_name and column_type specify parameters to pass from the SQL query to the DQL query.

FROM Clause

```
from_clause_list :  
    { artifact_ref | subquery_ref | fixed_property | native_sql }  
    [ from_clause_item ... ]  
  
from_clause_item :  
    , { artifact_ref | subquery_ref | fixed_property | native_sql }  
    | [ LEFT [ OUTER ] ] JOIN  
        { artifact_ref | subquery_ref } join_condition  
  
artifact_ref :  
    artifact_name [ alias ] [ (artifact_modifiers) ]  
  
subquery_ref :  
    (subquery)alias  
  
fixed_property :  
    property_refalias  
  
artifact_modifiers :  
    ID [ ,ID ... ]  
  
artifact_name :  
    ID  
  
join_condition :  
    | USINGproperty_ref
```

Conditions

```
condition :  
    condition_and [ OR condition_and ... ]  
  
condition_and :
```

```
simple_condition [ AND simple_condition ... ]  
  
simple_condition :  
  (condition)  
  | NOT simple_condition  
  | exists_condition  
  | like_condition  
  | null_condition  
  | in_condition  
  | simple_comparison_condition  
  | native_sql  
  | bind  
  
simple_comparison_condition :  
  exprcomparison_opexpr  
  
comparison_op :  
  = | <> | < | > | <= | >= |  
  
like_condition :  
  expr [ NOT ] LIKE like_expression [ ESCAPE STRING ]  
  
like_expression :  
  STRING  
  | variable_ref  
  
null_condition :  
  expr IS [ NOT ] NULL  
  
in_condition :  
  expr [ NOT ] IN( { subquery | expression_list } )  
  | macro  
  
exists_condition :  
  EXISTS(subquery)  
  
bind :  
  BIND(property_ref [ , alias ] )  
  
macro :  
  macro_name [ (expression_list) ]  
  
macro_name :  
  #ID
```

Explanation:

- Conditions can be evaluated to true, false, or N/A. *condition* consists of one or more *condition_and* that are connected by the **OR** logical operator.
- *condition_and* consists of one or more *simple_condition* connected by the **AND**

- *simple_condition* is one of following:
 - *condition* in parentheses.
 - Negation of *simple_condition*.
 - *exists_condition*
 - *like_condition*
 - *null_condition*
 - *in_condition*
 - *simple_comparison_condition*
 - *native_sql*
- *simple_comparison_condition* is a comparison of two expressions using one of the comparison operators:
=, <>, <, >, <=, >=
- *like_condition* compares an expression with a pattern. Patterns can contain wildcards:
 - _ means any character (including numbers and special characters).
 - % means zero or more characters (including numbers and special characters).
- **ESCAPE STRING** is used to prefix _ and % in patterns that should represent those characters and not the wildcard.
- *alias* references the target artifact.

Expressions

```
expr :  
    term [ { + | - | CONCAT } term ... ]  
  
term :  
    factor [ { * | / } factor ... ]  
  
factor :  
    (select)  
    | (expr)  
    | { + | - } expr  
    | case_expression  
    | NUMBER  
    | STRING  
    | NULL  
    | function_call  
    | variable_ref  
    | property_ref  
    | native_sql  
  
case_expression :
```

```
CASE                                case_item [ case_item ... ]  
    [ ELSE                            expr ]  
END  
  
case_item :  
    WHEN           condition          THEN          expr  
  
function_call :  
    ID( [ DISTINCT ] { [ * ] | [ expression_list ] } )  
  
property_ref :  
    { ID | QUOTED_ID } [ { . | $ } { ID | QUOTED_ID } ... ]  
  
expression_list :  
    expr [ ,expr ... ]  
  
variable_ref :  
    ? | :ID
```

Explanation:

- Variables are of two kinds:
 - Positional variables - ? in DQL.
 - Named variables - <name_of_variable>
- When variables are used in DQL, each variable must have a value bound to the variable.

Lexical Rules

```
CONCAT :  
    ||  
  
STRING :  
    [ N | n ] ' text '  
  
NUMBER :  
    [ [ INT ] . ] INT  
  
INT :  
    DIGIT [ DIGIT ... ]  
  
DIGIT :  
    0..9  
  
ID :  
    CHAR [ { CHAR | DIGIT } ... ]  
  
CHAR :  
    a..z | A..Z | _
```

Explanation:

- *ID* is sequence of characters, numbers and underscores beginning with a character or underscore.
- *QUOTED_ID* is text in quotes.
- *CONCAT* means a concatenation of strings - syntax ||

DQL with 3rd Party Products

DQL is provided by a JDBC driver which you can use with common SQL designers supporting 3rd-party JDBC drivers (or ODBC with an ODBC-JDBC bridge).

The following sections describe the driver and its use with third-party products:

- "[DQL JDBC Driver](#)" below
- "[DQL in SQL Designers](#)" on the next page
- "[DQL in MS Access](#)" on the next page

DQL JDBC Driver

The DQL JDBC driver translates DQL queries into SQL queries and executes them using the underlying JDBC driver for the used database. The translation is provided by a remote invocation of HPE EM.

All the required JAR files for the DQL driver are available in `EM_HOME/client/lib/jdbc`:

- `pl-dql-jdbc.jar`
- `hessian-version.jar`
- Database driver JAR files are copied here during installation (for example, `ojdbc6.jar`).

The following table describes the driver configuration required to use the driver with 3rd party products.

DQL JDBC Driver Configuration

Property	Description
Connection String	<code>jdbc:systinet:http(s)://<username>@<host:port>/<context>[schema=schema name][model=list of allowed models]</code> <ul style="list-style-type: none">• <code><username></code> is the HPE EM username who executes the DQL query using HPE EM permissions security.• <code><host:port></code> are the connection details of your HPE EM installation (for example, <code>localhost:8080</code> for HTTP or <code>secure:8443</code> for HTTPS).• <code><context></code> is the application server context, the default is <code>em</code>.• <code> schema=schema name</code> is the schema of the user who owns HPE EM database tables. This parameter is optional. When omitted it is supposed that the user account used to access the database is also the owner of HPE EM tables. In case a common user or read-only user is used, use the power user schema name, unless the DQL JDBC Driver cannot provide metadata regarding artifacts and properties.• <code> model=list of allowed models</code> is optional and represents a comma-separated list of models. Only artifacts from allowed models are provided in JDBC metadata as tables. The available models are <code>sys</code> and <code>public</code>. By default, only artifacts

Property	Description
	from the public model are provided. For example, <code>jdbc:systinet:http://admin@demoserver.acme.com:8080/soa schema=SOA320</code>
DB Credentials	The database username and credentials used for direct access to the HPE EM database. In most cases it is the user who owns all tables for HPE EM - called the <i>power user</i> . In case of "Manual Database Arrangement" with a power user and a common user (who has only read/write access to tables, but can not create other tables), use the common user account. In case the common user is still too powerful to be shared, the DB administrator can create another - "read-only user" with read-only access to HPE EM tables. Note that the read-only user must also have created synonyms/aliases for HPE EM tables to pretend that HPE EM tables are in the schema of the read-only user. For more details, see "Database Installation Types" in the <i>Installation and Configuration Guide</i> .
DQL JDBC Classname	com.hp.em.dql.jdbc.DqlDriver

Note: The DQL JDBC driver must be able to connect to the database from the client. Use the full hostname for your database used during installation or setup. In the event of connection problems, verify the firewall settings between the local server and the database server.

DQL in SQL Designers

SQL Designer software can use the DQL driver if the designer is JDBC-aware.

To configure a JDBC-aware SQL Designer:

1. Add the DQL JDBC JAR files to the classpath.
2. Create a JDBC connection using the properties described in "[DQL JDBC Driver](#)" on the previous page.

After you establish the DQL JDBC connection, the following functionality should be available in your SQL Designer:

- Schema introspection, browsing the list of artifact types and property groups as tables, and their properties as columns.
- DQL query execution.

DQL in MS Access

MS Access 2007 can execute DQL queries using an ODBC-JDBC bridge. Before using MS Access, you must configure the ODBC datasource in Windows.

To configure an ODBC-JDBC bridge:

1. Download and install an ODBC-JDBC bridge. For example, *Easysoft ODBC-JDBC Gateway*.
2. Configuration typically consists of:

- JDBC driver configuration using the properties described in "[DQL JDBC Driver](#)" on page 39.
- Bridge configuration. For details, see the documentation for the bridge software.

DQL syntax varies from the examples given in "[Introduction to DQL](#)" on page 23 in the following cases:

- Complex properties must use \$ notation and be enclosed by [].
`personArtifact.[address$addressLines$value], personArtifact.[address$country]`
- To use modifiers such as (include_deleted) use the Pass-Through option in MS Access.
- Left Joins do not work. Use plain joins instead.
- For fixed properties, use the Pass-Through option in MS Access.
- For timestamps, use the Pass-Through option in MS Access.
- Native queries do not work in MS Access.
- For property aliases, do not use quoted aliases.

Chapter 6: Exploring the Database

The functionality of Report Editor relies on interaction with the database.

This chapter describes how to examine and setup the database in the following sections:

- ["SDM to Database Mapping Tool " below](#)
- ["Adding a JDBC Driver " below](#)
- ["Changing the Data Collection Settings " on the next page](#)
- ["Optimizing the Database " on the next page](#)
- ["Writing SQL Queries " on the next page](#)

SDM to Database Mapping Tool

Artifacts in HPE EM are stored in the form of XML documents. Their structure is defined by the System Data Model (SDM). Artifacts are serialized into a database over a standard serialization layer. The serialization of data may differ from the norm, based on customer specific extensions or modifications.

The sdm2dbmap tool is a mapping tool that generates a report containing the mapping between your SDM and database tables.

To generate the report, execute the following command:

EM_HOME/lib/sdm/bin/sdm2dbmap

The mapping report is output to the following file:

EM_HOME/lib/sdm/build/sdm2dbmap.html

The output consists of the following parts:

- A top level 1:1 mapping between SDM artifacts and DB tables. Each artifact listed, maps directly to one table.
- A list of artifacts. Each artifact in the report maps each SDM property to a specific column in the table. There are also associated tables and foreign keys, joined using the primary key of the artifact table.
- A report documenting the DB schema for all database tables coming from the SDM. Tables with names ending in _Rev are used to store older revisions.

Adding a JDBC Driver

To connect to a database you must specify a JDBC driver.

To add a JDBC driver:

1. In the Database Connections dialog box, click **Manage Drivers**.
The Manage JDBC Drivers dialog box opens.
2. Click **Add** to browse your filesystem for a driver.

HPE Software recommends using the same JDBC driver used during HPE EM installation.

3. Select the driver, and then click **Open** to add it to the list of drivers in the **Manage JDBC Drivers** dialog box.

Changing the Data Collection Settings

By default, the editor limits the amount of data collected to 20 schemas and 100 tables in the Query dialog box.

To change the data collection settings:

1. From the menu, select **Windows > Preferences**.
2. Expand **Report Design > Data Set Editor**, and then select **JDBC Data Set**.
3. Change the number of schemas and tables as required, and then click **OK**.

Optimizing the Database

If you frequently use particular fields for joins in your queries, create an index for that field to improve performance.

To create an Oracle index:

1. Log on to the sqlplus or isqlplus console as the system user.
2. Enter the following command:

```
create index ix_docrel_optimize2 on ry_docRel(sourceld, rtype);
```

As a minimum optimization, HPE Software recommends the following:

- `create index ix_res_optimize1 on ry_resource(fk_artifactType, m_deleted, id, m_path);`
- `create index ix_docrel_optimize2 on ry_docRel(sourceld, rtype);`

Writing SQL Queries

Although it is possible to use the query editor in HPE EM Workbench, it is often more convenient to use a specialized tool to develop queries.

This section describes some typical methods and provides examples to help you design your queries.

These examples were created using Oracle Developer for use with an Oracle Database. Changes may be required to use these queries with other database types.

This section contains the following methods and examples:

- "[Joining Tables in Queries](#) " on the next page
- "[Example: Business Service SELECT](#) " on the next page
- "[Example: Contract SELECT](#) " on the next page
- "[Example: Combined Business Service and Contract SELECT](#) " on page 45
- "[Example: Accepted Contract Count for a Business Service](#) " on page 46

Joining Tables in Queries

To join tables in your queries, add the following to the WHERE clause of your SELECT statement:

- Key or foreign key condition
- Discriminator expression
- Check the deleted flag (0 means false)

Example:

```
WHERE ryga_bsnService.id = rygt_ctgryPty.fk_resource_id
      AND rygt_ctgryPty.discriminator = 'bsnPolicy_iBag'
      AND bsnRes.m_deleted = '0'
```

Example: Business Service SELECT

This example query returns details for business services that are marked as ready for consumption:

Table ry_bsnService contains the main fields for business services.

Table >ry_resource contains general information about every artifact (for all artifact types).

The inner join to ry_resource in the FROM clause excludes deleted artifacts.

```
SELECT
    bsn.id bsn_id,
    bsn.name_val bsn_name,
    bsnRes.m_path bsn_path,
    bsn.serviceVersion_val bsn_version,
    bsn.description_val bsn_description,
    bsn.productionStage_name bsn_productionStage,

FROM ryga_bsnService bsn
    INNER JOIN ry_resource bsnRes ON
    (
        bsnRes.id = bsn.id
        AND bsnRes.m_deleted = '0'
    )

WHERE bsn.readyForConsumption_val = '1'
ORDER BY lower(bsn.name_val)
```

Example: Contract SELECT

This example query returns details for contracts that have been accepted:

```
SELECT
    contract.id ctrct_id,
    contract.name_val ctrct_name,
```

```
contract.description_val ctrct_description,
contract.contractstate_name ctrct_state,
providerContractRel.targetpath ctrct_targetpath

FROM ry_contract contract
    INNER JOIN ry_docrel providerContractRel ON
    (
        providerContractRel.rtype = '{http://systinet.com/
2005/05/soa/model/property}providerContractor'
        AND providerContractRel.obsolete='0'
        AND providerContractRel.deleted='0'
        AND providerContractRel.targetDeleted='0'
        AND providerContractRel.sourceId = contract.id
    )
    INNER JOIN ry_resource contractRes ON
    (
        contractRes.id =contract.id
        AND contractRes.m_deleted='0'
    )

WHERE contract.contractState_val =
'uddi:systinet.com:soa:model:taxonomies:contractAgreementStates:accepted'
```

Table ry_contract contains the main fields for contracts.

Table ry_docrel contains artifact relationship details.

The inner join to ry_docrel in the FROM clause excludes contracts where the provider-contract relationship is obsolete, deleted, or where the provider does not exist.

Example: Combined Business Service and Contract SELECT

"[Example: Business Service SELECT](#)" on the previous page and "[Example: Contract SELECT](#)" on the previous page can be combined to list the names of the contracts and the business service to which they apply.

```
SELECT
    contract.id ctrct_id,
    contract.name_val ctrct_name,
    bsn.id bsn_id,
    bsn.name_val bsn_name

FROM ryga_bsnService bsn
    INNER JOIN ry_resource bsnRes ON
    (
        bsnRes.id = bsn.id
        AND bsnRes.m_deleted = '0'
    ),
```

```
ry_contract contract
INNER JOIN ry_docrel providerContractRel ON
(
    providerContractRel.rtype = '{http://systinet.com
/2005/05/soa/model/property}providerContractor'
        AND providerContractRel.obsolete='0'
        AND providerContractRel.deleted='0'
        AND providerContractRel.targetDeleted='0'
        AND providerContractRel.sourceId = contract.id
)
INNER JOIN ry_resource contractRes ON
(
    contractRes.id =contract.id
    AND contractRes.m_deleted='0'
)
WHERE bsn.readyForConsumption_val ='1'
    AND contract.contractState_val =
'uddi:systinet.com:soa:model:taxonomies:contractAgreementStates:accepted'
    AND providerContractRel.targetId = bsn.id
ORDER BY lower(bsn.name_val)
```

By merging the queries you create an n:1 relationship between contracts and business services.

Example: Accepted Contract Count for a Business Service

This example returns business service details and the number of accepted contracts for each service:

```
SELECT
    bsn.id bsn_id,
    bsn.name_val bsn_name,
    bsnRes.m_path bsn_path,
    bsn.serviceVersion_val bsn_version,
    bsn.description_val bsn_description,
    bsn.productionStage_name bsn_productionStage,

    ( -- Contracts --
    SELECT count (0)
    FROM ry_contract contract
        INNER JOIN ry_docrel providerContractRel ON
(
            providerContractRel.rtype = '{http://systinet.com
/2005/05/soa/model/property}providerContractor'
                AND providerContractRel.obsolete='0'
                AND providerContractRel.deleted='0'
```

```
        AND providerContractRel.targetDeleted='0'
        AND providerContractRel.sourceId = contract.id
    )
INNER JOIN ry_resource contractRes ON
(
    contractRes.id =contract.id
    AND contractRes.m_deleted='0'
)
WHERE contract.contractState_val =
'uddi:systinet.com:soa:model:taxonomies:contractAgreementStates:accepted'
    AND providerContractRel.targetId = bsn.id
) ctrct_count

FROM ryga_bsnService bsn
INNER JOIN ry_resource bsnRes ON
(
    bsnRes.id = bsn.id
    AND bsnRes.m_deleted = '0'
)

WHERE bsn.readyForConsumption_val ='1'
ORDER BY lower(bsn.name_val)
```

Chapter 7: Deploying Reports

When your report is ready, you must deploy it to the HPE EM server.

Report Editor offers two methods:

- Deploy a report directly to the HPE EM server.
For details, see "[Deploying a Report to HPE EM](#)" on the next page.
- Deploy a set of reports as an extension to the HPE EM server.

This process consists of the following steps:

- a. "[Creating a Reporting Extension](#)" below
- b. "[Applying Extensions](#)" on page 50
- c. "[Redeploying EAR File](#)" on page 52

After deployment, you can access your report in various ways.

For details, see "[Accessing Reports](#)" below.

You can remove custom reports from the HPE EM server.

For details, see "[Removing Report Definitions from HPE EM](#)" on page 52.

Accessing Reports

["Use Cases"](#) on page 11 describes how HPE EM uses specific functionality in the UI for each report category.

It is also possible to directly access the reports in the HPE EM server and obtain alternative outputs.

In your browser, the following URLs use the Service Portfolio report as an example:

- <https://hostname:port/em/reporting/rest/reports/>
- https://hostname:port/em/reporting/rest/reports/service_portfolio?alt=text/plain
- https://hostname:port/em/reporting/rest/reports/service_portfolio/documents/
- https://hostname:port/em/reporting/rest/reports/service_portfolio/documents/1/?alt=text/plain

The last URL is an instance of the report. The page source contains alternate URLs. Change the URL to return a comma separated output of the report as follows:

- https://hostname:port/em/reporting/rest/reports/service_portfolio/documents/1/content?alt=text/csv

Creating a Reporting Extension

You can also deploy a set of reports as an extension.

To create a reporting extension:

1. In the Project Explorer, open the context menu for the project you want to deploy and select **HPE EM>Build Extension**.

The Build Extension Wizard opens.

2. In the Build Extension Wizard, input the parameters you require.

For parameter descriptions, see "[Build Extension Wizard](#)" on page 57.

3. Click **Finish** to create the extension.

Deploy the extension to the HPE EM server using the Setup Tool.

For details, see [Applying Extensions](#).

Deploying a Report to HPE EM

The HPE EM plug-ins for Report Editor enable you to deploy your report directly to the HPE EM server.

To deploy a report to HPE EM:

1. Make sure that the HPE EM server is running.
2. In the Project Explorer or Navigator view, open the context menu for the report design you want to deploy, and select **HPE EM > Upload to Server**.

You will be asked if you want to publish the default library. If you do not want to be asked again, you can set this preference in the Preference menu of Report Editor.

Expand **Window > Preferences > HPE EM > Report Editor** and select whether you want Assertion Editor to prompt you every time you publish, always publish the default library, or never publish the default library.

Custom Policy Manager reports do not contain **Notify** functionality by default. To add this functionality you must add the report name to the notification context file.

To add notify functionality to custom PM reports:

1. Deploy your report to HPE EM as described above.
2. Open `EM_HOME\deploy\hp-em.ear\lib\pm-persistence.jar\META-INF\pmNotificationContext.xml` with a text editor.
3. Add a `value` element containing the report definition name to the file.

For example:

```
<bean id="pm-persistence.systemReportChecker"
      class="com.hp.em.policy.notification.SystemReportChecker">
  <property name="reports">
    <set>
      <!-- em system reports - report definition IDs -->
      <value>acs_basic</value>
      ...
      <value>MyTestReport</value>
    </set>
  </property>
</bean>
```

4. Save pmNotificationContext.xml.
5. Restart the HPE EM server.

Applying Extensions

You can extend HPE EM by adding libraries or JSPs to the deployed EAR files, by modifying the data model, by configuring the appearance of the UI, and by importing prepackaged data.

Extensions to HPE EM come from the following sources:

- **Customization Editor**

Typical extensions created by Customization Editor contain modifications to the data model and artifact appearance, and possibly data required by the customization (taxonomies). They may also contain new web components, which may include custom JSP and Java code.

If your extension contains new artifact types, HPE EM does not create default ACLs for them. Set default ACLs for the new artifact types in HPE EM.

- **Assertion Editor, Report Editor, and Taxonomy Editor**

These extensions contain assertion, reporting, and taxonomy data only. They do not involve changes to the data model.

The Setup Tool opens the EAR files, applies the extensions, and then repacks the EAR files.

Apply extensions according to one of the following scenarios:

- ["Single-Step Scenario " on the next page](#)

The Setup Tool performs all the processes involved in applying extensions, including any database alterations, as a single step.

- ["Decoupled DB Scenario " on the next page](#)

Database SQL scripts are run manually. The Setup Tool performs the other processes as individual steps that are executable on demand. This scenario is useful in organizations where the user applying extensions does not have the right to alter the database, which is done by a database administrator.

Caution: In some specific circumstances (underscores and numbers in property names), extension application may fail because HPE EM cannot create short enough database table names (31 character maximum for most databases).

The error in setup.log resembles the following:

```
[java] --- Nested Exception ---
[java] java.lang.RuntimeException: cannot reduce length of identifier
  'ry_c_es_Artifact02s_c_priEspPty01Group_c_priEspPty01',
  rename identifier elements or improve the squeezing algorithm
[java] at com.em.platform.rdbms.design.decomposition.naming.impl.
  BlizzardNameProviderImpl.getUniqueLimitedLengthName(
    BlizzardNameProviderImpl.java:432)
[java] at com.em.platform.rdbms.design.decomposition.naming.impl.
  BlizzardNameProviderImpl.filterTableName(BlizzardNameProviderImpl.java:374)
```

If you do not require backward compatibility with these older versions, you can change the table naming algorithm.

To change the table naming algorithm:

1. Open EM_HOME/lib/pl-repository-old.jar#META-INF/rdbPlatformContext.xml with a text editor.
2. In the rdb-nameProvider bean element, edit the following property element:
`<property name="platform250Compatible" value="false"/>`
3. Save rdbPlatformContext.xml

Caution: This solution only impacts properties with multiple cardinality. If the problem persists, then review the property naming conventions in your extension.

Decoupled DB Scenario

Follow this scenario if the user who applies extensions does not have permission to modify the database.

To apply extensions and modify the database separately:

1. Make sure that all extensions are in the following directory:
`EM_HOME/extensions`
The Setup Tool automatically applies all extensions in that directory.
2. Stop the server.
3. Start the Setup Tool by executing the following command:
`EM_HOME/bin/setup -a`.
4. Select the **Apply Extensions** scenario, and click **Next**.
5. Click **Next**, to execute the extension application, and exit the Setup Tool.
6. Provide the scripts from `EM_HOME/sql` to the database administrator.
The database administrator can use `all.sql` to execute the scripts that drop and recreate the database schema.
7. Execute the Setup Tool in command-line mode to finish the extension application:
`EM_HOME/bin/setup -c`
8. Redeploy the EAR file:
The Setup Tool deploys the EAR file automatically.
If you need to deploy the EAR file to JBoss manually, see "[Redeploying EAR File](#)" on the next page.

Single-Step Scenario

Follow this scenario if you have permission to alter the database used for HPE EM.

To apply extensions to HPE EM in a single step:

1. Make sure that all extensions are in the following directory:
`EM_HOME/extensions`
The Setup Tool automatically applies all extensions in that directory.
If you are applying extensions to another server, substitute the relevant home directory for `EM_HOME`
2. Stop the server.

3. Start the Setup Tool by executing the following command:
EM_HOME/bin/setup.bat(sh)
4. Select the **Apply Extensions** scenario, and click **Next**.
The Setup Tool automatically validates the step by connecting to the server, copying the extensions, and merging the SDM configuration.
5. Click **Next** for each of the validation steps and the setup execution.
This process takes some time.
6. Click **Finish** to end the process.
7. Deploy the EAR file:
The Setup Tool deploys the EAR file automatically.
If you need to deploy the EAR file to JBoss manually, see "[Redeploying EAR File](#)" below.
8. Restart the server.

Caution: Applying an extension that modifies the SDM model may drop your full text indices.

EM_HOME/log/setup.log contains the following line in these cases:

Could not apply alteration scripts, application will continue with slower DB drop/create/restore scenario.

In these cases, reapply full text indices.

Redeploying EAR File

After using the Setup Tool to apply extensions or updates, you must redeploy the EAR file to the application server. For JBoss, you can do this using the Setup Tool.

To redeploy the EAR file to JBoss:

1. Stop the application server.
2. Start the Setup Tool by executing the following command:
EM_HOME/bin/setup.bat(sh).
3. Select the **Advanced** scenario, and click **Next**.
4. Scroll down, select **Deployment**, and then click **Next**.
When the Setup Tool validates the existence of the JBoss Deployment folder, click **Next**.
5. Click **Finish** to close the Setup Tool.
6. Restart the application server.

Removing Report Definitions from HPE EM

You can remove custom report definitions from HPE EM.

To remove a single report, use the context menu option.

To remove custom reporting extensions:

1. Remove any custom report extensions from EM_HOME/extensions.
2. Execute the Setup Tool using the apply extensions scenario.

Chapter 8: Example: Failure Impact Report for the Reports Tab

To demonstrate the Reports Tab use case described in ["Use Cases " on page 11](#), follow this example:

To create a Failure Impact Report and add it to the a Reports Tab:

1. Create the failure impact report definition.

Follow the procedure described in ["Creating a Report Definition " on page 20](#) with the following inputs:

Parameter	Definition
Name	Failure Impact
Description	Summary of Business Service Failure Impact Status

2. Create the Failure Impact data set.

For details, see ["Example: Failure Impact Data Set " below.](#)

3. Create the Failure Impact Report layout.

For details, see ["Example: Failure Impact Report Layout " on the next page.](#)

4. Deploy the Failure Impact Report to HPE EM.

For details, see ["Deploying a Report to HPE EM " on page 49.](#)

5. Add the Failure Impact Report to the HPE EM Reports Tab.

For details, see the "Custom Birt Reports" section of the *HPE Enterprise Maps User Guide*.

Select **Failure Impact** from the list.

Example: Failure Impact Data Set

To demonstrate the reporting tool use case described in ["Creating a Data Set " on page 21](#), follow this example.

To create the Failure Impact data set:

1. Follow the procedure described in ["Creating a Data Set " on page 21](#) with the following inputs.
2. In the New Data Set dialog box, input the following parameters:

Parameter	DQL Option	SQL Option
Data Set Name	Failure Impact	
Data Source	dqlDatabase	Database
Data Set Type	DQL Select Query	SQL Select Query

3. Use the filter to only display the data that you want to use.

For SQL queries, all standard tables in HPE EM begin with RYGA.

4. Use Available Items to explore the data and identify the tables and columns you need for your query.

For this report all the information required is for business services:

- For DQL, artifact type **businessServiceArtifact**.
- For SQL, table **RYGA_BSNSERVICE**.

5. Construct your query by typing in the query input area and dragging and dropping items from **Available Items**.

For this report the DQL query is:

```
select bs.criticality.name as "Failure Impact Status",           count  
(bs.criticality.name) as "No. of Services"  from businessServiceArtifact bs  group  
by bs.criticality.name
```

For this report the SQL query is:

```
select RYGA_BSNSERVICE.CRITICALITY_NAME as "Failure Impact Status",  
count(RYGA_BSNSERVICE.CRITICALITY_NAME) as "No of Services"  from RYGA_BSNSERVICE  
group by RYGA_BSNSERVICE.CRITICALITY_NAME
```

6. Click **Finish** to complete your query and view the Output Columns for the data set.

7. Click **Preview Results** to view the actual data in your database.

8. Click **OK** and press **Ctrl+S** to save the data set as part of the report.

Example: Failure Impact Report Layout

To demonstrate the reporting tool use case referred to in "["Designing a Report Layout " on page 22](#), follow this example.

To Create the Layout of the Failure Impact Report:

1. In the failure_impact.rptdesign editor view, right-click and select **Insert>Label**.
2. Type the report heading **Business Service Failure Impact Status**.
3. Use the Property Editor view to change the format of the heading.
4. In a blank area of the failure_impact.rptdesign editor view, right-click and select **Insert>Table**.
5. Input the table parameters and select the data set. In this case, 2 columns and the **Failure Impact** data set.
6. Select the left column header row, right-click and select **Insert>Text**. Input column header **Failure Impact Status**, and then click **OK**. Repeat for the right column header, **No of Services**.

<u>Business Service Failure Impact Status</u>	
Failure Impact Status	No of Services
Detail Row	
Footer Row	
 Table	

7. In the Data Explorer, expand **Data Sets>Failure Impact**.
8. Drag **Failure Impact Status** from the Data Explorer to the left detail cell. Repeat for **No of Services** and the right detail cell.

<u>Business Service Failure Impact Status</u>	
Failure Impact Status	No of Services
[Failure Impact S...]	[No of Services]
Footer Row	

9. In a blank area of the failure_impact.rptdesign view, right-click and select **Insert>Chart** to open the New Chart dialog box.
10. This report requires a pie chart, select **Pie Chart**, and then click **Next**.
11. Under Select Data Set, select **Use Data Set** and **Failure Impact** from the drop-down list.
12. Drag **Failure Impact Status** from **Data Preview** to the **Category Definition** input.
13. Drag **No of Services** from **Data Preview** to the **Slice Size Definition** input.
14. Click **Next** to format the chart appearance.
15. Select **Chart Area**, amend **Chart Title** to **Business Service Failure Impact Status**, and then click **Finish** to add the chart to the report definition.
16. Drag the chart area outline to the size you require, and then press **Ctrl+S** to save the report definition.
17. Select the **Preview** tab to view the report with data from your data source.

Appendix A: Dialog Boxes

Each Report Editor input dialog is described in the following sections:

- "[Build Extension Wizard](#)" below. Creating a report extension.
- "[New Data Set](#)" below Creating a new data set.
- "[New Report Project Wizard](#)" below Creating a new report project.

Build Extension Wizard

Enter general parameters for the report extension.

Option	Definition
Name	The name of the reporting extension.
Description	A description for the reporting extension.
Include library in extension	Select this check-box if you want to include the default library in the extension.
Folder	The location of the reporting extensions folder.
Filename	The filename of the reporting extension.

New Data Set

Enter a name, then enter a source and type for the new data set.

Parameter	Definition
Data Set Name	Input a name for the data set.
Data Source	Select the data source from the drop-down list. The selection of a DQL or SQL datasource determines the exact query language required for your query.
Data Set Type	Choose one of the options from the drop-down list: <ul style="list-style-type: none">• Select Query• Stored Procedure Query

New Report Project Wizard

The New Report Project Wizard consists of the following stages depending on the options you select:

1. "New Report Project Wizard: Default Library Configuration - Create a new data source" below
2. "New Report Project Wizard: New Server" below

New Report Project Wizard: Default Library Configuration - Create a new data source

Configure the new data source and specify your login credentials.

Parameter	Definition
Server URL	The location of the HPE EM server.
Server Username	Your HPE EM login.
Driver Class	Automatically filled with the corresponding data base name on the server.
Database Username and Password	Your database credentials.
Database Schema	The database schema name.
Manage Drivers	Add, delete, or restore JAR files, and edit drivers.
Test Connection	Test the server connection using the specified parameters.

New Report Project Wizard: New Server

Create a new server for the project and optionally specify your authentication credentials.

Parameter	Definition
Name	The name of the server to display in the report editor.
URL	The location of the HPE EM server.
Username and Password	Credentials for access to the HPE EM server.
Save credentials	Select to store the input credentials.
Validate connection	Select to validate the server connection. The HPE EM server must be running to validate.

Appendix B: Troubleshooting

This appendix describes some common problems and their resolutions:

- "[Incomplete Table List](#)" below
- "[The Platform Perspective is Missing Views](#)" below
- "[The Report Result does not Appear](#)" below
- "[Oracle Developer Queries Cause Errors in HPE EM Workbench](#)" on the next page
- "[SQL Error on Report Previews](#)" on the next page
- "[HPE EM Workbench Looks Different from the Pictures in the Documentation](#)" on page 61
- "[HPE EM Workbench Displays Scrambled Table Names](#)" on page 61

Incomplete Table List

Problem

The list of tables is incomplete. HPE EM Workbench limits the number of schemas and tables accessed for performance reasons.

Solution

Change the settings, as described in "[Changing the Data Collection Settings](#)" on page 43.

The Platform Perspective is Missing Views

Problem

There are views missing from the Platform perspective. The most likely reason for this is that some of the views are closed.

Solution

Reset the perspective:

- From the menu, select **Window > Reset Perspective**.

The Report Result does not Appear

Problem

The report result is not deployed to the HPE EM server.

Solution

Check the report result:

1. In your browser, navigate to the latest report instance page. For example,
`https://hostname:port/reporting/reports/service_portfolio/documents/1/?alt=text/plain`.
2. Check the following status elements:
 - <category label="finished" scheme="urn:com:systinet:reporting:execution:status" term="finished"/>
 - <category label="report document" scheme="urn:com:systinet:reporting:kind" term="urn:com:systinet:reporting:kind:document"/>

A correctly finished report contains the *finished* value.

If the report execution does not finish, check the JMS settings, JMS queue, or the reporting service logs to analyze the bottleneck.

Oracle Developer Queries Cause Errors in HPE EM Workbench

Problem

HPE EM Workbench returns errors for imported queries. The most likely reason is that your table names do not include the schema.

Solution

Include the schema name in the **FROM** clause of your query. For example, `soadb.ry_docrel`.

SQL Error on Report Previews

Problem

When viewing the Preview page of a report, the following SQL error is shown:

```
ReportDesign (id = 1):
+ Cannot get the result set metadata.
SQL statement does not return a ResultSet object.
SQL error #1: Invalid column name ROWNUM
```

This error occurs because the Preview is not aware of the database type that the query is applicable to.

Solution

Check the database type parameter:

1. In the Preview page, click **Show Report Parameters**.
2. Verify that the database-type parameter matches the database you use.

HPE EM Workbench Looks Different from the Pictures in the Documentation

Problem

HPE EM Workbench does not look exactly as depicted in the user documentation. The most likely reason for this disparity is that you are in the wrong perspective.

Solution

Switch to the Platform perspective:

- From the menu, select **Window>Open Perspective>Platform**.

HPE EM Workbench Displays Scrambled Table Names

Problem

The tables names are unreadable. These are most likely to be deleted tables stored in Oracle 10gR2.

Solution

Either change the maximum number of tables to 3000, as described in "["Changing the Data Collection Settings " on page 43](#), or purge the deleted tables.

To purge deleted tables:

1. Log on to the sqlplus or isqlplus console as the system user.
2. Enter the following commands:
 - **PURGE RECYCLEBIN**
 - **PURGE DBA_RECYCLEBIN**