



HPE Operations Bridge Reporter

Software Version: 10.10

OBR Content Designer Guide

Document Release Date: January 2017
Software Release Date: January 2017

Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notice

© Copyright 2015 - 2017 Hewlett-Packard Development Company, L.P.

Trademark Notices

Adobe™ is a trademark of Adobe Systems Incorporated.

Microsoft® and Windows® are U.S. registered trademarks of Microsoft Corporation.

UNIX® is a registered trademark of The Open Group.

This product includes an interface of the 'zlib' general purpose compression library, which is Copyright © 1995-2002 Jean-loup Gailly and Mark Adler.

Documentation Updates

The title page of this document contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.
- Software Release Date, which indicates the release date of this version of the software.

To check for recent updates or to verify that you are using the most recent edition of a document, go to:

<https://softwaresupport.hp.com>

This site requires that you register for an HP Passport and sign in. To register for an HP Passport ID, go to:

<https://hpp12.passport.hp.com/hppcf/createuser.do>

Or click the **the Register** link at the top of the HP Software Support page.

You will also receive updated or new editions if you subscribe to the appropriate product support service.

Contact your HP sales representative for details.

Support

Visit the HP Software Support Online web site at: <https://softwaresupport.hp.com>

This web site provides contact information and details about the products, services, and support that HP Software offers.

HP Software online support provides customer self-solve capabilities. It provides a fast and efficient way to access interactive technical support tools needed to manage your business. As a valued support customer, you can benefit by using the support web site to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Download software patches
- Manage support contracts
- Look up HP support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and sign in. Many also require a support contract. To register for an HP Passport ID, go to:

<https://hpp12.passport.hp.com/hppcf/createuser.do>

To find more information about access levels, go to:

<https://softwaresupport.hp.com/web/softwaresupport/access-levels>

HP Software Solutions Now accesses the HPSW Solution and Integration Portal Web site. This site enables you to explore HP Product Solutions to meet your business needs, includes a full list of Integrations between HP Products, as well as a listing of ITIL Processes. The URL for this Web site is

<http://h20230.www2.hp.com/sc/solutions/index.jsp>

Contents

Introduction to Content Development	6
Content Designer Overview	8
Installing and Deploying the Content Designer	8
Downloading Content Development Environment (CDE)	8
Installing and Deploying Content Designer on OBR System	9
Installation Prerequisites	9
Installing Content Designer on Windows	10
Installing Content Designer on Linux	12
Installing and Deploying Content Designer on a Non-OBR System	13
Installation Prerequisites	13
Installing On Windows	15
Getting Started	17
Log on to Content Designer	17
Content Designer Home Page	18
Home Page Options	18
Settings	18
Creating Content Pack Using Content Workspace	20
Before You Begin	21
Generating Content on an OBR System	22
HP Operations Agent as a Datasource	22
Before you begin	22
CSV File as Datasource	32
Database as a Datasource	39
Generating Content on a Non-OBR System	50
HP Operations Agent as a Datasource	50
CSV File as Datasource	58
Database as a Datasource	64
Deploying Content Packs	73
Deploying Domain and ETL Content Packs	73
Generating and Exporting Application Content Pack	74
Creating Application Content Pack for a Linux System	75
Exporting the Universe to CMC Repository	76
Creating Web Intelligence Reports	83
Viewing Reports on SAP BusinessObjects BI Launch Pad	85
Generating Reports from BI Launch Pad	86
Modifying Existing Content Packs	89
Edit content	89
Re-build content pack	90
Re-build Multiple Content Packs	91

Frequently Asked Questions (FAQs)	93
References	95
SAP BusinessObjects Documentation	95
Send Documentation Feedback	97

Introduction to Content Development

HPE Operations Bridge Reporter (HPE OBR) Content Development Environment (CDE) is a platform, which enables a content developer to create content packs that can be deployed on OBR platform. Content packs are datamarts that are deployed on OBR platform; content packs are broadly categorized as ETL, domain and application components.

The Content Development Environment (CDE) consists of a set of utilities for developing content. These utilities use XML files authored by the content pack developer or XML files auto-generated by OBR Content Designer to generate the installable Content Pack component packages.


Content can be developed in either of the following ways:

- **Content Designer** - An interactive user interface to generate content quickly.

HPE OBR Content Designer uses a **simplified method** of creating a content pack and allows you to create Domain, ETL and Application components at the same time. The simplified method supports CSV files, generic database, and HP Operations Agent as the datasources for content creation.

The **simplified method** can be used by a content developer to develop end-to-end (Domain, ETL, and Application) content pack for a new domain. The following conditions have to be satisfied for creating content:

- When a content has fact tables that are associated with one or more dimensions (star schema) and the dimensions are not further normalized (dimensions without a parent table).

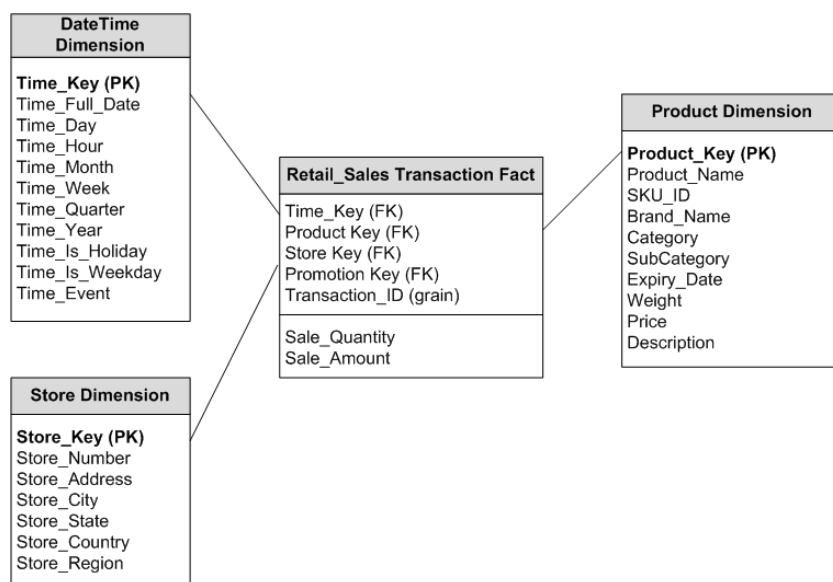

- When all the facts are to be reconciled against host (when HP Operations Agent is the datasource).
- When the generated reports do not require any roll up or drill down of data.
- **Command-based CDE** - a command-based utility for expert users to create content. For more information, see *HPE Operations Bridge Reporter Content Development Guide*.

Content Designer Overview

HPE OBR Content Designer uses the simplified method of creating a content pack and allows you to create, deploy, and install Domain, ETL, and Application components from the following datasources:

- CSV files
- Generic database
- Operations Agent

HPE OBR Content Designer can be used in following scenarios:

With OBR:

- [OBR on Windows Operating System](#)
- [OBR on Linux Operating System](#)

Without OBR:

- [Standalone \(Non-OBR\) on Windows Operating System](#)

Installing and Deploying the Content Designer

Downloading Content Development Environment (CDE)

Follow these steps to download Content Designer:

1. Log on to the following location using your HPE Passport credentials:
<https://hpln.hpe.com/contentoffering/hpe-obr-content-development-environment>
To register for an HPE Passport ID, [Create a new HPE Passport account](#).
2. Under **Versions**, click HPE OBR CDE, **Version 10.01.000** to expand.

 > HPE OBR CDE, Version 10.01.000

Note: Content packs created using the CDE Version 10.01.000 can be deployed on HPE OBR 10.10 or later versions only.

3. Click and download the following .zip file for Windows or the .tar for Linux:
 - HPEOBR CDE-10.01.000-Win5.2_64.zip
 - HPEOBR CDE-10.01.000-Linux2.6_64.tar


Installing and Deploying Content Designer on OBR System

This section provides information about downloading HPE OBR Content Development Environment files from HPE Live Network and deploy it on a Windows or Linux system as per your requirement.

Installation Prerequisites


Perform the following before you start installing and deploying OBR Content Designer on a Windows system:

- Ensure that SAP BusinessObjects 4.x or SAP BusinessObjects ClientTools (BusinessObjectsXI-4.1-Clienttools.zip) is installed on a Windows system where you want to deploy OBR Content Designer.
You can download BusinessObjectsXI-4.1-Clienttools.zip from HPE OBR media (OBR bits) folder.
- Set the BusinessObjects environment variable (BO_HOME):
 - a. On your Windows system, go to **Control Panel> System and Security > System**.
 - b. Click **Advanced system settings**.
 - c. Click **Advanced** tab, and then click **Environment Variables**.

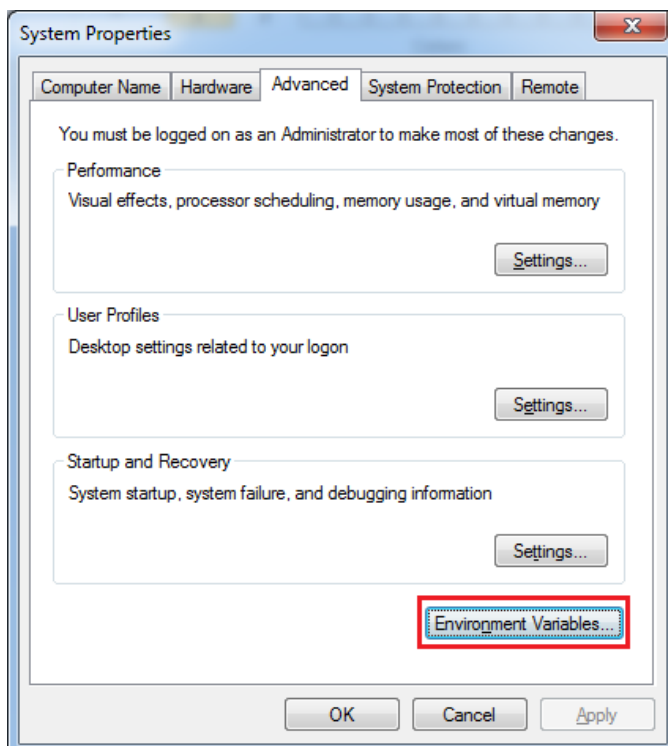

- d. Click **New**.

The New User Variable dialog box is displayed.

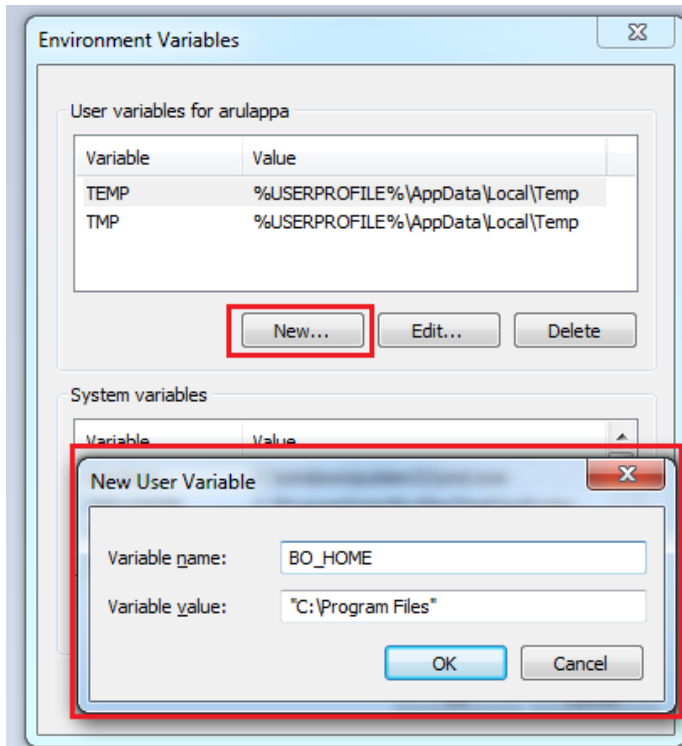


- e. In the **Variable Name** box, type BO_HOME.
- f. Specify the BO ClientTools path in the **Variable value** in double quotes (" ").
"C:\Program Files"
- g. Click **OK**.

Installing Content Designer on Windows

To instal the Content Designer on your system, follow these steps:

1. Copy the downloaded HPEOBRUDE-10.01.000-Win5.2_64.zip file to the system where you want to deploy HPE OBR Content Designer.
2. Extract the contents of the .zip file to view the HPSHRCDE-10.01.000-Win5.2_64.msi file.
3. Double-click the HPSHRCDE-10.01.000-Win5.2_64.msi file and follow the instructions on the installation wizard.
4. Select <OBR_Installation_Folder> to place the CDE.exe.
5. From OBR installation directory, double-click the CDE.exe file.

The contents of the CDE.exe file are extracted to the CDE folder.

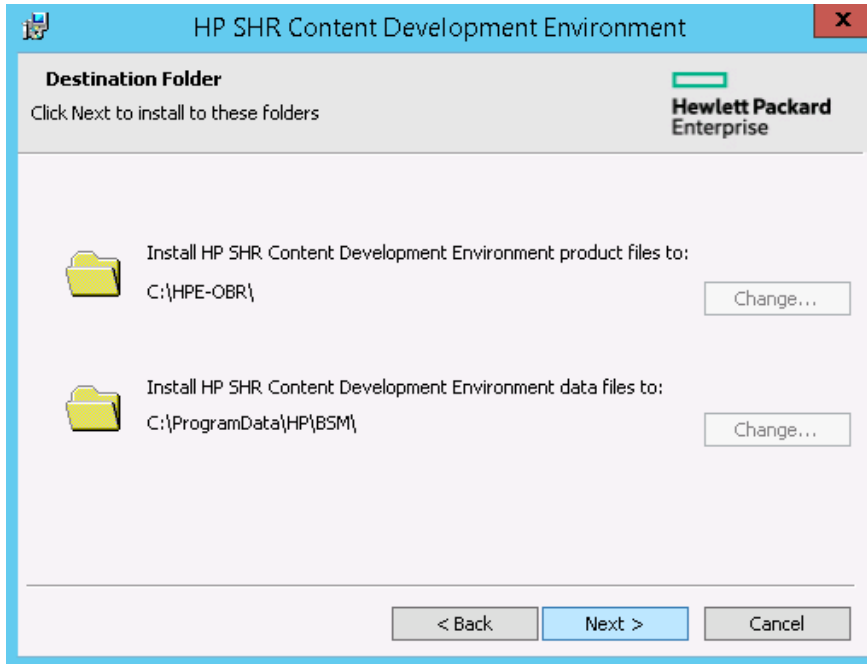

Caution: Ensure that the selected path does not contain spaces.

6. Open the command prompt, go to `<CDE_Folder>\bin` folder, where `<CDE_Folder>` is the path where you have extracted `CDE.exe`.
7. Go to `%CDE_HOME%\cdeConsole` folder.
8. Run the `deploy.bat` command.

The following message appears on successful deployment:

HPE Operations Bridge Reporter Content Designer Deployment complete

9. Run the `start.bat` command.

The following message appears if the server starts successfully:

Content Designer has been started successfully.

If the message exits and the command prompt appears, go to `%CDE_HOME%\cdeConsole\logs` and check the `server.log` and `server_err.log` files for any errors.

Note: Do not close the CDE console after running the `start.bat` command; this will shut down the Content Designer. Close the console only after completing your content development process using the Content Designer.

HPE OBR Content Designer is now deployed successfully. Go to ["Getting Started" on page 17](#) for creating content.

Installing Content Designer on Linux

To install and deploy the Content Designer on a Linux system, follow these steps:

1. Copy the downloaded `HPEOBRUDE-10.01.000-Linux2.6_64.tar` file to the system where you want to deploy Content Designer.
2. Run the following command to extract the contents of the `.tar` file.
`untar HPEOBRUDE-10.01.000-Linux2.6_64.tar`
 The `HPSHRCDE-10.01.000-Linux2.6_64.rpm` file is extracted.
3. Copy the `HPSHRCDE-10.01.000-Linux2.6_64.rpm` file to the `$PMDB_HOME/..` directory.
4. Run the `rpm -Uvh HPSHRCDE-10.01.000-Linux2.6_64.rpm` command to extract the contents of the `.rpm` file.

The `CDE.zip` file is copied to the `$PMDB_HOME/..` directory.

Note:

If you already have CDE 10.01.000 on your system, perform the following:

- a. Run the following command to check if CDE is installed on your system:

```
rpm -qa | grep HPSHRCDE
```

The existing CDE file name will be displayed. Example: `HPSHRCDE-10.01.000-1.x86_64`

- b. Uninstall CDE using the following command:

```
rpm -ev <existing_rpm_name>
```

Example `rpm -ev HPSHRCDE-10.01.000-1.x86_64`

- c. Run the following command to install the latest CDE:

```
rpm -Uvh HPSHRCDE-10.01.000-Linux2.6_64.rpm
```

5. Go to OBR installation directory: `$PMDB_HOME/..` directory.
6. Unzip the `CDE.zip` file.
 The contents of the `CDE.zip` file are extracted to the `CDE` directory.
7. Go to `<CDE_Directory>/bin` directory,
 where `<CDE_Directory>` is the path where you have extracted `CDE.zip`.
8. Change the permission of the `.sh` files using the `chmod a+x *.sh` command.
9. Run the `source ./setenv.sh` command.
10. Go to `$CDE_HOME/cdeConsole` directory and change the permission of the `.sh` files using the `chmod a+x *.sh` command.
11. Run the `./deploy.sh` command.

The following message appears on successful deployment:

```
HPE Operations Bridge Reporter Content Designer Deployment
complete
```

12. Run the `./start.sh` command.

Note: Do not close the CDE console after running the `start.bat` command; this will shut down the Content Designer. Close the console only after completing your content development process using the Content Designer.

If the command line exits and the command prompt appears, go to `$CDE_HOME/cdeConsole/logs` and check the `server.log` and `server_err.log` files for any errors.

HPE OBR Content Designer is now deployed successfully. Go to ["Getting Started" on page 17](#) for creating content.


Tip: You can view the Content Designer logs in the `{CDE_HOME}\cdeConsole\logs` folder. Other content development logs are available in the `{CDE_HOME}\cde.log` folder.

Installing and Deploying Content Designer on a Non-OBR System

Installation Prerequisites


Perform the following before you start installing and deploying OBR Content Designer on a non-OBR system:

- Ensure that SAP BusinessObjects 4.x or SAP BusinessObjects ClientTools (BusinessObjectsXI-4.1-Clienttools.zip) is installed on a Windows system where you want to deploy OBR Content Designer.
You can download BusinessObjectsXI-4.1-Clienttools.zip from HPE OBR media (OBR bits) folder.
- Set the BusinessObjects environment variable (`BO_HOME`):
 - a. On your Windows system, go to **Control Panel > System and Security > System**.
 - b. Click **Advanced system settings**.
 - c. Click **Advanced** tab, and then click **Environment Variables**.

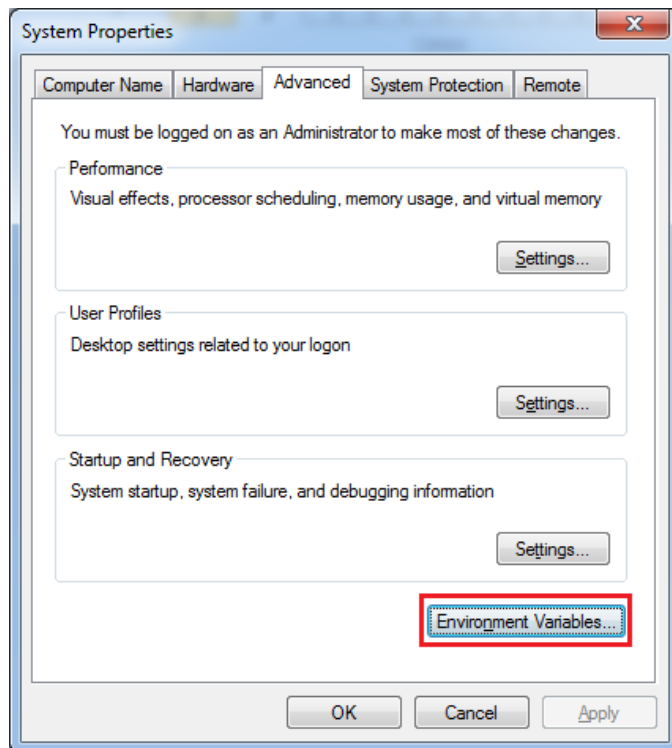

d. Click **New**.

The New User Variable dialog box is displayed.

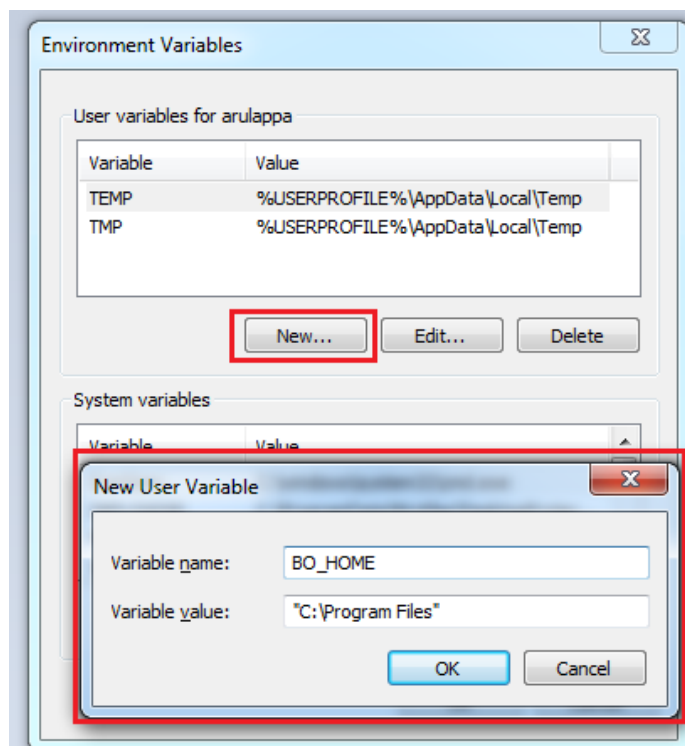

e. In the **Variable Name** box, type BO_HOME.

f. Specify the BO ClientTools path in the **Variable value** in double quotes (" ").

"C:\Program Files"

g. Click **OK**.

Installing On Windows

To install and deploy the Content Designer on your Windows system, follow these steps:

1. Copy the downloaded HPEOBRCODE-10.01.000-Win5.2_64.zip file to the system where you want to deploy HPE OBR Content Designer.
2. Extract the contents of the .zip file to view the HPSHRCODE-10.01.000-Win5.2_64.msi file.
3. Double-click the HPSHRCODE-10.01.000-Win5.2_64.msi file and follow the instructions on the installation wizard.

The CDE.exe file is placed in the folder you select.

Caution: Ensure that the installation path you select does not contain any spaces.

4. Double-click the CDE.exe file and select the path to extract contents of the CDE.exe file.

The content of the CDE.exe file are extracted to the folder you have selected.

5. Open the command prompt, go to <CDE_Folder>\bin folder, where <CDE_Folder> is the path where you have extracted CDE.exe.
6. Set BusinessObjects environment variable:
 - a. Go to **Control Panel > System and Security > System**.
 - b. Click **Advanced system settings**.
The *System Properties* dialog box appears.
 - c. Click **Advanced** tab > **Environment Variables**.
 - d. Click **New** and specify the **Variable name** as BO_HOME.
 - e. Specify the **Variable value** as the path where BusinessObjects ClientTools is installed on your system.
 - f. Click **OK**.

7. Run the setenv.bat command and specify the following while prompted:

- CDE_HOME - the path where you have extracted CDE.exe
- JRE_HOME - the path where JAVA is installed on your system

Caution: Ensure that your JRE_HOME path does not contain spaces.

8. Go to %CDE_HOME%\cdeConsole folder.

9. Run the `deploy.bat` command.

The following message appears on successful deployment:

HPE Operations Bridge Reporter Content Designer Deployment complete

10. Run the `start.bat` command.

The following message appears if the server starts successfully:

Content Designer has been started successfully.

Note: Do not close the CDE console after running the `start.bat` command; this will shut down the Content Designer. Close the console only after completing your content development process using the Content Designer.

HPE OBR Content Designer is now deployed successfully. Go to ["Getting Started" on the next page](#) for creating content.

Tip: You can view the Content Designer logs in the `{CDE_HOME}\cdeConsole\logs` folder.

Getting Started

The HPE OBR Content Designer consists of the following:

- "Content Designer Home Page" on the next page
- "Creating Content Pack Using Content Workspace" on page 20
- "Settings" on the next page


Log on to Content Designer

1. Open Google Chrome or Mozilla Firefox browser.
2. Launch the HPE OBR Content Designer using the following URL:

`http://<FQDN>:3000/`

where <FQDN> is the hostname of the system where HPE OBR Content Designer is deployed.

The HPE OBR Content Designer log in screen appears.

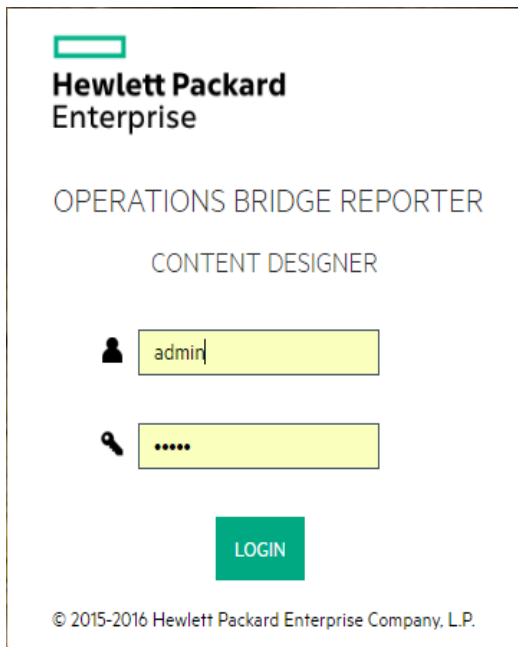

The screenshot shows the login interface for the HPE OBR Content Designer. At the top left is the Hewlett Packard Enterprise logo. Below it, the text "OPERATIONS BRIDGE REPORTER" and "CONTENT DESIGNER" are displayed. The login fields consist of a username input box with the text "admin" and a password input box with five dots. A green "LOGIN" button is positioned below the password field. At the bottom, a copyright notice reads "© 2015-2016 Hewlett Packard Enterprise Company, L.P."

3. Type **admin** as username and **admin** as password.
4. Click **LOGIN**.



The Content Designer Home Page appears.

Content Designer Home Page

The Home page provides navigation to the features of HPE OBR Content Designer. The Home page contains links to create new content and to access CDE help and to download report templates for easy content development.

Home Page Options

The following table lists the home page options:

Option/Link	Description
Content Workspace	The Content Workspace link takes you to the workspace to create your content from the various datasources.
Settings	This link directs you the Settings page to specify your preferences for HPE OBR server, Vertica database, and SAP Business Objects server.
	User - Displays the details of the user logged on to Content Designer at present.
	Help - Displays the HPE OBR Content Designer online help.

Settings

Note: You must configure settings before you start creating content on the Content Workspace.

To configure the settings, follow these steps:

1. On the Content Designer home page, click **Settings**.
The Settings page is displayed.

Settings

Workspace Settings

OBR Server Details

Vertica Database Server Details


SAP Business Objects Details

Save Settings

2. Under **OBR Server Details**, perform the following:

- a. Type the HPE OBR server **host name**.
- b. Click **Test OBR Server** to check if OBR system is running.

The  *OBR Server is running.* message is displayed.

If the  *OBR server is down.* message is displayed, check the OBR server details you have entered and try again.

3. Under **Vertica Database Server Details**, perform the following:

- a. Type the HPE OBR database **host name**.


Note: On your Windows system, go to C:\...drivers\etc folder (Example: C:\Windows\System32\drivers\etc), open the hosts file and type your database host name.

- b. Type the database **username** and **password**.
- c. Type OBR Vertica **Database Name** and **Database Schema Name**.

Note: If OBR 10.10 Patch is not installed and HPE OBR Content Designer 10.01 is deployed on your system, ensure that the Database Schema Name specified is `Public`. If OBR 10.10 Patch is deployed, you must specify database schema name as `obr`.

- d. Click **Test DB Connection** to check if OBR database is available.

The  *Connection Successful.* message is displayed.

If the  *Connection Failed* message is displayed, check the OBR database details you have entered and try again.

If the connection fails, view the log file at {CDE_HOME}
 \cdeConsole\logs\server_err.log.


4. Under **SAP Business Objects Details**, type the following SAP BusinessObjects information:
 - a. Type the SAP BusinessObjects **host name**.
 - b. Type the SAP BusinessObjects **username** and **password**.
 - c. Type the **Connection** name.


Note: Ensure that the Connection name is OBR_CONNECTION.

5. Click **Save Settings**.

Wait till the following message is displayed:



The  *Save Successful* message is displayed. You can now start creating content packs.

If the  *Save Unsuccessful* message is displayed, check the settings and try again.

Creating Content Pack Using Content Workspace



Note: Before creating content, you must configure settings on the ["Settings" on page 18](#).

The Content Workspace provides options to create content from the following datasources:

- HP Operations Agent as a Datasource
- CSV File as Datasource
- Database as a Datasource

Content Workspace consists of the following features:

Icon	Name	Description
	Create New Content	Start creating a content pack by selecting the datasource and specifying content attributes.

Icon	Name	Description
	Edit Content	Modify a content pack created by the Content Designer using an XML editor.
	Build Content	Re-build one or more modified content packs.

Before You Begin

Note:

- Identify the datasource containing metrics that are suitable to be fed into the domain data model. For more information on designing the data model, see *HPE Operations Bridge Reporter Content Development Guide*.
- Ensure table names are unique across your content development in OBR.

Before you launch the Content Designer, ensure you perform the following:

1. Using command prompt, log on to the location where you have deployed HPE OBR Content Designer.

On Windows

- a. Open the command prompt and go to `<CDE_Folder>\bin` folder, where `<CDE_Folder>` is the path where you have extracted `CDE.exe`.
- b. Run the `setenv.bat` command.
- c. Go to `%CDE_HOME%\cdeConsole` folder.
- d. Run the `start.bat` command.

The following message appears if Content Designer starts:

Content Designer has been started successfully

On Linux

- a. Open command prompt and go to `<CDE_Folder>/bin` directory, where `<CDE_Folder>` is the path where you have extracted `CDE.zip`.
- b. Run the `source ./setenv.sh` command.
- c. Go to `<CDE_Folder>/cdeConsole` directory.
- d. Run the `./start.sh` command.

The following message appears if Content Designer starts:

Content Designer has been started successfully

Generating Content on an OBR System

HP Operations Agent as a Datasource


Before you begin

Consider the following for creating content pack using HPE Operations Agent as a datasource:

- You must have RTSM and Operations Agent datasource for building content.
RTSM is a source of the topology information for HPE OBR. The topology information includes all Configuration Items (CIs) as modeled and discovered in RTSM. Node resource information is directly obtained from HP Operations Agent.
- Ensure that the topology source is RTSM when Operations Agent is the datasource for creating content.
- For each of the unique datasource and class combinations, one fact and one dimension must be selected.

Example:

In **Pick Dimension** in the content Designer, if you select Scope/CPU, Scope/Global combination,

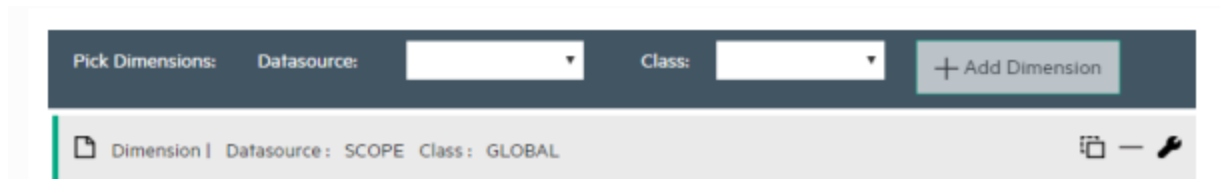

in **Pick Fact**, select Scope/CPU, Scope/Global for fact.



This creates one fact table of Rate_Global/Rate_CPU and one local dimension table of K_Global/K_CPU in model xml.

- For HPE Operations Agent as the datasource, the fact data is reconciled to host by default. Hence, it is mandatory to select a view and map nt/unix as citype in **Pick the RTSM Views for collection**.
- The fact table of datasource/class combination you select, is linked to K_CI_system automatically. You will not find any local dimension table for this particular fact

selection. Select this (Datasource/class) as associated dimension class for every fact, so that every fact gets reconciled against hostname.

Follow these steps to generate the Domain, ETL, and Application components of the content pack:

Task 1: Select the Datasource

Hewlett Packard Enterprise OPERATIONS BRIDGE REPORTER

Home Content Workspace Settings

Select your datasource to develop the content pack. Review selection and build.

Choose the datasource for your content:
 - Select -
 - Select -
Operations Agent
 CSV
 Database

© 2015-2016 Hewlett Packard Enterprise Company, L

1. On the Content Workspace page, from the **Choose the datasource for your content:** list, select **Operations Agent**.

The Select the datasource tab is displayed.

Choose the datasource for your content: Operations Agent ✓

Resume PA Saved Session

Select the datasource > Review the selection > Validate and build

Fill in source details:

Operations Agent: Hostname

Use HP OM as topology source ☒ Use RTSM for topology source ☒

RTSM: Hostname Port Username Password

Use SSL: ☐ Yes ☒ No

Use Previous Details Test Connection Process Source

2. Type the **Operations Agent** host name to specify your datasource details.

Note: Once you create content, the following options are displayed on this page during your subsequent sessions if you have saved your sessions:

- **Use Previous Details:** If you have entered datasource details in HPE OBR Content Designer earlier, click **Use Previous Details** to load Operations Agent details from an earlier session. Enter the **Password** and then click **Process Source**.
- **Resume PA Saved Session:** Click this option if you have already saved content pack artifact details in your previous session and want to continue creating content using the same details. Each time you use this option, make sure you click **Use Previous Details** to re-enter the password as OBR Content Designer does not save password.



3. Type the following **RTSM** details:


- **Hostname:** RTSM host name or IP address
- **Port:** RTSM port number
- **Username:** RTSM username
- **Password:** RTSM password

4. In **Use SSL**, click **Yes** if you want to establish secure connection with HP Operations Agent, else click **No**.


5. Click **Test Connection** to check if the Operations Agent and RTSM sources are connecting.

The following messages are displayed on successful validation:

 Validating connection to Agent source - Status 

 Validating connection to RTSM source - Status 

 indicates the validation failed.

 click to check the logs or view the log file at {CDE_HOME} \cdeConsole\logs\server_err.log.

6. Click **Process Source**.

The **Review the selection** page appears.

Task 2: Specify Content Attributes

Content Attributes:

Content Pack Name:

Content Publisher:

Datasource:

Version:

Topology Source: ☒ RTSM ☒ HP OM

1. Type you **Content Pack Name**.

Enter a string value as your content pack name, which you will be used for content creation.

2. In **Content Publisher** name, type the content developer/company details.

3. Type your datasource application in the **Datasource** box.




4. In the **Version** box, type the version of OBR against which you develop content.
Example: 10.01.000.

Task 3: Add Dimensions

Best practices for HPE Operations Agent as source while selecting dimensions and facts:

- For each of the unique datasource and class combination, one fact and one dimension must be selected.
- This dimension must be selected in associated dimension attribute to ensure that one fact table and one dimension table are created for each datasource and class combination.

Pick Dimensions: Datasource: Class: [+ Add Dimension](#)


Dimension | Datasource: SCOPE Class: GLOBAL   



OBR Table/Caption Name:

Business Key Columns: [+Add column](#)

Select Required Attributes:

DATE_SECONDS	>	YEAR
GBL_PROC_SAMPLE	>>	DAY
GBL_SYSCALL_RATE	<	INTERVAL
GBL_SYSTEM_UPTIME_HOURS	<<	GBL_MEM_CACHE_HIT_PCT
GBL_SYSTEM_UPTIME_SECONDS		GBL_INTERRUPT
GBL_STATTIME		GBL_SYSCALL
GBL_INTERVAL		STATDATE
GBL_CSWITCH_RATE		STATTIME
GBL_INTERRUPT_RATE		GBL_ACTIVE_CPU
		GBL_CPU_TOTAL_UTIL

1. In **Pick Dimensions**, select the **Datasource** and **Class** from the lists.
2. Click **Add Dimension**.
3. Type **OBR Table/Caption Name**. Table name created in the model would be of this name.
4. Click in the **Business Key Columns** box to select the column name and click **Add column**.
The selected column names are listed.
 - a. Repeat step 4 to add more Business Key Columns.
 - b. Click  next to the column name to delete the column.
5. Click **Add column**.
You can select multiple business key columns from the list.
6. Repeat [steps 1 to 5](#) to add more dimension tables.
7. **Select Required Attributes** from the list.
 - Click > to move selected column names or >> to move all the column names.

Tip: Click  to duplicate the current dimension source and  to delete the current datasource and class selection.

Task 4: Adding Facts

Pick Facts: Datasource: Class: + Add Fact

Fact | Datasource : SCOPE Class : GLOBAL

Time column: AGENTTIMESTAMP

Except for business key, other string columns are not allowed for fact selection.

Select Required Metrics :

- YEAR
- DAY
- DATE_SECONDS
- INTERVAL
- GBL_SYSTEM_UPTIME_HOURS
- GBL_SYSTEM_UPTIME_SECONDS
- GBL_STATTIME
- GBL_INTERVAL
- GBL_CSWITCH_RATE
- GBL_INTERRUPT_RATE
- GBL_INTERRUPT

Associated Dimensions: ☒ GLOBAL

1. In **Pick Facts**, select the **Datasource** and **Class** from the lists.
2. Click **Add Fact**.
3. Select **Time Column**.
The **Time Column** displays the default value.
4. **Select Required Metrics** from the list.

Note: Do not include the default **Time Column** value to the selected required metrics list.

5. Select the check box if you want to choose **Associate Dimensions**.
Select the dimension class matching the datasource/class combination of corresponding fact selection as one associated class. And the dimension class of datasource/class combination which you map to NT/Unix.
6. The **Business key to Fact column association** displays the selected dimensions.
Business key column selected here should be of same name as selected in the above dimension selection. for same combination of datasource/class name.

Associate DataType to the selected Metrics:

HOSTNAME	String ▾
GBL_PROC_SAMPLE	Integer ▾
GBL_MEM_CACHE_HIT_PCT	Integer ▾
GBL_SYSCALL_RATE	Integer ▾




Business key to Fact column association:

GLOBAL I	HOSTNAME: HOSTNAME ▾
----------	----------------------

Aggregate Functions: ☒ avg ☒ min ☒ max ☐ cnt ☐ tot ☐ med ☐ std

Column/Aggregate	avg All/None	min All/None	max All/None
HOSTNAME	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
GBL_PROC_SAMPLE	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
GBL_MEM_CACHE_HIT_PCT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

7. Select the **Aggregate Functions** by clicking the check boxes. Select aggregate columns for the selected metrics as per ["Select Required Metrics from the list."](#) on the previous page.

Tip: Click  to view **Sample Data**,  to duplicate the current fact source and  to delete the current datasource and class selection.

Task 5: Select Views

Note:

- For HPE Operations Agent as the datasource, the fact data is reconciled to host by default. Hence, it is mandatory to select a view and map nt/unix as citype.
- The fact table of datasource/class combination you select here, is linked to K_CI_system automatically. You will not find any local dimension table for this particular fact selection.

The view you select must be available in the RTSM datasource for successful deployment of content pack.

1. In the **Pick the RTSM Views for collection:** box, type or select the required RTSM, and then click **Add**.

Pick the RTSM Views for collection: + Add

View Name: SM_PA CI Type: NT + Add ci-type 🗑️

NT —

HP OM Topology scenario - Link the datasource and class dimension combination to CI Types:

View Name: SM_PA CI Type: NT Datasource/Class: SCOPE/GLOBAL + Add link

CI Type: NT , Datasource/Class: SCOPE/GLOBAL —

A message *View added successfully* is displayed.


2. Select the **CI Type** and click **Add ci-type**.

Tip: Click to view sample data from the dimension table, to duplicate the current dimension source, and to delete the current file selection.

3. Under the **HP OM Topology scenario - Link the datasource and class dimension combination to CI Types:** section,
 - a. Select the **CI Type**, and then select the **Datasource/Class** combination.
 - b. Click **Add link**. Repeat these steps to add more CI Type and Datasource/Class.
4. Repeat steps 1 to 3 to add more RTSM views.
5. Click **Confirm Selection**.
Click **Modify Selection** to reset the content workspace.

Task 6: Build and Deploy Content

The **Validate and build** page displays the details of the dimension and fact table collected.

Select the datasource > Review the selection >  Validate and build



Final validation of the content structure before the build -

Content Name: RetailPOS

Datasource Type: CSV

File : RetailPOS_O_Product_O_1234.csv ; Pattern : *Product* ; Data type : Dimension ; Name : Product ;

Attributes : [product_name] [brand_name] [category] [subcategory] ; Business key columns : [product_name] ;


File : RetailPOS_O_Sales_O_789.csv ; Pattern : *Sales* ; Data type : Fact ; Name : Sales ;

Metrics : [AGENTTIMESTAMP] [product_name] [sale_qty] [sale_amnt] ; Time column : AGENTTIMESTAMP ;


Linked Dimension : [Product] ; Primary dimension : Product ; Associated Dimensions : [Product - Dimension : product_name = Fact : product_name ;] ;

☒ Auto deploy Domain and ETL content pack

☒ Create Universe to Local Folder ☐ Publish Universe to CMC Repository

 Save Selection

 Modify Selection

 Run Build

1. Select **Auto deploy Domain and ETL content pack** if you want to deploy the content on OBR server after successful build.

Caution: If you have selected **Auto deploy Domain and ETL content pack** in OBR Content Designer, do not try to deploy content in your OBR system **Administration Console > Deployment Manager** at the same time. Content pack deployment will fail.

2. Select **Create Universe to Local Folder** or **Publish Universe to CMC Repository**:

- **Create Universe to Local Folder**

SAP BusinessObjects universe is created in your local file system at {CDE_HOME} \workspace\<ContentPack_Name>\<ContentPack_Name>.ap\UnxFolder\UnxLayers with the following extensions:

- .blx
- .cnx
- .dfx
- .unx

To export universe to CMC repository, see ["Exporting the Universe to CMC Repository" on page 76](#)

- **Publish Universe to CMC Repository**

On selecting this option , Universe gets deployed directly to CMC repository.


To generate Reports from BI Launch Pad, see ["Generating Reports from BI Launch Pad" on page 86](#)

If you are creating content on a Linux system, see ["Creating Application Content Pack for a Linux System" on page 75](#) to create application content pack.

3. Click **Save** to save your current content pack selection for future use.
4. Click **Modify selection** to reset the content workspace.
5. Click **Run Build** to generate your content packs.


Content build status is displayed and content pack creation is triggered.

Note: If you have selected **Auto deploy Domain and ETL content pack**, you will see the Installing the Generated content is shown in green.

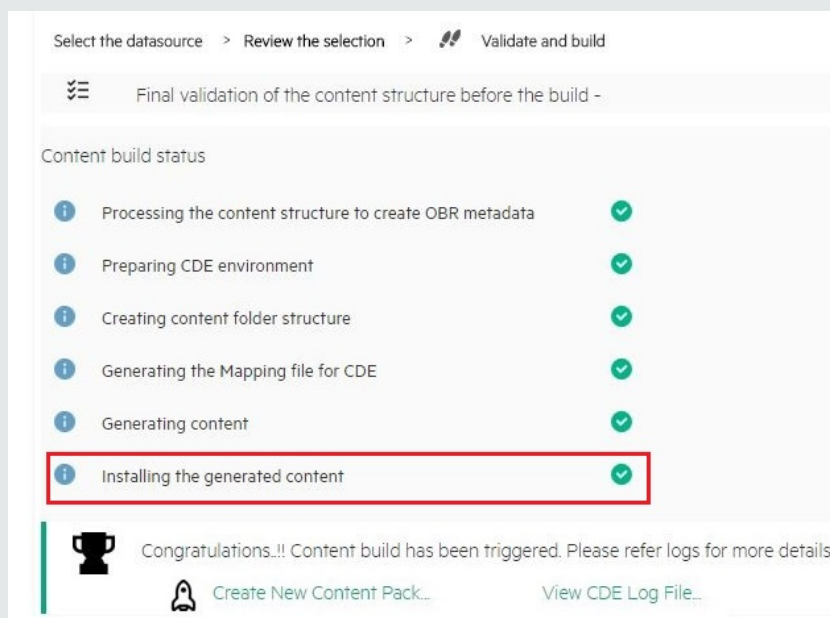

If this step fails, go to `{PMDB_HOME}\log\packagemanager.log` file and check the errors.

If you have **not selected** Auto deploy Domain and ETL content packs on OBR after successful build in the previous step, installation is skipped and you will see a hyphen (-) against Installing the Generated content.

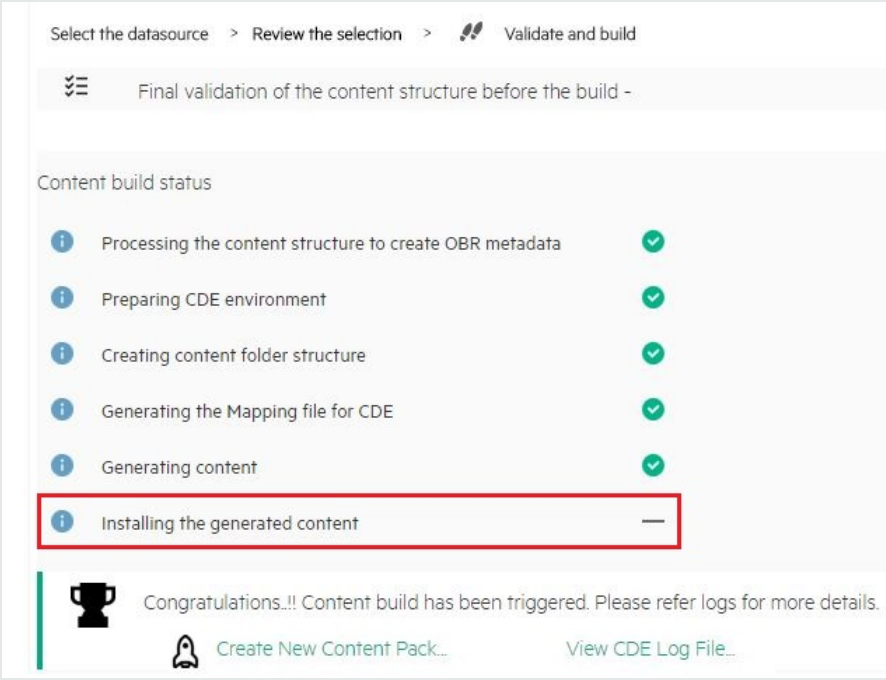

Select the datasource > Review the selection > Validate and build

Final validation of the content structure before the build -

Content build status

- Processing the content structure to create OBR metadata ✓
- Preparing CDE environment ✓
- Creating content folder structure ✓
- Generating the Mapping file for CDE ✓
- Generating content ✓
- Installing the generated content —

Congratulations...!! Content build has been triggered. Please refer logs for more details.

Create New Content Pack... View CDE Log File...

You have to log on to OBR Administration Console and deploy the content pack. For information about deploying and installing content packs, see ["Deploying Content Packs" on page 73](#).

Domain, ETL, and Application component packs are created at {CDE_HOME} \workspace folder with the *<content pack name>* you have specified.

Note:

- Click **Create New Content** to create a new content pack or **View CDE Log File** to see the CDE logs.
- You can also see the status on your system in the log file at {CDE_HOME} \log\cde.log.
- On successful build "Content Build Successful" is displayed in the log file.

CSV File as Datasource


You can create content using a set of CSV files as the datasource using HPE OBR Content Designer. Perform the following steps to generate the Domain, ETL, and Application components of the content pack:

Note: Ensure the following before selecting the .CSV files:


- Names of the CSV files you select are in the format: `<DomainName>_0_<TableName>_0_<UniqueIdentifier/TimeStamp>.csv`
Example: RetailPOS_0_Store_0_567.csv
- If you are selecting CSV files that are converted from dos2Unix, the new line character or the record delimiter (terminator) in the .CSV files must be `\n\r`.

Task 1: Select the Source File

- Open the **Content Workspace** page.
- From the **Choose the datasource for your content:** list, select **CSV**.

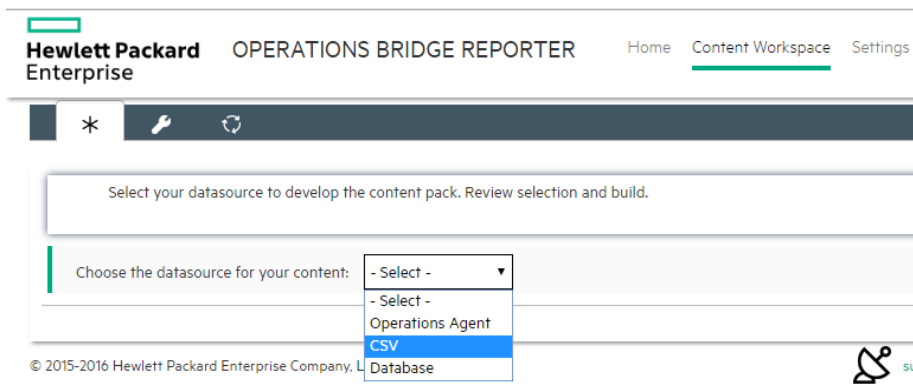

- Click **Select source file** and add the source .CSV file.

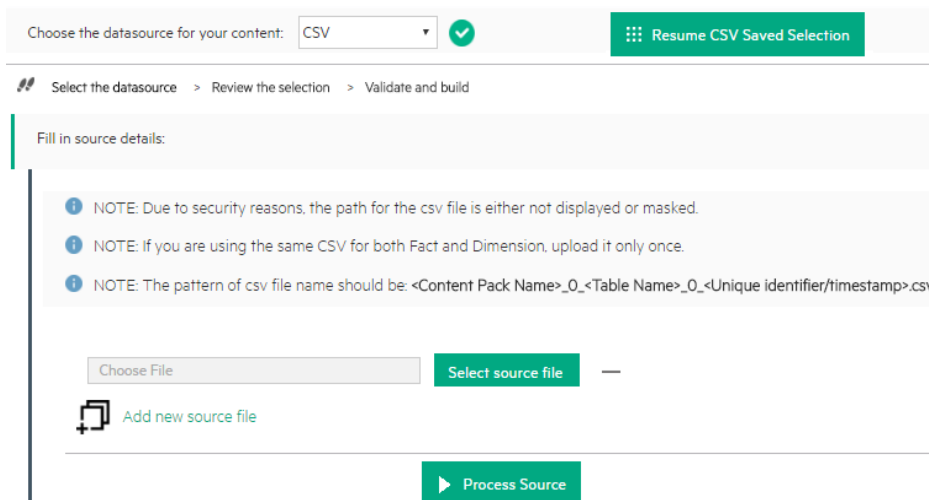

Note:

Click **Resume CSV Saved Selection** if you have saved dimension and fact selections on content workspace.

Click --next to Select source file to remove the selected CSV file.

- Click **Add new source file**, and then click **Select source file** to add more .CSV files.

- Click **Process Source** after you have added the CSV files.

The **Review the Selection** page appears.

Note: If you want to create fact and dimension from fields in same .csv file, make copies of the .csv and use them separately. Both the .csv files should have appropriate names.

Task 2: Specify Content Attributes

Content Attributes:

Content Pack Name:

Content Name

Content Publisher:

Content Publisher

Datasource:

CSV

Version:

10.00.000

- Type **Content Pack Name** and **Content Publisher** name.
- Type your datasource application in the **Datasource** box and content pack **Version**.

Task 3: Add Dimensions

Select files for dimension: + Add Dimension

Dimension | Source File : RetailPOS_0_Product_0_1234.csv 🗑️ - ✎️

File Identifier:

Product

File Pattern:

Product

OBR Table/Caption Name:

Product

Select Required Attributes :

>

>>

<

<<

sku_id

product_name

brand_name

category

subcategory

price

Business Key Columns:

column name


+Add column



product name —

- From the **Select files for dimension:** list, select the dimension file and click **Add Dimension**.
- Type the **File Identifier**, **File Pattern**, and **OBR Table/Caption Name**.

- From the **Select Required Attributes** list choose the metrics required.
- Click in the **Business Key Columns** box to select the column name and click **Add column**.

The selected column names are listed.

- Repeat step 4 to add more Business Key Columns.
- Click  next to the column name to delete the column.

Tip: Click  to duplicate the current dimension source and  to delete the current datasource and class selection.




- Repeat **steps 1 to 4** to add more dimensions.

Task 4: Add Facts

Select files for fact:

+ Add Fact

Fact | Source File : RetailPOS_0_Sales_0_789.csv

File Identifier:

Sales


File Pattern:

Sales

OBR Table/Caption Name:

Sales

Time column:

AGENTTIMESTAMP 

Primary Dimension:

☒ Product

Linked Dimensions:

☒ Product

Select Required Metrics :

store_name

promotion_name

>

>>

<

<<

AGENTTIMESTAMP

product_name

sale_qty


sale_amnt

Business key to Fact column association:

Product |

product_name:

product_name

- From the **Select files for fact list**, select the fact file, and then click **Add Fact**.
- Type the **File Identifier**, **File Pattern**, and **OBR Table/Caption Name**.
- Click  to add **Time Column** and select the column name.

Caution: This step is mandatory.

4. Select the **Primary Dimension**. The **Linked Dimension** is selected automatically.
5. From the **Select Required Metrics** list choose the metrics required.
6. From **Business key to Fact column association** list, select the business key column name and associated fact column name.

Note: Ensure that **Time column** and **Business key to Fact column association** are selected as part of required metrics.

7. Click the check boxes to select **Aggregate Functions**.

Aggregate Functions: ☒ avg ☒ min ☒ max ☐ cnt ☐ tot ☐ med ☐ std ☐ slope ☐ wav

AGENTTIMESTAMP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
product_name	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
sale_qty	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
sale_amnt	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

8. Repeat [steps 1 to 7](#) to add more facts.

Click  to duplicate the current fact source and  to delete the current selection.

9. Click **Confirm Selection** to proceed to build content.

The **Validate and build** page appears.

Click **Modify Source** to reset the workspace and select different CSV files.

Note: When you click **Modify Source** and change CSV files, if you retain one or more previously selected CSV files for content creation, Content Designer retains all the details of the unchanged CSV files.

Task 5: Build and Deploy Content

The **Validate and build** page displays the details of the dimension and fact table you have collected.

Select the datasource > Review the selection > Validate and build

Final validation of the content structure before the build -

Content Name	Datasource Type
RetailPOS	CSV

File : RetailPOS_O_Product_0_1234.csv ; Pattern : *Product* ; Data type : Dimension ; Name : Product ;

Attributes : [product_name] [brand_name] [category] [subcategory] ; Business key columns : [product_name] ;

File : RetailPOS_O_Sales_0_789.csv ; Pattern : *Sales* ; Data type : Fact ; Name : Sales ;

Metrics : [AGENTTIMESTAMP] [product_name] [sale_qty] [sale_amnt] ; Time column : AGENTTIMESTAMP ;

Linked Dimension : [Product] ; Primary dimension : Product ; Associated Dimensions : [Product - Dimension : product_name = Fact : product_name] ;

☒ Auto deploy Domain and ETL content pack

☒ Create Universe to Local Folder ☐ Publish Universe to CMC Repository

Save Selection Modify Selection Run Build

1. Select **Auto deploy Domain and ETL content pack** if you want to deploy the content on OBR after successful build.

Caution: If you have selected **Auto deploy Domain and ETL content pack** in OBR Content Designer, do not try to deploy content in your OBR system **Administration Console > Deployment Manager**. Content pack deployment will fail.

2. Select **Create Universe to Local Folder** or **Publish Universe to CMC Repository**:

- **Create Universe to Local Folder**

SAP BusinessObjects universe is created in your local file system at {CDE_HOME} \workspace\<ContentPack_Name>\<ContentPack_Name>.ap\UnxFolder\UnxLayers with the following extensions:

- .blx
- .cnx
- .dfx
- .unx

To export universe to CMC repository, see ["Exporting the Universe to CMC Repository" on page 76](#)

- **Publish Universe to CMC Repository**

On selecting this option , Universe gets deployed directly to CMC repository.

To generate Reports from BI Launch Pad, see ["Generating Reports from BI Launch Pad" on page 86](#)


If you are creating content on a Linux system, see "[Creating Application Content Pack for a Linux System](#)" on page 75 to create application content pack.

3. Click **Save** to save your current content pack selection for future use.
4. Click **Modify selection** to reset the content workspace.
5. Click **Run Build** to create your content packs.

Content build status is displayed and content pack creation is triggered.


Domain, ETL, and Application component packs are created at {CDE_HOME} \workspace folder with the *<content pack name>* you have specified.

Note: If you have selected **Auto deploy Domain and ETL content pack** in step 1, you will see the Installing the Generated content is shown in green.

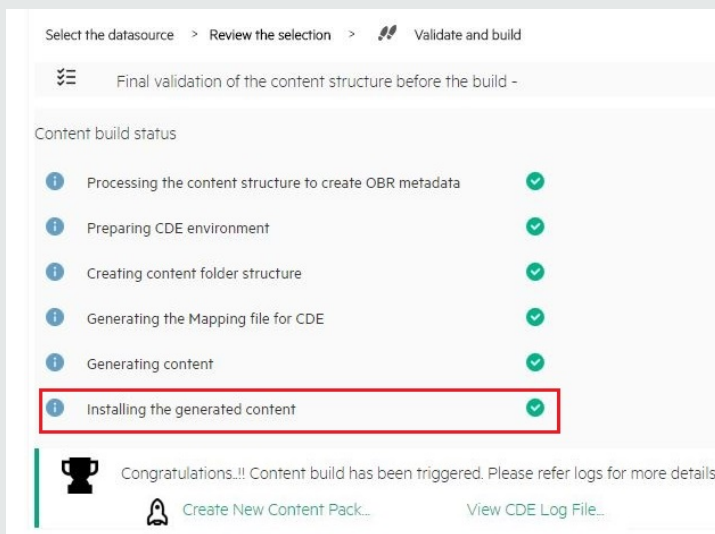

If this step fails, go to {PMDB_HOME}\log\packagemanager.log file and check the errors.

If you have **not selected** Auto deploy Domain and ETL content packs on OBR after successful build in the previous step, installation is skipped and you will see a hyphen (-) against Installing the Generated content.

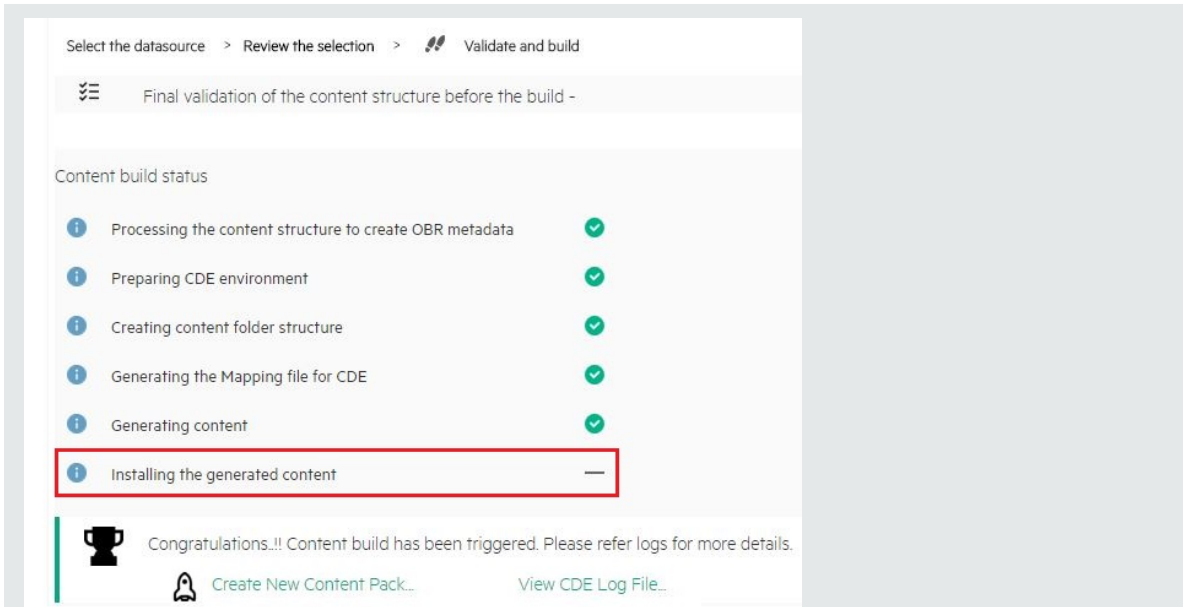

You have to log on to OBR Administration Console and deploy the content pack. For information about deploying and installing content packs, see ["Deploying Content Packs" on page 73](#).

Note:

After you deploy the content pack, ensure that the input CSV files are available in the {PMDB_HOME}\collect\ folder.

The record terminator in the CSV files must be according to the platform on which OBR is installed:

- **OBR on Windows:** Record terminator of the input CSV must be \n\r.
- **OBR on Linux:** Record terminator of the input CSV must be \n

- Click **Create New Content** to create a new content pack or **View CDE Log File** to see the CDE logs.
- You can also see the status on your system in the log file at {CDE_HOME}\log\cde.log.
- On successful build *Content Build Successful* is displayed in the log file.

Database as a Datasource

HPE OBR collects data from databases that support Java Database Connectivity (JDBC): Microsoft SQL, Oracle, Sybase IQ, PostgreSQL, and so on).

Perform the following steps to generate the Domain, ETL, and Application components of the content pack:

Note: If you select ORACLE as the database type, do not select Auto deploy Domain and ETL content pack. Your ETL content pack collection policy has to be edited and recreated using the command-based CDE. Edit the following:

From your collection policy, find the following DBDATE:

```
<statement>select "DBDATE" as DBDATE,"CUSTOMER_ID" as CUSTOMER_ID,"SESSION_COMP_SEC" as SESSION_COMP_SEC from RUM_EVENTS_90000 where DBDATE > $FETCH_START_TIME</statement>
```


Replace with the following:

```
<statement>select "DBDATE" as DBDATE,"CUSTOMER_ID" as CUSTOMER_ID,"SESSION_COMP_SEC" as SESSION_COMP_SEC from RUM_EVENTS_90000 where DBDATE > TO_TIMESTAMP($FETCH_START_TIME, 'YYYY-MM-DD HH24:MI:SS.FF')</statement>
```



For instructions to recreate ETL content pack, see *HPE Operations Bridge Reporter Content Development Guide*.


Task 1: Select the Datasource

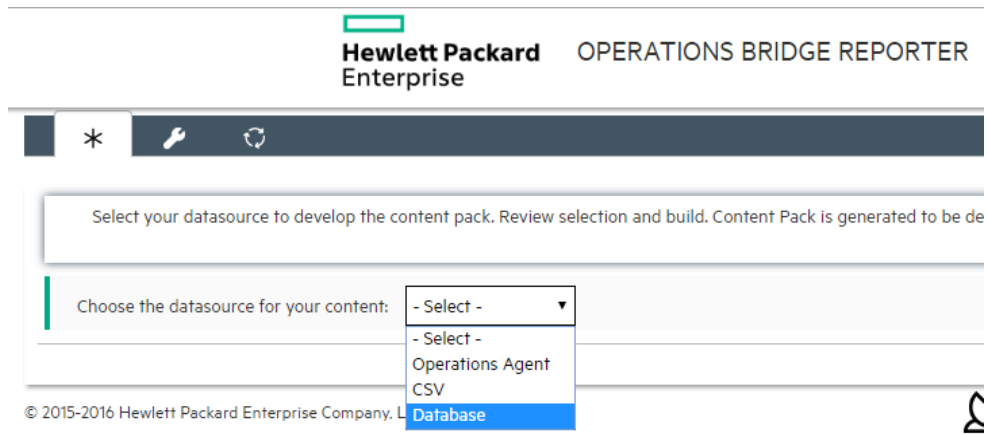1. Open the **Content Workspace** page.
2. From the **Choose the datasource for your content:** list, select **Database**.
The Select the datasource tab is displayed.





3. Specify the **Database** host name.


Choose the datasource for your content: Database  

 Select the datasource > Review the selection > Validate and build

Fill in source details:




 Database Host Name:

 Database Type:

 Connection details:

Database Name:

Database Instance Name/Server Name:

Note:

- If you have entered database details in HPE OBR Content Designer earlier, click **Use Previous Details** to display database details from an earlier session.
- Click **Resume DB Saved Selection** to view the dimension and fact selections from your previous session on HPE OBR Content Designer.

4. Select the **Database Type** from the list.

Note: For the database type, copy the following .jar files as applicable from the available location to the %CDE_HOME%\lib directory:

Database Type	.jar file	Available Location
MSSQL	jtds.jar	{PMDB_HOME} \adminServer\webapps\BSMRApp\ WEB-INF\lib
ORACLE	OVoracle.jar	{PMDB_HOME} \adminServer\webapps\BSMRApp\ WEB-INF\lib
SYBASEIQ/SYBASEASE	jconn4.jar	You can copy the jconn4.jar file from your jConnect install location or download the file from the Internet.
POSTGRESQL	postgresql.jar	{PMDB_HOME} \adminServer\webapps\BSMRApp\ WEB-INF\lib

Database Type	.jar file	Available Location
VERTICA	vertica-jdbc.jar	{PMDB_HOME} \adminServer\webapps\BSMRAApp\ WEB-INF\lib


5. Type the **Connection details**: Port number, username, and password.
6. Specify the **Database Name** and **Database Instance Name/Server Name**.

Note:

- **For MSSQL database:**

The **Database Name** is the name of your database on the MSSQL server and **Server Name** is the name of the SQL server where the database is created.



Example:

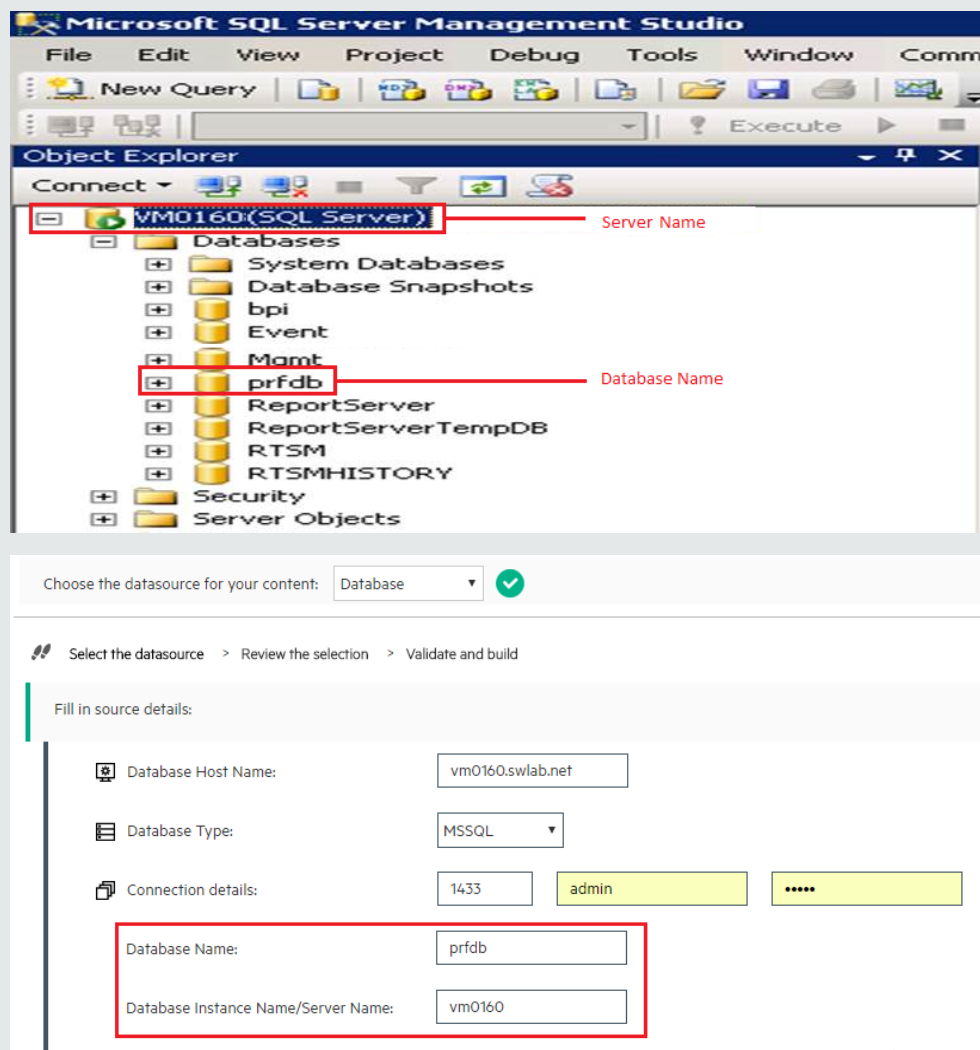

- **For Oracle database:**

The Database Name and the Database Instance Name are the same. Type the same name in both the boxes.

Example:

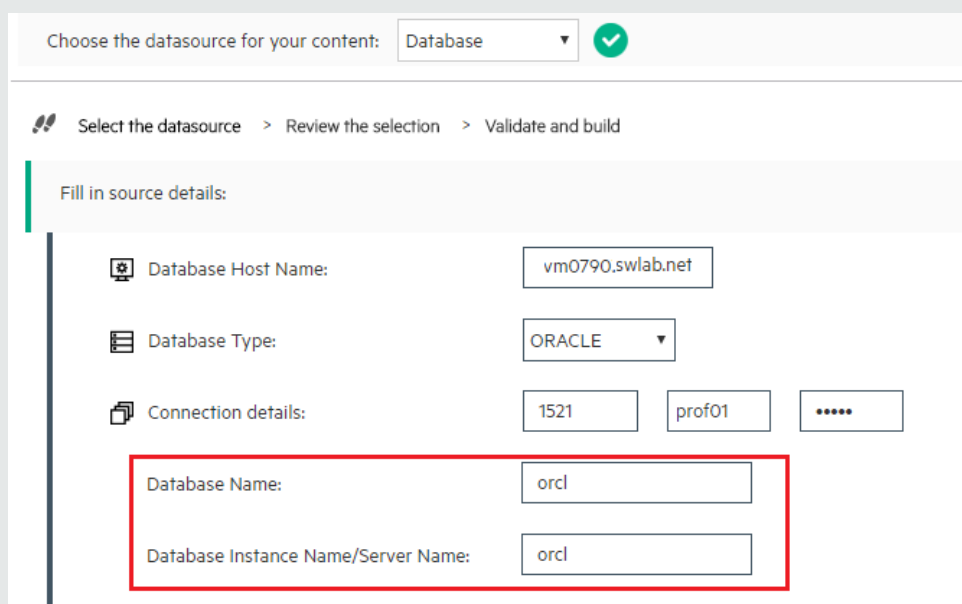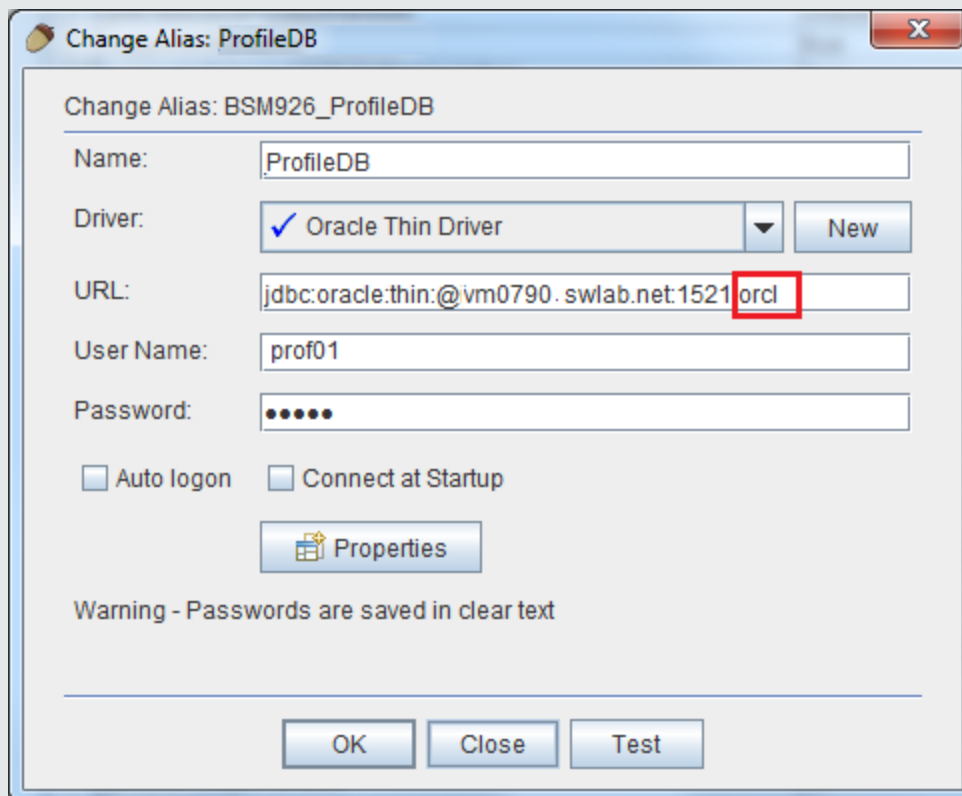

7. Click **Test Connection** to check the database connectivity.

- Click **Process Source** to proceed with content development.
The **Review the selection** page appears.

Task 2: Specify Content Pack Attributes

Content Attributes:

Content Pack Name:	<input type="text" value="Example_Content"/>	ETL Content Pack Name:	<input type="text" value="Example_ETL"/>	Content Publisher:	<input type="text" value="MyCompany"/>
Datasource:	<input type="text" value="CSV"/>	Version:	<input type="text" value="10.00.000"/>		

- Specify **Content Pack Name** and **Content Publisher** name.
- Specify your datasource application in the **Datasource** box and content pack **Version**.

Task 3: Add Dimensions

Select table for dimension: [+ Add Dimension](#)

Dimension | Source Table : TRANSACTIONS_DIM Database Type : MSSQL

File Identifier:

OBR Table/Caption Name:

Select Required Attributes :

>

>>

<

<<

INTERNAL_TRANSACTION_ID
 TRANSACTION_ID
 CUSTOMER_ID
 TRANSACTION_NAME
 TRANSACTION_DESCRIPTION
 APPLICATION_ID
 APPLICATION_NAME
 BTF_ID
 BTF_NAME
 INTERNAL_APPLICATION_ID

Business Key Columns: [+Add column](#)

CUSTOMER_ID —




SQL statement:

```
select 'INTERNAL_TRANSACTION_ID' as INTERNAL_TRANSACTION_ID,'TRANSACTION_ID' as TRANSACTION_ID,'CUSTOMER_ID' as CUSTOMER_ID,'TRANSACTION_NAME' as TRANSACTION_NAME,'TRANSACTION_DESCRIPTION' as TRANSACTION_DESCRIPTION,'APPLICATION_ID' as APPLICATION_ID,'APPLICATION_NAME' as APPLICATION_NAME,'BTF_ID' as BTF_ID,'BTF_NAME' as BTF_NAME,'INTERNAL_APPLICATION_ID' as INTERNAL_APPLICATION_ID from TRANSACTIONS_DIM
```

[Save and Validate](#)
 status : ✔

- From the **Select tables that serve as dimension for the content:** list, select the dimension table.
- Click **Add Dimension**.
- Specify the **File Identifier**, and **OBR Table/Caption Name**.
- From the **Select Required Attributes** list choose the metrics required.
- Click in the **Business Key Columns** box to select the column name and click **Add column**.
- Write or modify the **SQL Statement**, and click **Save and Validate**.
The SQL statement validation status is displayed.

- Repeat **steps 1 to 6** to add more dimensions.

Tip: Click  to view sample data from the dimension table,  to duplicate the current dimension source, and  to delete the current file selection.

Task 4: Add Facts

Select table for fact:




Table name

+ Add Fact

Fact I

Source Table : BPM_TRANS_2DAY_10000

Database Type : MSSQL

File Identifier:

BPM_TRANS_2DAY_10000_fact


OBR Table/Caption Name:

BPM_TRANS_2DAY_10000


SQL statement:

select 'DBDATE' as DBDATE,'CUSTOMER_ID' as CUSTOMER_ID,
'EM_RESULT_VALUE_MAX' as EM_RESULT_VALUE_MAX from
BPM_TRANS_2DAY_10000

Save and Validate

status : 

Time column:

DBDATE 


Primary Dimension:

☒ TRANSACTIONS_DIM

Linked Dimensions:

☒ TRANSACTIONS_DIM

Select Required Metrics :



Except for business key, other string columns are not allowed for fact selection.

SAMPLETIME

TUID

INTERNAL_APPLICATION_ID

INTERNAL_LOCATION_ID

STATUS_ID

TIME_STAMP_COUNT

EM_RESULT_VALUE_SUM

EM_RESULT_VALUE_SUMSQ

EM_RESULT_VALUE_MIN

EM_PAGE_CBD_COUNT_SUM

EM_DOWNLOAD_DATA_SIZE

>

>>


<

<<

DBDATE

CUSTOMER_ID

EM_RESULT_VALUE_MAX

- From the **Select tables that serve as Fact for the content** list, select the fact table.
- Click **Add Fact**.
- Specify the **File Identifier** and **OBR Table/Caption Name**.
- Write or modify the **SQL Statement**, and click **Save and Validate**.
- Click  to add **Time Column** and select the column name.
- Select the **Primary Dimension** and **Linked Dimensions**.
- From the **Select Required Metrics** list choose the metrics required.
- From **Business key to Fact column association** list, select the business key column names and the associated fact column names.

HPE Operations Bridge Reporter (10.10)

Page 45 of 97




Business key to Fact column association:

TRANSACTIONS_DIM1	CUSTOMER_ID: CUSTOMER_ID ▼
-------------------	----------------------------

Aggregate Functions: ☒ avg ☐ min ☐ max ☐ cnt ☐ tot ☐ med ☐ std ☐ slc

Column/Aggregate	avg All/None
DBDATE	<input type="checkbox"/>
CUSTOMER_ID	<input type="checkbox"/>
EM_RESULT_VALUE_MAX	<input checked="" type="checkbox"/>

- Click the check-boxes to select **Aggregate Functions**.


Tip: Click  to view sample data from the dimension table,  to duplicate the current dimension source, and  to delete the current file selection.


- Repeat [steps 1 to 8](#) to add more dimensions.
- Click **Modify Source** to go back and select a different source.
- Click **Confirm Selection** to proceed to build content.

The **Validate and build** page appears.

Task 5: Build and Deploy Content

The **Validate and build** page displays the details of the dimension and fact table you have collected.

Select the datasource > Review the selection >  Validate and build

 Summary Info - Review selection before the build:

Content Name: Sam Datasource Type: Database

Table : PRODUCT ;Query Name : PRODUCT_dim;Type: PRODUCT_dim;Data type : Dimension;Name : PRODUCT_hf;Database Type : MSSQL ;

Business key columns: [product_name] ;

Attributes: [sku_id] [product_name] [brand_name] [category] [subcategory] [price] ;

SQL statement : select 'sku_id' as sku_id,'product_name' as product_name,'brand_name' as brand_name,'category' as category,'subcategory' as subcategory,'price' as price from PRODUCT

Table : STORES ;Query Name : STORES_dim;Type: STORES_dim;Data type : Dimension;Name : STORES_hf;Database Type : MSSQL ;

Business key columns: [store_name] ;

Attributes: [agenttimestamp] [product_name] [store_name] [promotion_name] [stock_available] ;

SQL statement : select 'agenttimestamp' as agenttimestamp,'product_name' as product_name,'store_name' as store_name,'promotion_name' as promotion_name,'stock_available' as stock_available from STORES

Table : SALES ;Query Name : SALES_fact;Type: SALES_fact;Data type : Fact;Name : SALES_hf;Database Type : MSSQL ;

Metrics: [agenttimestamp] [product_name] [store_name] [sales_quantity] [sales_amount] ;

Time column: agenttimestamp ;

Linked Dimension : [PRODUCT_hf] [STORES_hf] ;

Primary dimension: PRODUCT_hf STORES_hf ;




Associated Dimensions : [PRODUCT_hf - Dimension : product_name = Fact : product_name ;] [STORES_hf - Dimension : store_name = Fact : store_name ;] ;

SQL statement : select 'agenttimestamp' as agenttimestamp,'product_name' as product_name,'store_name' as store_name,'sales_quantity' as sales_quantity,'sales_amount' as sales_amount from SALES

Aggregate Functions : [avg - sales_quantity ; sales_amount ;] [max - sales_amount ;]

☐ Auto deploy Domain and ETL content pack

☒ Create Universe to local folder ☐ Publish Universe to CMC repository

 Save Selection  Modify Selection  Save and Run Build

1. Select **Auto deploy Domain and ETL content pack** if you want to deploy the content on OBR after successful build.

Caution: If you have selected **Auto deploy Domain and ETL content pack** in OBR Content Designer, do not try to deploy content in your OBR system **Administration Console > Deployment Manager** at the same time. Content pack deployment will fail.

2. Select **Create Universe to Local Folder** or **Publish Universe to CMC Repository**:
 - **Create Universe to Local Folder**

SAP BusinessObjects universe is created in your local file system at {CDE_HOME} \workspace\<ContentPack_Name>\<ContentPack_Name>.ap\UnxFolder\UnxLayers with the following extensions:

- .blx
- .cnx
- .dfx
- .unx

To export universe to CMC repository, see ["Exporting the Universe to CMC Repository" on page 76](#)

- **Publish Universe to CMC Repository**

On selecting this option , Universe gets deployed directly to CMC repository.


To generate Reports from BI Launch Pad, see ["Generating Reports from BI Launch Pad" on page 86](#)

If you are creating content on a Linux system, see "[Creating Application Content Pack for a Linux System](#)" on [page 75](#) to create application content pack.

3. Click **Save** to save your current content pack selection for future use.
4. Click **Modify selection** to reset the content workspace.
5. Click **Run Build** to create your content packs.


Content build status is displayed and content pack creation is triggered.

Note: If you have selected **Auto deploy Domain and ETL content pack** in step 1, you will see the Installing the Generated content is shown in green

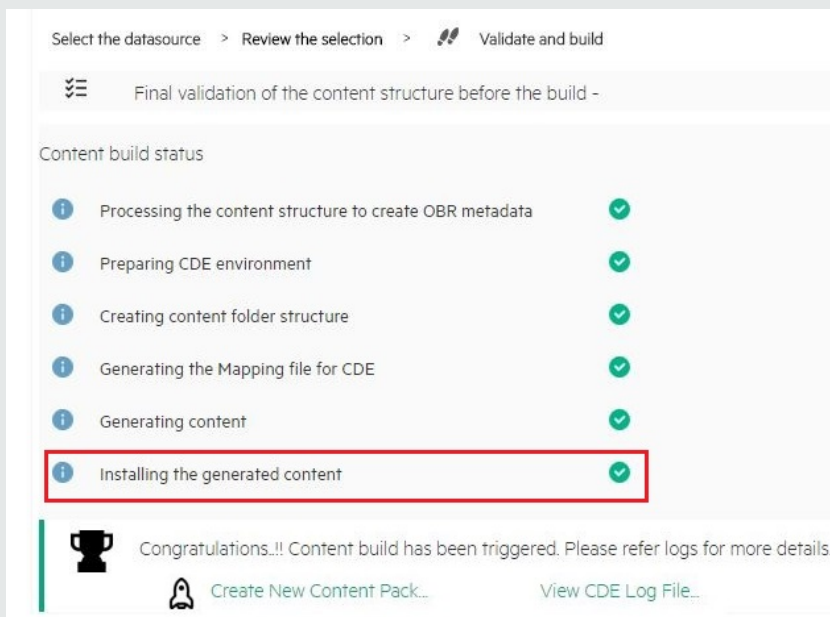

If this step fails, go to `{PMDB_HOME}\log\packagemanager.log` file and check the errors.

If you have **not selected** Auto deploy Domain and ETL content packs on OBR after successful build in the previous step, installation is skipped and you will see a hyphen (-) against Installing the Generated content.

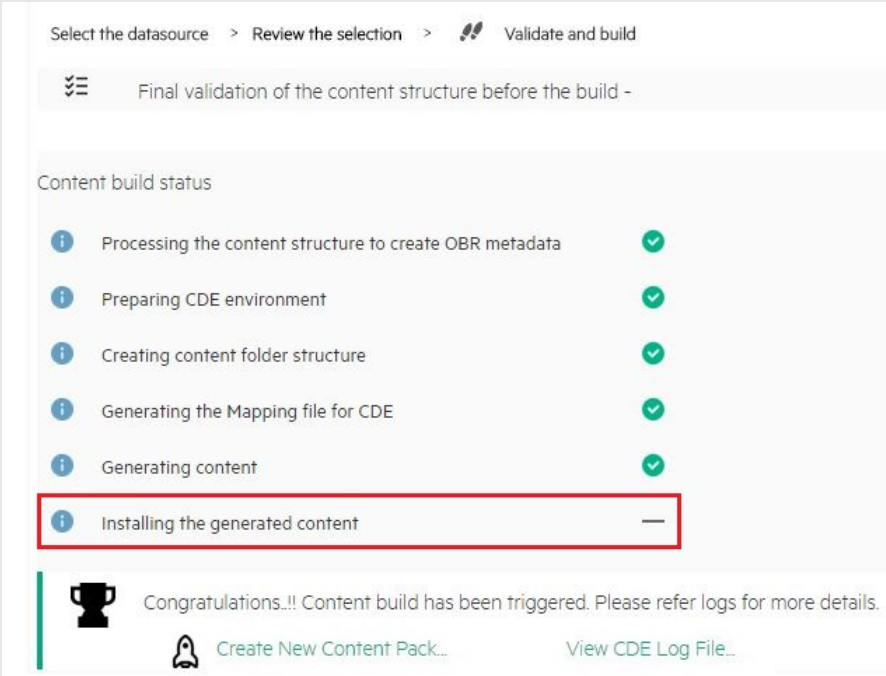

Select the datasource > Review the selection > Validate and build

Final validation of the content structure before the build -

Content build status

- Processing the content structure to create OBR metadata ✓
- Preparing CDE environment ✓
- Creating content folder structure ✓
- Generating the Mapping file for CDE ✓
- Generating content ✓
- Installing the generated content —

🏆 Congratulations...!! Content build has been triggered. Please refer logs for more details.

[Create New Content Pack...](#) [View CDE Log File...](#)

You have to log on to OBR Administration Console and deploy the content pack. For information about deploying and installing content packs, see ["Deploying Content Packs" on page 73](#).

Domain, ETL, and Application component packs are created at {CDE_HOME} \workspace folder with the *<content pack name>* you have specified.

Note:

- Click **Create New Content** to create a new content pack or **View CDE Log File** to see the CDE logs.
- You can also see the status on your system in the log file at {CDE_HOME} \log\cde.log.
- On successful build "Content Build Successful" is displayed in the log file.

Generating Content on a Non-OBR System

HP Operations Agent as a Datasource

This section guides you to create content for HPE Operations Agent as datasource.

Note:

Before you configure HPE Operations Agent as a datasource, ensure the following:

- You must have RTSM and Operations Agent datasource for building content.
- Ensure that the topology source is RTSM when Operations Agent is the datasource for creating content.

RTSM is a source of the topology information for HPE OBR. The topology information includes all Configuration Items (CIs) as modeled and discovered in RTSM. Node resource information is directly obtained from HP Operations Agent.

Follow these steps to generate the Domain, ETL, and Application components of the content pack:

Task 1: Select the Datasource

Hewlett Packard Enterprise OPERATIONS BRIDGE REPORTER Home Content Workspace Settings

Select your datasource to develop the content pack. Review selection and build.

Choose the datasource for your content: - Select - - Select - Operations Agent CSV Database

© 2015-2016 Hewlett Packard Enterprise Company, L

1. On the Content Workspace page, from the **Choose the datasource for your content:** list, select **Operations Agent**.

The Select the datasource tab is displayed.



2. Type the **Operations Agent** host name to specify your datasource details.


Note: Once you create content, the following options are displayed on this page during your subsequent sessions if you have saved your sessions:

- **Resume PA Saved Session:** Click this option if you have already saved content pack artifact details in your previous session and want to continue creating content using the same details.
- **Use Previous Details:** If you have entered datasource details in HPE OBR Content Designer earlier, click **Use Previous Details** to load Operations Agent details from an earlier session. Enter the **Password** and then click **Process Source**.

3. Type the following **RTSM** details:
 - **Hostname:** RTSM host name or IP address
 - **Port:** RTSM port number
 - **Username:** RTSM username
 - **Password:** RTSM password
4. In **Use SSL**, click **Yes** if you want to establish secure connection with HP Operations Agent, else click **No**.
5. Click **Test Connection** to check if the Operations Agent and RTSM sources are connecting.

The following messages are displayed on successful validation:

 Validating connection to Agent source - Status 

 Validating connection to RTSM source - Status 

 indicates the validation failed.

 click to check the logs.

6. Click **Process Source**.

The **Review the selection** page appears.

Task 2: Specify Content Attributes

Content Attributes:

Content Pack Name:

Content Name

Content Publisher:

Content Publisher

Datasource:

Datasource

Version:

Version

Topology Source:

☒ RTSM ☒ HP OM

1. Type the **Content Pack Name** and **Content Publisher** name.
2. Type your datasource application in the **Datasource** box and content pack **Version**.

Task 3: Add Dimensions

Best practices for HPE Operations Agent as source while selecting dimensions and facts:

- For each of the unique datasource and class combination, one fact and one dimension must be selected.
- This dimension must be selected in associated dimension attribute to ensure that one fact table and one dimension table are created for each datasource and class combination.

Pick Dimensions: Datasource: Class: [+ Add Dimension](#)

Dimension | Datasource: SCOPE Class: GLOBAL

OBR Table/Caption Name:

Business Key Columns: [+ Add column](#)

Select Required Attributes:

DATE_SECONDS	>	YEAR
GBL_PROC_SAMPLE	>>	DAY
GBL_SYSCALL_RATE	<	INTERVAL
GBL_SYSTEM_UPTIME_HOURS	<<	GBL_MEM_CACHE_HIT_PCT
GBL_SYSTEM_UPTIME_SECONDS		GBL_INTERRUPT
GBL_STATTIME		GBL_SYSCALL
GBL_INTERVAL		STATDATE
GBL_CSWITCH_RATE		STATTIME
GBL_INTERRUPT_RATE		GBL_ACTIVE_CPU
		GBL_CPU_TOTAL_UTIL

1. In **Pick Dimensions**, select the **Datasource** and **Class** from the lists.
2. Click **Add Dimension**.
3. Type **OBR Table/Caption Name**.
4. Click in the **Business Key Columns** box to select the column name and click **Add column**.
The selected column names are listed.
 - a. Repeat step 4 to add more Business Key Columns.
 - b. Click next to the column name to delete the column.
5. Click **Add column**.
You can select multiple business key columns from the list.
6. Repeat [steps 1 to 5](#) to add more dimension tables.
7. **Select Required Attributes** from the list.
 - Click > to move selected column names or >> to move all the column names.

Click to duplicate the current dimension source and to delete the current datasource and class selection.

Task 4: Adding Facts

Pick Facts: Datasource: SCOPE Class: GLOBAL + Add Fact

Fact | Datasource: SCOPE Class: GLOBAL

Time column: AGENTTIMESTAMP

Except for business key, other string columns are not allowed for fact selection.

Select Required Metrics:

- YEAR
- DAY
- DATE_SECONDS
- INTERVAL
- GBL_SYSTEM_UPTIME_HOURS
- GBL_SYSTEM_UPTIME_SECONDS
- GBL_STATTIME
- GBL_INTERVAL
- GBL_CSWITCH_RATE
- GBL_INTERRUPT_RATE
- GBL_INTERRUPT

Associated Dimensions: ☒ GLOBAL

1. In **Pick Facts**, select the **Datasource** and **Class** from the lists.
2. Click **Add Fact**.
3. Select **Time Column**.
The **Time Column** displays the default value.
4. **Select Required Metrics** from the list.

Note: Do not include the default **Time Column** value to the selected required metrics list.

5. Select the check box if you want to choose **Associate Dimensions**.
6. The **Business key to Fact column association** displays the selected dimensions.

Associate DataType to the selected Metrics:

HOSTNAME	String ▾
GBL_PROC_SAMPLE	Integer ▾
GBL_MEM_CACHE_HIT_PCT	Integer ▾
GBL_SYSCALL_RATE	Integer ▾




Business key to Fact column association:

GLOBAL I	HOSTNAME: HOSTNAME ▾
----------	----------------------

Aggregate Functions: ☒ avg ☒ min ☒ max ☐ cnt ☐ tot ☐ med ☐ std

Column/Aggregate	avg All/None	min All/None	max All/None
HOSTNAME	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
GBL_PROC_SAMPLE	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
GBL_MEM_CACHE_HIT_PCT	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

7. Select the **Aggregate Functions** by clicking the check boxes. Select aggregate columns for the selected metrics as per "Select Required Metrics from the list." on the previous page.

Click  to view **Sample Data**,  to duplicate the current fact source and  to delete the current datasource and class selection.

Task 5: Select Views

Note:



- For HPE Operations Agent as the datasource, the fact data is reconciled to host by default. Hence, it is mandatory to select a view and map nt/unix as citype.
- The fact table of datasource/class combination you select here, is linked to K_CI_system automatically. You will not find any local dimension table for this particular fact selection.

The screenshot shows the OBR Content Designer interface. The top section, titled "Pick the RTSM Views for collection:", contains a text input field labeled "view name", a green "+ Add" button, and a list of selected views. The selected view is "SM_PA" with a "CI Type" of "NT". There are icons for duplicating (two overlapping squares) and deleting (a minus sign) the current selection. The bottom section, titled "HP OM Topology scenario - Link the datasource and class dimension combination to CI Types:", contains a similar setup. It shows "View Name: SM_PA", "CI Type: NT" (in a dropdown), and "Datasource/Class: SCOPE/GLOBAL" (in a dropdown). A green "+Add link" button is present. Below these fields, a summary line reads "CI Type: NT , Datasource/Class: SCOPE/GLOBAL" with a minus sign icon.

1. In the **Pick the RTSM Views for collection:** box, type or select the required RTSM, and then click **Add**.

A message *View added successfully* is displayed.

2. Select the **CI Type** and click **Add ci-type**.

Click  to duplicate the current view selection and  to delete the current view selection.

3. Under the **HP OM Topology scenario - Link the datasource and class dimension combination to CI Types:** section,
 - a. Select the **CI Type**, and then select the **Datasource/Class** combination.
 - b. Click **Add link**. Repeat these steps to add more CI Type and Datasource/Class.
4. Repeat [steps 1 to 5](#) to add more RTSM views.
5. Click **Confirm Selection**.

Click **Modify Selection** to reset your content workspace.

Task 6: Build and Deploy Content

The **Validate and build** page displays the details of the dimension and fact table you have collected.

Select the datasource > Review the selection > Validate and build

Final validation of the content structure before the build -

Content Name: RetailPOS Datasource Type: CSV

File : RetailPOS_O_Product_O_1234.csv ; Pattern : "Product" ; Data type : Dimension ; Name : Product ;
 Attributes: [product_name] [brand_name] [category] [subcategory] ; Business key columns: [product_name] ;

File : RetailPOS_O_Sales_O_789.csv ; Pattern : "Sales" ; Data type : Fact ; Name : Sales ;
 Metrics: [AGENTTIMESTAMP] [product_name] [sale_qty] [sale_amnt] ; Time column: AGENTTIMESTAMP ;
 Linked Dimension : [Product] ; Primary dimension: Product ; Associated Dimensions : [Product - Dimension : product_name = Fact : product_name ;] ;

☒ Create Universe to Local Folder ☐ Publish Universe to CMC Repository

Save Selection Modify Selection Run Build

1. Select **Create Universe to Local Folder** or **Publish Universe to CMC Repository**:

• **Create Universe to Local Folder**

SAP BusinessObjects universe is created in your local file system at {CDE_HOME} \workspace\<ContentPack_Name>\<ContentPack_Name>.ap\UnxFolder\UnxLayers with the following extensions:

- .b1x
- .cnx
- .dfx
- .unx

To export universe to CMC repository, see ["Exporting the Universe to CMC Repository" on page 76](#)

• **Publish Universe to CMC Repository**

On selecting this option , Universe gets deployed directly to CMC repository.

To generate Reports from BI Launch Pad, see ["Generating Reports from BI Launch Pad" on page 86](#)

If you are creating content on a Linux system, see ["Creating Application Content Pack for a Linux System" on page 75](#) to create application content pack.

2. Click **Save** to save your current content pack selection for future use.
3. Click **Modify selection** to reset the content workspace.
4. Click **Run Build** to create your content packs.

Content build status is displayed and content pack creation is triggered.

Domain, ETL, and Application component packs are created at {CDE_HOME} \workspace folder with the <content pack name> you have specified. For

information about deploying content pack on OBR, see ["Deploying Content Packs" on page 73](#).

Note:

- Click **Create New Content** to create a new content pack or **View CDE Log File** to see the CDE logs.
- You can also see the status on your system in the log file at {CDE_HOME} \log\cde.log.

CSV File as Datasource


You can create content using a set of CSV files as the datasource using HPE OBR Content Designer. Perform the following steps to generate the Domain, ETL, and Application components of the content pack:

Note: Ensure the following before selecting the .CSV files:



- Names of the CSV files you select are in the format: `<DomainName>_0_<TableName>_0_<UniqueIdentifier/TimeStamp>.csv`
Example: RetailPOS_0_Store_0_567.csv
- If you are selecting CSV files that are converted from dos2Unix, the new line character or the record delimiter (terminator) in the .CSV files must be `\n\r`.


Task 1: Select the Source File

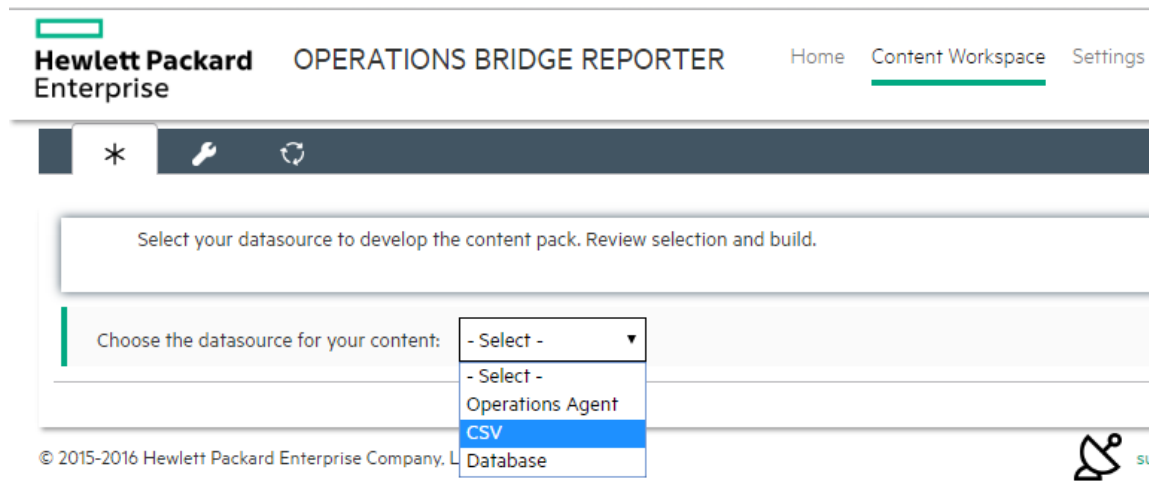1. Open the **Content Workspace** page.
2. From the **Choose the datasource for your content:** list, select **CSV**.







3. Click **Select source file** and add the source .CSV file.


Choose the datasource for your content: CSV  


 Select the datasource > Review the selection > Validate and build

Fill in source details:

-  NOTE: Due to security reasons, the path for the csv file is either not displayed or masked.
-  NOTE: If you are using the same CSV for both Fact and Dimension, upload it only once.
-  NOTE: The pattern of csv file name should be: <Content Pack Name>_O_<Table Name>_O_<Unique identifier/timestamp>.csv

Choose File  —

 Add new source file



Note:

Click **Resume CSV Saved Selection** if you have saved dimension and fact selections on content workspace.

Click --next to Select source file to remove the selected CSV file.

- Click **Add new source file**, and then click **Select source file** to add more .CSV files.
- Click **Process Source** after you have added the CSV files.

The **Review the Selection** page appears.

Note: If you want to create fact and dimension from fields in same .csv file, make copies of the .csv and use them separately. Both the .csv files should have appropriate names.

Task 2: Specify Content Attributes

Content Attributes:

Content Pack Name: Content Publisher: Datasource:

Version:

- Type **Content Pack Name**. Example, RetailPOS.
- Content Publisher** name. Example, ABC Retail.
- Type your datasource application in the **Datasource** box and content pack **Version**.

Task 3: Add Dimensions

Select files for dimension: + Add Dimension

Dimension | Source File : RetailPOS_0_Product_0_1234.csv 📄 — ✎

File Identifier:

File Pattern:

OBR Table/Caption Name:

Select Required Attributes :

>
>>
<
<<

Business Key Columns: +Add column

product name —

Attributes list: sku_id, product_name, brand_name, category, subcategory, price

1. From the **Select files for dimension:** list, select the dimension file and click **Add Dimension**.
2. Specify the **File Identifier**, **File Pattern**, and **OBR Table/Caption Name**.

Note: Table names must be unique across your content creation in OBR.

3. From the **Select Required Attributes** list choose the metrics required.
4. Click in the **Business Key Columns** box to select the column name and click **Add column**.

The selected column names are listed.

- Repeat step 4 to add more Business Key Columns.
- Click — next to the column name to delete the column.

Note: Click 📄 to duplicate the current dimension source and — to delete the current datasource and class selection.

5. Repeat [steps 1 to 4](#) to add more dimensions.

Task 4: Add Facts

Select files for fact:

Fact | Source File : RetailPOS_0_Sales_0_789.csv 🗑️ — 🛠️

File Identifier:

File Pattern:

OBR Table/Caption Name:

Time column: AGENTTIMESTAMP ✎

Primary Dimension: ☒ Product

Linked Dimensions: ☒ Product

Select Required Metrics :

store_name

promotion_name

>

>>

<

<<

AGENTTIMESTAMP

product_name

sale_qty

sale_amnt

ⓘ Except for business key, other string columns are not allowed for fact selection.

Business key to Fact column association:

Product	product_name :	<input type="text" value="product_name"/>
---------	----------------	---

1. From the **Select files for fact list**, select the fact file, and then click **Add Fact**.
2. Specify the **File Identifier**, **File Pattern**, and **OBR Table/Caption Name**.
3. Click ✎ to add **Time Column** and select the column name.

Caution: This step is mandatory.

4. Select the **Primary Dimension**. The **Linked Dimension** is selected automatically.
5. From the **Select Required Metrics** list choose the metrics required.
6. From **Business key to Fact column association** list, select the business key column name and associated fact column name.

Note: Ensure that **Time column** and **Business key to Fact column association** are selected as part of required metrics.

7. Click the check boxes to select **Aggregate Functions**.

Aggregate Functions: ☒ avg ☒ min ☒ max ☐ cnt ☐ tot ☐ med ☐ std ☐ slope ☐ wav

AGENTTIMESTAMP	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
product_name	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
sale_qty	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
sale_amnt	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

8. Repeat [steps 1 to 7](#) to add more facts.

Click  to duplicate the current fact source and  to delete the current selection.

9. Click **Confirm Selection** to proceed to build content.


The **Validate and build** page appears.


Click **Modify Source** to reset the workspace and select different CSV files.

Note: When you click **Modify Source** and change CSV files, if you retain one or more previously selected CSV files for content creation, Content Designer retains all the details of the unchanged CSV files.

Task 5: Build and Deploy Content

The **Validate and build** page displays the details of the dimension and fact table you have collected.

Select the datasource > Review the selection >  Validate and build




 Final validation of the content structure before the build -

Content Name: RetailPOS Datasource Type: CSV

File : RetailPOS_O_Product_0_1234.csv ; Pattern : "Product" ; Data type : Dimension ; Name : Product ;
 Attributes : [product_name] [brand_name] [category] [subcategory] ; Business key columns : [product_name] ;

File : RetailPOS_O_Sales_0_789.csv ; Pattern : "Sales" ; Data type : Fact ; Name : Sales ;
 Metrics : [AGENTTIMESTAMP] [product_name] [sale_qty] [sale_amnt] ; Time column : AGENTTIMESTAMP ;
 Linked Dimension : [Product] ; Primary dimension : Product ; Associated Dimensions : [Product - Dimension : product_name = Fact : product_name ;] ;

☒ Create Universe to Local Folder ☐ Publish Universe to CMC Repository

 Save Selection  Modify Selection  Run Build

1. Select **Create Universe to Local Folder** or **Publish Universe to CMC Repository**:

• **Create Universe to Local Folder**

SAP BusinessObjects universe is created in your local file system at {CDE_HOME} \workspace\<ContentPack_Name>\<ContentPack_Name>.ap\UnxFolder\UnxLayers with the following extensions:

- .blx
- .cnx
- .dfx
- .unx

To export universe to CMC repository, see ["Exporting the Universe to CMC Repository" on page 76](#)

• **Publish Universe to CMC Repository**


On selecting this option , Universe gets deployed directly to CMC repository.

To generate Reports from BI Launch Pad, see ["Generating Reports from BI Launch Pad" on page 86](#)

If you are creating content on a Linux system, see ["Creating Application Content Pack for a Linux System" on page 75](#) to create application content pack.

2. Click **Save Selection** to save your current content pack selection for future use.
3. Click **Modify selection** to reset the content workspace.
4. Click **Run Build** to create your content packs.

Content build status is displayed and content pack creation is triggered and the following status is displayed:

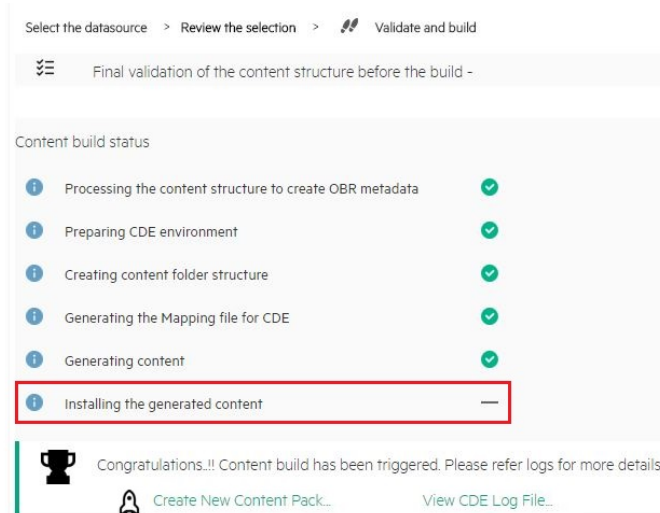

Domain, ETL, and Application component packs are created at {CDE_HOME} \workspace folder with the <content pack name> you have specified.

Log on to OBR Administration Console and deploy the content pack. For information about deploying and installing content packs, see ["Deploying Content Packs" on page 73](#).

Note:

After you deploy the content pack, ensure that the input CSV files are available in the {PMDb_HOME}\collect\ folder.

The record terminator in the CSV files must be according to the platform on which OBR is installed:

- **OBR on Windows:** Record terminator of the input CSV must be \n\r.
- **OBR on Linux:** Record terminator of the input CSV must be \n

Click **Create New Content** to create a new content pack or **View CDE Log File** to see the CDE logs.

You can also see the status on your system in the log file at {CDE_HOME}\log\cde.log.

Database as a Datasource

HPE OBR collects data from databases that support Java Database Connectivity (JDBC): Microsoft SQL, Oracle, Sybase IQ, PostgreSQL, and so on).

Note: If you select ORACLE as the database type, do not select Auto deploy Domain and ETL content pack. Your ETL content pack collection policy has to be edited and recreated using the command-based CDE.

From your collection policy, find the following DBDATE:

```
<statement>select "DBDATE" as DBDATE,"CUSTOMER_ID" as CUSTOMER_ID,"SESSION_COMP_SEC" as SESSION_COMP_SEC from RUM_EVENTS_90000 where DBDATE > $FETCH_START_TIME</statement>
```

Replace with the following:

```
<statement>select "DBDATE" as DBDATE,"CUSTOMER_ID" as CUSTOMER_ID,"SESSION_COMP_SEC" as SESSION_COMP_SEC from RUM_EVENTS_90000 where DBDATE > TO_TIMESTAMP($FETCH_START_TIME, 'YYYY-MM-DD HH24:MI:SS.FF')</statement>
```

For instructions to recreate ETL content pack, see *HPE Operations Bridge Reporter Content Development Guide*.

Perform the following steps to generate the Domain, ETL, and Application components of the content pack:

Task 1: Select the Datasource

1. Open the **Content Workspace** page.
2. From the **Choose the datasource for your content:** list, select **Database**.
The Select the datasource tab is displayed.

The screenshot shows the top of the Hewlett Packard Enterprise Operations Bridge Reporter interface. Below the header, there is a navigation bar with icons for a new workspace, settings, and refresh. The main content area has a message: "Select your datasource to develop the content pack. Review selection and build. Content Pack is generated to be de". Below this, there is a section titled "Choose the datasource for your content:" with a dropdown menu. The dropdown menu is open, showing options: "- Select -", "- Select -", "Operations Agent", "CSV", and "Database" (which is highlighted in blue). At the bottom left, there is a copyright notice: "© 2015-2016 Hewlett Packard Enterprise Company, L".

3. Specify the **Database Host Name**.

The screenshot shows the "Fill in source details:" form. At the top, there is a section "Choose the datasource for your content:" with a dropdown menu set to "Database" and a green checkmark icon. To the right of this is a button labeled "Resume DB Saved Selection". Below this, there is a breadcrumb trail: "Select the datasource > Review the selection > Validate and build". The main form area has the following fields:

- Database Host Name:** A text input field with the placeholder "Hostname".
- Database Type:** A dropdown menu with the option "-Select-".
- Connection details:** Three text input fields labeled "Port", "Username", and "Password".
- Database Name:** A text input field.
- Database Instance Name/Server Name:** A text input field.

 At the bottom of the form, there are three buttons: "Use Previous Details", "Test Connection", and "Process Source".

Note:

- If you have entered database details in HPE OBR Content Designer earlier, click **Use Previous Session Details** to load database details saved earlier.
- Click **Resume DB Saved Selection** to load your content pack attributes selection from an earlier session in content workspace.

4. Select the **Database Type** from the list.

Note: For the database type, copy the following .jar files as applicable from the available location to the {CDE_HOME}\lib directory:

Database Type	.jar file	Available Location
MSSQL	jtds.jar	{PMDB_HOME} \adminServer\webapps\BSMRApp\ WEB-INF\lib
ORACLE	OVoracle.jar	{PMDB_HOME} \adminServer\webapps\BSMRApp\ WEB-INF\lib
SYBASEIQ/SYBASEASE	jconn4.jar	You can copy the jconn4.jar file from your jConnect install location or download the file from the Internet.
POSTGRESQL	postgresql.jar	{PMDB_HOME} \adminServer\webapps\BSMRApp\ WEB-INF\lib
VERTICA	vertica-jdbc.jar	{PMDB_HOME} \adminServer\webapps\BSMRApp\ WEB-INF\lib


- Specify the **Connection details**: Port number, username, and password.
- Specify the **Database Name** and **Database Instance Name/Server Name**.

Note:

- **For MSSQL database:**

The **Database Name** is the name of your database on the MSSQL server and **Server Name** is the name of the SQL server where the database is created.

Example:

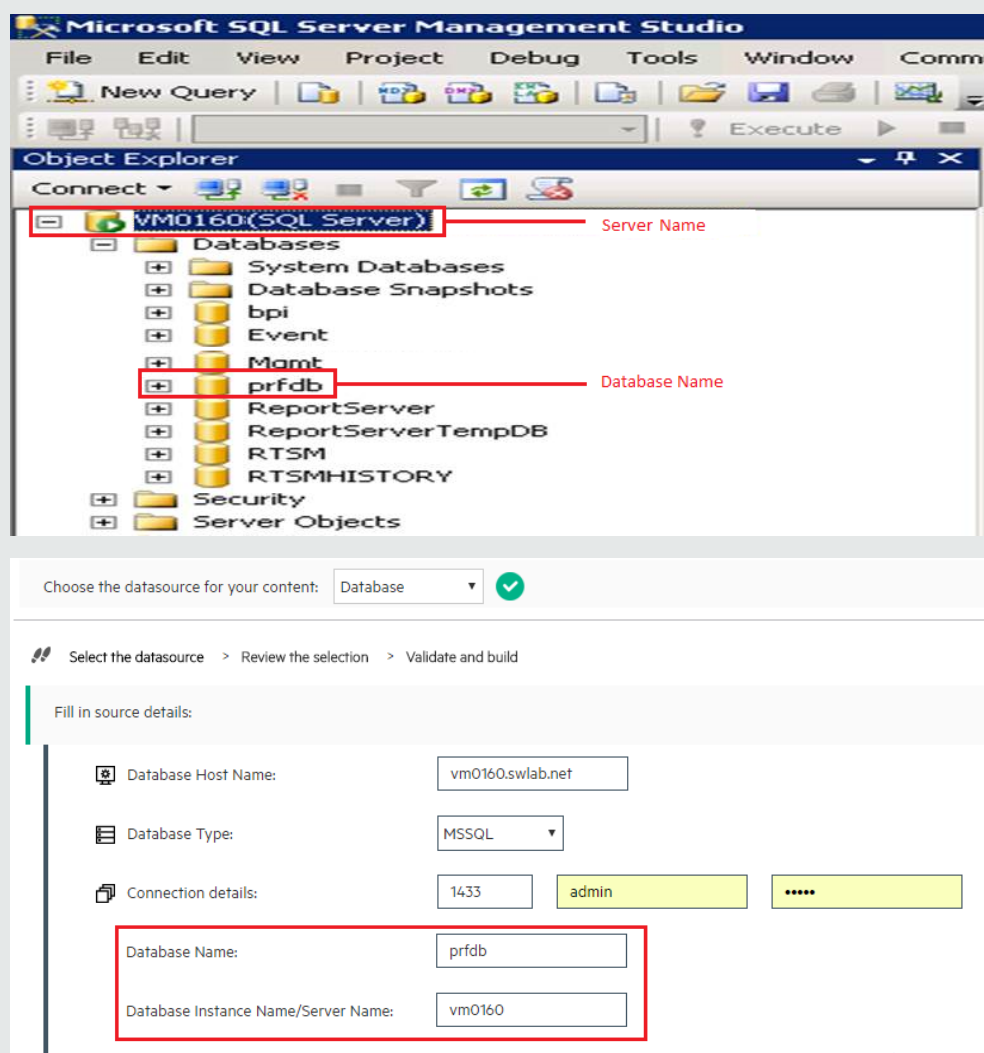

- **For Oracle database:**

The Database Name and the Database Instance Name are the same. Type the same name in both the boxes.

Example:

The image shows two screenshots from the OBR Content Designer interface.

The top screenshot is a dialog box titled "Change Alias: ProfileDB". It contains the following fields and controls:

- Name:** ProfileDB
- Driver:** Oracle Thin Driver (selected from a dropdown menu, with a "New" button next to it)
- URL:** jdbc:oracle:thin:@vm0790.swlab.net:1521:orcl (The "orcl" part is highlighted with a red box)
- User Name:** prof01
- Password:** (masked with dots)
- ☐ Auto logon
- ☐ Connect at Startup
- Properties** button
- Warning - Passwords are saved in clear text**
- OK**, **Close**, and **Test** buttons at the bottom.

The bottom screenshot is the "Review the selection" page. It shows the following configuration details:

- Choose the datasource for your content:** Database (selected from a dropdown menu, with a green checkmark icon)
- Select the datasource > Review the selection > Validate and build** (breadcrumb navigation)
- Fill in source details:**
- Database Host Name:** vm0790.swlab.net
- Database Type:** ORACLE (selected from a dropdown menu)
- Connection details:** 1521, prof01, (masked password)
- Database Name:** orcl (highlighted with a red box)
- Database Instance Name/Server Name:** orcl

7. Click **Test Connection** to check the database connectivity.
 8. Click **Process Source** to proceed with content development.
- The **Review the selection** page appears.

Task 2: Specify Artifact Attributes

Content Attributes:

Content Pack Name:	Example_Content	ETL Content Pack Name:	Example_ETL	Content Publisher:	MyCompany
Datasource:	CSV	Version:	10.00.000		

1. Specify **Content Pack Name** and **Content Publisher** name.
2. Specify your datasource application in the **Datasource** box and content pack **Version**.

Task 3: Add Dimensions

Select table for dimension: [+ Add Dimension](#)

Dimension | Source Table : TRANSACTIONS_DIM Database Type : MSSQL

File Identifier:

OBR Table/Caption Name:

Select Required Attributes :

Business Key Columns: [+Add column](#)




CUSTOMER_ID —

SQL statement:

```
select 'INTERNAL_TRANSACTION_ID' as INTERNAL_TRANSACTION_ID,'TRANSACTION_ID' as TRANSACTION_ID,'CUSTOMER_ID' as CUSTOMER_ID,'TRANSACTION_NAME' as TRANSACTION_NAME,'TRANSACTION_DESCRIPTION' as TRANSACTION_DESCRIPTION,'APPLICATION_ID' as APPLICATION_ID,'APPLICATION_NAME' as APPLICATION_NAME,'BTF_ID' as BTF_ID,'BTF_NAME' as BTF_NAME,'INTERNAL_APPLICATION_ID' as INTERNAL_APPLICATION_ID from TRANSACTIONS_DIM
```

[Save and Validate](#) status :

1. From the **Select tables that serve as dimension for the content:** list, select the dimension table.
2. Click **Add Dimension**.
3. Specify the **File Identifier**, and **OBR Table/Caption Name**.
4. From the **Select Required Attributes** list choose the metrics required.
5. Click in the **Business Key Columns** box to select the column name and click **Add column**.
6. Write or modify the **SQL Statement**, and click **Save and Validate**.
The SQL statement validation status is displayed.

Tip: Click  to view sample data from the dimension table,  to duplicate the current dimension source, and  to delete the current file selection.

- Repeat [steps 1 to 6](#) to add more dimensions.

Task 4: Add Facts

Select table for fact:




Table name

+ Add Fact

Fact I

Source Table : BPM_TRANS_2DAY_10000

Database Type : MSSQL

File Identifier:


BPM_TRANS_2DAY_10000_fact


OBR Table/Caption Name:

BPM_TRANS_2DAY_10000


SQL statement:

select 'DBDATE' as DBDATE,'CUSTOMER_ID' as CUSTOMER_ID,
'EM_RESULT_VALUE_MAX' as EM_RESULT_VALUE_MAX from
BPM_TRANS_2DAY_10000

 Save and Validate

status : 

Time column:

DBDATE 


Primary Dimension:

☒ TRANSACTIONS_DIM

Linked Dimensions:

☒ TRANSACTIONS_DIM

Select Required Metrics :

 Except for business key, other string columns are not allowed for fact selection.

SAMPLETIME

TUID

INTERNAL_APPLICATION_ID

INTERNAL_LOCATION_ID

STATUS_ID

TIME_STAMP_COUNT

EM_RESULT_VALUE_SUM

EM_RESULT_VALUE_SUMSQ

EM_RESULT_VALUE_MIN

EM_PAGE_CBD_COUNT_SUM

EM_DOWNLOAD_DATA_SIZE

>

>>


<

<<

DBDATE

CUSTOMER_ID

EM_RESULT_VALUE_MAX

- From the **Select tables that serve as Fact for the content** list, select the fact table.
- Click **Add Fact**.
- Specify the **File Identifier** and **OBR Table/Caption Name**.
- Write or modify the **SQL Statement**, and click **Save and Validate**.
- Click  to add **Time Column** and select the column name.
- Select the **Primary Dimension** and **Linked Dimensions**.
- From the **Select Required Metrics** list choose the metrics required.
- From **Business key to Fact column association** list, select the business key column names and the associated fact column names.

HPE Operations Bridge Reporter (10.10)

Page 70 of 97




Business key to Fact column association:

TRANSACTIONS_DIM1	CUSTOMER_ID: CUSTOMER_ID ▼
-------------------	----------------------------

Aggregate Functions: ☒ avg ☐ min ☐ max ☐ cnt ☐ tot ☐ med ☐ std ☐ slc

Column/Aggregate	avg All/None
DBDATE	<input type="checkbox"/>
CUSTOMER_ID	<input type="checkbox"/>
EM_RESULT_VALUE_MAX	<input checked="" type="checkbox"/>

- Click the check boxes to select **Aggregate Functions**.


Tip: Click  to view sample data from the fact table,  to duplicate the current fact source and  to delete the current file selection.

- Repeat [steps 1 to 8](#) to add more dimensions.
- Click **Modify Source** to go back and select a different source.
- Click **Confirm Selection** to proceed to build content.

The **Validate and build** page appears.

Task 5: Build and Deploy Content

The **Validate and build** page displays the details of the dimension and fact table you have collected.

Select the datasource > Review the selection >  Validate and build



Final validation of the content structure before the build -

Content Name: RetailPOS

Datasource Type: CSV

File : RetailPOS_O_Product_0_1234.csv ; Pattern : "Product" ; Data type : Dimension ; Name : Product ;


Attributes: [product_name] [brand_name] [category] [subcategory] ; Business key columns: [product_name] ;

File : RetailPOS_O_Sales_0_789.csv ; Pattern : "Sales" ; Data type : Fact ; Name : Sales ;

Metrics: [AGENTTIMESTAMP] [product_name] [sale_qty] [sale_amnt] ; Time column: AGENTTIMESTAMP ;

Linked Dimension : [Product] ; Primary dimension: Product ; Associated Dimensions : [Product - Dimension : product_name = Fact : product_name ;] ;

☒ Create Universe to Local Folder ☐ Publish Universe to CMC Repository

 Save Selection

 Modify Selection

 Run Build

1. Select **Create Universe to Local Folder** or **Publish Universe to CMC Repository**:

• **Create Universe to Local Folder**

SAP BusinessObjects universe is created in your local file system at {CDE_HOME} \workspace\<ContentPack_Name>\<ContentPack_Name>.ap\UnxFolder\UnxLayers with the following extensions:

- .blx
- .cnx
- .dfx
- .unx

To export universe to CMC repository, see ["Exporting the Universe to CMC Repository" on page 76](#)

• **Publish Universe to CMC Repository**


On selecting this option , Universe gets deployed directly to CMC repository.

To generate Reports from BI Launch Pad, see ["Generating Reports from BI Launch Pad" on page 86](#)

If you are creating content on a Linux system, see ["Creating Application Content Pack for a Linux System" on page 75](#) to create application content pack.

2. Click **Save** to save your current content pack selection for future use.
3. Click **Modify selection** to reset the content workspace.
4. Click **Run Build** to create your content packs.

Content build status is displayed and content pack creation is triggered.

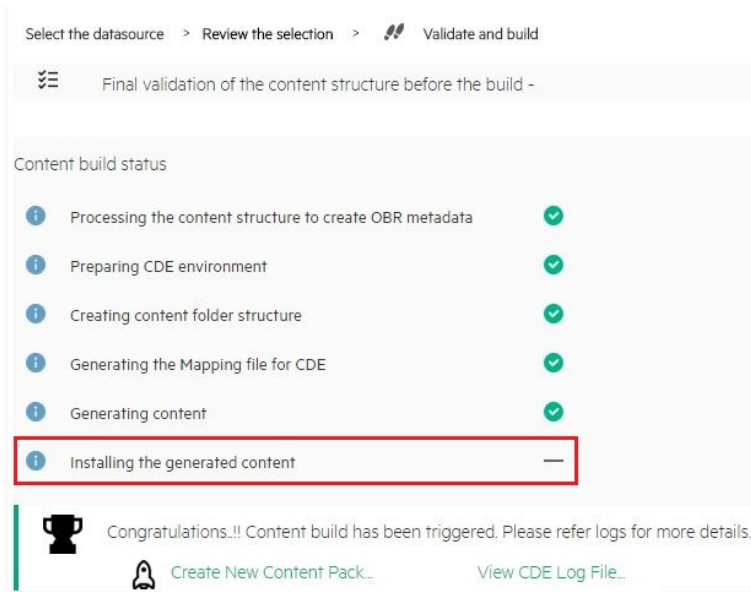

Domain, ETL, and Application component packs are created at {CDE_HOME} \workspace folder with the *<content pack name>* you have specified.

Note:

- Click **Create New Content** to create a new content pack or **View CDE Log File** to see the CDE logs.
- You can also see the status on your system in the log file at {CDE_HOME} \log\cde.log.
- On successful build "Content Build Successful" is displayed in the log file.

Deploying Content Packs

Deploying Domain and ETL Content Packs

After you build content using HPE OBR Content Designer, domain, ETL, and Application component packs are created at {CDE_HOME} \workspace folder with the *<ContentPack>* name you have specified. If you have selected **Auto deploy Domain and ETL content pack** while creating content on OBR system, the domain and ETL content pack components are available on **OBR Administration Console > Deployment Manager** for installation.

Select the datasource > Review the selection > Validate and build

Final validation of the content structure before the build -

Content Name: RetailPOS Datasource Type: CSV

File: RetailPOS_O_Product_0_1234.csv; Pattern: "Product"; Data type: Dimension; Name: Product;

Attributes: [product_name] [brand_name] [category] [subcategory]; Business key columns: [product_name];

File: RetailPOS_O_Sales_0_789.csv; Pattern: "Sales"; Data type: Fact; Name: Sales;

Metrics: [AGENTTIMESTAMP] [product_name] [sale_qty] [sale_amnt]; Time column: AGENTTIMESTAMP;

Linked Dimension: [Product]; Primary dimension: Product; Associated Dimensions: [Product - Dimension: product_name = Fact: product_name];

☒ Auto deploy Domain and ETL content pack

☐ Create Universe to Local Folder ☐ Publish Universe to CMC Repository

Save Selection Modify Selection Run Build

To deploy the generated content pack manually on OBR system, follow these steps:

1. On your OBR system, go to {PMDB_HOME}\packages\ directory.
2. Create a folder with the <ContentPack> name you have specified.
3. Copy the contents of the following folders to {PMDB_HOME}\packages\<ContentPack> folder:

Domain: {CDE_HOME}\workspace\<ContentPack>\Core<ContentPack>.ap\dist\ContentPack

ETL: {CDE_HOME}\workspace\<ContentPack>\ETL_<ContentPack>.ap\dist\ContentPack

Copying a generated components to the packages folder makes the components available in the **OBR Administration Console > Deployment Manager** page for installation.

Generating and Exporting Application Content Pack

1. Select **Auto deploy Domain and ETL content pack** if you want to deploy the content on OBR server after successful build.

Caution: If you have selected **Auto deploy Domain and ETL content pack** in OBR Content Designer, do not try to deploy content in your OBR system **Administration Console > Deployment Manager** at the same time. Content pack deployment will fail.

2. Select **Create Universe to Local Folder** to create SAP BusinessObjects universe in your local file system and publish it later on OBR CMC repository.

Files are created with the following extensions at {CDE_HOME}
 \workspace\<ContentPack_Name>\<ContentPack_Name>.ap\UnxFolder\UnxLayers.:

- .blx
- .cnx
- .dfx
- .unx

Or select **Publish Universe to CMC Repository** On selecting this option , Universe gets deployed directly to CMC. To view the published universe and create reports after publishing the universe, perform the following:

- Export universe to CMC repository - see ["Exporting the Universe to CMC Repository" on the next page.](#)
- Generate Reports from BI Launch Pad - see ["Generating Reports from BI Launch Pad" on page 86.](#)

If you are creating content on a Linux system, see ["Creating Application Content Pack for a Linux System" below](#) to create application content pack.

For information about installing and configuring content packs, refer to *HPE Operations Bridge Reporter Configuration Guide*.

For information about exporting SAP BusinessObjects universe to repository, see ["Exporting the Universe to CMC Repository" on the next page.](#)

Creating Application Content Pack for a Linux System

When you create content using a Linux system, you need to create the application content pack using a Windows system where BusinessObjects ClientTools is installed. Copying the files from Linux to Windows does not work.

For information, see *HPE Operations Bridge Reporter Content Development Guide*.

Follow these steps to create Application content pack in windows:

1. Extract the CDE.zip file.
2. Run setenv.bat command with appropriate parameter values.

3. Copy the ETL, Domain and Application components generated under \$CDE_HOME/workspace directory of the Linux system to Windows %CDE_HOME%\workspace folder.
4. On your command prompt, go to %CDE_HOME%\workspace\RetailPOS\RetailPOSDomain.ap.
5. Run the following command to compile domain content pack:
ant
6. Go to %CDE_HOME%\workspace\RetailPOS\RetailPOSETL.ap.
7. Run the following command to compile ETL content pack:
ant
8. Go to %CDE_HOME%\workspace\RetailPOS\RetailPOSReporting.ap.
9. Run the following command to compile application content pack:
ant

Files are created with the following extensions at {CDE_HOME}\workspace\<ContentPack_Name>\<ContentPack_Name>.ap\UnxFolder\UnxLayers:

- .blx
- .cnx
- .dfx
- .unx

To view the published universe and create reports refer After publishing the universe, perform the following:


- Export universe to CMC repository - see ["Exporting the Universe to CMC Repository" below](#).
- Generate Reports from BI Launch Pad - see ["Generating Reports from BI Launch Pad" on page 86](#).

Exporting the Universe to CMC Repository


After the application content pack is generated using the OBR Content Development Environment (CDE) or OBR Content Designer, perform the following steps:

1. On the system where BusinessObjects Clienttools is installed, select **SAP Business Intelligence> SAP BO BI platform 4 Client Tools > Information Design Tool**.
2. Log on to Information Design Tool (IDT).

3. Click **Window> Local Projects**.
4. Right-click in the **Local Projects** area, and select **New > Project**.

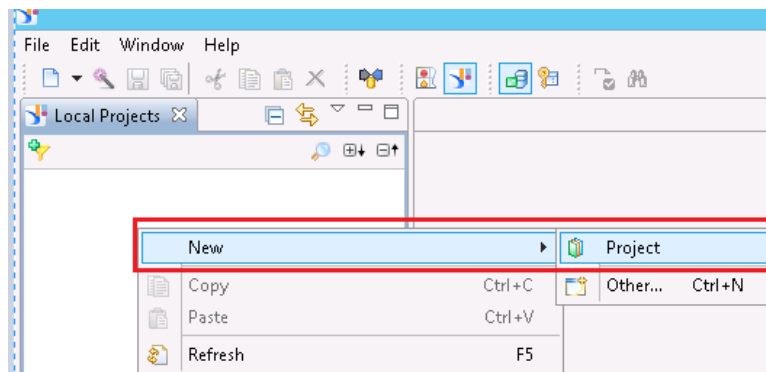


5. Specify the **Project Name** and **Project Location**. The project location is the path of unx folder(UnxFolder) generated by HPE OBR Content Designer.

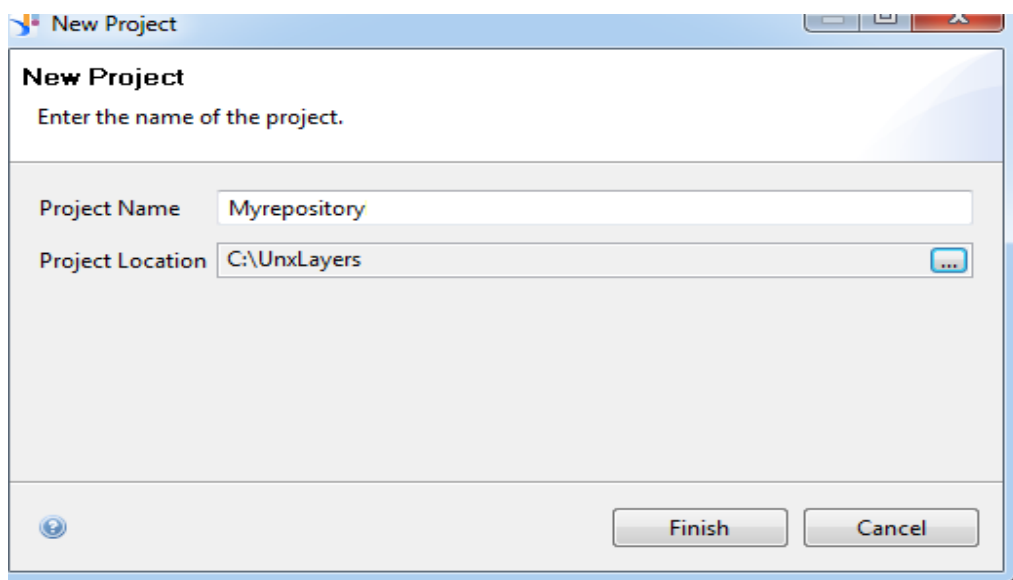


UnxLayer contains files with the following extensions:

- .blx
- .cnx
- .dfx
- .unx

6. Click **OK**.
7. Double-click the **Application<ContentPack>.cnx** and modify the **Array Size** to 5.

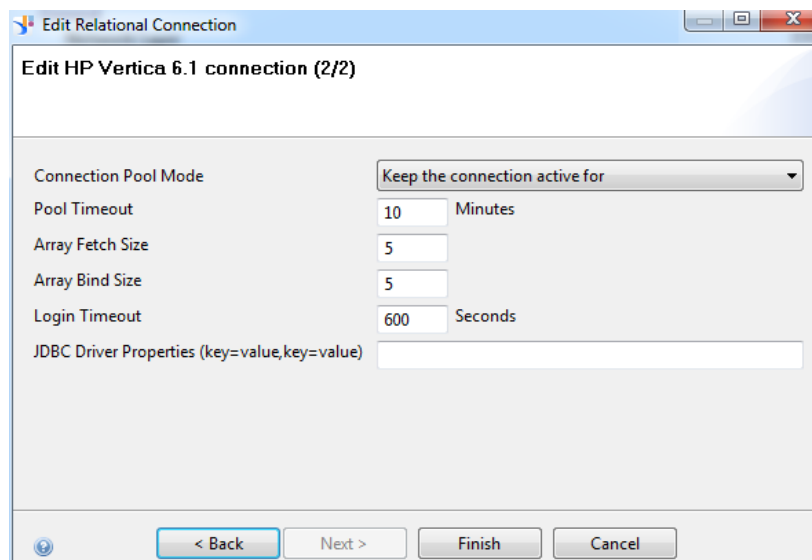


8. Right-click the **Application<ContentPack>.cnx** file and select **Publish Connection to a Repository**.
9. On the Publish Connection window, perform the following:

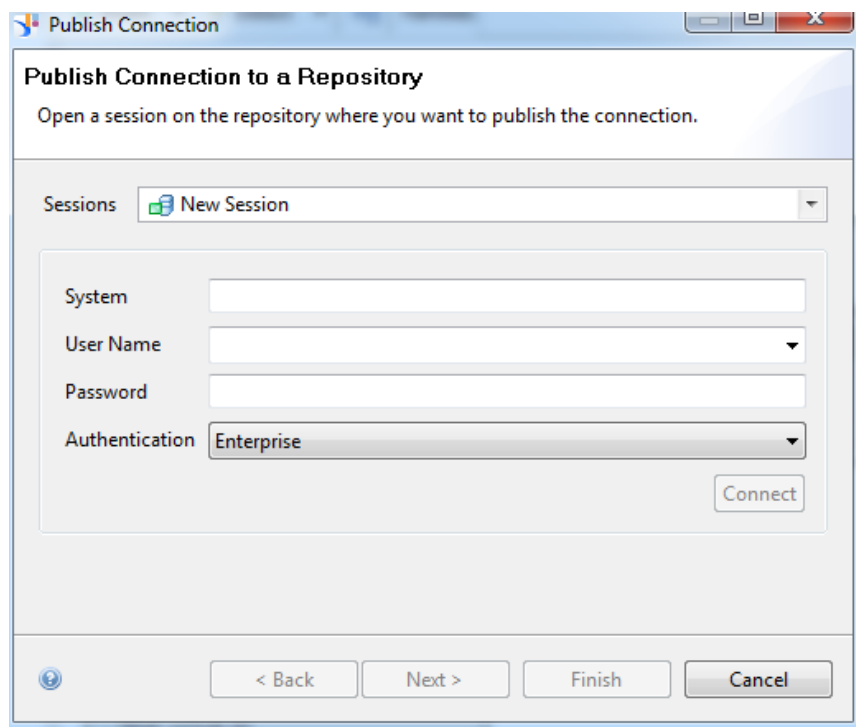


- a. From the **Session** drop-down list, select **New Session**.
- b. In the **System** box, type your OBR BusinessObjects system details.
- c. Type OBR BusinessObjects server Administrator **User Name** and **Password**.
- d. From the **Authentication** list, select **Enterprise**.

- e. Click **Connect** to verify connection to OBR BusinessObjects system.
- f. Click **Finish**.

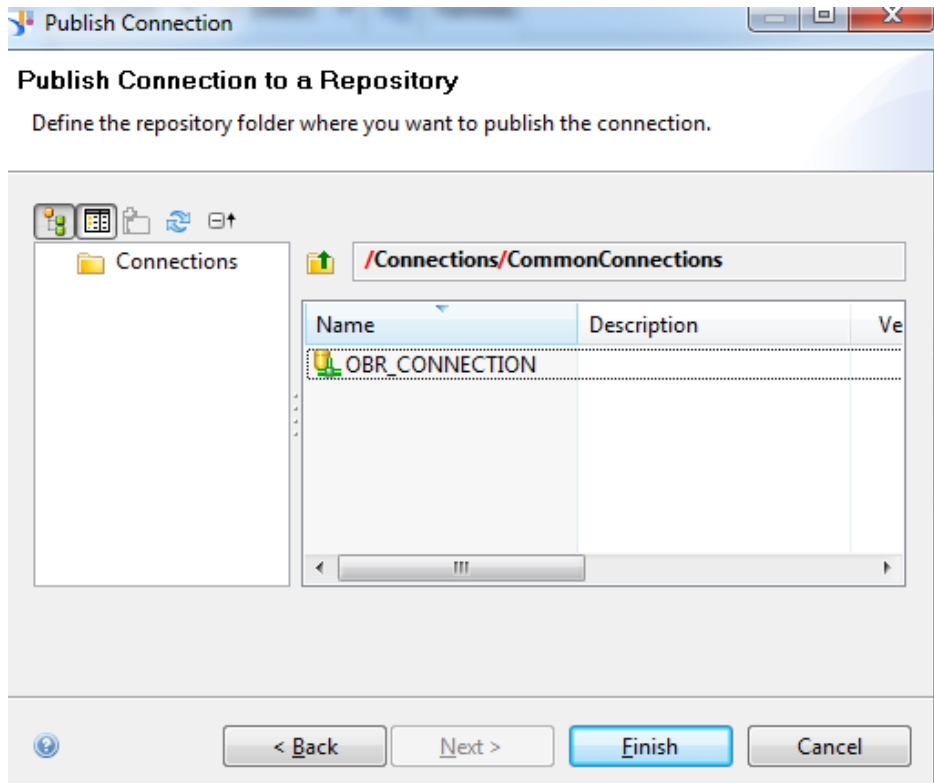


10. Save the connection under the **CommonConnections** folder and click **Finish**.

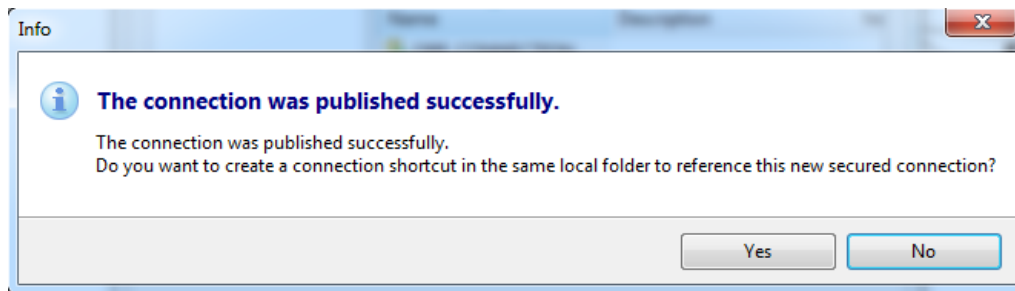


Click **Yes** if you want to create a shortcut to the connection file, or else click **No**.
The OBR_CONNECTION.cns is added to the new project.


11. If prompted for secure connection, click **Yes**.
12. In the **Connection** area click the **Change Connection** icon and select the new **OBR_CONNECTION.cns**.

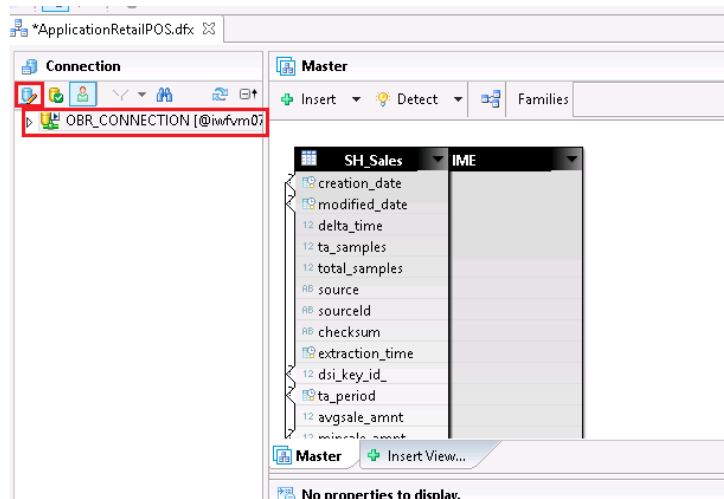

13. Select the connection name and click **Finish**.
14. In **Local Projects**, right-click the .blx file and select **Change Data Foundation**.

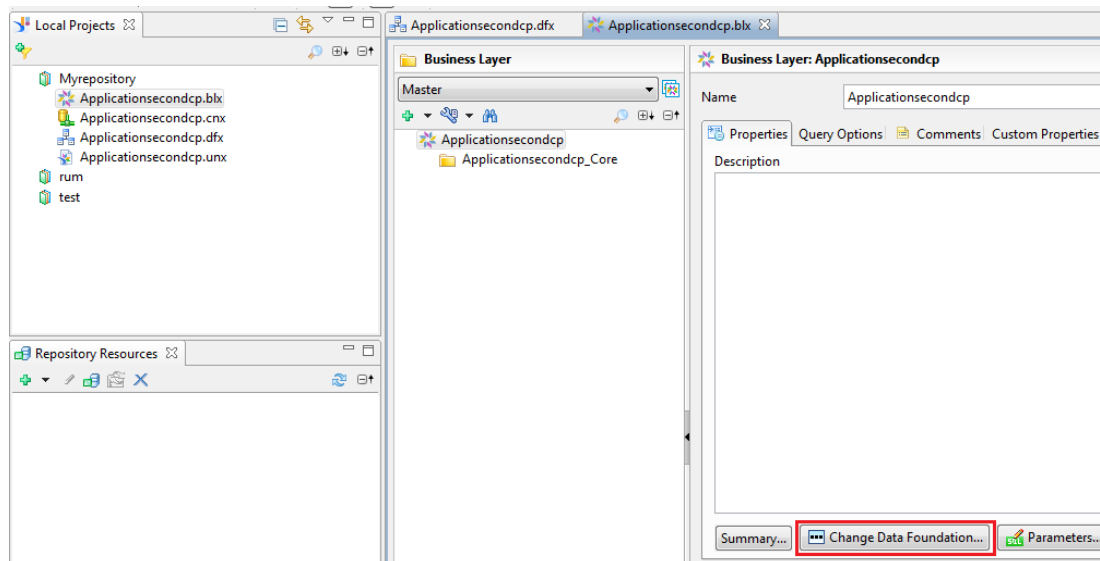


15. Select the .dfx file (data foundation) and click **Finish**.

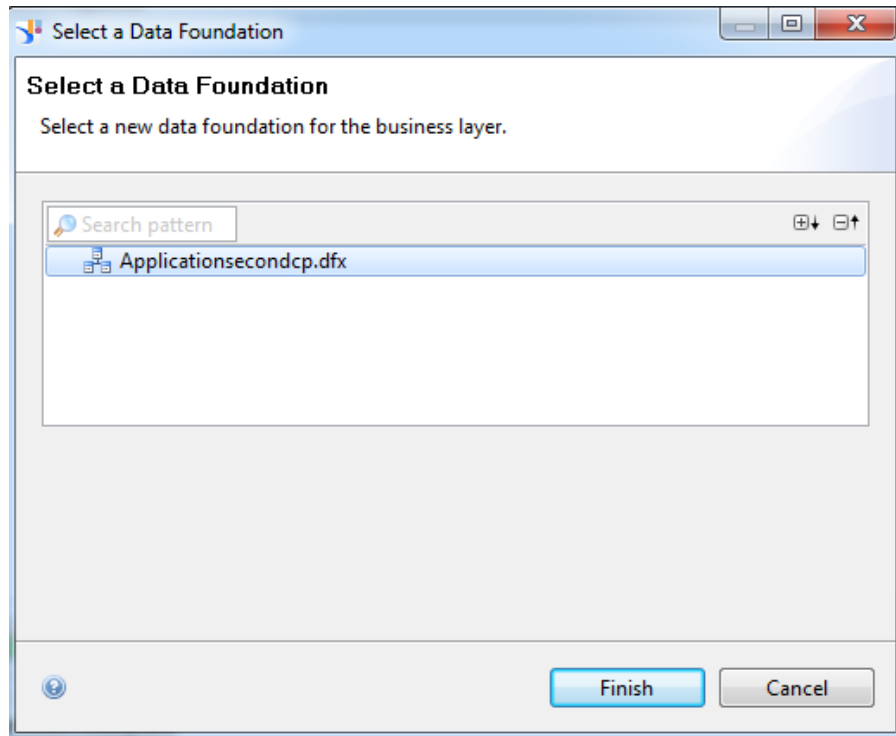

16. Right-click the **.blx** file and select **Publish > To Repository**.
17. Create a folder with your content pack name and click **Finish**.

Note: Ensure that your folder is selected before you click Finish.

18. Change the **Qualifier** and **Owner** as per your configuration during the on post-install configuration.
By default, the Owner is `Public` and Qualifier is `pmdb`.

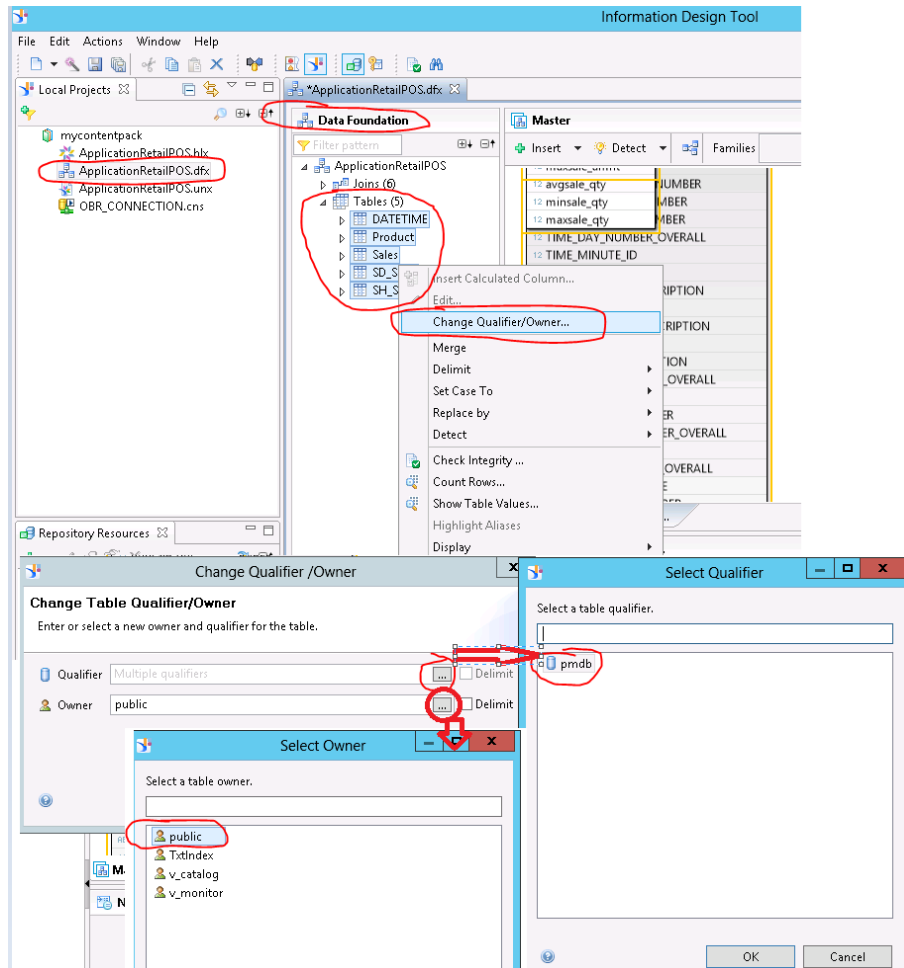

Note: If you are not able to change **Qualifier** and **Owner** successfully:


- Go to <B0 installation Drive>:\Program Files (x86)\SAP BusinessObjects\SAP BusinessObjects Enterprise XI 4.0\dataAccess\connectionServer\jdbc\extensions\qt directory.
- Open the vertica.prm file.
- Change the following parameters to Y instead of N:

```
<Parameter Name="OWNER">Y</Parameter>
<Parameter Name="QUALIFIER">Y</Parameter>
```

Points to remember

- The connection name must be OBR_CONNECTION and the connection must be saved under the CommonConnections folder.
- Qualifier and Owner must be appropriate as per your the custom change.

3. Please note that .dfx and .cns are connected with .blx layer. Export only the .blx layer to repository.
4. To import the universe from repository and make changes, right-click and retrieve the universe as shown below in Information Design Tool, so that you can view the .dfx and .blx. The .cns layer will be extracted in a folder named with the date of retrieval.

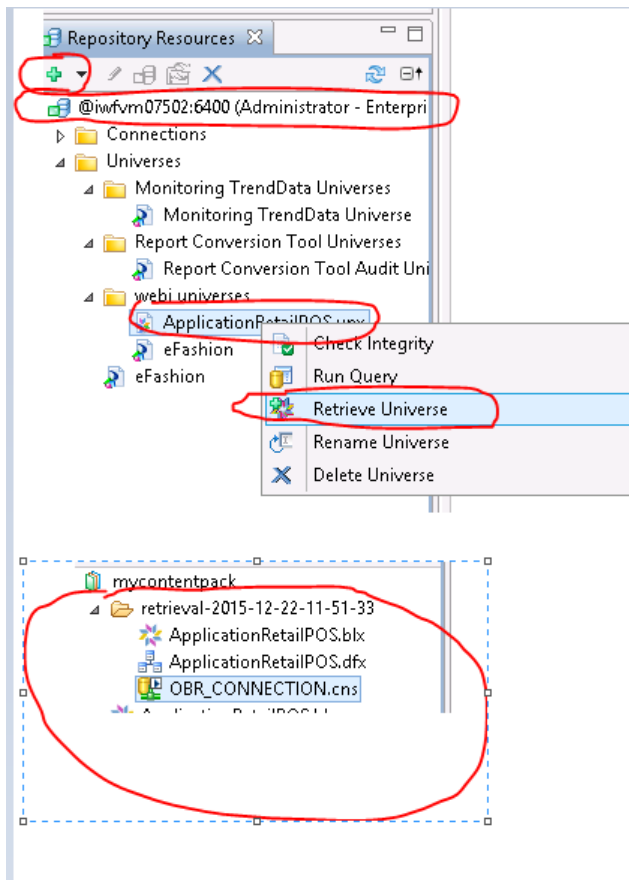

Creating Web Intelligence Reports

You can create Web Intelligence reports by selecting the universe in SAP BusinessObjects BI Launch Pad and building one or more queries to define the data content of the reports.


To create a simple sales report containing a table of sales quantity and sales amount per product category, follow these steps:

1. Logon to SAP BusinessObjects BI Launch Pad by using one of the following ways:
 - In the address bar of your web browser, type the URL of the SAP BusinessObjects system. The URL of the machine will be in the format:
https://<HostName>:8443/BI

- In the Administration Console, click **Administration > SAP BOBJ** and then click **Launch BI Launch Pad**. The BI Launch Pad login page appears.
2. Log on to the SAP BusinessObjects BI Launch Pad with your System details, User Name and Password.
 3. Under **My Applications**, click **Web Intelligence** icon.




4. Click the **New** icon.

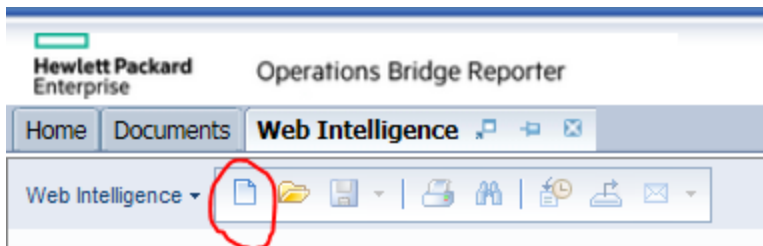

5. From the **Create a Document** page, click **Universe**.

The Query Panel window opens. The **Universe Outline** tab displays the objects – dimensions and measures – available in the universe as shown in the following figure:

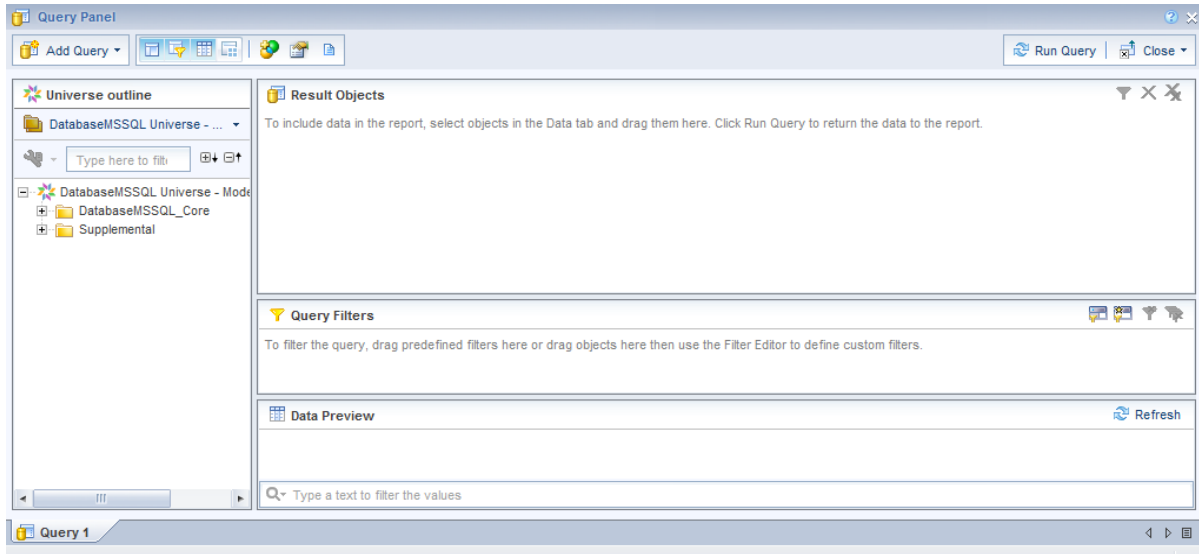

6. Select **RetailPOSReporting Universe - Model Generator**.
7. To include data in the report, select the following in the data tab and drag them into the Result Objects window. Alternatively, you can double-click the objects to place them in the Result Objects window.
 - Dimension: Category (under Product(Retail Sales))
 - Measures:
 - Sale Quantity (under Sales Measures)
 - Sale Amount (under Sales Measures)
8. Click **Run Query** to return the data to the report.
 A table of Sale Quantity and Sale Amount by Product Category is created. You can rename the table to an appropriate title.

Viewing Reports on SAP BusinessObjects BI Launch Pad

Now that you installed the Domain and Reports component packages and the data is loaded into the data warehouse, you can view the reports on the SAP BusinessObjects BI Launch Pad interface.


If you installed the recently created content pack, you will see the report in the Document List in BI Launch Pad.

For instructions on how to log on to the BI Launch Pad and view reports, see *HPE Operations Bridge Reporter Online Help for Users*.


Generating Reports from BI Launch Pad

Perform the following steps to create reports:


1. Type `https://<HostName>:8443/BI` on the web browser and log on to the BI launch pad of HPE OBR.
2. Click on Web Intelligence icon.

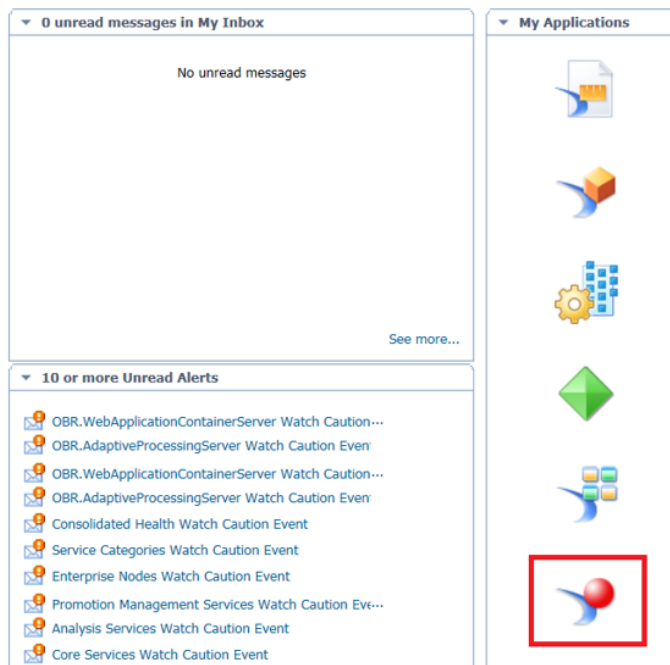


3. Click on create a new **Web intelligence** icon.

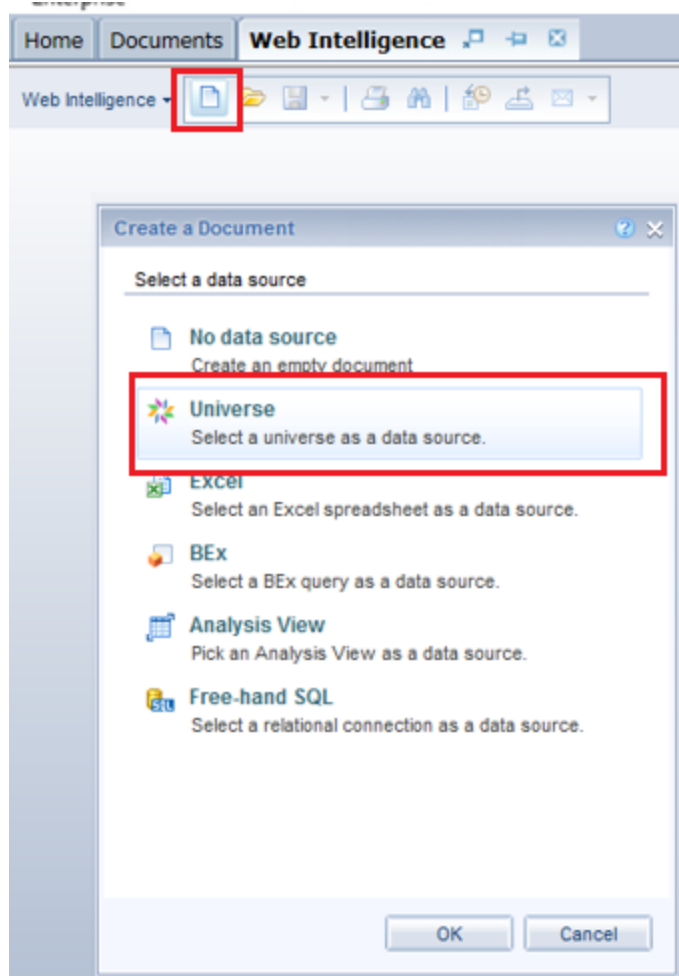


4. In the Create a Document page, select **Universe** as a data source.
5. Click **Refresh Universe list** if the created Universe is not available in Available Universe List.

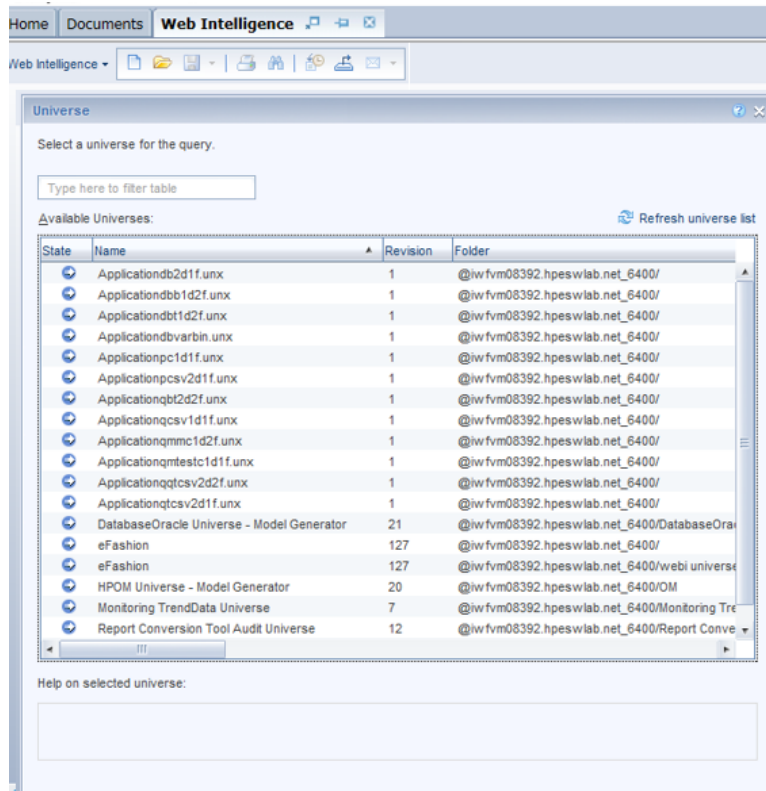


- Double-click on the Universe to generate reports.
- Click and expand the content under Universe outline to view the metrics.

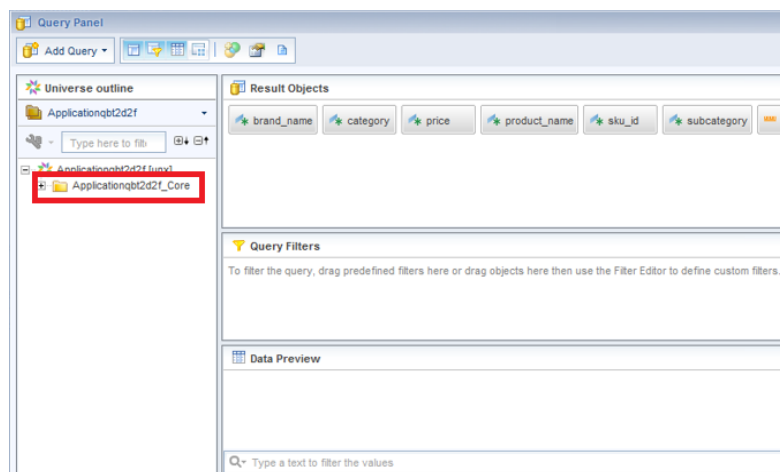

- Drag and drop the required metrics from *Dimension* and *Fact* tables to **Result objects**.
- Click on **Run Query**. You can see the report generated.

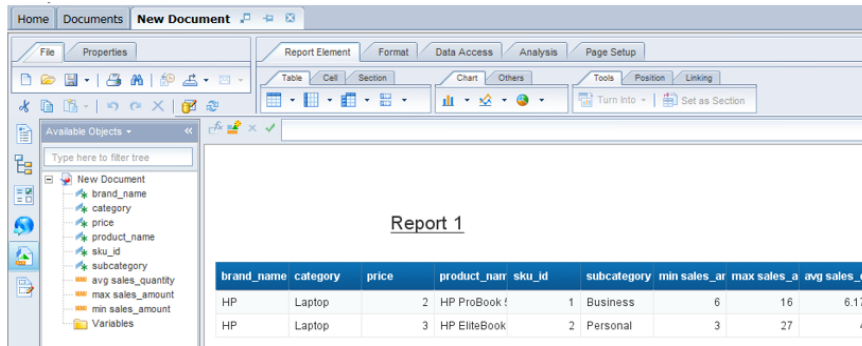

10. You can generate column charts, pie charts and so on as per your requirement.

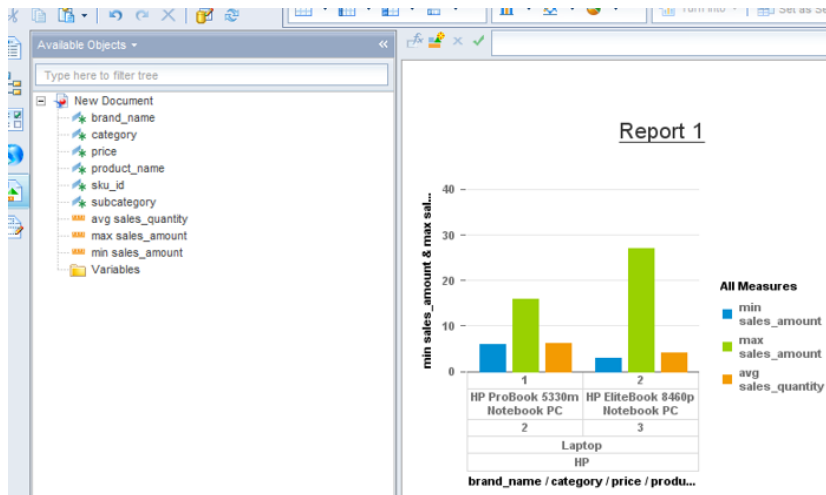


Modifying Existing Content Packs


HPE OBR Content Designer allows you to make changes in your content pack artifacts using an built-in, easy-to-use XML editor and regenerate the content pack. You can also make changes in several content packs and re-build the content packs all at once.



Note: You can modify only the .xml files using the XML editor. You cannot modify build.xml file under any content pack.

Edit content

Follow these steps to edit your content:

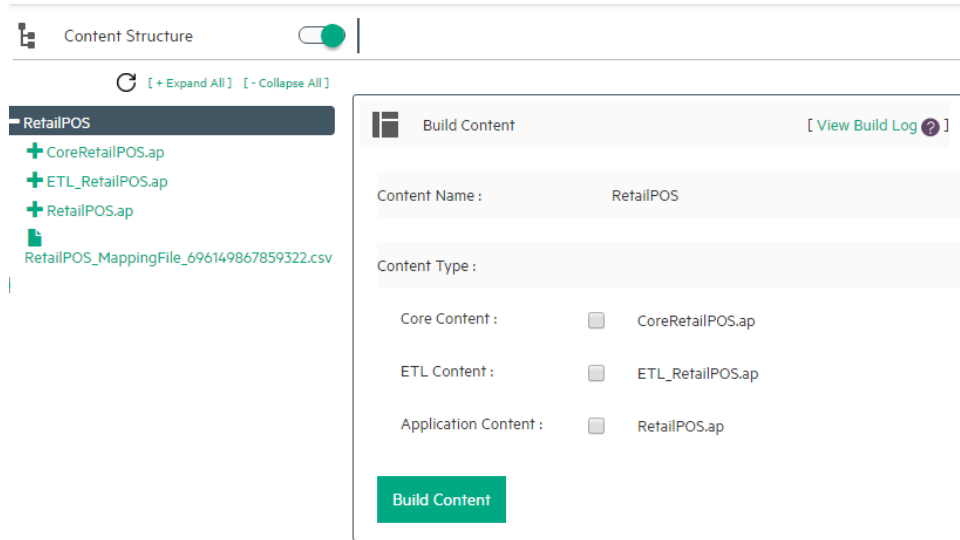
1. On your Content Workspace, click Edit Content . All the content packs you have previously created are listed.



2. Click a content pack name and then the plus sign  to view the artifacts.
Click **Expand All** to expand and view the content artifacts for all the content packs.
Click **Collapse All** to collapse the artifacts.
Click  to hide the list of content packs; click the same button to view the content packs.
3. Click the .xml file you want to modify.
The .xml file opens in the XML Editor on the left.
4. Make the changes required and click **Save**.
When you click **Save**, the .xml file is saved but the content pack is not updated with the changes. Ensure that you rebuild the content.

Re-build content pack

1. After you modify and save the .xml files for a content pack, click a content pack name.
The Build Content page appears on the right.

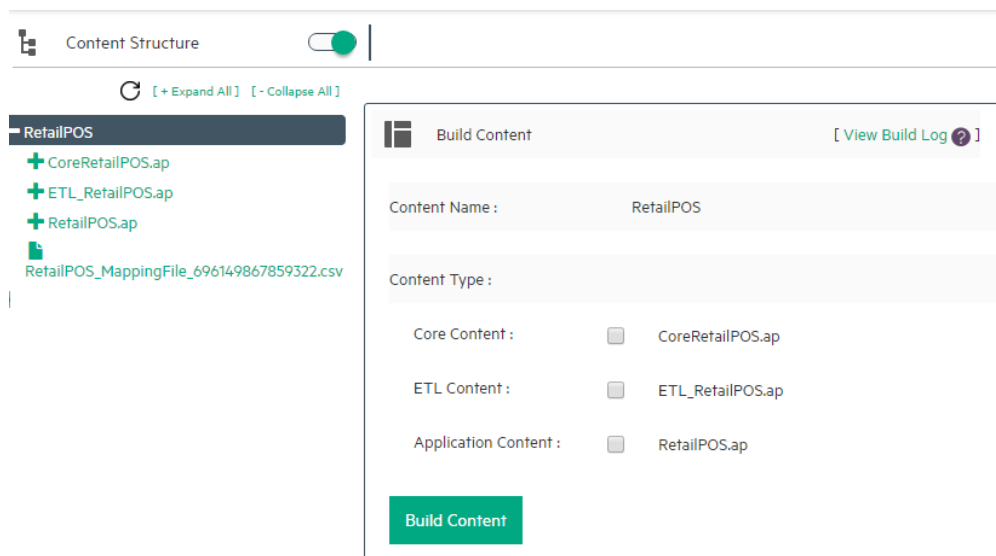

2. Select the **Content Type**: Core, ETL, and Application.
3. Click **Build Content**.

The content pack is re-generated. Click View Build Log to see the logs.

Re-build Multiple Content Packs

OBR Content Designer provides the option to modify content packs and re-build multiple content packs at once.

Follow these steps to re-build the multiple modified content packs together:


1. On your Content Workspace, click **Build Content**.

The Build Content page displayed with all the content packs.

RetailPOS2 :
☐ CoreRetailPOS2.ap
☐ ETL_RetailPOS2.ap
☐ RetailPOS2.ap

RetailPOS3 :
☐ CoreRetailPOS3.ap
☐ ETL_RetailPOS3.ap
☐ RetailPOS3.ap

RetailPOS4 :
☐ CoreRetailPOS4.ap
☐ ETL_RetailPOS4.ap
☐ RetailPOS4.ap

 Do not refresh this page when you click Build Content Button.

Build Content

2. Click the type of content you want to re-generate for each content pack.
Click **Select All** to select all the content packs and **Deselect All** to clear your selection.
3. Click **Build Content** to rebuild all the selected content packs.
The Build Successful or Build Failed message is displayed for each content pack based on the content pack status.

Caution: Do not refresh the page after you click Build Content. Wait until the content packs are regenerated.

4. Click **View Build Log** to see the logs.


Frequently Asked Questions (FAQs)

1. I want to register a new User. How can I do that?

At present, **admin** is the only username supported on HPE OBR Content Designer.

2. What do I do when my Content Workspace hangs?

If the Content Workspace hangs as shown in the figure below, from the {CDE_HOME} folder, delete the files that are not related to content development.

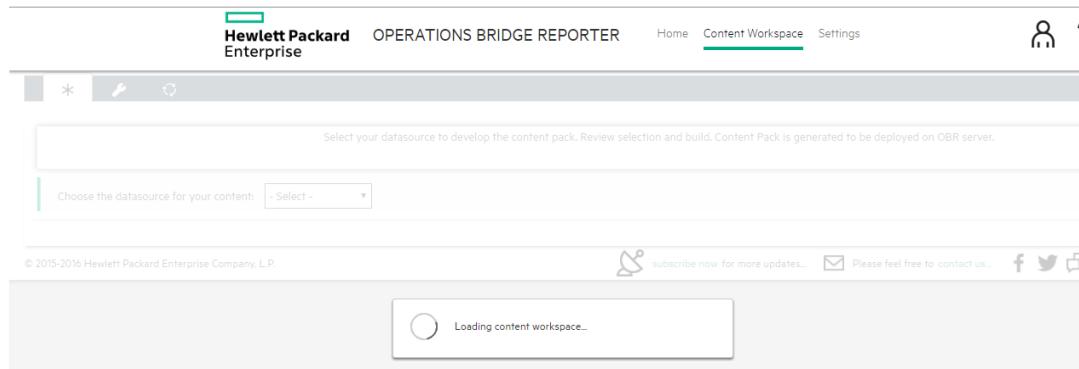

3. What can I do to avoid "Error: Could not find or load main class org.apache.tools.ant.launch.Launcher" even when ANT_HOME is set correct?

If you get the error *Error: Could not find or load main class org.apache.tools.ant.launch.Launcher*, even when **ANT_HOME** is set correct, Create the **/usr/share/java-1.8.0** and **/usr/lib/java-1.8.0** folders manually by running the below commands:

- For **/usr/share/java-1.8.0**:

```
mkdir /usr/lib/java-1.8.0
```
- For **/usr/lib/java-1.8.0**:

```
mkdir /usr/share/java-1.8.0
```

4. While creating universe, the error *java.lang.UnsupportedOperationException: csEX* appears. Why?

Follow these steps for a successful universe creation:

- Go to **Environment variables**.
- In **System Variables**, locate **BO_HOME**.
- Type the Variable value within quotes ("").
For example: `"C:\<BO_HOME path>"`

5. Can multiple users build content at a time using the Content Designer?

No. At preset, only one user can build content at a time.

6. **While running the content build using Content Designer, can I update ModelMapper.csv? .**

No, you cannot update the file after triggering the build. You need to do it outside the content designer at %CDE_HOME%\workspace\<contentpack> folder manually using the command prompt. See *HPE Operations Bridge Reporter Content Development Guide* for more information.

7. **What do I do if BusinessObjects ClientTools is installed on the path that contains spaces?**

For regenerating content on your Windows system:

If BusinessObjects ClientTools is installed on the path that contains spaces,

- a. Exit the command prompt.
- b. Specify the BO_HOME environment variable path in double quotes ("").
For example, if BusinessObjects ClientTools is installed on C:\Program Files, specify the BO_HOME **Variable value** in double quotes as "C:\Program Files".
- c. Open a new command prompt.
- d. Go to %CDE_HOME%\workspace\<content_pack_name>\<content_pack_name>.ap directory.
- e. Run the antcommand.

8. **What do I do when I come across a Table Not Found Error? .**

Install domain content pack on OBR system, and perform the following steps:

On Windows

- a. Right-click your Computer icon and select Properties.
- b. Click **Advanced System Settings, Advanced** tab, and then click **Environment Variables**.
- c. Select **BO_HOME** from the list of enthronement variables and click **Edit**.
- d. Specify the **Variable value** in double quotes (" ").
- e. Click **OK**.

On Windows and Linux

- a. Open the command prompt.
- b. Go to {CDE_HOME}\bin directory.
- c. Run setenv.bat/ setenv.sh.
- d. Go to {CDE_HOME}\workspace\<content_pack_name>\content_pack_name.ap directory.
- e. Run the ant command.

f. When you get a Build Successful message, follow the steps in "[Exporting the Universe to CMC Repository](#)" on page 76.

9. Installing the generating content pack goes to an indefinite loop. What can I do to resolve this?

Check and ensure that your BusinessObjects services are up and running.

References

SAP BusinessObjects Documentation

For documents on SAP BusinessObjects Business Intelligence platform 4.1, go to:
<http://help.sap.com/bobip41?current=bobip41>

For information on the following SAP BusinessObjects Official Product Tutorials, see:

- [SAP BusinessObjects Dashboards 4.x](#)
- [SAP BusinessObjects BI Launch Pad 4.x](#)
- [SAP BusinessObjects Information Design Tool](#)
- [Securing Business Objects Content – Folder Level, Top Level and Application Security](#)

You can also refer to SAP BusinessObjects documents available at physical location on OBR server:

For information on Central Configuration Manager help, go to:

- <Install_Drive>\Program Files (x86)\SAP BusinessObjects\SAP BusinessObjects Enterprise XI 4.0\Help\en\Central Configuration Manager Help.chm (On Windows)

For information on Designer tool, go to:

- <Install_Drive>\Program Files (x86)\SAP BusinessObjects\SAP BusinessObjects Enterprise XI 4.0\Web Content\enterprise_Xi40\help\en\designer_en.chm (On Windows)

For information on SDK samples and documents, go to:

- <Install_Drive>\Program Files (x86)\SAP BusinessObjects\SAP BusinessObjects Enterprise XI 4.0\SL SDK (On Windows)
- /opt/HP/BSM/BOE4/sap_bobj/enterprise_xi40/SL_SDK (On Linux)

For information on Central management console(Administration of Business objects), go to:

- `/opt/HP/BSM/BOE4/sap_bobj/enterprise_xi40/warfiles/webapps/CMCDoc/en` (On Linux)

For information on BI Launchpad (creation of reports, report functions and other admin tasks like scheduling), go to:

- `/opt/HP/BSM/BOE4/sap_bobj/enterprise_xi40/warfiles/webapps/InfoViewDoc/en`(On Linux)

Send Documentation Feedback

If you have comments about this document, you can [contact the documentation team](#) by email. If an email client is configured on this system, click the link above and an email window opens with the following information in the subject line:

Feedback on OBR Content Designer Guide (Operations Bridge Reporter 10.10)

Just add your feedback to the email and click send.

If no email client is available, copy the information above to a new message in a web mail client, and send your feedback to docfeedback@hpe.com.

We appreciate your feedback!