

HP Universal CMDB

for the Windows and Linux operating systems

Software Version: 9.02

Data Flow Management Guide

Document Release Date: October 2010

Software Release Date: October 2010



Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notices

© Copyright 2005 - 2010 Hewlett-Packard Development Company, L.P

Trademark Notices

Adobe® and Acrobat® are trademarks of Adobe Systems Incorporated.

AMD and the AMD Arrow symbol are trademarks of Advanced Micro Devices, Inc.

Google™ and Google Maps™ are trademarks of Google Inc.

Intel®, Itanium®, Pentium®, and Intel® Xeon® are trademarks of Intel Corporation in the U.S. and other countries.

Java™ is a US trademark of Sun Microsystems, Inc.

Microsoft®, Windows®, Windows NT®, Windows® XP, and Windows Vista® are U.S. registered trademarks of Microsoft Corporation.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates.

UNIX® is a registered trademark of The Open Group.

Acknowledgements

- This product includes software developed by Apache Software Foundation (<http://www.apache.org/licenses>).

- This product includes OpenLDAP code from OpenLDAP Foundation (<http://www.openldap.org/foundation/>).
- This product includes GNU code from Free Software Foundation, Inc. (<http://www.fsf.org/>).
- This product includes JiBX code from Dennis M. Sosnoski.
- This product includes the XPP3 XMLPull parser included in the distribution and used throughout JiBX, from Extreme! Lab, Indiana University.
- This product includes the Office Look and Feels License from Robert Futrell (<http://sourceforge.net/projects/officeInfs>).
- This product includes JEP - Java Expression Parser code from Netaphor Software, Inc. (<http://www.netaphor.com/home.asp>).

Documentation Updates

The title page of this document contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.
- Software Release Date, which indicates the release date of this version of the software.

To check for recent updates, or to verify that you are using the most recent edition of a document, go to:

<http://h20230.www2.hp.com/selfsolve/manuals>

This site requires that you register for an HP Passport and sign-in. To register for an HP Passport ID, go to:

<http://h20229.www2.hp.com/passport-registration.html>

Or click the **New users - please register** link on the HP Passport login page.

You will also receive updated or new editions if you subscribe to the appropriate product support service. Contact your HP sales representative for details.

Support

Visit the HP Software Support web site at:

<http://www.hp.com/go/hpsoftwaresupport>

This web site provides contact information and details about the products, services, and support that HP Software offers.

HP Software online support provides customer self-solve capabilities. It provides a fast and efficient way to access interactive technical support tools needed to manage your business. As a valued support customer, you can benefit by using the support web site to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Download software patches
- Manage support contracts
- Look up HP support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and sign in. Many also require a support contract. To register for an HP Passport ID, go to:

<http://h20229.www2.hp.com/passport-registration.html>

To find more information about access levels, go to:

http://h20230.www2.hp.com/new_access_levels.jsp

Table of Contents

Welcome to This Guide	11
How This Guide Is Organized	11
Who Should Read This Guide	12
HP Universal CMDB Online Documentation	12
Additional Online Resources.....	15
Documentation Updates	16

PART I: INTRODUCTION

Chapter 1: Introduction to Data Flow Management.....	19
Data Flow Management Overview	20
Data Flow Management Architecture	24
Data Flow Management Concepts	25
Naming Conventions	30
Receiving Bulk Data from SiteScope	30

PART II: DATA FLOW MANAGEMENT SETUP

Chapter 2: Data Flow Probe Setup	35
Job Execution Policies	36
Data Validation on the Data Flow Probe	38
Filtering Results	39
Get Started With the Data Flow Probe.....	40
Add a Data Flow Probe	42
Delete Unsent Probe Results	43
Data Flow Probe Setup User Interface	44
Domain Credential References.....	59
Data Flow Probe Log Files.....	83
The DiscoveryProbe.properties File	87
Chapter 3: Data Flow Probe Status.....	91
Data Flow Probe Status Overview.....	92
View Current Status of Discovered CIs	93
Data Flow Probe Status User Interface	94

Chapter 4: Adapter Management	101
Automatically Deleted CIs and Relationships and Candidates for Deletion CIs	102
Discovering Running Software.....	104
Identifying Running Software by Processes	105
The portNumberToPortName.xml File	106
Configure the Data Flow Probe to Automatically Delete CIs – Workflow	107
Discover Running Software – Scenario	108
Define a New Port	111
Use the cpVersion Attribute to Verify Content Update.....	113
Manage Adapter Configurations	114
Filter Probe Results	116
Resource Files.....	119
Internal Configuration Files.....	120
Adapter Management User Interface	120
Chapter 5: DDM Community	163
Discovery and Integration Content Packs	164

PART III: INTEGRATION

Chapter 6: Integration Studio	167
Integration Studio Overview	168
Work with Federated Data	173
Work with Population Jobs	175
Work with Data Push Jobs	177
Create a CI Topology.....	179
Deploy a Package to a Remote Data Repository.....	179
Integration Studio User Interface.....	182
Out-of-the-Box Integrations.....	203

Chapter 7: Integrating Multiple CMDBs	207
Integrating Multiple CMDBs Overview.....	208
Configuration Management System (CMS).....	208
Global ID	209
Use Cases – Multiple CMDB Deployments	209
Multiple Deployments with Version 9.0x CMDBs	210
Federation in Version 9.0x CMDBs.....	214
Multiple Deployments with Version 8.0x CMDBs	215
Perform Initial Synchronization	218
Set Up Integrations Between Multiple CMDBs (UCMDB Version 9.0x)	219
Set Up Integrations Between Multiple CMDBs (UCMDB Version 8.0x)	222

PART IV: DISCOVERY CONTROL PANEL

Chapter 8: Discovery Control Panel	231
Discovery Control Panel Overview	232
Viewing Permissions While Running Jobs.....	234
Managing Problems With Error Reporting	235
The Permissions Document.....	236
Discovery Control Panel – Basic Mode Workflow	238
Discovery Control Panel – Advanced Mode Workflow	239
View Job Information on the Data Flow Probe.....	243
Manually Activate a Job	244
Manage Errors.....	245
Find Errors	246
Discovery Control Panel User Interface	248
Operations Commands	320
Job Operation Parameters.....	329

PART V: RECONCILIATION

Chapter 9: Reconciliation	333
Reconciliation Overview	334
Stable ID	335
Identification Configuration.....	335
Reconciliation Services	341
Add an Identification Rule to an Existing CIT.....	346
Create an Identification Rule Document.....	346
Identification Rule Schema	349

Table of Contents

- Chapter 10: Reconciliation Priority 357**
- Reconciliation Priority Overview 358
- Add Reconciliation Priorities to an Existing CIT 359
- Create a Reconciliation Priority Document 359
- Reconciliation Priority Schema 361
- Reconciliation Priority Manager User Interface 362
- Index 367**

Welcome to This Guide

This guide describes the applications that enable data flow management. These applications include the Integration Studio and Discovery.

For details on working with DFM content, see the *HP Universal CMDB Discovery and Integration Content Guide* PDF.

This chapter includes:

- ▶ How This Guide Is Organized on page 11
- ▶ Who Should Read This Guide on page 12
- ▶ HP Universal CMDB Online Documentation on page 12
- ▶ Additional Online Resources on page 15
- ▶ Documentation Updates on page 16

How This Guide Is Organized

The guide contains the following parts:

Part I Introduction

Describes the components of Data Flow Management, including the Integration Studio and discovery.

Part II Data Flow Management Setup

Describes how to set up HP Universal CMDB to discover components running in your environment.

Part III Integration

Explains how to define adapters to include data in the CMDB from other sources.

Part IV Discovery Control Panel

Describes how to activate jobs that discover the components of your system

Part V Reconciliation

Explains how to match and identify entities from different data repositories.

Who Should Read This Guide

This guide is intended for the following users of HP Universal CMDB:

- ▶ HP Universal CMDB administrators
- ▶ HP Universal CMDB platform administrators
- ▶ HP Universal CMDB application administrators
- ▶ HP Universal CMDB data management administrators

Readers of this guide should be knowledgeable about enterprise system administration, have familiarity with ITIL concepts, and be knowledgeable about HP Universal CMDB.

HP Universal CMDB Online Documentation

HP Universal CMDB includes the following online documentation:

Readme. Provides a list of version limitations and last-minute updates. From the HP Universal CMDB DVD root directory, double-click **readme.html**. You can also access the most updated readme file from the HP Software Support Web site.

What's New. Provides a list of new features and version highlights. In HP Universal CMDB, select **Help > What's New**.

Printer-Friendly Documentation. Choose **Help > UCMDB Help**. The following guides are published in PDF format only:

- ▶ the *HP Universal CMDB Deployment Guide* PDF. Explains the hardware and software requirements needed to set up HP Universal CMDB, how to install or upgrade HP Universal CMDB, how to harden the system, and how to log in to the application.
- ▶ the *HP Universal CMDB Database Guide* PDF. Explains how to set up the database (MS SQL Server or Oracle) needed by HP Universal CMDB.
- ▶ the *HP Universal CMDB Discovery and Integration Content Guide* PDF. Explains how to run discovery to discover applications, operating systems, and network components running on your system. Also explains how to discover data on other data repositories through integration.

HP Universal CMDB Online Help includes:

- ▶ **Modeling.** Enables you to manage the content of your IT Universe model.
- ▶ **Data Flow Management.** Explains how to integrate HP Universal CMDB with other data repositories and how to set up HP Universal CMDB to discover network components.
- ▶ **UCMDB Administration.** Explains how to work with HP Universal CMDB.
- ▶ **Developer Reference.** For users with an advanced knowledge of HP Universal CMDB. Explains how to define and use adapters and how to use APIs to access data.

Online Help is also available from specific HP Universal CMDB windows by clicking in the window and clicking the **Help** button.



Online books can be viewed and printed using Adobe Reader, which can be downloaded from the Adobe Web site (www.adobe.com).



Topic Types

Within this guide, each subject area is organized into topics. A topic contains a distinct module of information for a subject. The topics are generally classified according to the type of information they contain.

This structure is designed to create easier access to specific information by dividing the documentation into the different types of information you may need at different times.

Three main topic types are in use: **Concepts**, **Tasks**, and **Reference**. The topic types are differentiated visually using icons.

Topic Type	Description	Usage
Concepts 	Background, descriptive, or conceptual information.	Learn general information about what a feature does.
Tasks 	<p>Instructional Tasks. Step-by-step guidance to help you work with the application and accomplish your goals. Some task steps include examples, using sample data.</p> <p>Task steps can be with or without numbering:</p> <ul style="list-style-type: none"> ▶ Numbered steps. Tasks that are performed by following each step in consecutive order. ▶ Non-numbered steps. A list of self-contained operations that you can perform in any order. 	<ul style="list-style-type: none"> ▶ Learn about the overall workflow of a task. ▶ Follow the steps listed in a numbered task to complete a task. ▶ Perform independent operations by completing steps in a non-numbered task.
	<p>Use-case Scenario Tasks. Examples of how to perform a task for a specific situation.</p>	Learn how a task could be performed in a realistic scenario.

Topic Type	Description	Usage
 Reference	General Reference. Detailed lists and explanations of reference-oriented material.	Look up a specific piece of reference information relevant to a particular context.
	User Interface Reference. Specialized reference topics that describe a particular user interface in detail. Selecting Help on this page from the Help menu in the product generally open the user interface topics.	Look up specific information about what to enter or how to use one or more specific user interface elements, such as a window, dialog box, or wizard.
 Troubleshooting and Limitations	Troubleshooting and Limitations. Specialized reference topics that describe commonly encountered problems and their solutions, and list limitations of a feature or product area.	Increase your awareness of important issues before working with a feature, or if you encounter usability problems in the software.

Additional Online Resources

Troubleshooting & Knowledge Base accesses the Troubleshooting page on the HP Software Support Web site where you can search the Self-solve knowledge base. Choose **Help > Troubleshooting & Knowledge Base**. The URL for this Web site is <http://h20230.www2.hp.com/troubleshooting.jsp>.

HP Software Support accesses the HP Software Support Web site. This site enables you to browse the Self-solve knowledge base. You can also post to and search user discussion forums, submit support requests, download patches and updated documentation, and more. Choose **Help > HP Software Support**. The URL for this Web site is www.hp.com/go/hpsoftwaresupport.

Most of the support areas require that you register as an HP Passport user and sign in. Many also require a support contract.

To find more information about access levels, go to:

http://h20230.www2.hp.com/new_access_levels.jsp

To register for an HP Passport user ID, go to:

<http://h20229.www2.hp.com/passport-registration.html>

HP Software Web site accesses the HP Software Web site. This site provides you with the most up-to-date information on HP Software products. This includes new software releases, seminars and trade shows, customer support, and more. Choose **Help > HP Software Web site**. The URL for this Web site is www.hp.com/go/software.

Documentation Updates

HP Software is continually updating its product documentation with new information.

To check for recent updates, or to verify that you are using the most recent edition of a document, go to the HP Software Product Manuals Web site (<http://h20230.www2.hp.com/selfsolve/manuals>).

Part I

Introduction

1

Introduction to Data Flow Management

This chapter includes:

Concepts

- ▶ Data Flow Management Overview on page 20
- ▶ Data Flow Management Architecture on page 24
- ▶ Data Flow Management Concepts on page 25

Reference

- ▶ Naming Conventions on page 30
- ▶ Receiving Bulk Data from SiteScope on page 30

Troubleshooting and Limitations on page 30

Concepts

Data Flow Management Overview

This section includes the following topics:

- ▶ "UCMDB Integrations" on page 20
- ▶ "Discovery" on page 21
- ▶ "Reconciliation" on page 23

UCMDB Integrations

You use the Integration Studio to set up integrations with external data repositories.

An integration type can be:

- ▶ **Population.** Integration that populates the CMDB with CI and relationship information.
- ▶ **Federation.** Integration that retrieves CIs and relationships from an external repository whenever the data is requested in an ad-hoc fashion.
- ▶ **Data Push.** Integration that pushes CIs and relationships from the CMDB to an external data repository.

Each integration adapter supports certain types of integrations. For example, an Integration adapter that supports both Population and Federation types can retrieve data periodically for storage within the CMDB or upon query time; both these configurations can co-exist within a single integration.

For details, see "Integration Studio" on page 167.

Discovery

The Discovery process is the mechanism that enables you to collect information about your IT infrastructure resources and their interdependencies. Discovery automatically discovers and maps logical application assets in Layers 2 to 7 of the Open System Interconnection (OSI) Model.

Discovery discovers resources such as applications, databases, network devices, servers, and so on. Each discovered IT resource is delivered to, and stored in, the configuration management database (CMDB) where the resource is represented as a managed CI.

Discovery is an ongoing, automatic process that continuously detects changes that occur in the IT infrastructure and updates the CMDB accordingly. You do not need to install any agents on the devices to be discovered.

Following installation, the network on which the Data Flow Probe is located, the host on which the Probe resides, and the host's IP address are automatically discovered and a CI is created for each of these objects. These discovered CIs populate the CMDB. They act as triggers that activate a Discovery job. Every time a job is activated, the job discovers more CIs, which in turn are used as triggers for other jobs. This process continues until the entire IT infrastructure is discovered and mapped.

Once you configure Discovery and activate the required discovery jobs, Discovery runs on the system, discovers system components, and saves them as CIs in the CMDB. You can discover new objects either manually or automatically. Objects that are outside the Probe's network require additional, manual configuration.

For details on discovering and integrating components on your system, see the *HP Universal CMDB Discovery and Integration Content Guide* PDF.

Note: This guide assumes that the Data Flow Probe is installed in the default location, that is, **C:\hp\UCMDB\DataFlowProbe**.

Data Flow Management Modules

Data Flow Management (DFM) includes the following application modules:

- "Integration Studio" on page 22
- "Reconciliation Priority" on page 22
- "Discovery Control Panel" on page 22
- "Data Flow Probe Setup" on page 23
- "Adapter Management" on page 23
- "DDM Community" on page 23
- "Data Flow Probe Status" on page 23

Integration Studio

The Integration Studio module enables you to set up UCMDb integrations to define and control data flows from external data repositories to the CMDB, or from the CMDB to external data repositories.

For details, see "Integration Studio" on page 167.

Reconciliation Priority

The Reconciliation Priority module enables you to specify the reconciliation priority for a particular integration point, CIT, or attribute.

For details, see "Reconciliation Priority" on page 357.

Discovery Control Panel

The Discovery Control Panel application module enables you to manage the Discovery process to discover the CIs and relationships of your IT Infrastructure. You control the process by activating discovery jobs. You can choose to activate all or some of the jobs in a module. You can also edit discovery jobs, and schedule a job to run at a certain time.

For details, see "Discovery Control Panel" on page 231.

Data Flow Probe Setup

The Data Flow Probe Setup module enables you to add Probes to the system and to edit existing Probes. You define the network range that each Probe covers. From the Data Flow Probe Setup you also manage credentials. The credentials are used for both Discovery and Integrations purposes.

For details, see "Data Flow Probe Setup" on page 35.

Adapter Management

The Adapter Management module enables you to edit adapters, scripts, and configuration files. You can also replace or remove external resources needed in either Discovery or Integration.

For details, see "Adapter Management" on page 101.

DDM Community

The DDM Community Web site provides you with a convenient way to obtain the latest Discovery and Integration Content Pack. You need an HP Passport user name and password to log in. The URL for this Web site is: <https://h20090.www2.hp.com/>.

For details, see "DDM Community" on page 163.

Data Flow Probe Status

The Data Flow Probe Status module enables you to view the current status of a particular Data Flow Probe: which discovery or integration job the Probe is currently running, execution statistics, and so on.

For details, see "Data Flow Probe Status" on page 91.

Reconciliation

The Reconciliation process consists of two important steps:

- **Identification.** The process by which CIs and relationships within the CMDB are identified against existing CIs within the CMDB, other CIs within the same bulk, or CIs coming from various federated data sources.

- **Reconciliation Priority.** The process by which the CMDB reconciliation engine decides how to deal with conflicting data. When conflicting values are given for the same CI attribute by different integrations, the CMDB reconciliation engine resolves the conflict by looking at the reconciliation priority assigned to each integration.


By default, unless you customize the reconciliation priorities within the Reconciliation Priority Manager, the CMDB reconciliation engine uses the last reported value as the most accurate, that is, all integrations have exactly the same priority.

For details about reconciliation, see "Reconciliation" on page 333.

For details about the Reconciliation Priority Manager, see "Reconciliation Priority Window" on page 364.

Data Flow Management Architecture

Data Flow Management architecture is deployed as follows:

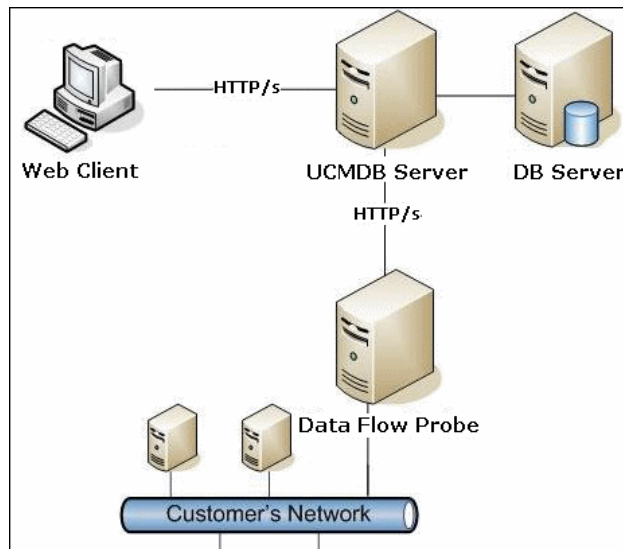

- The Data Flow Probe is responsible for the data flow to and from external data repositories (data push or population) and for performing discovery. Federation is always run directly from the UCMDB Server and does not leverage the Probe infrastructure. Generally, data push runs from the UCMDB Server, but uses the Probe in cases where the adapter is based on the Data Push Adapter platform.
- The Data Flow Probe initiates communication with the UCMDB Server using http or https traffic, enabling the product to bypass possible firewalls.

Data Flow Management Concepts

This section describes the main topics of Data Flow Management:

- "Data Flow Probe" on page 25
- "Communication Protocols" on page 26
- "Discovery and Integration Adapters" on page 26
- "Discovery Modules" on page 27
- "Discovery and Integration Content Packs" on page 28
- "Integration Points" on page 28
- "Discovery Jobs" on page 28
- "Discovery Wizards" on page 28
- "Agentless Discovery" on page 29
- "Trigger CIs and Trigger Queries" on page 29

Data Flow Probe

The Data Flow Probe is the main component responsible for requesting tasks from the server, scheduling tasks, executing them, and sending the results back to the UCMDB Server. You define a range of network addresses for a specific, installed Probe. Each Probe is identified by its name, chosen as part of the Data Flow Probe installation process.

Communication Protocols

Discovery of the IT infrastructure components uses protocols such as SNMP, WMI, JMX, Telnet, and so on. For details, see "Domain Credential References" on page 59.

Discovery and Integration Adapters

An adapter can be of one of the following types:

- ▶ **Jython Adapter.** An adapter based on a set of Jython scripts that are executed sequentially. For details, see "Create Jython Code" in the *HP Universal CMDB Developer Reference Guide*.
- ▶ **Java Adapter.** An adapter based on Java code that implements the various DFM interfaces and is wrapped in a JAR file. For details, see "Developing Java Adapters" in the *HP Universal CMDB Developer Reference Guide*.
- ▶ **Generic DB Adapter.** An adapter that uses SQL queries and maps database tables to CIs and relationships by using an ORM file. For details, see "Developing Generic Database Adapters" in the *HP Universal CMDB Developer Reference Guide*.
- ▶ **Generic Push Adapter.** An adapter that uses a mapping file and Jython scripts to push data to an external data repository. For details, see "Developing Push Adapters" in the *HP Universal CMDB Developer Reference Guide*.

The adapters themselves do not contain information about the target to which they are to connect and from which they are to retrieve information. For data flow to be configured and set up correctly, adapters require further context information, which can include an IP address, port information, credentials, and so on.

For discovery adapters (adapters used for performing Discovery), the additional information is brought from the Trigger CIs attached to the Discovery Jobs; for integration adapters, the information is either being manually fed when creating the integration or take from the selected Trigger CI.

For details on making adapter changes, see "Adapter Management Window" on page 134. For details on creating adapters, see "Adapter Development and Writing" in the *HP Universal CMDB Developer Reference Guide*.

Input Queries

Note: Input queries refer only to Discovery-based integrations.

Each adapter is assigned an Input query that is used for two functions:

- **The Input query defines a minimal set of requirements** for every Trigger CI included in a job or integration that triggers this adapter. (This is true even when no trigger query is associated with the job.)

For example, an input query can query for IPs related to nodes with an SNMP agent installed and discovered on them, that is, only IPs with installed SNMP agents can trigger this adapter. This prevents the case where a user could manually create a Trigger CI that adds all IPs as triggers to an adapter.

- **An Input query defines how to retrieve data information from the CMDB.** Destination data information, even if it is not included in a Trigger CI, can be retrieved by the input query. The input query defines **how** to retrieve the information.

For example, you can define a relationship between a Trigger CI (a node with the node name of **SOURCE**) and the target CI and then can refer to the target CI according to this node name, in the Triggered CI Data pane. For details, see "Input Pane" on page 122.

For details on using input queries when writing adapters, see "Step 1: Create an Adapter" in the *HP Universal CMDB Developer Reference Guide*.

Discovery Modules

The module is a grouping of discovery jobs that logically belong together, can be operated and managed together, and so on. This helps to reduce clutter in the main view when many jobs need to be written, and can also offer better manageability.

When creating a job, you should choose a module for it or create a new module. If you are creating several jobs, the best practice is to split them into logical groups and assign them to modules accordingly.

Discovery Modules support a hierarchy of folders, to facilitate easy finding of the relevant discovery capability.

Discovery and Integration Content Packs

The latest Discovery and Integration content for UCMDB is delivered as a Content Pack available for download via the HP Live Network. For details on downloading and installing Content Packs, see "DDM Community" on page 163.

By downloading the latest Content Pack, you ensure that your system is up-to-date with the latest defect-fixes and content functionality. Content Packs are released in a separate release train and are installed on top of the current product platform.

Integration Points

Integration points are entities used to set up UCMDB integrations. Each integration point is created with a selected integration adapter and the additional configuration information required to set up the integration. For details on creating integration points, see "Integration Studio" on page 167.

Discovery Jobs

A job enables reuse of a discovery adapter for multiple Discovery process flows. Jobs enable scheduling the same adapter differently over different sets of triggered CIs and also supplying different parameters to each set. You launch Discovery by activating the relevant set of discovery jobs that must be run. Relevant trigger CIs are automatically added to the activated discovery jobs based on their Trigger Queries.

For details, see "Discovery Control Panel" on page 231.

Discovery Wizards

You use one of the Discovery wizards (to discover the infrastructure, databases, and J2EE applications) when you need to use the default values set for IP ranges, network credentials, and so on. For details on using a wizard, see "Basic Mode Window" on page 251.

Agentless Discovery

Discovery is an agentless technology that discovers IT environment components through a dedicated Data Flow Probe residing on the customer's site.

Although Discovery is agentless, that is, it does not require the installation of dedicated agents on the servers that are to be discovered, it does depend on agents that are already installed such as SNMP, WMI, TELNET, SSH, NETBIOS, and others. Other discovery capabilities are based on application-specific protocols such as SQL, JMX, SAP, Siebel, and so on. For details, see "Domain Credential References" on page 59.

Trigger CIs and Trigger Queries

A Trigger CI is a CI in the CMDB that activates a discovery job. Every time a job is activated, the job may discover additional CIs, which in turn are used as triggers for other jobs. This process continues until the entire IT infrastructure is discovered and mapped.

For details on adding Trigger CIs to a job, see "Discovery Status Pane" on page 269.

A Trigger Query associated with a job is a subset of the Input Query, and defines which specific CIs should automatically trigger a job. That is, if an Input Query queries for IPs running SNMP, a Trigger Query queries for IPs running SNMP in the range 195.0.0.0-195.0.0.10.

Note: A Trigger Query must refer to the same objects as the Input Query. For example, if an Input Query of an adapter queries for IPs running SNMP, you cannot define a Trigger Query for an associated job to query for IPs connected to a node. This is because some of the IPs may not be connected to an SNMP object, as required by the Input Query.

Reference

Naming Conventions

When naming entities in Data Flow Management, you can use the following characters: a-z, A-Z, 0-9. When entering IP addresses, use only digits and asterisks (*).

Receiving Bulk Data from SiteScope

SiteScope results can be sent to UCMDB either zipped or unzipped. The request includes a parameter that indicates to UCMDB whether the results being sent are in zipped or unzipped format.

To send SiteScope results in a zipped format:

- 1 Open the following file:
`C:\hp\UCMDB\DataFlowProbe\conf\DiscoveryProbe.properties`
- 2 Locate the line beginning `appilog.agent.probe.send.results.zipped`.
- 3 Change the value to **true**.
- 4 Restart the Probe so that it is updated with the changes.

SiteScope results are zipped before being sent to UCMDB.

Troubleshooting and Limitations

For details on using the log files to perform basic troubleshooting, see:

- "Data Flow Probe Log Files" on page 83.
- "Data Flow Management Log Files" in the *HP Universal CMDB Administration Guide*.

For details on troubleshooting login, installation, and so on, see "Accessing HP Universal CMDB" in the *HP Universal CMDB Deployment Guide* PDF.

This section includes the following topics:

- "Discovery Results Do Not Appear in the Topology Map" on page 31
- "Networks and IPs" on page 31
- "TCP Ports" on page 31
- "Discover Resources on a Windows XP Machine" on page 32
- "Limitations" on page 32

Discovery Results Do Not Appear in the Topology Map

Problem. Data that should have been discovered during the Discovery process does not appear in the topology map.

Verification. The CMDB cannot retrieve the data or build the query results. Check the Statistics Results pane. If the CIs were not created, the problem is occurring during the Discovery process.

Solution. Check the error messages in the **probeMgr-services.log** file located in **C:\hp\UCMDB\DataFlowProbe\runtime\logs**.

Networks and IPs

Problem. Not all networks or IPs have been discovered.

Indication. Not all the networks or IPs appear in the topology map results.

Verification. The IP address range in the Data Flow Probe Setup window does not encompass the scope of the networks or IPs that should have been discovered.

Solution. Change the scope of the Discovery range:

- 1** Select **Data Flow Management > Data Flow Probe Setup**.
- 2** Select the Probe and the range.
- 3** Change the IP address range in the Ranges box as required.

TCP Ports

Problem. Not all TCP ports have been discovered.

Indication. Not all TCP ports appear in the topology map results.

Verification. Open the `portNumberToPortName.xml` file (**Data Flow Management > Adapter Management > Network > Configuration Files > portNumberToPortName.xml**), and search for the missing TCP ports.

Solution. Add the port numbers that should be discovered to the `portNumberToPortName.xml` file.

Discover Resources on a Windows XP Machine

Problem. Failure to discover resources on a machine running on the Windows platform.

- ▶ **Solution 1.** **Start > Settings > Control Panel > System.** In the Remote tab, verify that the following check box is selected: **Allow users to connect remotely to this computer.**
- ▶ **Solution 2.** (For Windows XP) In Windows Explorer, select **Tools > Folder Options.** In the View tab, clear the **Use simple file sharing (Recommended)** check box.

Limitations

- ▶ When Discovery is installed on a non-English operating system, job and module names are still limited to English characters.
- ▶ Each Content Pack installation overrides all out-of-the-box resources with the contents of that Content Pack. This means that any changes you made to these resources are lost. This applies to the following resources: Queries, Views, Enrichments, Reports, Discovery Jython scripts, Discovery adapters, Discovery jobs, Discovery resources, Discovery configuration files, Discovery modules, CI Types, and Relationships. (Attributes added to CI Types and Relationships are not overridden).

In general, you should refrain from making changes to out-of-the-box resources. If you must do so, be sure to track your changes so that they can be re-applied after you install a Content Pack. Important general fixes (not specific to your environment) should be sent to CSO so that they can be analyzed and included as part of one of the next Content Packs.

Part II

Data Flow Management Setup

2

Data Flow Probe Setup

This chapter includes:

Concepts

- ▶ Job Execution Policies on page 36
- ▶ Data Validation on the Data Flow Probe on page 38
- ▶ Filtering Results on page 39

Tasks

- ▶ Get Started With the Data Flow Probe on page 40
- ▶ Add a Data Flow Probe on page 42
- ▶ Delete Unsent Probe Results on page 43

Reference

- ▶ Data Flow Probe Setup User Interface on page 44
- ▶ Domain Credential References on page 59
- ▶ Data Flow Probe Log Files on page 83
- ▶ The DiscoveryProbe.properties File on page 87

Troubleshooting and Limitations on page 88

Concepts






Job Execution Policies

You can define periods of time when a Probe must not run. You can choose to disable specific jobs running on any Probe or all jobs running on a specific Probe. You can also exclude jobs from a job execution policy so that they continue running as usual.


For details on defining a job execution policy, see "Add/Edit Policy Dialog Box" on page 47.

Example of Policy Ordering


Say there are two policies, **Total TCP Blackout** and **Always** (the out-of-the-box policy). **Total TCP Blackout** does not allow any TCP discovery jobs to run. The policies appear in the list as follows:

Job Execution Policy		
    		
Time	Probes	Jobs
Total TCP Blackout	All	[IP Traffic by Network Data, Col
Always	All	All

A job (Class C IPs by ICMP) starts running. It checks the policies in the policy list from top to bottom. It starts by checking **Total TCP Blackout**. The job does not appear in this policy, so it continues down the list and checks **Always**. The job does appear here (**Allow All** is selected in the Edit Policy dialog box) so the job runs:

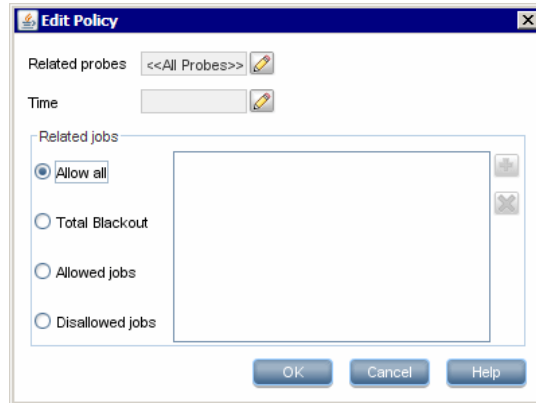

The next job (Software Element CF by Shell) starts running. It checks the policies in the policy list from top to bottom. It starts by checking **Total TCP Blackout**. The job appears in this policy (**Dismissed Jobs** is selected in the Edit Policy dialog box), so the job does not run:

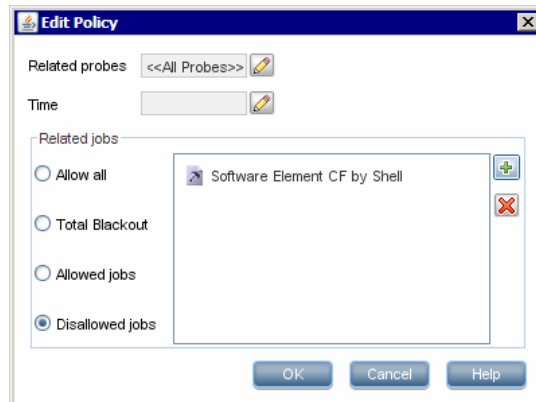

Caution: If a job is not connected to any policy, it does not run. To run these jobs, set the last policy in the list to **Allow All**.

Running Jobs When a Job Execution Policy Is Running

If a policy begins to operate while a Probe is executing a job, the job pauses. When the policy finishes, the job continues to run from where it ceased. For example, say a job contains 10,000 Trigger CIs. The job finishes working on 7,000 of them and then the policy starts to operate. When the job continues (after the policy finishes), it works on the remaining 3,000 Trigger CIs—the job does not start running from the beginning.

Data Validation on the Data Flow Probe

The CIT model resides on the Data Flow Probe (as well as in the CMDB). This enables data validation to take place on the Probe when receiving data from services. Problems are generated for a specific Trigger CI and displayed to the user.

The following validation takes place on the Probe:

- ▶ The CIT of the CI is compared to that in the CIT model.
- ▶ The CI is checked to verify that all key attributes are present (on condition that the `CmdbObjectId` attribute is not defined).
- ▶ The CI's attributes are checked to verify that they are all defined in the CIT.
- ▶ The CI's attributes of type `STRING` are checked to verify that they do not exceed the size limit. If an attribute is longer than the limit, DFM checks whether an `AUTO_TRUNCATE` qualifier is defined for the attribute. If there is a qualifier, the value is truncated and a warning message is written to the Probe `error.log` file.

All invalid attributes raise an error, which reports on a specific CI. When the Probe finds invalid data that is related to the CITs, all data that the Probe has collected on that CI is dropped by the Probe and is not sent to the server.

For details on attributes, see "CI Type Attributes" in the *HP Universal CMDB Modeling Guide*.

Filtering Results

You can filter results sent by the Probe to the HP Universal CMDB server. You would probably need to filter irrelevant data regularly during production runs and specifically when you are testing a limited environment.

There are two levels of filtering: adapter filtering and global filtering:

- ▶ **Adapter filtering.** The Data Flow Probe filters the results for a specific adapter and sends to the CMDB only those filtered CIs. You define an adapter filter in the Results Management Pane in the Adapter Management tab. For details, see "Adapter Management Tab" on page 127.
- ▶ **Global filtering.** DFM filters the results of all jobs running on a Probe. You define global filters in the `globalFiltering.xml` file. For details, see "Configure a Filter" on page 117.

The order of filtering is as follows: during a run, the Data Flow Probe first searches for an adapter filter and applies the filter to the results of the run. If there are no adapter filters, DFM searches for a global filter and applies that filter to the results. If DFM finds no filters, all results are sent to the server.

Tasks

Get Started With the Data Flow Probe

This section explains how to install and launch the Data Flow Probe running on a Windows platform. (The Data Flow Probe that runs on a Linux platform is intended only for integrations.)

Note: The managed environment is defined by the IP ranges of the domains. However, with some discovery adapters it is possible to override this behavior and discover CIs that are out of a Probe's range.

This task includes the following steps:

- "Install the Probe" on page 40
- "Launch HP Universal CMDB" on page 40
- "Launch the Probe from the Start Menu" on page 41
- "Launch the Probe in a Console" on page 41
- "Run Discovery" on page 41
- "Stop the Probe" on page 41

Install the Probe

For details, see "Data Flow Probe Installation on the Windows Platform" or "Data Flow Probe Installation on the Linux Platform" in the *HP Universal CMDB Deployment Guide* PDF.

Launch HP Universal CMDB

For details, see "Accessing HP Universal CMDB" in the *HP Universal CMDB Deployment Guide* PDF.

Launch the Probe from the Start Menu

On the machine on which the Probe is installed, select **Start > Programs > HP UCMDB > Start Data Flow Probe**. The Probe is started as a service.

To verify that the Probe has been launched successfully, in HP Universal CMDB select **> Data Flow Management > Data Flow Probe Setup**. Select the Probe and, in the Details pane, verify that the status is **connected**.

Launch the Probe in a Console

You can configure the Probe so that it opens in a console. In this case, the command prompt window is displayed. Execute the following script:

```
C:\hp\UCMDB\DataFlowProbe\bin\gateway.bat console.
```

Note: The user running the Probe service must be a member of the Administrators group.

Run Discovery

For details, see "Discovery Control Panel Overview" on page 232.

Stop the Probe

- To stop the Probe when it is running in a command prompt window (the console), press CTRL+C, then **y**.
- To stop the Probe when it is running as a service, select **Start > Programs > HP UCMDB > Stop Data Flow Probe**.

Add a Data Flow Probe

This task describes how to add a Probe to UCMDB.

This task includes the following steps:

- "Prerequisites" on page 42
- "Add a Domain to UCMDB" on page 42
- "Add a Probe to the New Domain" on page 42
- "Add Further Probes to the Domain – Optional" on page 43
- "Define Credentials" on page 43

1 Prerequisites

Verify that the Probe is installed and make a note of its IP address.

2 Add a Domain to UCMDB

In this step, you create the domain for the new Probe. When you start the Probe, it connects to UCMDB automatically. To verify, select **Data Flow Management > Data Flow Probe Setup**. Select the Probe and, in the Details pane, verify that the status is **connected**.

To define Probe ranges before the Probe has connected for the first time, you must define them manually. For details, see "Add/Edit IP Range Dialog Box" on page 45.

- a** Access the Probe configuration window: **Data Flow Management > Data Flow Probe Setup**.
- b** Select **Domains and Probes** and click the **Add Domain or Probe** button to open the **Add New Domain** dialog box. For details, see "Add New Domain Dialog Box" on page 48.

3 Add a Probe to the New Domain

In this step, you define the Probe and its range.

- a** Double-click the new domain and select the **Probes** folder.
- b** Click the **Add Domain or Probe** button to open the Add New Probe dialog box. For details, see "Add New Probe Dialog Box" on page 49.

- c Select the new Probe and define its IP range. For details, see "Add/Edit IP Range Dialog Box" on page 45.

4 Add Further Probes to the Domain – Optional

You can add more Probes to this domain. For details, see the previous steps.

5 Define Credentials

You configure credentials depending on what must be discovered and which protocols are supported on your site's network.

For details, see "Details Pane" on page 52. For a list of protocols, see "Domain Credential References" on page 59.

Delete Unsent Probe Results

This task describes how to empty the Probe queue that contains results that have not yet been transmitted to the UCMDB Server.

- 1 Access the Data Flow Probe JMX console: Launch a Web browser and enter the following address: **http://<Probe Gateway machine name or IP address>:1977**. If you are running the Data Flow Probe locally, enter **http://localhost:1977**.

You may have to log in with a user name and password.

Note: If you have not created a user, use the default user name **admin** and the password **admin** to log in.

- 2 Locate the **Probe_<Probe Name> > type=MainProbe** service and click the link to open the JMX MBEAN View page.
- 3 Invoke the operation by clicking the **dropUnsentResults** button.

Reference

Data Flow Probe Setup User Interface

This section describes:




- ▶ Add/Edit IP Range Dialog Box on page 45
- ▶ Add/Edit Policy Dialog Box on page 47
- ▶ Add New Domain Dialog Box on page 48
- ▶ Add New Probe Dialog Box on page 49
- ▶ Choose Discovery Jobs Dialog Box on page 50
- ▶ Data Flow Probe Setup Window on page 50
- ▶ Details Tab on page 51
- ▶ Domains and Probes Pane on page 55
- ▶ Edit Related Probes Dialog Box on page 56
- ▶ Edit Timetable Dialog Box on page 56
- ▶ Protocol Parameter Dialog Box on page 57
- ▶ Scope Definition Dialog Box on page 57
- ▶ Selecting Probes on page 58

Add/Edit IP Range Dialog Box

Enables you to set the network range for discovery. The results are retrieved from the addresses in the range you define. You can also define IP addresses that must be excluded from a range.

To access	Select the required Probe in the Domains and Probes pane and then click the Add IP range button in the Ranges pane (Data Flow Management > Data Flow Probe Setup > Details pane).
Important information	If you define a range that is out of the scope of the network on which the Probe is installed, a warning message informs you that the Probe is not included in the range. Answer Yes to save the current range without including the Probe in the range. Answer No to continue editing without saving the current range.
Relevant tasks	"Discovery Control Panel – Advanced Mode Workflow" on page 239

User interface elements are described below:

GUI Element (A–Z)	Description
	To exclude an IP range from discovery, click the Add IP range button.
	To delete the excluded part of an IP range, select the excluded range and click the Remove IP range button.
	To edit the excluded part of an IP range, click the Edit IP range button. For details, see Exclude Ranges.

GUI Element (A-Z)	Description
<p>Exclude Ranges</p>	<p>Click the Add IP range button to open the Add IP Range dialog box (to add a new IP range) or the Edit IP range button to open the Edit IP Range Dialog box (to change an existing IP range), and then click Advanced to exclude part of a range. In the Exclude IP Range dialog box, enter the range to exclude.</p> <p>Note:</p> <ul style="list-style-type: none"> ▶ You must enter a range (in the Add/Edit IP Range dialog box) before you can enter the excluded range. ▶ The rules for entering an excluded range are the same as for entering a range. For details, see Range. ▶ Use this feature to divide a network range into several subranges. For example, say a range is 10.0.64.0 – 10.0.64.255. You define three excluded ranges: 10.0.64.45 – 10.0.64.50 10.0.64.65 – 10.0.64.70 10.0.64.89 – 10.0.64.95 Therefore, the ranges to be discovered are: 10.0.64.0 – 10.0.64.44 10.0.64.51 – 10.0.64.64 10.0.64.71 – 10.0.64.88 10.0.64.96 – 10.0.64.255



GUI Element (A–Z)	Description
Range	<p>The rules for defining an IP address range are as follows:</p> <ul style="list-style-type: none"> ▶ The IP address range must have the following format: start_ip_address – end_ip_address For example: 10.0.64.0 - 10.0.64.57 ▶ The range can include an asterisk (*), representing any number in the range of 0-255. ▶ If you use an asterisk, you do not need to enter a second IP address. For example, you can enter the range pattern 10.0.48.* to cover the range from 10.0.48.0 to 10.0.48.255. ▶ Use an asterisk in the lower bound IP address of the IP range pattern only. (If you use an asterisk in the lower bound IP address and also enter an upper bound IP address, the upper bound IP address is ignored.) ▶ You can use more than one asterisk (*) in an IP address as long as they are used consecutively. The asterisks cannot be situated between two numbers in the IP address, nor can they be substituted for the first digit in the number. For example, you can enter 10.0.*.* but not 10.*.64.*. ▶ Two Probes in the same domain cannot have the same IP address in their range.

Add/Edit Policy Dialog Box

Enables you to add a job execution policy, to disable jobs from running at specific times.

To access	Data Flow Management > Data Flow Probe Setup > Domains and Probes > Details pane > Job Execution Policy section. Select an existing policy and click Edit Policy , or click the Add Policy button.
See also	<p>"Job Execution Policies" on page 36</p> <p>"Job Execution Policy Pane" on page 53</p> <p>"Domain Credential References" on page 59</p>

User interface elements are described below:

GUI Element (A–Z)	Description
Related jobs	<ul style="list-style-type: none"> ➤ Allow all. Run the job execution policy on all jobs. ➤ Total blackout. The policy does not run on any jobs. ➤ Allowed jobs. Choose jobs to run even during the configured blackout time. ➤ Disallowed jobs. Choose jobs that do not run during the configured blackout time. <p>For allowed and disallowed jobs, click the Add job or Remove job button to choose specific jobs to be included in, or excluded from, the policy. If you click the Add job button, the Choose Discovery Jobs dialog box opens.</p>
Related Probes 	The Probes on which to run the policy. Click the button to open the Edit Related Probes dialog box to define which Probes are included in the policy.
Time 	The date and time during which the policy is active. Click the button to open the Edit Timetable dialog box.

Add New Domain Dialog Box

Enables you to add a domain.

To access	Click the Add Domain or Probe button in the Domains and Probes pane.
Important information	In a version 8.01 or later environment that has been upgraded from version 6.x, to enable data to be modelled similarly as in the previous version, you must define the Probes as belonging to the External domain and not to the Customer domain.

User interface elements are described below:

GUI Element (A–Z)	Description
Description	Enter a description to appear in the Details pane of the Data Flow Probe Setup window.
Domain Type	<ul style="list-style-type: none"> ▶ Customer. A private domain used for your site. You can define several domains and each domain can include multiple Probes. Each Probe can include IP ranges but the customer domain itself has no range definition. ▶ External. Internet/public domain. A domain that is defined with a range. The external domain can contain only one Probe whose name equals the domain name. However, you can define several external domains in your system.
Name	Enter a unique name for the domain.


Add New Probe Dialog Box

Enables you to add a Probe.

To access	Click the Add Domain or Probe button in the Domains and Probes pane.
Important information	<ul style="list-style-type: none"> ▶ To add a Probe to an existing domain, select Probes in the Domains and Probes pane and click the Add Domain or Probe button. ▶ To add a Probe to a new domain, create a domain, then add the Probe to the domain. ▶ Two Probes in the same domain cannot have the same IP address in their range. ▶ When a Probe is activated, it is added automatically and its status changes to connected. For details, see "Launch the Probe from the Start Menu" on page 41 or "Launch the Probe in a Console" on page 41.

Choose Discovery Jobs Dialog Box

Enables you to choose the jobs that are to be added to, or excluded from, the job execution policy.

To access	Select Allowed Jobs or Disallowed jobs in the Edit Policy dialog box and click the button  .
------------------	---

User interface elements are described below:

GUI Element (A–Z)	Description
<Installed packages>	Locate the job to be included in, or excluded from, the policy. (Use the SHIFT or CTRL key to select several packages.)

Data Flow Probe Setup Window

Enables you to define a new domain or to define a new Probe for an existing domain. Also enables you to define the connection data for each protocol.





To access	Data Flow Management > Data Flow Probe Setup
Important information	<ul style="list-style-type: none"> ▶ For details on the Domains and Probes pane, see "Domains and Probes Pane" on page 55. ▶ For details on the Details pane, see "Details Tab" on page 51.
See also	"Domain Credential References" on page 59

Details Tab

Enables you to view the Probes running under all domains and to add an execution policy to jobs (that is, to schedule time periods when jobs should not run).





To access	Click an object in the Domains and Probes pane.
Important information	Depending on what you select in the Domains and Probes pane, different information is displayed in the Details tab. For details, see "Displayed Information" on page 51 in the next section.

Displayed Information

If You Select...	The Information Displayed Is...
 <p>The screenshot shows the 'Domains and Probes' pane with a search icon and a refresh icon. The tree view shows 'DefaultDomain' selected.</p>	<p>Domains and Probes. You can view details on all Probes and you can define and edit job execution policies. For details, see "Details Pane" on page 53 and "Job Execution Policy Pane" on page 53.</p>
 <p>The screenshot shows the 'Domains and Probes' pane with a search icon and a refresh icon. The tree view shows 'DefaultDomain' expanded, with 'Credentials' selected.</p>	<p>A specific domain. You can add a description and view a list of Probes running in that domain. For details, see "Details Pane" on page 53 and "Description Pane" on page 52.</p>
 <p>The screenshot shows the 'Domains and Probes' pane with a search icon and a refresh icon. The tree view shows 'DefaultDomain' expanded, with 'Credentials' expanded, and 'JBOSS Protocol' selected.</p>	<p>A specific protocol. You can add protocol parameters and you can view details on the protocol, including user credentials. For details, see "Details Pane" on page 52 and "Domain Credential References" on page 59.</p>
 <p>The screenshot shows the 'Domains and Probes' pane with a search icon and a refresh icon. The tree view shows 'Probes' expanded, with 'LABMAM1' selected.</p>	<p>A specific Probe. You can view details on the Probe, including range information. You can also add ranges to, or exclude ranges from, the Probe, and you can remove a Probe from UCMDB. For details, see "Ranges Pane" on page 54, "Details Pane" on page 53, and "Data Flow Probes Pane" on page 52.</p>

Details Pane

This pane is displayed if you select a specific protocol. User interface elements are described below:

GUI Element (A-Z)	Description
	Add new connection details for selected protocol type.
	Remove a protocol.
	Click to edit a protocol. For details, see "Protocol Parameter Dialog Box" on page 57.
	Click a button to move a protocol up or down to set the order in which credential sets are attempted. DFM executes all the protocols in the list with the first protocol taking priority.
Protocol	Click to view details on the protocol, including user credentials.

Description Pane

User interface elements are described below:

GUI Element (A-Z)	Description
Description	The description that was entered during domain creation.
Domain Type	For details, see Domain Type in "Add New Domain Dialog Box" on page 48.

Data Flow Probes Pane

Enables you to view a list of all Probes connected to the server.

To access	Click Domains and Probes or a domain.
------------------	--

User interface elements are described below:

GUI Element (A–Z)	Description
IP	The IP range defined during Probe creation.
Last Access Time	The last time that the Probe requested tasks from the server.
Name	The Probe name as it appears in DFM.
Status	<ul style="list-style-type: none"> ▶ Connected. The Probe has successfully connected to the server (the Probe connects every few seconds). ▶ Disconnected. The Probe is not connected to the server.

Details Pane

User interface elements are described below:





GUI Element (A–Z)	Description
Last time probe accessed	The last time that the Probe was accessed on the server machine.
Probe IPs	The IP of the Probe machine.
Status	<ul style="list-style-type: none"> ▶ Connected. The Probe has successfully connected to the server (the Probe connects every few seconds). ▶ Disconnected. The Probe is not connected to the server.

Job Execution Policy Pane

Enables you to configure the periods of time when jobs should not run.

To access	Data Flow Management > Data Flow Probe Setup. Select Domains and Probes.
Important information	Jobs that have a listening functionality (that is, they do not perform discovery, for example, they listen to SNMP traps) are not included in a policy.
See also	"Job Execution Policies" on page 36 "Domain Credential References" on page 59

User interface elements are described below:




GUI Element (A–Z)	Description
	Move the policy up or down. DFM executes all the policies in the list with the first policy taking priority. If a job is included in two policies, DFM executes the first policy only for that job.
	Add a policy.
	Remove a policy.
	Edit a policy. Click to open the Edit Policy dialog box.
Jobs	The jobs that are affected by the policy.
Probes	The Probes that are affected by the policy.
Time	The schedule of the policy.



Ranges Pane

Enables you to add and remove ranges that a Probe should work with.

To access	Click a Probe in the Domains and Probes pane.
Important Information	For details on searching for a specific range, locate the Find Probe Range by IP button in "Domains and Probes Pane" on page 55.


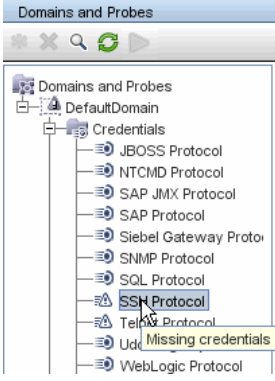
User interface elements are described below:

GUI Element (A–Z)	Description
	Click to open the Add IP Range dialog box.
	Click a range and click the button to remove a range from the list.
	Click to open the Edit IP Range dialog box.






GUI Element (A–Z)	Description
	Export a permission object in Excel, PDF, RTE, CSV, or XML format. For details, see "Browse Views Mode" in the <i>HP Universal CMDB Modeling Guide</i> .
	Click to import ranges from a CSV file. Before using this feature, verify that the imported file is a valid CSV file, and that the ranges in the file do not conflict with existing ranges (that is, there are no duplicate or overriding ranges).
Excluded	Displays the IP addresses that have been excluded from the range that the Probe uses to discover CIs. For details, see "Add/Edit IP Range Dialog Box" on page 45.
Range	The network IP addresses that the Probe uses to discover CIs. For details, see "Add/Edit IP Range Dialog Box" on page 45.

Domains and Probes Pane

Enables you to view, define, or edit a domain, a Probe, or a Probe's credentials.


To access	Data Flow Management > Data Flow Probe Setup
Important Information	<p>A missing credential is represented by an icon , as shown in the following image:</p>  <p>The screenshot shows a tree view titled "Domains and Probes". Under "DefaultDomain", there is a "Credentials" folder containing several protocols: JBOSS Protocol, NTCMD Protocol, SAP JMX Protocol, SAP Protocol, Siebel Gateway Proto, SNMP Protocol, SQL Protocol, SSN Protocol (highlighted with a red box), Telnet Protocol, and Udc. A "Missing credentials" label is shown next to the Telnet Protocol icon, which is a red triangle with a white exclamation mark.</p>
See also	"Job Execution Policies" on page 36

User interface elements are described below:

GUI Element (A–Z)	Description
	Adds a domain or Probe, depending on what is selected. For details, see "Add New Domain Dialog Box" on page 48 or "Add New Probe Dialog Box" on page 49.
	Deletes a domain or Probe, depending on what is selected.
	Find Probe Range by IP button. If a Probe has many ranges defined for it, you can locate a specific range: select the Probe and click the button. In the Find Probe Range dialog box, enter the IP address and click the Find button. DFM highlights the range in the Ranges pane.
	Updates all domain and Probe information.
	Suspend Probe. Click to disconnect the Probe from the UCMDB Server. The button changes to a Play button. To reconnect the Probe, click the button again.


Edit Related Probes Dialog Box

Enables you to select specific Probes.


To access	 Click the Related Probes button in the Edit Policy dialog box.
See also	"Job Execution Policies" on page 36

Edit Timetable Dialog Box

Enables you to set the times when a Probe must run a job execution policy.

To access	 Click the Edit button in the Edit Policy dialog box.
See also	"Add/Edit Policy Dialog Box" on page 47

User interface elements are described below:

GUI Element (A–Z)	Description									
Description	<p>Add a description of the specific policy. This field is mandatory.</p> <p>Tip: The text you enter here appears in the Time box in the Job Execution Policy pane, so it is recommended that the description be informative:</p>  <table border="1" data-bbox="592 482 1178 621"> <thead> <tr> <th>Time</th> <th>Probes</th> <th>Jobs</th> </tr> </thead> <tbody> <tr> <td>Labor Day weekend</td> <td>All</td> <td>None (total blackout)</td> </tr> <tr> <td>Always</td> <td>All</td> <td>All</td> </tr> </tbody> </table>	Time	Probes	Jobs	Labor Day weekend	All	None (total blackout)	Always	All	All
Time	Probes	Jobs								
Labor Day weekend	All	None (total blackout)								
Always	All	All								
Time Definition	<p>Click a cell for a day and time to be included in the policy. To add more than one time unit, drag the pointer over the cells.</p> <p>Note: To clear a time unit, click the cell a second time.</p>									

Protocol Parameter Dialog Box

Displays the attributes that can be defined for a protocol.

To access	Data Flow Management > Data Flow Probe Setup > Domains and Probes > Domain > Credentials , select a protocol and click the Add or Edit button.
Important Information	For the description of each protocol, see "Supported Protocols" on page 62.

Scope Definition Dialog Box

Enables you to set the range that a protocol must discover.



To access	Click the Edit button in the Protocol Parameters dialog box.
------------------	---

User interface elements are described below:

GUI Element (A–Z)	Description
Selected Probes	To select specific Probes whose IP range must be changed, click Edit . For details, see "Choose Probe Dialog Box" on page 256.
Selected Ranges	<ul style="list-style-type: none"> ▶ All. The protocol runs discovery on all ranges for the domain. ▶ Selected Range. For the procedure to select a specific range on which the protocol runs discovery or to define an excluded range, see "Add/Edit IP Range Dialog Box" on page 45.

Selecting Probes

The Choose Probe to Filter, Edit Probe Limitations for Query Output, and Edit Related Probes dialog boxes include the following elements:

GUI Element (A–Z)	Description
	Add Selected Probe . Click to add a Probe to the Selected Probes column.
	Remove Selected Probe . Click to remove a Probe from the Selected Probes column.
All Data Flow Probes	<ul style="list-style-type: none"> ▶ Select to add all Probes in the Non-selected Probes list. ▶ Clear to add a specific Probe from the Non-selected Probes list.
Non-selected Probes	Probes that are not included in the policy/filter/limitations.
Selected Probes	Probes that are included in the policy/filter/limitations.

Domain Credential References

This section explains protocol credentials. You can edit credential attributes. For details, see "Protocol Parameter Dialog Box" on page 57.




Note: The following information can change from version to version: Changes in content implementation can cause protocol attributes to be updated.


This section includes the following topics:

- "Domains and Probes Pane GUI Elements" on page 59
- "Supported Agents" on page 61
- "Supported Protocols" on page 62

Domains and Probes Pane GUI Elements

When a protocol is selected in the Domains and Probes Pane, the following elements are included (unlabeled GUI elements are shown in angle brackets>):

GUI Element (A-Z)	Description
	Click to add new connection details, to open the Protocol Parameter dialog box.
	Select a protocol, select connection details, and click the button to remove the connection details. Answer OK to the message.
	Select a protocol and click to open the Edit Protocol Parameter dialog box.

GUI Element (A-Z)	Description
	<p>Select a protocol and click an arrow to move the protocol instance up or down.</p> <p>The order of the policies in the list defines which policy is checked first: a job starts running and checks the policy list from top to bottom. If the job name exists in a policy, the job runs. For details on adding jobs to a protocol, see "Add/Edit Policy Dialog Box" on page 47. For details on job execution policies, see "Example of Policy Ordering" on page 36.</p>
<right-click menu>	<p>Choose from the following options:</p> <ul style="list-style-type: none"> ▶ Edit. Choose this option to enter protocol parameters, such as user name and password, that enable DFM to connect to an application on a remote machine. ▶ Edit using previous interface. Choose this option if: <ul style="list-style-type: none"> ▶ In a previous version of HP Universal CMDB, you added parameters to this protocol that do not exist in this version. ▶ Values in this version cannot be deleted. For example, in this version you cannot configure SQL Protocol credentials with an empty port number. Select this option to open the previous Edit Protocol Parameter dialog box and delete the port number. ▶ Check credentials. In the box that opens, enter the IP address of the remote machine on which the protocol must run. The Probe attempts to connect to this IP and returns an answer as to whether the connection succeeded or not.
<right-click a title>	<p>Choose from the following options:</p> <ul style="list-style-type: none"> ▶ Hide Column. Displayed when a column is shown. ▶ Show All Columns. Displayed when a column is hidden. ▶ Customize. Select to change the display order of the columns. ▶ Auto-resize Column. Select to change the column width to fit the contents.

All protocol credentials include the following parameters:

Parameter	Description
Index	Indicates the order in which protocol instances are used to make a connection attempt. The lower the index, the higher the priority. Default: 9999 . If you do not change the default, this protocol instance is used last.
Scope	To change the range that a protocol must discover or to select a Probe, click Edit . For details, see "Scope Definition Dialog Box" on page 57. Default: ALL .
User Label	Enter a label to help you identify a specific protocol credential, when you use it later. Enter a maximum of 50 characters.

Supported Agents

- **SNMP Agent.** Provides information about the operating systems, device types, installed software, and other system resources information. SNMP agents can usually be extended to support new MIBs, exposing more data for managerial purposes.
- **WMI Agent.** Microsoft's remote management agent, which is usually available for access by a remote administrator. The WMI agent is also extensible by adding WMI providers to the generic agent.
- **Telnet/SSH Agent (or daemon).** Used mostly on UNIX systems to connect remotely to a machine and to launch various commands to obtain data.
- **xCmd.** A remote administration technology similar in functionality to Telnet/SSH that enables launching any console command over Windows machines. xCmd relies on Administrative Shares & Remote Service Administration APIs to function correctly.

The **xCmd.exe** file is signed by an HP digital certificate. To validate that **xCmd.exe** is provided by HP, right-click the **xCmd.exe** file (or **xCmdSvc.exe** on a remote machine), select **Properties** and view the digital signatures.

- **Application specific.** This agent depends on the remote application to function as an agent and respond appropriately to the Probe's remote queries, for example, database discoveries, Web server discoveries, and SAP and Siebel discoveries.

Supported Protocols

This section includes the following topics:

- "Generic Protocol" on page 63
- "HP SIM Protocol" on page 63
- "JBoss Protocol" on page 64
- "LDAP Protocol" on page 64
- "NetApp Protocol" on page 65
- "NNM Protocol" on page 66
- "NTCMD Protocol" on page 67
- "Remedy Protocol" on page 67
- "SANscreen Protocol" on page 67
- "SAP JMX Protocol" on page 68
- "SAP Protocol" on page 68
- "Siebel Gateway Protocol" on page 69
- "SNMP Protocol" on page 70
- "SQL Protocol" on page 72
- "SSH Protocol" on page 73
- "Telnet Protocol" on page 76
- "UDDI Registry Protocol" on page 78
- "VMware Infrastructure Management (VIM) Protocol" on page 79
- "WebLogic Protocol" on page 80
- "WebSphere Protocol" on page 81
- "WMI Protocol" on page 82

Tip: If you use the SSH or Telnet credentials for discovery, we recommend that you add the following folders to the system path:

/sbin

/usr/sbin

/usr/local/sbin

Generic Protocol

This protocol is intended for integrations that do not need a specific protocol. It is recommended to use this protocol for all out-of-the-box integrations, as they require a user name and password only.

Parameter	Description
Description	Description of the credentials.
User Name	The name of the user needed for authentication.
User Password	The password of the user needed for authentication.

HP SIM Protocol

Parameter	Description
Port Number	The port at which the SIM MXPartner WebService API listens for SOAP requests. The defaults are 280 for HTTP and 50001 for HTTPS.
SIM Database Instance	<ul style="list-style-type: none"> ▶ Microsoft SQL Server: Enter the instance name only for non-default instances of Microsoft SQL Server. ▶ Oracle: Enter the SID.
SIM Database Name	(Microsoft SQL Server only) Enter the name of the database.
SIM Database Password	The password of the database user (Microsoft SQL Server) or schema name (Oracle) for the SIM database.

Parameter	Description
SIM Database Port	The listener port for the database.
SIM Database Type	Choose between: <ul style="list-style-type: none"> ➤ MSSQL ➤ MSSQL_NTLM ➤ Oracle
SIM Database User Name	The database user (Microsoft SQL Server) or schema name (Oracle) with permissions to access the database.
SIM Webservice Protocol	Choose between HTTP or HTTPS .
User Name	The name of the user needed to connect to the application.
User Password	The password of the user needed to connect to the application.

JBoss Protocol

Parameter	Description
Port Number	The port number.
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the JBoss application server.
User Name	The name of the user needed to connect to the application.
Password	The password of the user needed to connect to the application.

LDAP Protocol

Parameter	Description
Port Number	The port number.
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the LDAP application server.
User Name	The name of the user needed to connect to the application.

Parameter	Description
Password	The password of the user needed to connect to the application.
Protocol	Choose which security model to use to access the service: LDAP . Discovery uses an unprotected connection. LDAPS . Discovery uses an SSL connection.
LDAP Authentication Method	Simple . The supported authentication method.
Trust Store File Path	The file containing trusted certificates. To import certificates into the Trust Store file: <ul style="list-style-type: none"> ▶ Create a new Trust Store or use the default Java Trust Store: <java-home>/lib/security/cacerts ▶ Enter the full path to the LDAP Trust Store file.
Trust Store Password	The LDAP Trust Store password used to access the Trust Store file. This password is set during the creation of a new Trust Store. If the password has not been changed from the default, use changeit to access the default Java Trust Store.

NetApp Protocol

Parameter	Description
Port Number	The port number. The default is 8088 .
User Name	The name of the user needed to connect to the application.
User Password	The password of the user needed to connect to the application.

 **NNM Protocol**

Parameter	Description
Connection Timeout	Time-out in milliseconds after which the Data Flow Probe stops trying to connect to the NNMi server.
NNM Password	The password for the specified NNMi Web service (for example, Openview).
NNM User name	The user name for connecting to the NNMi console. This user must have the NNMi Administrator or Web Service Client role.
NNM Webservice Port	<p>The port for connecting to the NNMi console. This field is pre-filled with the port that the jboss application server uses for communicating with the NNMi console, as specified in the following file:</p> <ul style="list-style-type: none"> ➤ Windows: %NnmDataDir%\shared\nnm\conf\nnm.ports.properties ➤ UNIX: \$NnmDataDir/shared/nnm/conf/nnm.ports.properties <p>For non-SSL connections, use the value of <code>jboss.http.port</code>, which is 80 or 8004 by default (depending on the presence of another Web server when NNMi was installed).</p> <p>For SSL connections, use the value of <code>jboss.https.port</code>, which is 443 by default.</p>
NNM Webservice Protocol	The protocol for the NNMi Web service (the default is http).
UMCBD Password	The password for the UCMDB Web service (the default is admin).
UCMDB Username	A valid UCMDB Web service account name with the UCMDB Administrator role (the default is admin).
UCMDB Webservice Port	<p>The port for connecting to the UCMDB Web service.</p> <p>If you are using the default UCMDB configuration, use port 8080 (for non-SSL connections to UCMDB).</p>
UCMDB Webservice Protocol	The protocol for the UCMDB Web service (the default is http).

NTCMD Protocol

Parameter	Description
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the NTCMD server.
User Name	The name of the user needed to connect to the host as administrator.
Password	The password of the user needed to connect to the host as administrator.
Windows Domain	The Windows domain in which the credentials are defined. If this field is left empty, the NTCMD protocol assumes the user is defined locally on the host.

Remedy Protocol

Field	Description
Connection Timeout	Time-out in milliseconds after which the Data Flow Probe stops trying to connect to the Remedy application server.
Remedy Password	Enter the password of the user account that enables access to Remedy/Atrium through the Java API.
Remedy Username	Enter the user name that enables access to Remedy/Atrium through the Java API.

SANscreen Protocol

Parameter	Description
Port Number	The port number. The default is 80 .
User Name	The name of the user needed to connect to the application.
User Password	The password of the user needed to connect to the application.
Webservice Protocol	Can be either http or https .

SAP JMX Protocol

Parameter	Description
Port Number	<p>The SAP JMX port number. The SAP JMX Port structure is usually 5<System Number>04. For example, if the system number is 00, the port is 50004.</p> <p>Leave this field empty to try to connect to the discovered SAP JMX port; SAP JMX port numbers are defined in the portNumberToPortName.xml configuration file.</p>
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the SAP JMX console.
User Name	The name of the user needed to connect to the application as administrator.
Password	The password of the user needed to connect to the application as administrator.

SAP Protocol

Parameter	Description	
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the SAP console.	
User Name	The name of the user needed to log in to the SAP system. The user should have the following permissions:	
	Authorization Object	Authorization
	S_RFC	For the S_RFC object, obtain privileges: RFC1, SALX, SBDC, SDIF, SDIFRUNTIME, SDTX, SLST, SRFC, STUB, STUD, SUTL, SXMB, SXMI, SYST, SYSU, SEU_COMPONENT.
	S_XML_PROD	EXTCOMPANY=MERCURY;EXTPRODUCT=DARM;INTERFACE=XAL
	S_TABU_DIS	DICBERCLS=SS; DICBERCLS=SC
Password	The password of the user needed to log in to the SAP system.	

Parameter	Description
SAP Client Number	It is recommended to use the default value (800).
SAP Instance Number	By default, set to 00 .
SAP Router String	A route string describes the connection required between two hosts using one or more SAProuter programs. Each of these SAProuter programs checks its Route Permission Table (http://help.sap.com/saphelp_nw04/helpdata/en/4f/992dfe446d11d189700000e8322d00/content.htm) to see whether the connection between its predecessor and successor is allowed. If it is, SAProuter sets it up.

Siebel Gateway Protocol

Parameter	Description
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the Siebel Gateway console
User Name	The name of the user needed to log on to the Siebel enterprise
Password	The password of the user needed to log on to the Siebel enterprise.

Parameter	Description
Siebel Site Name	The name of the Siebel Enterprise.
Path to Siebel Client	<p>The location on the Probe machine of the Siebel driver folder, where you copied <code>srvmgr</code>. For details, see "Prerequisites – Copy the driver Tool to the Data Flow Probe" in the <i>HP Universal CMDB Discovery and Integration Content Guide</i> PDF.</p> <p>Note:</p> <ul style="list-style-type: none"> ▶ If there are several protocol entries with different <code>srvmgr</code> versions, the entry with the newer version should appear before the entry with the older version. For example, to discover Siebel 7.5.3. and Siebel 7.7, define the protocol parameters for Siebel 7.7 and then the protocol parameters for Siebel 7.5.3. ▶ Siebel discovery. If the Data Flow Probe is installed on a 64-bit machine on a Windows platform, place the <code>ntdll.dll</code>, <code>MSVCR70.DLL</code>, and <code>msvcp70.dll</code> drivers together with the Siebel drivers in the Siebel driver folder on the Probe machine. These drivers usually exist on a 32-bit machine and can be copied to the 64-bit machine.

SNMP Protocol

Parameter	Description
Port Number	(For SNMP versions v1, v2, and v3) The port number on which the SNMP agent listens.
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the SNMP agent.
Retry Count	The number of times the Probe tries to connect to the SNMP agent. If the number is exceeded, the Probe stops attempting to make the connection.
Versions 1, 2	Community. Enter the authentication password you used when connecting to the SNMP service community (which you defined when configuring the SNMP service—for example, a community for read-only or read/write).

Parameter	Description
Version 3	<p>Authentication Method: Select one of the following options for securing the access to management information:</p> <ul style="list-style-type: none"> ▶ noAuthNoPriv. Using this option provides no security, confidentiality, or privacy at all. It can be useful for certain applications, such as development and debugging, to turn security off. This option requires only a user name for authentication (similar to requirements for v1 and v2). ▶ authNoPriv. The user logging on to the management application is authenticated by the SNMP v3 entity before the entity allows the user to access any of the values in the MIB objects on the agent. Using this option requires a user name, password, and the authentication algorithm (HMAC-MD5 or HMAC-SHA algorithms). ▶ authPriv. The user logging on to the management application is authenticated by the SNMP v3 entity before the entity allows the user to access any of the values in the MIB objects on the agent. In addition, all of the requests and responses from the management application to the SNMP v3 entity are encrypted, so that all the data is completely secure. This option requires a user name, password, and an authentication algorithm (either HMAC-MD5 or HMAC-SHA). <p>User Name: The name of the user authorized to log on to the management application.</p> <p>Password: The password used to log on to the management application.</p> <p>Authentication Algorithm: The MD5 and SHA algorithms are supported.</p> <p>Privacy Key: The secret key used to encrypt the scoped PDU portion in an SNMP v3 message.</p> <p>Privacy Algorithm: The DES algorithm is supported.</p>

Troubleshooting

Problem. Failure to collect information from SNMP devices.

- **Solution 1.** Verify that you can actually access information from your Network Management station by using a utility that can verify the connectivity with the SNMP agent. An example of such a utility is **Getif**.
- **Solution 2.** Verify that the connection data to the SNMP protocol has been defined correctly in the Add Protocol Parameter dialog box. For details, see "Protocol Parameter Dialog Box" on page 57.
- **Solution 3.** Verify that you have the necessary access rights to retrieve data from the MIB objects on the SNMP agent.

SQL Protocol

Parameter	Description
Database Type	The database type. Select the appropriate type from the box.
Port Number	<p>The port number on which the database server listens.</p> <ul style="list-style-type: none"> ➤ If you enter a port number, DFM tries to connect to a SQL database using this port number. ➤ For an Oracle database: If there are many Oracle databases in the environment and you do not want to have to create a new credential for each separate database port, you leave the Port Number field empty. When accessing an Oracle database, DFM refers to the <code>portNumberToPortName.xml</code> file and retrieves the correct port number for each specific Oracle database port. <p>Note: You can leave the port number empty on condition that:</p> <ul style="list-style-type: none"> ➤ All Oracle database instances are added to the <code>portNumberToPortName.xml</code> file. For details, see "The <code>portNumberToPortName.xml</code> File" on page 106. ➤ The same user name and password is needed to access all Oracle database instances.
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the database.

Parameter	Description
User Name	The name of the user needed to connect to the database.
Password	The password of the user needed to connect to the database.
Instance Name	The name of the database instance, either the Oracle system identification or the DB2 database name. When connecting to any database, you can leave this field empty. In this case, DFM takes the SID from the Triggered CI data value: #{DB.name:NA} . For details, see "Trigger CIs and Trigger Queries" on page 29.

SSH Protocol

For details on configuring F-Secure when discovering Windows machines on which the F-Secure application is running on an SSH server, see "Discover Windows Running F-Secure with the Host Connection by Shell Job" in the *HP Universal CMDB Discovery and Integration Content Guide* PDF.

Parameter	Description
Port Number	By default an SSH agent uses port 22. If you are using a different port for SSH, enter that port number.
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the remote machine. For the UNIX platform: If your server is slow, it is recommended to change Timeout to 40000.
Version	SSH2. Connect through SSH-2 only. SSH1. Connect through SSH-1 only. SSH2 or SSH1. Connect through SSH-2 and in case of error (if SSH-2 is not supported by the server), try to connect through SSH-1.

Parameter	Description
Shell Command Separator	<p>The character that separates different commands in a shell (to enable the execution of several commands in the same line).</p> <p>For example, in UNIX, the default shell command separator is a semicolon (;).</p> <p>In Windows, the shell command separator is an ampersand (&).</p>
Authentication Method	<p>Choose one of the following authentication options to access SSH:</p> <ul style="list-style-type: none"> ▶ password. Enter a user name and password. ▶ publickey. Enter the user name and path to the key file that authenticates the client. ▶ keyboard-interactive. Enter questions and answers. For details, see "Prompts and Responses" on page 75.
User Name	<p>The name of the user needed to connect to the host through the SSH network protocol.</p>
Password	<p>The password of the user needed to connect to the host.</p>
Key File Path	<p>(Enabled when the publickey authentication method is selected.) Location of the authentication key. (In certain environments, the full key path is required to connect to an SSH agent.)</p> <p>Note: Enter the full path to the key file on the Probe machine.</p>

Parameter	Description
Prompts and Responses	<p>(Enabled when the keyboard-interactive authentication method is selected.) A method whereby the server sends one or more prompts to enter information and the client displays them and sends back responses keyed-in by the user.</p> <p>The following is an example of prompts and expected responses:</p> <p>Prompt: Please enter your user name. Response: Shelly-Ann</p> <p>Prompt: What is your age? Response: 21</p> <p>Prompt: This computer is HP property. Press y to enter. Response: y</p> <p>To create these prompts and responses, enter the following strings in the fields, separated by commas:</p> <p>Prompts: user,age,enter Response: Shelly-Ann,21,y</p> <p>You can enter the full string as it appears in the SSH prompt, for example:</p> <div data-bbox="586 939 1076 1274" data-label="Form"> <p>The screenshot shows a dialog box with the following fields and values:</p> <ul style="list-style-type: none"> Authentication Method: keyboard-interactive User Name: (empty) Password: (empty) Key File Path: (empty) Prompts: Please enter your user name Responses: (empty) Sudo paths: (empty) Sudo commands: (empty) <p>Buttons at the bottom: OK, Cancel, Help.</p> </div> <p>or you can enter a key word, for example, user. DFM maps this word to the correct prompt.</p>

Parameter	Description
Sudo paths	The full paths to the <code>sudo</code> command. Paths are separated by commas.
Sudo commands	A list of commands that can be executed with the <code>sudo</code> command. Commands are separated by commas. For all commands to be executed with <code>sudo</code> , add an asterisk (*) to this field. This field accepts a <code>sudo</code> command that prompts for the user's password.

Troubleshooting

Problem. Failure to connect to the TTY (SSH/Telnet) agent.

Solution. To troubleshoot connectivity problems with the TTY (SSH/Telnet) agent, use a utility that can verify the connectivity with the TTY (SSH/Telnet) agent. An example of such a utility is the client tool PuTTY.

Telnet Protocol

Parameter	Description
Port Number	The port number. By default a Telnet agent uses port 23. If you are using a different port for Telnet in your environment, enter the required port number.
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the remote machine. For UNIX platforms: If your server is slow, it is recommended to change Connection Timeout to 40000.
Authentication Method	Choose one of the following authentication options to access Telnet: <ul style="list-style-type: none"> ➤ password. Enter a user name and password. ➤ keyboard-interactive. Enter questions and answers. For details, see "Prompts and Responses" on page 75.
User Name	The name of the user needed to connect to the host.
Password	The password of the user needed to connect to the host.

Parameter	Description
Prompts and Responses	<p>(Enabled when the keyboard-interactive authentication method is selected.) A method whereby the server sends one or more prompts to enter information and the client displays them and sends back responses keyed-in by the user.</p> <p>The following is an example of prompts and expected responses:</p> <p>Prompt: Please enter your user name. Response: Shelly-Ann</p> <p>Prompt: What is your age? Response: 21</p> <p>Prompt: This computer is HP property. Press y to enter. Response: y</p> <p>To create these prompts and responses, enter the following strings in the fields, separated by commas:</p> <p>Prompts: user,age,enter Response: Shelly-Ann,21,y</p> <p>You can enter the full string as it appears in the Telnet prompt, for example:</p> <div data-bbox="582 939 1072 1211" data-label="Form"> </div> <p>or you can enter a key word, for example, user. DFM maps this word to the correct prompt.</p>

Parameter	Description
Sudo paths	The full paths to the sudo command. Paths are separated by commas.
Sudo commands	A list of commands that can be executed with the sudo command. Commands are separated by commas. For all commands to be executed with sudo, add an asterisk (*) to this field.

Troubleshooting and Limitations

Problem. Failure to connect to the TTY (SSH/Telnet) agent.

Solution. To troubleshoot connectivity problems with the TTY (SSH/Telnet) agent, use a utility that can verify the connectivity with the TTY (SSH/Telnet) agent. An example of such a utility is the client tool PuTTY.

Limitation. The Telnet protocol does not support discovery of Windows Telnet servers.

UDDI Registry Protocol

Parameter	Description
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the UDDI Registry.
UDDI Registry URL	The URL where the UDDI Registry is located.

 **VMware Infrastructure Management (VIM) Protocol**

Parameter	Description
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to VMware Infrastructure.
Port Number	<p>DFM uses the number defined here when processing one of the Network – VMware jobs:</p> <p>If the port number is left empty, DFM performs a WMI query to extract the port number from the registry. DFM queries HKLM\SOFTWARE\VMware, Inc.\VMware VirtualCenter and searches for the HttpsProxyPort or HttpProxyPort attributes:</p> <ul style="list-style-type: none"> ▶ If the HttpsProxyPort attribute is found, DFM uses its value for the port and sets the prefix to HTTPS. ▶ If the HttpProxyPort attribute is found, DFM uses its value for the port and sets the prefix to HTTP.
Use SSL	<p>true: DFM uses a Secure Sockets Layer (SSL) protocol to access VMware Infrastructure, and the prefix is set to HTTPS.</p> <p>false: DFM uses the http protocol.</p>
User Name	The name of the user needed to connect to VMware Infrastructure.
Password	The password of the user needed to connect to VMware Infrastructure.

 **WebLogic Protocol**

Parameter	Description
Port Number	<p>If you enter a port number, DFM tries to connect to WebLogic using this port number.</p> <p>However, say you know that there are many WebLogic machines in the environment and do not want to have to create a new credential for each machine. You leave the Port Number field empty. When accessing a WebLogic machine, DFM refers to the WebLogic port (defined in <code>portNumberToPortName.xml</code>) already found on this machine (by TCP scanning, using the Network Connection – Active Discovery module).</p> <p>Note: You can leave the port number empty on condition that:</p> <ul style="list-style-type: none"> ▶ All WebLogic ports are added to the <code>portNumberToPortName.xml</code> file. For details, see "The <code>portNumberToPortName.xml</code> File" on page 106. ▶ The same user name and password is needed to access all WebLogic instances.
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the WebLogic application server.
User Name	The name of the user needed to connect to the application.
Password	The password of the user needed to connect to the application.
Protocol	An application-level protocol that determines whether DFM should connect to the server securely. Enter either http or https .
Trust Store File Path	<p>Enter the full path to the SSL trust store file.</p> <p>To use the trust store file, do one of the following:</p> <ul style="list-style-type: none"> ▶ Enter the name (including the extension) and place the file in the following resources folder: <code>C:\hp\UCMDB\DataFlowProbe\runtime\probeManager\discoveryResources\j2ee\weblogic\<WebLogic version></code>. ▶ Insert the trust store file full path.

Parameter	Description
Trust Store Password	The SSL trust store password.
Key Store File Path	<p>Enter the full path to the SSL keystore file.</p> <p>To use the keystore file, do one of the following:</p> <ul style="list-style-type: none"> ▶ Enter the name (including the extension) and place the file in the following resources folder: C:\hp\UCMDB\DataFlowProbe\runtime\probeManager\discoveryResources\j2ee\weblogic\ <WebLogic version>. ▶ Insert the keystore file full path.
Key Store Password	The password for the keystore file.

WebSphere Protocol

Parameter	Description
Port Number	<p>The protocol port number as provided by the WebSphere system administrator.</p> <p>You can also retrieve the protocol port number by connecting to the Administrative Console using the user name and password provided by the WebSphere system administrator.</p> <p>In your browser, enter the following URL: http://<host>:9060/admin, where:</p> <ul style="list-style-type: none"> ▶ <host> is the IP address of the host running the WebSphere protocol ▶ 9060 is the port used to connect to the WebSphere console <p>Access Servers > Application Servers > Ports > SOAP_CONNECTOR_ADDRESS to retrieve the required port number.</p>
Connection Timeout	Time-out in milliseconds after which the Probe stops trying to connect to the WebSphere server.

Parameter	Description
User Name	The name of the user needed to connect to the application.
Password	The password of the user needed to connect to the application.
Trust Store File Path	The name of the SSL trust store file. To use the trust store file, do one of the following: <ul style="list-style-type: none"> ▶ Enter the name (including the extension) and place the file in the following resources folder: C:\hp\UCMDB\DataFlowProbe\runtime\probeManager\discoveryResources\j2ee\websphere. ▶ Insert the trust store file full path.
Trust Store Password	The SSL trust store password.
Key Store File Path	The name of the SSL keystore file. To use the keystore file, do one of the following: <ul style="list-style-type: none"> ▶ Enter the name (including the extension) and place the file in the following resources folder: C:\hp\UCMDB\DataFlowProbe\runtime\probeManager\discoveryResources\j2ee\websphere. ▶ Insert the keystore file full path.
Key Store Password	The password for the keystore file.

 **WMI Protocol**

Parameter	Description
User Name	The name of the user needed to connect to the host.
Password	The password of the user needed to connect to the host.
Windows Domain	The Windows domain in which the credentials are defined. If this field is left empty, the NTCMD protocol assumes the user is defined locally on the host.

Data Flow Probe Log Files

Probe logs store information about job activation that occurs on the Probe Gateway and Probe Manager.

General Logs

WrapperProbeGw.log

Records all the Probe's console output in a single log file.

Level	Description
Error	Any error that occurs within the Probe Gateway.
Information	Important information messages, such as the arrival or removal of a new task.
Debug	N/A

Basic Troubleshooting. Use this file for any Probe Gateway problems to verify what occurred with the Probe Gateway at any time as well as any important problems it encountered.

probe-error.log

Summary of the errors from the Probe.

Level	Description
Error	All errors in the Probe components.
Information	N/A
Debug	N/A

Basic Troubleshooting. Check this log to verify if errors occurred in the Probe components.

probe-infra.log

List of all infrastructure messages.

Level	Description
Error	All infrastructure errors.
Information	Information about infrastructure actions.
Debug	Messages mainly for debug purposes.

Basic Troubleshooting. Messages from the Probe's infrastructure only.

wrapperLocal.log

When running the Probe in separate mode (that is, the Probe Manager and Probe Gateway are installed on separate machines), a log file is also saved to the Probe Manager.

Level	Description
Error	Any error that occurs within the Probe Manager.
Information	Important information messages such as received tasks, task activation, and the transferring of results.
Debug	N/A

Basic Troubleshooting. Use this file for any Probe Manager problems to verify what occurred with the Probe Manager at any time as well as any important problems it encountered.

Probe Gateway Logs

probeGW-taskResults.log

This log records all the task results sent from the Probe Gateway to the server.

Level	Description
Error	N/A
Information	Result details: task ID, job ID, number of CIs to delete or update.
Debug	The ObjectStateHolderVector results that are sent to the server (in an XML string).

Basic Troubleshooting.

- ▶ If there is a problem with the results that reach the server, check this log to see which results were sent to the server by the Probe Gateway.
- ▶ The results in this log are written only after they are sent to the server. Before that, the results can be viewed through the Probe JMX console (use the **ProbeGW Results Sender** MBean). You may have to log in to the JMX console with a user name and password.

probeGW-tasks.log

This log records all the tasks received by the Probe Gateway.

Level	Description
Error	N/A
Information	N/A
Debug	The task's XML.

Basic Troubleshooting.

- ▶ If the Probe Gateway tasks are not synchronized with the server tasks, check this log to determine which tasks the Probe Gateway received.
- ▶ You can view the current task's state through the JMX console (use the **Discovery Scheduler** MBean).

Probe Manager Logs

probeMgr-performance.log

Performance statistics dump, collected every predefined period of time, which includes memory information and thread pool statuses.

Level	Description
Error	N/A
Information	N/A
Debug	N/A

Basic Troubleshooting.

- ▶ Check this log to investigate memory issues over time.
- ▶ The statistics are logged every 1 minute, by default.

probeMgr-adaptersDebug.log

This log contains messages that are created following a job execution.

The **DiscoveryProbe.properties** File

A DFM process needs several parameters to be activated. These parameters specify the method to be used (for example, ping five times before declaring a failure) and against which CI a method should be run. If parameters have not been defined by the user, the DFM process uses the default parameters defined in the **DiscoveryProbe.properties** file. To edit the parameters, open **DiscoveryProbe.properties** in a text editor.

The **DiscoveryProbe.properties** file is located in the following folder:
C:\hp\UCMDB\DataFlowProbe\conf.

Caution: If you update the parameters in the **DiscoveryProbe.properties** file, you must restart the Probe so that it is updated with the changes.

The **DiscoveryProbe.properties** file is divided into the following sections:

- ▶ **Server Connection Definitions.** Contains parameters that are needed to set up the connection between the server and the Probe, such as the protocol to be used, machine names, default Probe and domain names, time-outs, and basic authentication.
- ▶ **Data Flow Probe Definitions.** Contains parameters that define the Probe, such as root folder location, ports, and Manager and Gateway addresses.
- ▶ **Probe Gateway Configurations.** Contains parameters that define time intervals for retrieving data.
- ▶ **Probe Manager Configurations.** Contains parameters that define Probe Manager functionality, such as scheduled intervals, result grouping, chunking, threading, time-outs, and filtering.
- ▶ **I18N Parameters.** Contains parameters that define language settings.
- ▶ **Internal Configurations.** (**Caution:** These parameters should not be changed without an advanced knowledge of Data Flow Management.) Contains parameters that enable DFM to function efficiently, such as thread pool size.

Troubleshooting and Limitations

Problem. You cannot transfer a Data Flow Probe from one domain to another. Once you have defined the domain of a Probe, you can change its ranges, but not the domain.

Solution. Install the Probe again:

- 1** (Optional) If you are going to use the same ranges for the Probe in the new domain, export the ranges before removing the Probe. For details, see "Ranges Pane" on page 54.
- 2** Remove the existing Probe from UCMDB. For details, see the **Remove Domain or Probe** button in "Domains and Probes Pane" on page 55.
- 3** Install the Probe. For details, see "Data Flow Probe Installation on the Windows Platform" or "Data Flow Probe Installation on the Linux Platform" in the *HP Universal CMDB Deployment Guide PDF*.

During installation, make sure you give a different name to the Probe from the one used by the old Probe. For details, see step 1 in "Data Flow Probe Installation on the Windows Platform" or step 6 in "Data Flow Probe Installation on the Linux Platform" in the *HP Universal CMDB Deployment Guide PDF*.

Problem. Discovery shows a disconnected status for a Probe.

Solution. Check the following on the Probe machine:

- ▶ That the Probe is running.
- ▶ That there are no network problems.

Problem. You cannot transfer a Data Flow Probe from one domain to another. Once you have defined the domain of a Probe, you can change its ranges, but not the domain.

Solution. Install the Probe again:

- 1** (Optional) If you are going to use the same ranges for the Probe in the new domain, export the ranges before removing the Probe. For details, see "Ranges Pane" on page 54.
- 2** Remove the existing Probe from UCMDB. For details, see the **Remove Domain or Probe** button in "Domains and Probes Pane" on page 55.

- 3** Install the Probe. For details, see "Data Flow Probe Installation on the Windows Platform" or "Data Flow Probe Installation on the Linux Platform" in the *HP Universal CMDB Deployment Guide* PDF.

During installation, make sure you give a different name to the Probe from the one used by the old Probe. For details, see step 1.

Problem. The connection between the HP Universal CMDB server and the Probe fails due to an HTTP exception.

Solution. Ensure that none of the Probe ports are in use by another process.

Problem. A Data Flow Probe node name cannot be resolved to its IP address. If this happens, the host cannot be discovered, and the Probe does not function correctly.

Solution. Add the host machine name to the Windows HOSTS file on the Data Flow Probe machine.

3

Data Flow Probe Status

This chapter includes:

Concepts

- ▶ Data Flow Probe Status Overview on page 92

Tasks

- ▶ View Current Status of Discovered CIs on page 93

Reference

- ▶ Data Flow Probe Status User Interface on page 94

Concepts

Data Flow Probe Status Overview

You use Data Flow Probe Status to view the current status of the discovered CIs in the Probes. Data Flow Probe Status retrieves the status from the Probes and displays the results in a view.



The view is not automatically updated; to refresh the status data, click the **Get snapshot** button.

Tasks

View Current Status of Discovered CIs

This task describes how to view the current status of discovered CIs.

This task includes the following steps:

- "Prerequisites" on page 93
- "Access Data Flow Probe Status" on page 93

1 Prerequisites

Verify that the Probe is enabled and is connected to the HP Universal CMDB server. For details, see "Get Started With the Data Flow Probe" on page 40.

2 Access Data Flow Probe Status

a Go to **Data Flow Management > Data Flow Probe Status**.

b Select a connected Probe.

All current jobs in the Probe are listed, together with their status. For details, see "Data Flow Probe Status Window" on page 96.

c Click the **Get Snapshot** button.

d Select jobs from the Progress list and click the **View Job progress** button. The Job Details window opens.

Reference


Data Flow Probe Status User Interface

This section includes (in alphabetical order):

- ▶ [Job Name] Dialog Box on page 94
- ▶ Data Flow Probe Status Window on page 96

[Job Name] Dialog Box

Enables you to view details about a job, including its scheduling, as well as job statistics.

To access	<ul style="list-style-type: none">▶ Select a job in the Progress pane of the Data Flow Probe Status window and click the View job progress  button.or▶ Double-click a job the Progress pane of the Data Flow Probe Status window.
------------------	---

User interface elements are described below:

GUI Element (A-Z)	Description
Job Details	<p>Status. Can be Scheduled (the job runs according to a defined schedule) or Running (the job is running now).</p> <p>Last updated. The last time that the job was updated.</p> <p>Threads. The number of threads currently allocated to this job.</p> <p>Progress. The number of Trigger CIs in the job and the number of Trigger CIs that the Probe has finished working on.</p>
Schedule	<p>Previous invocation. The last time that DFM ran the job.</p> <p>Next invocation. The next time that DFM is scheduled to run the job.</p> <p>Last duration. The length of time, in seconds, taken to run the job in the previous invocation.</p> <p>Average duration. The average duration, in seconds, of the time it took the Probe to run this job.</p> <p>Recurrence. The number of times a job is run in a week. For example, if a job is scheduled to run daily, it runs 7 times in a week. If a job is scheduled to run weekly, Recurrence = 1.</p>
Statistics Results	For details, see "Statistics Results Pane" on page 98.

Data Flow Probe Status Window

Enables you to view the current status of discovered CIs and all active jobs running on the Probes.

To access	Data Flow Management > Data Flow Probe Status
Important Information	<p>Depending on what you select in the Domains Browser pane, different information is displayed in the viewing pane.</p> <p>If you select:</p> <ul style="list-style-type: none"> ▶ a domain, you can view details and CIT statistics for the domain. For details, see "Details Tab" on page 51 and "Statistics Results Pane" on page 98. ▶ a Probe, you can view details on the Probe (such as the Probe IP), the progress of a job and you can view CIT statistics. For details, see "Details Pane" on page 97, "Progress Pane" on page 97, "Statistics Results Pane" on page 98, and "Probe Snapshot Information" on page 99.
Relevant tasks	"View Current Status of Discovered CIs" on page 93
See also	"Data Flow Probe Status Overview" on page 92


Details Pane

User interface elements are described below:

GUI Element (A–Z)	Description
Domain Type	<p>Customer. A private domain used for your site. You can define several domains and each domain can include multiple Probes. Each Probe can include IP ranges but the customer domain itself has no range definition.</p> <p>External. Internet/public domain. A domain which is defined with a range. The external domain may contain only one Probe whose name equals the domain name. However, you can define several external domains in your system.</p> <p>For details on defining domains, see "Add New Domain Dialog Box" on page 48.</p>

Progress Pane

User interface elements are described below:



GUI Element (A–Z)	Description
	Select a CI and click View job progress to view details of a job. For details, see "[Job Name] Dialog Box" on page 94.
Job	<p>The name of the job.</p> <p>Double click a job to open a dialog box displaying job details. For details, see "[Job Name] Dialog Box" on page 94.</p>
Next invocation	The next time that the Probe is scheduled to run.
Previous invocation	The last time that the Probe ran.
Progress	Can be either Scheduled or Running. If a job is running, a progress bar displays the percentage finished.
Thread count	The number of threads currently allocated to this job.
Triggered CIs	The number of CIs triggered in the job.

Statistics Results Pane

Enables you to view details and CIT statistics.

To access	Click the Default Domain or Probe name in the Domains Browser pane.
------------------	---


User interface elements are described below:

GUI Element (A–Z)	Description
	Click to retrieve the latest data from the Probe (data is not automatically updated).
	<p>Set the time range for which to display statistics about the CITs.</p> <ul style="list-style-type: none"> ▶ All. Displays statistics for all job runs. ▶ Last Hour/Day/Week/Month. Choose a period of time for which to display statistics about the CITs. ▶ Custom Range. Click to open the Customize Statistics Time Range dialog box. Enter the date or click the arrow to choose a date and time from the calendar, for the To and From dates. To delete a date, click Reset.
<Column title>	Click a column title to change the order of the CITs from ascending to descending order, or vice versa.
<right-click a title>	<p>Choose from the following options:</p> <ul style="list-style-type: none"> ▶ Hide Column. Select to hide a specific column. ▶ Show All Columns. Displayed when a column is hidden. ▶ Select Columns. Select to display or hide columns and to change the order of the columns in the table. Opens the Columns dialog box. ▶ Auto-resize column. Select to change a column width to fit the contents. <p>For details, see "Select Columns Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i>.</p>

GUI Element (A–Z)	Description
CIT	The name of the discovered CIT.
Created	The number of CIT instances created by the Probe.
Deleted	The number of CIT instances deleted by the Probe.
Discovered CIs	The sum of all the CIs for all the invocations.
Filter	The time range set with the Set Filter button.
Last updated	The date and time that the statistics table has been updated for a particular Probe.
Total	The total number of CIs in each column.
Updated	The number of CIT instances that have been updated.

Probe Snapshot Information

User interface elements are described below:

GUI Element (A–Z)	Description
	Click to view the current status of the discovered CIs and jobs on the selected Probe.
Last updated	The date and time at which the Get snapshot button was last pressed (that is, the date and time of the data displayed in Data Flow Probe Status).
Probe IPs	The IP addresses defined for the Probe.
Running jobs	The number of jobs running on the Probe.
Scheduled jobs	The number of jobs that are scheduled to run according to the settings in the Discovery Scheduler. For details, see "Discovery Scheduler Dialog Box" on page 286.
Status	The status of the Probe (either disconnected or connected).
Threads	The sum of all threads currently allocated to the running jobs.

4

Adapter Management

This chapter includes:

Concepts

- ▶ Automatically Deleted CIs and Relationships and Candidates for Deletion CIs on page 102
- ▶ Discovering Running Software on page 104
- ▶ Identifying Running Software by Processes on page 105
- ▶ The portNumberToPortName.xml File on page 106

Tasks

- ▶ Configure the Data Flow Probe to Automatically Delete CIs – Workflow on page 107
- ▶ Discover Running Software – Scenario on page 108
- ▶ Define a New Port on page 111
- ▶ Use the cpVersion Attribute to Verify Content Update on page 113
- ▶ Manage Adapter Configurations on page 114
- ▶ Filter Probe Results on page 116

Reference

- ▶ Resource Files on page 119
- ▶ Internal Configuration Files on page 120
- ▶ Adapter Management User Interface on page 120

Concepts

Automatically Deleted CIs and Relationships and Candidates for Deletion CIs

During discovery, the Data Flow Probe compares CIs found during the previous, successful invocation with those found during the current invocation. A missing component, such as a disk or software, is assumed to have been removed from the system, and its CI is deleted from the Probe's database.

The Data Flow Probe does not wait for the aging mechanism to perform the calculation but immediately sends a deletion request to the server. For details on aging, see "The Aging Mechanism Overview" in the *HP Universal CMDB Administration Guide*.

You can define that CI instances are to be deleted for specific jobs. For details, see "Configure the Data Flow Probe to Automatically Delete CIs – Workflow" on page 107.

By default, the Data Flow Probe deletes CI instances of certain CITs, for example, the current configuration for the Host Resources and Applications jobs (snmp: file system, installed software, osuser, service).

Candidates for Deletion

You can mark a CI instance as a candidate for deletion. This enables you to isolate CIs instead of them being automatically deleted when they are not discovered.

Discovery forces its aging status to change to **aged**, so that the CI appears in the Aged CIs box. Its time-to-deletion by the aging mechanism is shortened (to 20 days, by default).

Note:

- ▶ The change is defined on the job's adapter.
 - ▶ If discovery fails and errors occur, objects are sent for deletion according to how the results are managed. For details, see "Results Management Pane" on page 131.
 - ▶ Carefully choose the CIs that are to be candidates for deletion. For example, process CITs are not good candidates because they are often shutting down and starting up again and as a result may be deleted at every invocation.
 - ▶ You can use this procedure to delete relationships, too. For example, the contained relationship is used between a node and an IP address. A laptop machine is allocated a different IP address very often; by deleting the relationship, you prevent the accumulation of old IP addresses attached to this node.
-

Example of Automatic Deletion

During the previous invocation, the Data Flow Probe ran the **Host Resources and Applications by WMI** job and discovered a host with disks a, b, c, and d. During the current invocation, the Probe discovers disks a, b, and c, compares this result with the previous result, and deletes the CI for disk d.

More Information

- ▶ You can view deleted CIs in the Probe log and in the Deleted column in the Statistics Results pane. For details, see "Data Flow Probe Log Files" on page 83 and "Statistics Results Pane" on page 276.
- ▶ For details on setting automatic deletion, see "Automatic Deletion" on page 131 in the Results Management pane.
- ▶ For details on aging, see "The Aging Mechanism Overview" in the *HP Universal CMDB Administration Guide*.

Discovering Running Software

You can discover software (for example, a specific Oracle database) running in your environment.

This section includes the following topics:

- ▶ "Discovery Process" on page 104
- ▶ "Running Software Default View" on page 104

Discovery Process

The discovery process runs as follows:

- ▶ The Host Resources and Applications jobs are activated.
- ▶ DFM searches for processes on the machines in your environment.
- ▶ DFM saves the process data (including open port and command line information) to the Probe database.
- ▶ The jobs run on this data in the Probe database, build the new RunningSoftware CIs according to the data in the database, and extract the key attributes from the process data. The jobs send the CIs to the UCMDB Server.

Running Software Default View

A default view displays the mapping of relationships between applications:

Modeling > Modeling Studio > Resources pane > Root > Application > Deployed Software.

You can configure DFM to discover running software. For details, see "Discover Running Software – Scenario" on page 108.

Identifying Running Software by Processes

An application is identified by the existence of one or more running processes which are defined by their names and by command line (optional).

A process can be optionally marked as a key process or as a main process.

An application is identified if the following holds true:

- At least one process was found.
- All processes mark as key processes exist.

If an application is identified, a result RunningSoftware CI is created for the application obeying the following rules:

- If none of the processes mark as main process, a single RunningSoftware CI will be created, linked to all discovered processes by dependency links.
- If there are processes mark as main process, a RunningSoftware CI will be created for each instance of these main processes.

For example, assume that rules are defined for the identification of two applications, **application_a** and **application_b**:

- **application_a** is identified by **proc.exe** and **unique_proc_a.exe**.
- **application_b** is identified by **proc.exe** and **unique_proc_b.exe**.

Say that **proc.exe** is found but none of its processes are marked as key or main processes. In this case, **RunningSoftware** CIs are created for both **application_a** and **application_b**. These CIs are linked by a dependency link to the same process (that is, **proc.exe**).

Assume too that **unique_proc_a.exe** and **unique_proc_b.exe** are marked as key processes:

- If the **proc.exe** process only is discovered, a **RunningSoftware** CI is not created.
- If **unique_proc_a.exe** is discovered, **RunningSoftware** CIs are created for **application_a** linked by a dependency link to **unique_proc_a.exe**. If in addition, **proc.exe** is discovered, it is linked to the same CI. The same holds for **application_b**.

Assume that two instances of **unique_proc_a.exe** are discovered:

- ▶ If the process is not marked as a main process, a single **RunningSoftware** CI is created for **application_a** linked to both processes.
- ▶ If the process is marked as a main process, two separate **RunningSoftware** CIs are created for **application_a**.

For details on the key field in the Software Identification Rule Editor dialog box, see "Identifying Processes" on page 159.

The portNumberToPortName.xml File

The portNumberToPortName.xml file is used by DFM as a dictionary to create Port CIs by mapping port numbers to meaningful port names. When a port is discovered, the Probe extracts the port number, searches in the portNumberToPortName.xml file for the port name that corresponds to this port number, and creates the Port CI with that name. If the port name does not appear in this file, the Probe uses the port number as the port name.

For details on adding new ports to be discovered, see "Define a New Port" on page 111.

Note: The results of running a **Network Connections – Active Discovery** job appear in the Topology Map with the port names instead of the port numbers (the port title is the value of the Port Name attribute, defined in the CIT). For details, see "Add/Edit Attribute Dialog Box" in the *HP Universal CMDB Modeling Guide*.

Tasks

Configure the Data Flow Probe to Automatically Delete CIs – Workflow

This task explains how to configure a job so that CI instances of specific CITs are automatically deleted. For details on how the Data Flow Probe deletes CIs, see "Automatically Deleted CIs and Relationships and Candidates for Deletion CIs" on page 102.

This task includes the following steps:

- "Select the CIs to be Deleted" on page 107
- "Results" on page 107

1 Select the CIs to be Deleted

- a** Access the **Results Management** pane in the **Adapter Management** tab.
- b** Select the **Enable Automatic Deletion** check box.
- c** Click the **Add** button to open the Choose Discovered Class dialog box. For details, see "Choose Discovered Class Dialog Box" on page 138.
- d** Select the deletion method for the CIT: either **Auto Delete** or **Candidate for Deletion**.
- e** Click the **Save** button at the bottom of the page.

2 Results

To view the deleted CIs, access the Deleted column in the Statistics Results pane. For details, see "Statistics Results Pane" on page 276.

Discover Running Software – Scenario

This scenario explains how to set up the discovery of Oracle databases so that there is no need to enter a specific set of credentials to discover each database instance. DFM runs an `extract` command that retrieves the database name attribute.

In this scenario, we assume that the following syntax is used in the Oracle command lines:

```
c:\ora10\bin\oracle.exe UCMDB
```

This task includes the following steps:

- "Prerequisites" on page 108
- "Create a Command Line Rule" on page 109
- "Define the Value of an Attribute" on page 110
- "Activate the Job" on page 111

1 Prerequisites

Display the Attribute Assignment Rules dialog box:

- a** Select **Data Flow Management > Discovery Control Panel**. In the **Discovery Modules** pane, select the **Network Discovery** module > **Host Resources and Applications > Software Element CF by Shell**. In the **Properties** tab, select **Global Configuration Files > applicationSignature.xml**. For details, see "Global Configuration Files Pane" on page 126.

Tip: If the Global Configuration Files pane does not display, click the arrow below the Trigger Queries pane.

- b** Click the **Edit** button to open the Software Library dialog box. For details, see "Software Library Dialog Box" on page 160.

- c** Choose the signature to be edited. Click the **Edit** button to open the **Software Identification Rule Editor** dialog box. For details, see "Software Identification Rule Editor Dialog Box" on page 158.
- d** Click the **Set Attributes** button to open the **Attributes Assignment Editor** dialog box. For details, see "Attribute Assignment Editor Dialog Box" on page 136.

2 Create a Command Line Rule

The command line rule is text that identifies the process to be discovered, for example, `oracle.exe c:\ora10\bin\oracle.exe UCMDB`. You can substitute the text entry with a regular expression, so that discovery is more flexible. For example, you can set up a rule that discovers all Oracle databases, whatever their name.

Subsequently, DFM uses the information in the command lines discovered by the regular expression to populate a CI's name attribute with the database name.


- a** To create a Command Line rule that includes a regular expression, in the Attributes Assignment Rules dialog box, click the **Add** button in the Parsing Rules pane. For details, see "Parse Rule Editor Dialog Box" on page 149.
- b** In the Parse Rules Editor dialog box, build the rule:
 - ▶ Enter a unique name in the Rule ID field: **r1**.
 - ▶ Choose **Command Line** in the Process Attribute field.
 - ▶ Enter the following regular expression in the Regular Expression field: `.\s+(\w+)\$`:

This expression searches for any character (`.`), followed by a space or spaces (`+\s+`), followed by a word or words (`(\w+)`) that appear at the end of the line (`$`). You can use the following characters: a-z, A-Z, or 0-9. The following command line fulfils this expression: `c:\ora10\bin\oracle.exe UCMDB`.

3 Define the Value of an Attribute

In this step, you define which attribute is used by DFM to discover the Oracle databases, and the value it should take.

- a** In the Attributes Assignment Rules dialog box, click the **Add** button in the Attribute Assignments pane, to select the attribute.
- b** In the Attribute Editor dialog box:
 - ▶ Choose the attribute that holds the database name, from the list of Oracle CIT attributes, in this case **The Database instance name**.
 - ▶ Enter a value, using the following syntax: **\${<rule ID name>(<group number>)}**, in this case, **\${r1(1)}**.

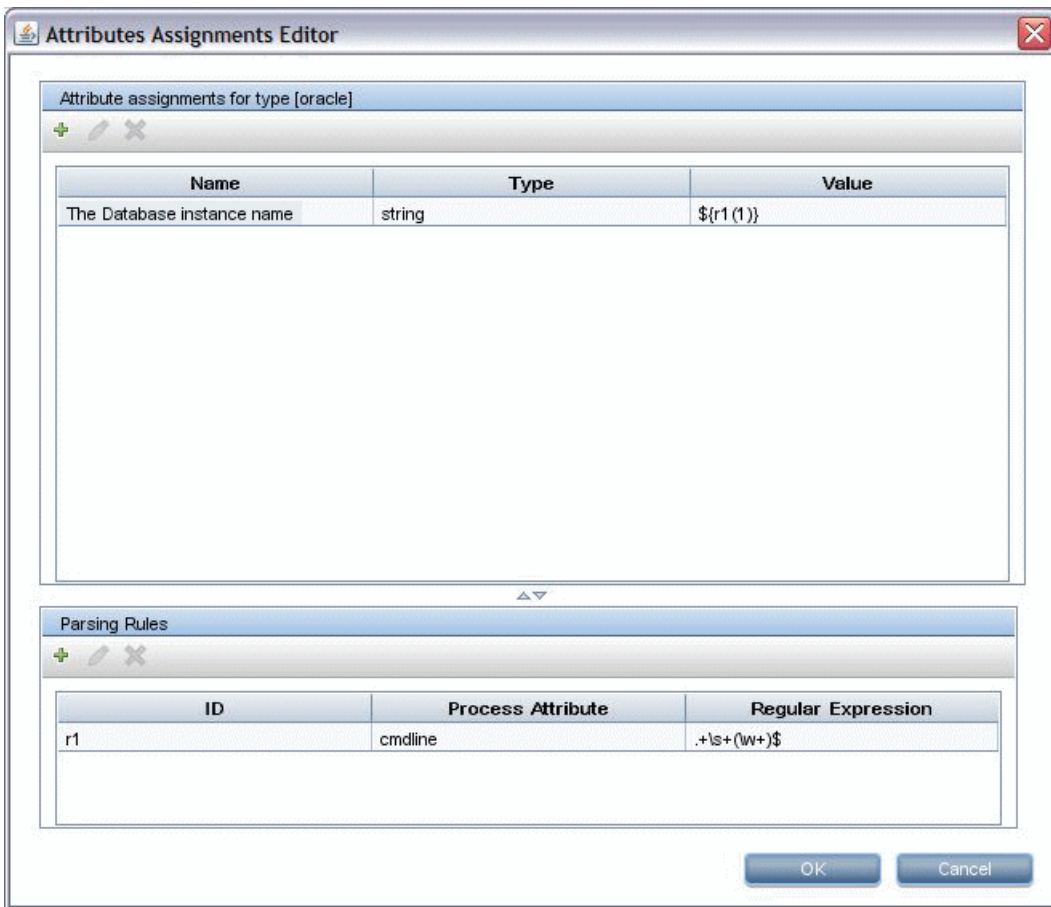

This dialog box is configured as follows: DFM enters the value of the first group ((\w+)\$) in the command line regular expression (**{r1(1)}**) in the name attribute of the Oracle database CI.

That is, during discovery, DFM searches through the process files for command lines with a word or words at the end of the line. For example, the following command line matches this regular expression: c:\ora10\bin\oracle.exe UCMDB.

4 Activate the Job

For details, see "Manually Activate a Job" on page 244 and "Discovery Modules Pane" on page 281.

Define a New Port

To define a new port by editing the `portNumberToPortName.xml` file:

- 1 In the Adapter Management window (**Data Flow Management > Adapter Management**), search for the `portNumberToPortName.xml` file: click the **Find resource** button and enter `portNumberToPortName.xml` in the **Name** box. Click **Find Next**, then click **Close**.

The file is selected in the Resources pane and the file contents are displayed in the View pane.

For an explanation of the `portNumberToPortName.xml` file, see "The `portNumberToPortName.xml` File" on page 106.

- 2 Add another row to the file and make changes to the parameters:

```
<portInfo portProtocol="xxx" portNumber="xxx" portName="xxx" discover="0"
cpVersion="xx"/>
```

- **portProtocol.** The network protocol used for discovery (udp or tcp).
- **portNumber.** The port number to be discovered.
- **portName.** The name that is to be displayed for this port.
- **discover.** **1.** This port must be discovered. **0:** This port should not be discovered.

- **cpVersion.** Use this parameter when you want to export the **portNumberToPortName.xml** file to another UCMDB system with the Package Manager. If the **portNumberToPortName.xml** file on the other system includes ports for this application but does not include the new port you want to add, the **cpVersion** attribute ensures that the new port information is copied to the file on the other system.

The **cpVersion** value must be greater than the value that appears in the root of the **portNumberToPortName.xml** file.

For example, if the root **cpVersion** value is **3**:

```
<portList  
parserClassName="com.hp.ucmdb.discovery.library.communication.downloader.cfg  
files.KnownPortsConfigFile" cpVersion="3">
```

the new port entry must include a **cpVersion** value of **4**:

```
<portInfo portProtocol="udp" portNumber="1" portName="A1" discover="0"  
cpVersion="4"/>
```

Note: If the root **cpVersion** value is missing, you can add any non-negative number to the new port entry.

This parameter is also needed during Content Pack upgrade. For details, see "Use the cpVersion Attribute to Verify Content Update" on page 113.

Use the cpVersion Attribute to Verify Content Update

The cpVersion attribute is included in the portNumberToPortName.xml file, and indicates in which Content Pack release a port has been discovered. For example, the following code defines that the LDAP port 389 has been discovered in Content Pack 5.00:

```
<portInfo portProtocol="tcp" portNumber="389" portName="ldap" discover="1"
cpVersion="5"/>
```

During a Content Pack upgrade, DFM uses this attribute to perform a smart merge between the existing portNumberToPortName.xml file (which may include user-defined ports) and the new file. Entries previously added by the user are not removed and entries previously deleted by the user are not added.

For an explanation of the portNumberToPortName.xml file, see "The portNumberToPortName.xml File" on page 106.

To verify that a DFM Content Pack is successfully deployed:

- 1** Install the latest Service Pack release.
- 2** Start the UCMDB Server.
- 3** Verify that all services are running. For details, see "HP Universal CMDB Services" in the *HP Universal CMDB Deployment Guide* PDF.
- 4** Install and deploy the latest Content Pack release. For details, refer to the Content Pack installation guide.
- 5** Access the portNumberToPortName.xml file (**Data Flow Management > Adapter Management > Discovery Packages > Network > Configuration Files > portNumberToPortName.xml**).
- 6** Verify that any user-defined ports have not been deleted and any ports deleted by the user have not been added.

Manage Adapter Configurations

You should edit adapter and XML files in one of the following ways:

Use the Adapter Management module

This method is recommended.

- 1 Navigate to **Data Flow Management > Adapter Management**.
- 2 In the Resources pane, select the adapter file: **Packages > <package name> > Adapters**.
- 3 Do one of the following:
 - ▶ To edit general adapter settings, use the Adapter Definition and Adapter Management tabs. For details, see "Adapter Definition Tab" on page 121 and "Adapter Management Tab" on page 127.
 - ▶ To define specific settings for the selected adapter, right-click the adapter and select **Edit Adapter Source** from the shortcut menu.

Use Package Manager

Edit the package and redeploy it. For details, see "Package Manager" in the *HP Universal CMDB Administration Guide*.

Use the JMX Console

- 1 Launch the Web browser and enter the server address, as follows: **http://<UCMDB Server Host Name or IP>:8080/jmx-console**.
You may have to log in with a user name and password.
- 2 Under UCMDB, click **UCMDB:service=Packaging Services** to open the JMX MBEAN View page.
- 3 Locate the **listSubsystems** operation.
- 4 Enter the Customer ID value and click **Invoke**.
- 5 Click the **discoveryPatterns** or **discoveryConfigFiles** link.
- 6 Click the resource to edit.

Change the Full Population value

Because the UCMDDB 9.0x adapter only synchronizes changes, **over time** CIs are not touched and are aged out; therefore, by default the UCMDDB 9.0x adapter runs a full population job every seven days.

To change the full population value:

- 1** Access the Resources pane: **Data Flow Management > Adapter Management > Resources.**
- 2** Select the **CmdbAdapter** adapter file: **CmdbAdapter > Adapters > CmdbAdapter.**
- 3** Right-click the **CmdbAdapter** file and choose **Edit Adapter Source.**
- 4** In the source file, locate the following tag:
`<full-population-days-interval>7</full-population-days-interval>`.
- 5** Edit the value as follows:
 - **7** = run full population job every 7 days
 - **1** = run full population job each day
 - **0** = always run a full population job
 - **-1** = the option is disabled

Filter Probe Results

You can filter Probe results for all adapters, so that only results of interest to you are sent to the HP Universal CMDB Server. (You can also filter specific adapters. For details, see "Adapter Management Tab" on page 127.)

Note:

- ▶ You can use regular expressions in filters.
 - ▶ Attributes in the filter should be of type string only. For details on attribute types, see "Attributes Page" in the *HP Universal CMDB Modeling Guide*.
 - ▶ A result is considered to be a match only if all filter attributes have the same values as those in the CI. (If one of a CI's attributes is not specified in the filter, all the results for this attribute match the filter.)
 - ▶ A CI can match more than one filter. The CI is removed or remains according to the filter in which it is included.
 - ▶ DFM filters first according to the `<includeFilter>` and then applies the `<excludeFilter>` on the results of `<includeFilter>`.
-

Configure a Filter

Locate the **globalFiltering.xml** file: in **Adapter Management**, open the **DDM Infra** folder and click the **Configuration Files** folder. Select **globalFiltering.xml** to display the code in the View pane:

```
<resultFilters>
  <excludeFilter>
    <vector />
  </excludeFilter>
  <includeFilter>
    <vector />
  </includeFilter>
</resultFilters>
```

- ▶ **<excludeFilter>**. When a vector marker is added to this filter, all CIs that match the filter are removed. If this marker is left empty, all results are sent to the server.
- ▶ **<includeFilter>**. When a vector marker is added to this filter, all CIs that do not match the filter are removed. If this marker is left empty, all results are sent to the server.

The following example shows an **ipAddress** CI that has address and domain attributes:

```
<vector>
  <object class="ipAddress">
    <attribute name="name" type="String">192.168\82\17.*</attribute>
    <attribute name="routing_domain" type="String">DefaultProbe</attribute>
  </object>
</vector>
```

If this vector is defined in **<includefilter>**, all results **not** matching the filter are removed. The results sent to the server are those where the **ip_address** matches the regular expression **192\168\82\17.*** and the **ip_domain** is **DefaultProbe**.

If this vector is defined in **<excludefilter>**, all results matching the filter are removed. The results sent to the server are those where the **ip_address** does **not** match the regular expression **192\168\82\17.*** and the **ip_domain** is **not DefaultProbe**.

The following example shows a `ip_subnet` CI that has no attributes.

```
<vector>
  <object class="ip_subnet">
  </object>
</vector>
```

Configure a Filter to Ignore Case

You can configure a filter to ignore case by prefixing a regular expression with `(?i)`. For example, `(?i)DefaultProbe` finds `defaultprobe` as well as `DefaultProbe`.

The following example removes all occurrences of the `DefaultdoMain` attribute because the vector code is located in the `<excludeFilter>` section:

```
<resultFilters>
  <excludeFilter>
    <vector>
      <object class="ip_address">
        <attribute name="routing_domain" type="String">(?i)DefaultdoMAin</
attribute>
      </object>
    </vector>
  </excludeFilter>
  <includeFilter>
    <vector />
  </includeFilter>
</resultFilters>
```

Reference

Resource Files

The following files can be changed to enable DFM in non-default systems. The location of these files is: **Data Flow Management > Adapter Management > Packages > Network > Configuration Files.**

This section includes the following topics:

- ▶ "oidToHostClass.xml" on page 119

oidToHostClass.xml

The `oidToHostClass.xml` file contains a list of OID numbers, for all CIs in the system that have an ID. This list is required for mapping CIs to their correct CIT, and for converting the discovered OID number of an operating system or a device into string data.

To access the `oidToHostClass.xml` file, in Adapter Management, search for the file by clicking the **Find resource** button and entering **oidto** in the **Name** box. Click **Find Next**, then click **Close**.

The file is selected in the Resources pane and the file contents are displayed in the View pane.

Note: If an OID is discovered and its details do not appear in the `oidToHostClass.xml` file, its CIT is registered in the CMDB as `host`.

The `oidToHostClass.xml` file includes the following parameters:

- ▶ **class.** The converted CIT name of the discovered OID. Under this name, the operating system or device appears in the CMDB and in HP Universal CMDB.
- ▶ **vendor.** The vendor of the operating system or device.

- ▶ **os.** A specific operating system, for example, Linux. This parameter is optional.
- ▶ **model.** A specific model, for example, JETDIRECT,JD30. This parameter is optional.
- ▶ **oid.** The discovered OID.

Internal Configuration Files

The following files are for internal use only and should be changed only by users with an advanced knowledge of content writing.

- ▶ **discoveryPolicy.xml.** Includes the schedule when the Probe does not execute tasks. For details, see "Add/Edit Policy Dialog Box" on page 47. Located in **Data Flow Management > Adapter Management > Packages > AutoDiscoveryInfra > Configuration Files.**
- ▶ **jythonGlobalLibs.xml.** A list of default Jython global libraries that DFM loads before running scripts. Located in **Data Flow Management > Adapter Management > Packages > AutoDiscoveryContent > Configuration Files.**

Adapter Management User Interface

This section describes:

- ▶ Adapter Definition Tab on page 121
- ▶ Adapter Management Tab on page 127
- ▶ Adapter Management Window on page 134
- ▶ Adapter Source Editor Window on page 135
- ▶ Attribute Assignment Editor Dialog Box on page 136
- ▶ Attribute Editor Dialog Box on page 137
- ▶ Choose Discovered Class Dialog Box on page 138
- ▶ Configuration File Pane on page 140

- Edit Process Dialog Box on page 141
- Find Resource/Jobs Dialog Box on page 143
- Find Text Dialog Box on page 144
- Input Query Editor Window on page 145
- Parse Rule Editor Dialog Box on page 149
- Permission Editor Dialog Box on page 150
- Resources Pane on page 152
- Script Editor Window on page 155
- Script Pane on page 156
- Software Identification Rule Editor Dialog Box on page 158
- Software Library Dialog Box on page 160

Adapter Definition Tab

Enables you to define an adapter by specifying:

- which CITs the adapter should discover
- which protocols are needed to perform discovery

To access	Select a specific adapter in the Resources pane.
Relevant tasks	"Implement a Discovery Adapter" in the <i>HP Universal CMDB Developer Reference Guide</i>






User interface elements are described below:




GUI Element (A–Z)	Description
Adapter Category	Used to arrange adapters by category.
Description	A detailed description of the adapter's purpose, including relevant comments.
Display Name	A display name to identify the adapter.

GUI Element (A–Z)	Description
Type	For Discovery adapters: jython ; for Integration adapters: can be of various types.
Used as Integration Adapter	Select to define that this adapter is an integration adapter. Note: These adapters cannot be used for defining Discovery jobs, and are accessible only through the Integration Studio.

Input Pane




User interface elements are described below:


GUI Element (A–Z)	Description
Input CI Type 	The input CIT is used as the adapter input. For details, see "Define Adapter Input (Trigger CIT and Input Query)" in the <i>HP Universal CMDB Developer Reference Guide</i> . Click the button to choose a CIT to use as the input.
	Edit input query.
	Remove input query.
Input Query	Defines a query for validation of the triggered CIs for jobs that run this adapter. (CIs matching the job's triggered query must match the Input query as well.) Note: Since this field is optional, not all adapters include an input query. None signifies this adapter does not have an input query definition. <ul style="list-style-type: none"> ▶ Click the Edit Input Query button  to open the Input Query Editor window. ▶ Click the Remove Input query button  to remove the Input query from the adapter. For details, see "Input Query Editor Window" on page 145. For an explanation, see "Trigger CIs and Trigger Queries" on page 29. For an example, see "Example of Input Query Definition" in the <i>HP Universal CMDB Developer Reference Guide</i> .

GUI Element (A–Z)	Description
Triggered CI Data	 Add Trigger CI data to the adapter.  Remove Trigger CI data from the adapter.  Edit the Trigger CI data in the Parameter Editor dialog box. <p>Name. The information that is needed to perform a task on a specific CI. This information is passed to the CI queried in the task.</p> <p>Important: Do not use id for a Triggered CI Data entry, as it is a reserved name.</p> <p>Value. The attribute value. Variables are written using the following syntax: <code>#{VARIABLE_NAME.attributeName}</code> where VARIABLE_NAME can be one of three predefined variables:</p> <ul style="list-style-type: none"> ▶ SOURCE. The CI that functions as the task’s trigger. ▶ HOST. The node in which the triggered CI is contained. ▶ PARAMETERS. The parameter defined in the Parameter section. <p>You can create a variable. For example, <code>#{SOURCE.network_netaddr}</code> indicates that the trigger CI is a network.</p>

Used Scripts Pane

User interface elements are described below (unlabeled elements are shown in angle brackets>):

GUI Element (A–Z)	Description
	Change the order of the scripts. DFM runs the scripts in the order in which they appear here.
	Add a script to the adapter.
	Remove a script from the adapter.




GUI Element (A–Z)	Description
	Edit the selected script in the Script Editor that opens.
<Scripts>	A list of Jython scripts used by the adapter.



Required Permissions Pane

Enables you to view the permissions that you have configured for an adapter.

To access	Data Flow Management > Adapter Management > select an adapter > Adapter Definition tab > Required Permissions pane.
Important Information	<ul style="list-style-type: none"> ▶ Workflow: <ul style="list-style-type: none"> ▶ Configure the permissions in the Permission Editor dialog box. ▶ View the permissions in this pane. ▶ When working with jobs in the Discovery Control Panel window, view these permissions for a specific job. ▶ For details on the fields in this pane, see "Permission Editor Dialog Box" on page 150.
See also	<ul style="list-style-type: none"> ▶ "Permission Editor Dialog Box" on page 150 ▶ "Discovery Permissions Window" on page 284 ▶ "Viewing Permissions While Running Jobs" on page 234



User interface elements are described below:

GUI Element (A–Z)	Description
	Click to add a permission object. The Permission Editor dialog box opens. For details, see "Permission Editor Dialog Box" on page 150.
	Select a permission object and click the button to edit. For details, see "Permission Editor Dialog Box" on page 150.
	Select a permission object and click to delete it.

GUI Element (A–Z)	Description
	Change the order of the permissions by selecting the permission object and clicking the up or down button. The order given here is the order in which the credentials are verified.
	Export a permission object in Excel, PDF, RTF, CSV, or XML format. For details, see "Browse Views Mode" in the <i>HP Universal CMDB Modeling Guide</i> .



Required Discovery Protocols Pane


User interface elements are described below (unlabeled elements are shown in angle brackets>):

GUI Element (A–Z)	Description
	Opens the Add Required Protocol dialog box.
	Click to remove an existing protocol.
<Protocols>	List of protocols required by the adapter for the task. For example, the NTCmd protocol, together with its user name, password, and other parameters, is needed for DFM to access a Windows system.

Discovered CITs Pane

User interface elements are described below:

GUI Element (A–Z)	Description
	Click to open the Choose Discovered Class dialog box, to select a CIT that is to be discovered by the adapter. For details, see "Choose Discovered Class Dialog Box" on page 138.
	Click to remove the CIT from the list of CITs that the adapter discovers.




GUI Element (A–Z)	Description
	You can choose to view a map of the CITs and links that are discovered by the adapter, instead of a list. Click the button to open the Discovered CITs Map window. The CIs and relationship links discovered by the adapter are shown.
CITs	List of CITs that the adapter discovers.

Global Configuration Files Pane

Enables you to add default configuration files to the adapter, as well as the specific configuration files that the adapter needs.




To access	<ul style="list-style-type: none"> ▶ In Adapter Management, select an adapter and the Adapter Definition tab. ▶ In Discovery Control Panel, select a job and the Properties tab.
Important Information	<p>The configuration file <code>applicationsSignature.xml</code> opens the Software Library dialog box. For details, see "Software Library Dialog Box" on page 160.</p> <p>The <code>applicationsSignature.xml</code> file contains a list of all applications that DFM attempts to find in the environment.</p>
Relevant tasks	"Discover Running Software – Scenario" on page 108

User interface elements are described below:

GUI Element (A–Z)	Description
	Click to open the Global Configuration Files dialog box, to select configuration files that are needed by the adapter.
	Click to delete a selected configuration file.
	Select a configuration file and click to open the appropriate editor. For example, the file <code>msServerTypes.xml</code> opens the Script Editor.

Adapter Parameters Pane

User interface elements are described below:

GUI Element (A–Z)	Description
	Click to open the Parameter Editor. Enter details on the parameter. The value you enter here is assigned to the attribute.
	Click to remove a parameter.
	Select a parameter and click the button to open the Parameter Editor and make changes.
Name	Each row represents the definitions for one parameter.
Value	Separate values with commas.

Adapter Management Tab

Enables you to define additional options relevant to adapter execution and result filtering.

To access	Select a specific adapter in the Resources pane and click the Adapter Management tab.
Important Information	Click the Save button to save any changes you make.
See also	"The DiscoveryProbe.properties File" on page 87

Probe Selection Pane

Enables you to specify which Probe to use with an adapter.

To access	Select a specific adapter in the Resources pane and select the Adapter Management tab.
Important Information	<p>By default, DFM automatically chooses the Probe for the Trigger CI according to the CI's related node. After obtaining the CI's related node, DFM chooses one of the node's IPs and chooses the Probe according to the Probe's network scope definitions.</p> <p>This may fail in the following situations:</p> <ul style="list-style-type: none"> ▶ A Trigger CI does not have a related node (such as the network CIT). ▶ A triggered CI's node has multiple IPs, each belonging to a different Probe. <p>To resolve these issues, you can specify which Probe to use with the adapter by:</p> <ul style="list-style-type: none"> ▶ In the Probe Selection section, selecting Override default probe selection. ▶ In the Probe box, typing the Probe to use for the task.

User interface elements are described below:

GUI Element (A–Z)	Description
Override default probe selection	<p>You can use calculated values such as:</p> <p>#{Network.network_domain}</p> <p>This value uses a syntax similar to that used by Triggered CI data in the Adapter Definition tab > Input pane. For details, see "Input Pane" on page 122.</p>

Execution Options Pane

User interface elements are described below:

GUI Element (A–Z)	Description
<p>Create communication log</p>	<p>Choose to create a log file that logs the connection between the Probe and a remote machine.</p> <ul style="list-style-type: none"> ▶ Always. A communication log is created for this session. ▶ Never. A communication log is not created for this session. ▶ On Failure. A communication log is created for this session, only if the execution fails. <p>That is, DFM reports an error (report of a warning does not create a communication log). This is useful when you need to analyze which queries or operations take most of the time, send data for analysis from different locations, and so on.</p> <p>If the job completes successfully, no log is created.</p> <p>When requested (in the Discovery Status pane), DFM displays the log retrieved from the Probe (if a log has been created). For details, see "Discovery Status Pane" on page 269.</p> <p>Note: For debug purposes, you can always retrieve the communication logs for the last 10 executions, even if Create communication logs is set to On Failure.</p> <p>Communication log files are created on the Probe Manager under the C:\hp\UCMDB\DataFlowProbe\runtime\communicationLog folder. For details on how the communication logs work, see "Record DFM Code" in the <i>HP Universal CMDB Developer Reference Guide</i>.</p>
<p>Include results in communication log</p>	<p>Select to enable capturing the discovered results with the created communication log; these discovered results may help in investigating various discovery problems.</p>
<p>Max. execution time</p>	<p>The maximum time allowed for an adapter to run on one Trigger CI.</p>

GUI Element (A-Z)	Description
Max. threads	<p>Each job is run using multiple threads. You can define a maximum number of threads that can be used concurrently when running a job. If you leave this box empty, the Probe's default threading value is used (8).</p> <p>The default value is defined in DiscoveryProbe.properties in the defaultMaxJobThreads parameter.</p> <p>Note: The jobs in the Network – Host Resources and Applications module require a permanent connection to the Probe's internal database. Therefore, these jobs are limited to a maximum number of 20 concurrent threads (which is the maximum number of concurrent connections permitted to the internal database). For details, see "Host Resources and Applications" in the <i>HP Universal CMDB Discovery and Integration Content Guide</i> PDF.</p>

Results Management Pane

User interface elements are described below:

GUI Element (A–Z)	Description
<p>Automatic Deletion</p>	<p>Enables marking specific CITs for deletion or as candidates for deletion, if the Data Flow Probe does not find them during its next invocation.</p> <p>To add CITs to the list of CIs, click the Add button. In the Choose Discovered Class dialog box, choose the CITs that should be automatically deleted.</p> <p>The changes you make here are added to the adapter file, for example:</p> <pre data-bbox="629 626 1110 826"> <resultMechanism isEnabled="true"> <autoDeleteCITs isEnabled="true"> <CIT>shell</CIT> <candidateForDeletionCIT>node</ candidateForDeletionCIT> </autoDeleteCITs> </resultMechanism> </pre> <p>For details on how the Data Flow Probe handles CI deletion, see "Automatically Deleted CIs and Relationships and Candidates for Deletion CIs" on page 102.</p>
<p>Enable aging</p>	<p>Select this check box to run the aging mechanism that specifies how long a period must pass in which CIs are discovered, before DFM treats these CIs as no longer relevant and removes them. For details on aging, see "The Aging Mechanism Overview" in the <i>HP Universal CMDB Administration Guide</i>.</p>

GUI Element (A–Z)	Description
<p>Enable Automatic Deletion</p>	<p>Choose between:</p> <ul style="list-style-type: none"> ▶ Always. Automatic Deletion or Candidate for Deletion is always enabled, regardless of whether discovery succeeds or fails. ▶ On Success or Warnings. Automatic Deletion or Candidate for Deletion is enabled only when discovery finishes with a success or warning status. In the case of a discovery error, nothing is removed and CIs are not marked as a candidate for deletion. ▶ Only on Success. Automatic Deletion or Candidate for Deletion is enabled only when discovery finishes with a success status. In the case of a discovery error or warning, nothing is removed and CIs are not marked as a candidate for deletion (this is the default). <p>When this check box is selected, the Automatic Deletion pane is enabled. For details, see "Automatic Deletion" on page 131.</p> <p>For details on how the Data Flow Probe handles CI deletion, see "Automatically Deleted CIs and Relationships and Candidates for Deletion CIs" on page 102.</p>

GUI Element (A–Z)	Description
<p>Enable collecting 'Discovered by' data</p>	<ul style="list-style-type: none"> ▶ Selected. DFM collects data on the results of running the adapter. This data is then used to enable rediscovery of CIs. The data is necessary for the Discovery tab in IT Universe to function correctly. It is also used for the View Based Discovery Status functionality which leverages the data to aggregate the complete discovery status for certain views. ▶ Cleared. DFM does not collect this data. The check box needs to be cleared for adapters where rediscovery is not helpful. For example, the Range IPs by ICMP job has this check box cleared by default because its Trigger CI is the Probe Gateway and so all CIs discovered by this job have the same Trigger CI. If the check box was not cleared, a rediscovery attempt on any view containing any single IP would result in a ping sweep throughout the entire customer network, certainly not desirable behavior. <p>The job results of this adapter are displayed in the Discovery for View dialog box only if this check box is selected. For details, see "Check Status of Application Discovery (Rediscover a View)" and "Show Discovery Status and Changes Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i>.</p>
<p>Fail entire bulks due to invalid CIs</p>	<p>If a set of objects (for example, 1,000 objects) includes even one invalid CI (for example, a node cannot be identified because of missing topological information), the reconciliation engine drops the entire set and does not send it to the CMDB. This is the default behavior.</p> <p>Clear the check box to have the results sent to the CMDB with only the invalid CIs (and their topology) dropped from the results. In the above example, 999 objects would be processed. UCMDB displays an error message when you view the results.</p>

Result Grouping Pane

User interface elements are described below:

GUI Element (A–Z)	Description
Grouping Interval (Seconds)	To group results in the Probe before they are sent to the server, type the value that indicates how long results are stored in the Probe before being transferred to the server. The default value is 30 seconds. Note: If you enter a value in both boxes, DFM applies the value of whichever occurs first.
Max. CIs in group	Specify the number of CIs that should accumulate in the Probe before being transferred to the server. The default value is 5000.

Adapter Management Window

Enables you to view or edit default parameter values used for the DFM process.

To access	Data Flow Management > Adapter Management or right-click a job in the Discovery Control Panel window and click Go to Adapter .
------------------	---



Important Information	<p>Note: An asterisk (*) next to a resource (adapter, script, or configuration file) signifies that the resource has changed since the package (in which it is included) was deployed. If the original package is redeployed, the changes are deleted from the resource. To save the changes, move the resource to a new package and deploy the package (the asterisk disappears).</p> <p>Caution: Only administrators with an expert knowledge of the DFM process should delete packages.</p>
See also	<ul style="list-style-type: none"> ➤ "Adapter Definition Tab" on page 121 ➤ "Global Configuration Files Pane" on page 126 ➤ "Adapter Management Tab" on page 127 ➤ "Script Pane" on page 156 ➤ "Resources Pane" on page 152 ➤ the <i>HP Universal CMDB Discovery and Integration Content Guide PDF</i> ➤ "Configuration File Pane" on page 140







Adapter Source Editor Window

Enables you to edit an adapter script.

To access	Right-click an adapter in the Resources pane and select Edit Adapter Source .
See also	"Resources Pane" on page 152

User interface elements are described below:

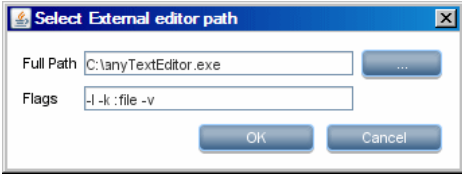GUI Element (A–Z)	Description
	Find specific text in the adapter script. For details, see "Find Text Dialog Box" on page 144.
	Click to go to a specific line in the adapter script. In the Go To Line dialog box, enter the line number.

GUI Element (A–Z)	Description
	<p>Click to open the adapter script in an external text editor. You define which editor is used in the User Profile dialog box. For details, see "User Profile Page" in the <i>HP Universal CMDB Administration Guide</i>.</p>
	<p>Click to edit the external editor preferences. You can run the editor by adding flags to the path.</p> <p>In the following example:</p> <div data-bbox="554 499 1011 673" style="border: 1px solid black; padding: 5px; margin: 10px 0;">  </div> <p>:file sets the place of the file in relation to the flags. The user cannot set the file name.</p>
	<p>Click to toggle between the advanced editor and a simple text editor. You can use the simple editor when the advanced editor causes problems.</p>
	<p>Signifies that the code is valid.</p>
	<p>Signifies that the code is invalid.</p>




Attribute Assignment Editor Dialog Box

Enables you to define a regular expression that discovers specific running software according to a CIT's attribute value.

<p>To access</p>	<p>Click Set Attributes in the Software Identification Rule Editor dialog box.</p>
-------------------------	---

Relevant tasks	"Discover Running Software – Scenario" on page 108
See also	<ul style="list-style-type: none"> ▶ "Parse Rule Editor Dialog Box" on page 149 ▶ "Attribute Editor Dialog Box" on page 137 ▶ "Software Identification Rule Editor Dialog Box" on page 158

User interface elements are described below:

GUI Element (A–Z)	Description
	Click to add a regular expression that determines the attribute of the CI to be discovered, or to add an attribute.
	Click to edit an existing regular expression or attribute.
	Click to delete the regular expression or the attribute.
Attribute assignments for type	For details, see "Attribute Editor Dialog Box" on page 137.
Parsing Rules	For details, see "Parse Rule Editor Dialog Box" on page 149.

Attribute Editor Dialog Box

Enables you to define a rule that discovers a CIT according to an attribute. The attribute is defined according to a regular expression.

To access	Software Identification Rule Editor > Set Attributes button > Attributes Assignment Editor. Click the Add button in the Attributes Assignment for Type pane.
Relevant tasks	"Discover Running Software – Scenario" on page 108
See also	"Parse Rule Editor Dialog Box" on page 149

User interface elements are described below:


GUI Element (A–Z)	Description
Name	Choose from the list of attributes of the CIT selected in the Editor. This attribute name is replaced by the value found by the regular expression. To find an attribute, start typing the name.
Type	The type of operation defined for the attribute, for example, Boolean, string, date, and so on.
Value	<p>The value that replaces the name in the Rule ID field in the Parse Rule Editor dialog box.</p> <p>Use the following syntax for the value:</p> <pre>\${<rule ID name>(<group number>)}</pre> <p>For example, <code>\${DB_SID(1)}</code> means that DFM should search for the Rule ID with the name <code>DB_SID</code> and retrieve its regular expression.</p> <p>DFM should then retrieve the code for the first group (1). For example, in the regular expression <code>.\s+(\w+)\\$</code>, the first group is <code>(\w+)\\$</code>, that is, a word or words that appear at the end of the line.</p>

Choose Discovered Class Dialog Box

Enables you to choose CITs that are to be discovered by a selected adapter and to limit links so that they are mapped only when they connect specific CITs.

To access	<ul style="list-style-type: none"> ▶ Data Flow Management > Adapter Management. In the Resources pane, select an adapter. In the Adapter Definition tab > Discovered CITs pane, click the Add Discovered CIT button. ▶ Data Flow Management > Adapter Management. In the Resources pane, select an adapter. In the Adapter Management tab > Results Management pane, select the Enable Automatic deletion check box and click the Add button in the Automatic Deletion pane.
------------------	--

User interface elements are described below:





GUI Element (A-Z)	Description
<p>Link</p>	<p>Enables DFM to discover CITs only when they are linked by link types you choose in this box.</p> <p>Note: This section is relevant only when adding a discovered CIT, not for defining CITs for automatic deletion.</p> <p>Select a link type from the list and click the button  in the End 1 and End 2 boxes to open the Choose Configuration Item Type dialog box. Choose the CITs that DFM should map when they are linked by the selected link type.</p> <p>Note: DFM automatically recognizes the links between CIs and adds them to the map of discovered CITs. However, during adapter writing, you may need to exclude links between certain CITs. For example, both nodes and IPs and nodes and ports are linked by usage. You may need to receive results only for nodes and IPs that are connected by the usage link, and not nodes and ports. The End 1 and End 2 links determine the result received from the adapter, and this result is reflected in the map, as can be seen in the following example:</p> <div data-bbox="621 980 1220 1319" data-label="Diagram"> <pre> graph TD CD[Configuration Document] -- Usage_5 --> WS[WebServer] CD -- Usage_4 --> IP[IpAddress] WS -- Usage_1 --> RS[RunningSoftware] IP -- Usage_3 --> RS RS -- Usage_1 --> NE[NodeElement] RS -- Usage_2 --> TCPP[TCP/IP Port] NE -- Usage --> TCPP </pre> </div>
<p>Object</p>	<p>Select a CIT to be added to the list of CITs that an adapter is to discover. Save the changes by clicking the Save button at the bottom of the Adapter Definition pane.</p>




Configuration File Pane

Enables you to edit a specific configuration file that is part of a package. For example, you can edit the **portNumberToPortName.xml** file so that specific port numbers, names, or types are discovered.

To access	Click a specific configuration file in the Resources pane.
Important Information	<p>The following files are for internal use only and should only be changed by users with an advanced knowledge of adapter-writing:</p> <ul style="list-style-type: none"> ▶ discoveryPolicy.xml ▶ jythonGlobalLibs.xml <p>For details, see "Resource Files" on page 119 and "Internal Configuration Files" on page 120.</p>

User interface elements are described below:

GUI Element (A–Z)	Description
	Find specific text in the configuration file. For details, see "Find Text Dialog Box" on page 144.
	Click to go to a specific line in the configuration file. In the Go To Line dialog box, enter the line number.
	Click to open the file in an external editor. The editor is defined as part of a user's profile. For details, see "User Profile Page" in the <i>HP Universal CMDB Administration Guide</i> .
	<p>Click to edit the external editor preferences. You can run the editor by adding flags to the path.</p> <p>In the following example:</p> <div data-bbox="554 1246 1011 1420" data-label="Image"> </div> <p>:file sets the place of the file in relation to the flags. The user cannot set the file name.</p>

GUI Element (A–Z)	Description
	Click to toggle between the advanced editor and a simple text editor. You can use the simple editor when the advanced editor causes problems.
	For XML files, signifies that the code is valid.
	For XML files, signifies that the code is not valid.

Edit Process Dialog Box

Enables you to add a process that can identify specific running software.

To access	Click the Add button in the Identifying Processes pane in the Software Identification Rule Editor dialog box.
See also	"Software Identification Rule Editor Dialog Box" on page 158

User interface elements are described below:

GUI Element (A–Z)	Description
Attributes	Opens the Attributes Assignments Editor dialog box for the identifying process.
Command Line	The running software can also be mapped using the process name. In this case, you must add a process command line (or part of it) with which the process name uniquely identifies the software, for example, <code>c:\ora10\bin\oracle.exe UCMDB</code> .


GUI Element (A-Z)	Description
Key Process	Select this check box if, during discovery, DFM must distinguish between applications that run similar processes (IP, port, command line, or owner). For an explanation of this box, see "Identifying Running Software by Processes" on page 105.
Main process	Select this check box to mark this process as a unique and distinguishing process. For such processes there need to be several instances of the software CI.
Name	Enter the exact name of the process, for example, java.exe .
Port	<p>Add a port number or name, either by typing a number or by clicking the Add button then selecting the ports in the Global Ports List.</p> <ul style="list-style-type: none"> ▶ If the process has to listen at a specific port, the port should be listed. You can enter more than one port, separated by commas, for example, 8888,8081,8080,81,8000,82,80. ▶ If the process does not have to listen at a specific port (that is, the running software can use any port), select the All Ports option.
Port match is optional	<ul style="list-style-type: none"> ▶ Select this check box to enable discovery of processes that are not listening at any of the ports entered in the Port field (that is, identification is by process name only). ▶ Clear this check box to enable discovery of processes based on process name and the port number entered in the Port field.

Find Resource/Jobs Dialog Box

Enables you to build a search query to find a particular resource or job.

To access	<ul style="list-style-type: none"> ➤ Discovery Control Panel > Discovery Modules pane. Click the Search for Discovery Job button. ➤ Adapter Management > Resources pane. Click the Find resource button.
See also	"Resources Pane" on page 152

User interface elements are described below:



GUI Element (A–Z)	Description
	Click to select a CIT from the dialog box that opens. Click OK to return to the Find Resource dialog box. Note: This button is not accessible when Name is selected.
Direction	Searches forwards or backwards through the packages.
Find Discovery Job by/ Find Discovery resource by	Choose between: <ul style="list-style-type: none"> ➤ Name. Enter the name, or part of it, of the resource. ➤ Input type/Adapter input type. CIs that trigger the job. Click the button to open the Choose Configuration Item Type dialog box. Locate the CI type that you are searching for. ➤ Output type/Adapter output type. CIs that are discovered as a result of the job or the adapter.
Find All	Click to highlight all instances of the text entered in Name .
Find Next	The next job/resource meeting the search criteria is highlighted in the Discovery Modules/Resources pane.

Find Text Dialog Box

Enables you to find text in a script or configuration file.

To access	Select a script or configuration file and click the Find text button in the file pane.
------------------	---

User interface elements are described below:

GUI Element (A–Z)	Description
 	<ul style="list-style-type: none"> ▶ Click Find to find one instance of the text you are searching for. ▶ Click Find All to find all instances of the text.
Direction	Search forwards or backwards through the script or configuration file.
Find what	<p>Type the text to be found or click the down arrow to choose from previous searches.</p> <p>Click the adjacent arrow to display a list of symbols you can use in wildcard or regular expression searches. This arrow is enabled when you select the Use option.</p>
Options	Select an option to narrow your search.
Origin	Enables a search of the entire scope or from the current cursor position.
Target	<ul style="list-style-type: none"> ▶ Global. Searches throughout the file. ▶ Selected Text. Searches through the selected text.

Input Query Editor Window

Enables you to define which CIs can be Trigger CIs for jobs that run a specific adapter.

To access	Data Flow Management > Adapter Management > select an adapter > Adapter Definition tab > Input pane > click the Edit Input Query button next to the Input Query box.
See also	<ul style="list-style-type: none"> ▶ "Trigger CIs and Trigger Queries" on page 29 ▶ "Trigger Query Editor Window" on page 315

User interface elements are described below:

GUI Element (A–Z)	Description
<Panes>	<ul style="list-style-type: none"> ▶ CI Type Selector Pane ▶ Editing Pane ▶ Information Pane
Query Name	The name of the adapter's input query.

CI Type Selector Pane

Displays a hierarchical tree structure of the CI Types found in the CMDB. For more details, see "CI Type Manager User Interface" in the *HP Universal CMDB Modeling Guide*.


Note: The number of instances of each CIT in the CMDB is displayed to the right of each CIT.

To access	To create or modify a query, click and drag nodes to the Editing pane and define the relationship between them. Your changes are saved to the CMDB.
------------------	---

Relevant tasks	<ul style="list-style-type: none"> ▶ "Define a TQL Query" in the <i>HP Universal CMDB Modeling Guide</i> ▶ "Create a Pattern View" in the <i>HP Universal CMDB Modeling Guide</i>
See also	"Add Query Nodes and Relationships to a TQL Query" in the <i>HP Universal CMDB Modeling Guide</i>

Editing Pane

User interface elements are described below:

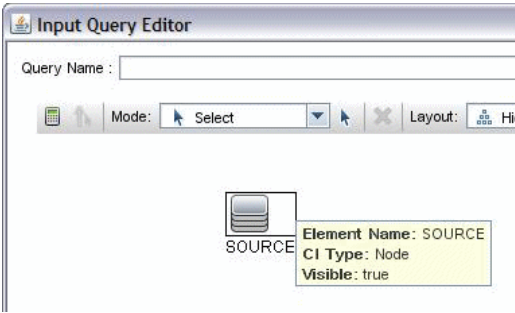GUI Element (A–Z)	Description
<node>	<p>Hold the cursor over a node to view information about the node:</p>  <p>The screenshot shows a window titled "Input Query Editor". It has a "Query Name:" field at the top. Below it is a toolbar with icons for a grid, a hand, a mode dropdown menu set to "Select", a mouse cursor icon, a close icon, and a "Layout:" button. In the center of the editor, there is a node icon labeled "SOURCE". A tooltip is displayed over this node, containing the following text: "Element Name: SOURCE", "CI Type: Node", and "Visible: true".</p>
<right-click menu>	For details, see "Shortcut Menu Options" in the <i>HP Universal CMDB Modeling Guide</i>
<Toolbar>	For details, see "Toolbar Options" in the <i>HP Universal CMDB Modeling Guide</i>

Information Pane

Displays the properties, conditions, and cardinality for the selected node and relationship.

Important Information

Hold the pointer over a node to view information:

Element Name: WMI
 CI Type: WMI
 Visible: false
 Cardinality: Composition (Node_2, WMI) : 1..*

A small green indicator is displayed next to the tabs that include information:

Attributes	* Cardinality	Qualifiers
Containment (Node, IpAddress_2) : 1..*		

User interface elements are described below:

GUI Element (A-Z)	Description
Edit button	Select a node or relationship in the Editing pane and click the Edit button to open the Query Node Properties dialog box. For details, see "Query Node/Relationship Properties Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i> .
Attributes	Displays the attribute conditions defined for the node or the relationship. For details, see "Attribute Tab" in the <i>HP Universal CMDB Modeling Guide</i> .
Cardinality	Cardinality defines how many nodes you expect to have at the other end of a relationship. For example, in a relationship between node and IP, if the cardinality is 1:3, the query retrieves only those nodes that are connected to between one and three IPs. For details, see "Cardinality Tab" in the <i>HP Universal CMDB Modeling Guide</i> .
Details	<p>► CI Type. The CIT of the selected node/relationship.</p> <p>► Visible. A tick signifies that the selected node/relationship is visible in the topology map. When the node/relationship is not visible, a box <input type="checkbox"/> is displayed to the right of the selected node/relationship in the Editing pane:</p> <div data-bbox="586 977 895 1229" data-label="Diagram"> </div> <p>► Include subtypes. Display both the selected CI and its descendants in the topology map.</p> <p>Note: To change the visible and subtype settings, select a node in the Editing pane and click the Edit button. In the Query Node Properties dialog box, select or clear the boxes.</p>

GUI Element (A-Z)	Description
Qualifiers	Displays the qualifier conditions defined for the node or the relationship. For details, see "Qualifier Tab" in the <i>HP Universal CMDB Modeling Guide</i> .
Selected Identities	Displays the element instances that are used to define what should be included in the query results. For details, see "Identity Tab" in the <i>HP Universal CMDB Modeling Guide</i> .

Parse Rule Editor Dialog Box

Enables you to create a rule that matches an attribute to process-related information (IP, port, command line, and owner).

To access	Software Identification Rule Editor > Set Attributes > Attributes Assignment Editor > Parsing Rules > Add
Important Information	Only users with a knowledge of regular expressions should make changes to a rule.
Relevant tasks	"Discover Running Software – Scenario" on page 108
See also	<ul style="list-style-type: none"> ▶ "Attribute Editor Dialog Box" on page 137 ▶ "Software Identification Rule Editor Dialog Box" on page 158

User interface elements are described below:

GUI Element (A-Z)	Description
Process Attribute	Choose between the Port , IP , Command Line , Name , or Owner process-related information. The rule is invoked on the attribute you choose here.

GUI Element (A–Z)	Description
Regular Expression	<p>Enables you to create a dynamic expression that finds at least one process that defines this running software. The regular expression is invoked on the value in the Process Attribute field.</p> <p>For example, a command line process includes the following regular expression:</p> <pre>.+\s+(\w+)\$</pre> <p>This expression searches for any character, followed by a space or spaces, followed by a word or words (a-z or A-Z or 0-9) that appear at the end of the line.</p> <p>The following command line matches this regular expression: <code>c:\ora10\bin\oracle.exe UCMDB</code></p>
Rule ID	<p>Enter a unique name for the rule. The Rule ID is needed to identify the rule in the Attributes Assignment Editor pane. For details, see "Additional Attributes" on page 159.</p>

Permission Editor Dialog Box




Enables you to configure an adapter you have written, so that users can view permissions for the job.

To access	Data Flow Management > Adapter Management > select an adapter > Adapter Definition tab > Required Permissions pane > click the Add button.
Important Information	The information you define here is not dynamic, that is, if an adapter is changed, the information in this dialog box is not updated.
See also	<ul style="list-style-type: none"> ➤ "Discovery Permissions Window" on page 284 ➤ "Viewing Permissions While Running Jobs" on page 234 ➤ "Required Permissions Pane" on page 124 ➤ "Discovery Job Details Pane" on page 268

User interface elements are described below:

GUI Element (A–Z)	Description
Operation	The action that is being run.
Permission	Enter a name for the permission, to appear in the Required Permissions pane.
Usage Description	Free text that you enter to describe the permission object and its parameters. This text is usually a general comment on the type of permission object, whereas the description is a more specific comment. For example, you could enter Permissions for host machines here, and Permissions for host machines running on Windows for a particular row.

Permission Objects and Parameters Pane





GUI Element (A–Z)	Description
	Click to open the Permission Object and Parameter pane. You can enter more than one object or parameter for each permission. The information you enter in this dialog box appears in the Required Permissions pane, in the Objects and Parameters column.
	Click to delete a permission object.
	Click to edit an existing permission object.
Context	Specific information about the permission object's environment, for example, Windows or UNIX.
Parameter	The parameters that are needed during the job run. For example, the UNIX permission object <code>cat</code> needs the <code>/etc/passwd</code> parameter.
Permission Object	The name of the command, table, or other content of the Jython script.



Resources Pane

Enables you to locate a specific package, adapter, script, configuration file, or external resource. You can also create an adapter, Jython script, configuration file, or Discovery wizard, and you can import an external resource.

To access	Data Flow Management > Adapter Management
Important Information	<p>Depending which level you select in the Resources pane, different information is displayed in the View pane.</p> <p>If you select:</p> <ul style="list-style-type: none"> ➤ One of the following folders: Discovery Packages root, a specific package, an adapter, script, configuration file, or external resource: a list of the resources in that folder is displayed. To access a resource directly, double-click the resource in the View pane. ➤ A specific adapter: The Adapter Definition and Adapter Management panes are displayed. For details, see "Adapter Definition Tab" on page 121 and "Adapter Management Tab" on page 127. ➤ A script or configuration file: The script editor is displayed. For details, see "Script Pane" on page 156. ➤ An external resource: Information about the file is displayed.
See also	"Package Manager User Interface" in the <i>HP Universal CMDB Administration Guide</i> .

User interface elements are described below (unlabeled elements are shown in angle brackets>):

GUI Element (A–Z)	Description
	<p>Click to:</p> <ul style="list-style-type: none"> ▶ Create an adapter. Enter the adapter name, choose whether it should be used as a discovery adapter or for integration. For integration adapters, choose the integration type from the list of available types. Click OK. The new adapter is added to the << No Package >> folder. Edit the adapter. For details, see "Adapter Definition Tab" on page 121 and "Adapter Management Tab" on page 127. For details on moving an adapter to a package, see "Create a Custom Package" in the <i>HP Universal CMDB Administration Guide</i>. For details on creating integration adapters, see "Discovery and Integration Adapters" on page 26. ▶ Create a Jython script. Enter the script name. For details, see "Script Pane" on page 156. ▶ Create a configuration file. Enter the configuration file name. By default, the file takes an .xml extension. To give the file another extension, for example, *.properties, name the file and include the extension. Add the appropriate XML code or other content. For XML files, you can save the file only if it is valid. For details, see "Configuration File Pane" on page 140. ▶ Import an external resource. In the browser that opens, locate the resource to be imported and click Open. ▶ Create a Discovery Wizard. Name the new wizard. By default, the file takes an .xml extension. A new file is added to the Discovery Wizard folder of the << No Package >> folder. The file is in template format.
	<p>Click to delete the resource.</p>
	<p>Click to open the Find Resource dialog box. For details on filtering, see "Filtering Results" on page 39.</p>
	<p>Click to refresh the list of packages.</p>

GUI Element (A–Z)	Description
	Packages tree. Displays a list of all packages.
	Package root. Displays a list of all resources included in the package. You can view any of these resources by clicking the resource in the Resources pane.
<Configuration files>	Right-click a file to: <ul style="list-style-type: none"> ▶ Save as. Saves the file under a new name. Use this option to clone an existing file. The new file includes all attributes of the existing file. Make any necessary changes to the file and save it. ▶ Delete. Deletes the configuration file. The resource is removed completely from the system. ▶ Open in Frame. Select to open the file in a new window.
<External resource files>	An external resource is any file needed to perform discovery or integration. For example, the <code>nmap.exe</code> file is needed for credential-less discovery. <ul style="list-style-type: none"> ▶ Right-click a file to: <ul style="list-style-type: none"> ▶ Save as. Save the resource under a new name. Use this option to clone an existing resource. The new resource includes all attributes of the existing resource and is saved to the same location in the file system. Make any necessary changes to the new resource and save it. ▶ Delete. Deletes the file. The file is removed completely from the system. ▶ Select the file to display information in the View pane. You can open an external resource or export it (you should provide a name for the file you are exporting).

GUI Element (A–Z)	Description
<Adapter files>	Right-click a file to: <ul style="list-style-type: none"> ▶ Save as. Save the adapter under a new name. Use this option to clone an existing adapter. The new adapter includes all attributes of the existing adapter. Give a name to the new adapter, and change the necessary attributes. ▶ Delete. Deletes the adapter. The adapter is removed completely from the system. ▶ Go to Discovery job. When enabled, click to open the Discovery Control Panel window with the job selected. This option is enabled if the adapter is included in a job. ▶ Edit adapter source. Opens the adapter source editor where you can make changes to the adapter. For details, see "Adapter Source Editor Window" on page 135.
<Script files>	Right-click a file to: <ul style="list-style-type: none"> ▶ Save as. Save the script under a new name. Use this option to clone an existing script. The new script includes all attributes of the existing script. Make any necessary changes to the script and save it. ▶ Delete. Deletes the script. The script is removed completely from the system. ▶ Open in Frame. Select to open the script in a new window. For details on editing the script, see "Adapter Source Editor Window" on page 135.


Script Editor Window

Enables you to edit a specific script that is part of a package.




To access	<ul style="list-style-type: none"> ▶ Right-click a script in the Resources pane and choose Open in Frame. ▶ Select a configuration file in the Global Configuration Files pane and click the Edit button. For details, see "Script Pane" on page 156.
------------------	---


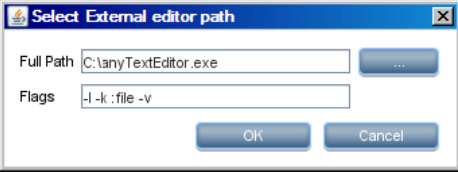




Script Pane

Enables you to edit a specific script that is part of a package.

To access	Click a specific script in the Resources pane.
Important Information	<p>The script pane title bar includes the actual physical location of the script. For example, the following script is located in C:\hp\UCMDB\DataFlowProbe\runtime\probeManager\discoveryScripts (or probeGateway\discoveryScripts):</p> 
See also	"Adapter Development and Writing" in the <i>HP Universal CMDB Developer Reference Guide</i>

User interface elements are described below (unlabeled elements are shown in angle brackets>):

GUI Element (A–Z)	Description
	Find specific text in the script. For details, see "Find Text Dialog Box" on page 144.
	Click to go to a specific line in a script. In the Go To Line dialog box, enter the line number.
	Click to open the script in an external text editor. You define which editor is used in the User Profile dialog box. For details, see "User Profile Page" in the <i>HP Universal CMDB Administration Guide</i> .

GUI Element (A–Z)	Description
	<p>Click to edit the external editor preferences. You can run the editor by adding flags to the path.</p> <p>In the following example:</p>  <p>:file sets the place of the file in relation to the flags. The user cannot set the file name.</p>
	<p>Click to toggle between the advanced editor and a simple text editor. You can use the simple editor when the advanced editor causes problems.</p>
	<p>For Jython files, signifies that the code is valid.</p>
	<p>For Jython files, signifies that the code is not valid.</p>
	<p>See Validation Information below.</p> <p>Note: This button is displayed when a script contains Framework API errors.</p>






GUI Element (A–Z)	Description
<script>	The Jython script used by the package. For details on working with Jython, see "Create Jython Code" in the <i>HP Universal CMDB Developer Reference Guide</i> .
Validation Information	<p>If a script is not valid, Validation Information displays the errors in the script, for example:</p> <p style="padding-left: 40px;">Script has failed validation. At line 48: Factory.getProtocolProperty(found. This is a problem - Usage of Factory is deprecated. Use Framework.getProtocolProperty instead.</p> <p>Click Fix validation errors then OK to update the script.</p> <p>The error may occur due to changes in the Framework object's API. For details, see "HP Universal CMDB Web Service API" in the <i>HP Universal CMDB Developer Reference Guide</i>.</p>

Software Identification Rule Editor Dialog Box

Enables you to define a new running software rule.

To access	Data Flow Management > Discovery Control Panel. In the Discovery Modules pane, select Network > Host Resources and Applications > Software Element CF by Shell . In the Properties tab, select Global Configuration Files > applicationSignature.xml . In the Software Library dialog box, click the Add button or select an existing element and click the Edit button.
Important Information	Each parse rule must be matched by at least one process.
Relevant tasks	"Discover Running Software – Scenario" on page 108
See also	"Global Configuration Files Pane" on page 126

User interface elements are described below:

GUI Element (A–Z)	Description
	Click to add attributes to the component. For details, see "Attribute Assignment Editor Dialog Box" on page 136.
	Click to open the Optional Configuration Files dialog box.
	Click to add a process.
	Select a process and click to delete.
	Select a process and click to edit.
Additional Attributes	To add attributes, click the Set Attributes button. For details, see "Attribute Assignment Editor Dialog Box" on page 136.
Category	<p>You can:</p> <ul style="list-style-type: none"> ▶ Choose the category under which the new running software should appear. ▶ Change the category for an existing element. ▶ Add a new category by typing its name in this field. <p>The changes you make here are immediately displayed in the Software Library dialog box.</p>
CI Type	Select the CIT that is to be discovered.
Discovered Product Name	The name of the running software to be created by this signature.
Identifying Processes	To add a process that can identify specific running software, click the Add button. The Edit Process dialog box opens. For details, see "Edit Process Dialog Box" on page 141.
Optional Configuration Files	<p>A list of configuration files</p> <p>Click the Set Configuration Files button to open the Optional Configuration Files dialog box.</p> <p>To add a configuration file, in the Optional Configuration Files dialog box, click the Add button and, in the Configuration File Names box, enter the full path to the running software's configuration file and the file name.</p>

GUI Element (A–Z)	Description
Software Signature ID	The name of the definition. Note: This is not the running software’s name but a name you give to differentiate this discovery from similar discoveries.
Supported versions	Versions supported for this running software.
Vendor	The vendor of this running software.





Software Library Dialog Box

Enables you to view the logical groups of running software.

To access	<ul style="list-style-type: none"> ▶ Discovery Control Panel window > Network Discovery > select one of the Host Resources and Applications module jobs. Locate the Global Configuration Files pane in the Properties tab. Select applicationsSignature.xml and click the Edit button. ▶ Adapter Management window > select one of the Host_Resources_By_SNMP/TTY/WMI adapters. Locate the Global Configuration Files pane in the Adapter Definition tab. Select applicationsSignature.xml and click the Edit button. ▶ In the Infrastructure Wizard Preferences page, open the Choose Software Element to be discovered and configure Identification box.
Important Information	<p>The software elements are organized in logical categories. You can change the names of these elements, you can move an element to another category, and you can define new elements and categories. For details, see the Category entry in "Software Identification Rule Editor Dialog Box" on page 158.</p> <p>The code you define in this dialog box and the Software Element Editor dialog box overwrites the code in applicationsSignature.xml.</p>

Relevant tasks	"Discover Running Software – Scenario" on page 108
See also	"Global Configuration Files Pane" on page 126

User interface elements are described below (unlabeled elements are shown in angle brackets):

GUI Element (A–Z)	Description
	<p>Select a check box to include a category or software element in the discovery.</p> <p>Clear a check box to remove the category or element from the discovery.</p>
	<p>Click to define a new software element. For details, see "Software Identification Rule Editor Dialog Box" on page 158.</p>
	<p>Select a software element and click to delete the element.</p>
	<p>Select a software element and click to make changes to the element. For details, see "Software Identification Rule Editor Dialog Box" on page 158.</p>
<p><List of software elements></p>	<p>List of objects that are software elements.</p>

5

DDM Community

This chapter includes:

Reference

- ▶ Discovery and Integration Content Packs on page 164

Reference

Discovery and Integration Content Packs

The DDM Community Web site provides customers with a convenient way to obtain the latest Discovery and Integration Content Pack. You need an HP Passport user name and password to log in. The URL for this Web site is: <https://h20090.www2.hp.com/>.

Part III

Integration

6

Integration Studio

This chapter includes:

Concepts

- ▶ Integration Studio Overview on page 168

Tasks

- ▶ Work with Federated Data on page 173
- ▶ Work with Population Jobs on page 175
- ▶ Work with Data Push Jobs on page 177
- ▶ Create a CI Topology on page 179
- ▶ Deploy a Package to a Remote Data Repository on page 179

Reference

- ▶ Integration Studio User Interface on page 182
- ▶ Out-of-the-Box Integrations on page 203

Troubleshooting and Limitations on page 204

Concepts

Integration Studio Overview

The Integration Studio is where you manage your UCMDB integration points and connect and share information with external repositories, such as other CMDBs, BTO Software products, or third party products.

Integration points in the CMDB are based on adapters, which are entities that are capable of communicating with external data repositories. A basic set of adapters is provided with the CMDB; however, you can create additional adapters using the Federation Framework SDK. For details, see "Add an Adapter for a New External Data Source" in the *HP Universal CMDB Developer Reference Guide*.

You can also create adapters in the Adapter Management module. For details, see "Resources Pane" on page 152.

For details about how to set up integration points for data integrations, see "Integration Studio Page" on page 196.

Integration points can be of one of the following types:

- "Population" on page 169
- "Federation" on page 169
- "Data Push" on page 172

Population

An integration of Population type copies data from an external data repository into the CMDB, so that the CMDB now controls the data.

You use population in one of the following scenarios:

- When you need to track changes made by the CMDB at the CI level.
- When a remote repository is not reliable in terms of response time; for instance, a network delay prohibits you from setting up run-time federation with the repository.
- When a remote repository does not support federation capabilities (no appropriate adapter exists).

Federation

An integration of Federation type includes data in the CMDB from other sources, in such a way that the source of the data still retains control of the data.

You use the CMDB's federation capabilities to extend the scope of the existing topology query language (TQL) capabilities to encompass data that is stored and maintained in an external repository. The ability to include such information is important, as it prevents you from having to copy large amounts of data and instead bring it into your CMDB only when it is really needed.

Federation also has the benefit that the federated data does not burden the CMDB in terms of capacity; theoretically, you can set up an integration that federates trillions of CIs and relationships. Federated data is fetched at run time, as requested, which lessens the impact on system performance.

Note that the CMDB does not offer change tracking on federated data, because the data does not reside within the CMDB and the CMDB is not notified when external data is modified.

Federated integration creates a federated integration point, which can then be used when defining TQL queries. For details on TQLs, see "Topology Query Language" in the *HP Universal CMDB Modeling Guide*.

Retrieving Data from Multiple Federated Data Sources

During TQL calculation, you can retrieve data for the same CIT from several federated data sources. The data is retrieved from the local CMDB, as well as from other federated data sources, according to how you have configured integration points. As data arrives at the CMDB, it is identified and reconciled, with the end result determined according to the configured reconciliation priority given to the various integrations.

Each CI that is retrieved from an external data repository includes an attribute (Created By) to show from which federated data source the CI has been retrieved.

For limitations, see "Limitations on Retrieving Data from Multiple Data Repositories" on page 204.

Retrieve Attributes from an External Data Repository

- ▶ You can retrieve the attributes of a CI from an external data repository, when the core CI data is stored in the CMDB.
- ▶ The core data repository must be the CMDB.
- ▶ The CIT must be located in a data repository for its attributes to be defined.
- ▶ The same attributes can be retrieved from multiple data repositories.
- ▶ For details on retrieval options, see the CI Type Retrieval Mode field on the "Federation Tab" on page 187.
- ▶ When you configure an integration point to include federated CIs, you must select either full federation of a CI, or the federation of an attribute alone. You cannot set up two integrations for the same CIT where one is mapped to an external CIT and the other is mapped to that same CIT with an external attribute.
- ▶ A CIT can support external attributes if the adapter (which is federating the CIT data) supports mapping information (reconciliation) for this CIT.

Reconciling Information

Federated queries should use the mapping file to reconcile the CI from the CMDB with the attributes from the external data repository.

For details on the Mapping Engine, see "Federation Framework Flow for Federated TQL Queries" in the *HP Universal CMDB Developer Reference Guide*.

For details on selecting attributes to be included in the federation, see "Federation Tab" on page 187.

For details on how reconciliation is performed, see "Reconciliation" on page 333.

Use Cases

- ▶ You need to discover the SMS or Altiris desktops in your system. The desktop CIT is a core CIT and is already synchronized with the CMDB. However, you do not want to store all the desktop data in the CMDB as this is inefficient and unnecessary. It is enough to store core attributes such as name and MAC address in the CMDB, and to define the other details of the desktops as external attributes in two data repositories: SMS and Altiris.
- ▶ VMware creates virtual machines that contain a virtual machine monitor (hypervisor) that allocates hardware resources dynamically and transparently. Multiple operating systems can run concurrently on a single physical computer. Since the allocation resources (for example, memory) are dynamic, DFM cannot discover these resources (DFM runs once every 24 hours and the resource data can change hourly). To enable HP Universal CMDB to always be updated with real-time data, the solution is to divide the data into two: the core data of the virtual hosts should be discovered and placed in the CMDB; the resource attributes should be retrieved from the external source. In this use case, the data for these attributes is retrieved from two data repositories: CMDB and VMware.

Data Push

An integration of Data Push type copies data from the CMDB to an external data repository, so that the CMDB no longer retains control over this data.

You use data push integrations to feed important data from your CMDB into an external system, in order to facilitate your necessary business processes. An example of this is pushing data discovered by DFM into HP Service Manager, where tickets may be opened that are connected to the actual CIs in your IT infrastructure.

Tasks

Work with Federated Data

This task explains how to set up and work with data that is federated from different CMDB sources.

This task includes the following steps:

- "Prerequisites" on page 173
- "Create an Integration Point" on page 173
- "Set Reconciliation Priority" on page 174
- "Select CITs and Attributes to be Federated" on page 174
- "Edit Adapter Configurations" on page 174
- "View Instances in IT Universe Manager" on page 174
- "View Reports" on page 174

1 Prerequisites

Set up the adapter. For details, see "Add an Adapter for a New External Data Source" in the *HP Universal CMDB Developer Reference Guide*.

For details on existing adapters, see "Out-of-the-Box Integrations" on page 203.

2 Create an Integration Point



Select **Data Flow Management > Integration Studio**. Click the **Create New Integration Point** button to open the Create New Integration Point dialog box. For details, see "Create New Integration Point/Edit Integration Point Dialog Box" on page 183.

3 Set Reconciliation Priority

For details, see "Reconciliation Priority Window" on page 364.

4 Select CITs and Attributes to be Federated

For details, see "Federation Tab" on page 187.

5 Edit Adapter Configurations

Modify adapter configurations using the Adapter Management module.

Note: Since in UCMDB version 9.01 adapter files reside on both the Server and the Probe, manual editing of the adapter files is discouraged. Use the Adapter Management module of UCMDB to edit adapter files. For details, see "Manage Adapter Configurations" on page 114.

6 View Instances in IT Universe Manager

For details, see "IT Universe Manager Overview" in the *HP Universal CMDB Modeling Guide*.

7 View Reports

For details, see "Reports" in the *HP Universal CMDB Modeling Guide*.

Work with Population Jobs

This task explains how to schedule population jobs and select the queries that are used to populate the CMDB with data.

This task includes the following steps:

- "Prerequisites" on page 175
- "Create an Integration Point" on page 175
- "Set Reconciliation Priority" on page 176
- "Edit Adapter Configurations" on page 176
- "Schedule the Population Job" on page 176
- "Run the Population Job" on page 176
- "Build a View of the Population Results" on page 176
- "View Instances in IT Universe Manager" on page 176
- "View Reports" on page 176

1 Prerequisites

Set up the adapter. For details, see "Add an Adapter for a New External Data Source" in the *HP Universal CMDB Developer Reference Guide*.

For details on existing adapters, see "Out-of-the-Box Integrations" on page 203.

2 Create an Integration Point



Select **Data Flow Management > Integration Studio**. Click the **Create New Integration Point** button to open the Create New Integration Point dialog box. For details, see "Create New Integration Point/Edit Integration Point Dialog Box" on page 183.

3 Set Reconciliation Priority

For details, see "Reconciliation Priority Window" on page 364.

4 Edit Adapter Configurations

Modify adapter configurations using the Adapter Management module.

Note: Since in UCMDB version 9.02 adapter files reside on both the Server and the Probe, manual editing of the adapter files is discouraged. Use the Adapter Management module of UCMDB to edit adapter files. For details, see "Manage Adapter Configurations" on page 114.

5 Schedule the Population Job

In this step you select queries that specify which CIs are copied to the CMDB, and schedule these queries to run. For details, see "Population Tab" on page 198.

6 Run the Population Job

For details, see "Integration Jobs Pane" on page 189.

7 Build a View of the Population Results

For details, see "Modeling Studio Overview" in the *HP Universal CMDB Modeling Guide*.

8 View Instances in IT Universe Manager

For details, see "IT Universe Manager Overview" in the *HP Universal CMDB Modeling Guide*.

9 View Reports

For details, see "Reports" in the *HP Universal CMDB Modeling Guide*.

Work with Data Push Jobs

This task explains how to schedule data push jobs and select the queries that are used to send data from the CMDB to another data repository.

This task includes the following steps:

- "Prerequisites" on page 177
- "Create an Integration Point" on page 177
- "Set Reconciliation Priority" on page 177
- "Edit Adapter Configurations" on page 178
- "Schedule the Data Push Job" on page 178
- "Run the Data Push Job" on page 178
- "Build a View of Data Push Results" on page 178
- "View Instances in IT Universe Manager" on page 178

1 Prerequisites

Set up the adapter. For details, see "Add an Adapter for a New External Data Source" in the *HP Universal CMDB Developer Reference Guide*.

For details on existing adapters, see "Out-of-the-Box Integrations" on page 203.

2 Create an Integration Point



Select **Data Flow Management > Integration Studio**. Click the **Create New Integration Point** button to open the Create New Integration Point dialog box. For details, see "Create New Integration Point/Edit Integration Point Dialog Box" on page 183.

3 Set Reconciliation Priority

For details, see "Reconciliation Priority Window" on page 364.

4 Edit Adapter Configurations

Modify adapter configurations using the Adapter Management module.

Note: Since in UCMDB version 9.02 adapter files reside on both the Server and the Probe, manual editing of the adapter files is discouraged. Use the Adapter Management module of UCMDB to edit adapter files. For details, see "Manage Adapter Configurations" on page 114.

5 Schedule the Data Push Job

In this step you select queries that specify which CIs are pushed to a remote repository from the CMDB with CIs, and schedule these queries to run. For details, see "Data Push Tab" on page 186.

6 Run the Data Push Job

For details, see "Integration Jobs Pane" on page 189.

7 Build a View of Data Push Results

For details, see "Modeling Studio Overview" in the *HP Universal CMDB Modeling Guide*.

8 View Instances in IT Universe Manager

For details, see "IT Universe Manager Overview" in the *HP Universal CMDB Modeling Guide*.

Create a CI Topology

You can save a topology to the CMDB for a new adapter. This adapter can include elements from a defined topology already existing in the CMDB as well as new elements that you have added to the topology.

For details on creating the topology, see "Topology CI Creation Wizard" on page 198.

Deploy a Package to a Remote Data Repository

You can deploy a package to a data repository located on a remote machine without logging in to the remote machine. This feature is useful if you need to deploy queries, views, or other UCMDB resources created on one machine to other machines running UCMDB.

Note: You perform the following procedure for each data repository that the package is to be deployed to.

This task includes the following steps:

- "Prerequisites" on page 179
- "Change Timeout (Optional)" on page 180
- "Select the Integration Point" on page 180
- "Select the Package" on page 180
- "View Deployment Results" on page 181
- "Log Files" on page 181

1 Prerequisites

- Verify that the Data Flow Probe is configured correctly and is connected to UCMDB.
- Verify that the version of UCMDB running on the remote machine is version 9.02 or later.

- ▶ Verify that UCMDB running on the remote machine is up and running.
- ▶ Create the package that must be deployed to the remote machine, and deploy this package to the local UCMDB Server.

Note: By default, you cannot deploy a package that is larger than 10 MB.

- ▶ Create an integration point on the local UCMDB Server, that uses the **UCMDB9.x** adapter.

2 Change Timeout (Optional)

You can change the time after which UCMDB times out package deployment. If UCMDB cannot connect to the remote machine in 5 minutes, by default, the deployment is timed out.

To change the default: Select **Administration > Infrastructure Settings Manager > Integration Settings > Remote package deploy Timeout**. (The refresh rate indicates when the change takes effect in UCMDB after the value is modified.)

3 Select the Integration Point

- a** In the Integration Point pane, select the integration point that you created in step 1 on page 179. For details, see "Integration Point Pane" on page 194.
- b** Click the **Deploy Remote Package** button.

4 Select the Package

- a** In the **Deploy Remote Package** dialog box, select a package from the list of packages existing on the local UCMDB Server. This is the package that you created in step 1 on page 179. For details, see "Deploy Package to Remote Data Repository using <Integration Point>" on page 186.
- b** Click **OK** to deploy the package.

5 View Deployment Results

Answer the message that is displayed: click **OK** to begin deploying the package.

The status of the deployed package is displayed together with the status of each individual resource in the package.

Successful deployment: A package is successfully deployed if all its resources are successfully deployed.

Failed deployment: If even one resource fails, the package deployment is considered to have failed. Even if package deployment fails, all the successful resources are deployed on the remote machine.

The reason for the failure, for example, a missing CIT, is displayed in the **Deployed resources** section:

Deployed resources

Resource	Status
tqi/View/testing.xml	✘ Class not in class model

6 Log Files

The following table shows the locations of the log files that record any issues that might arise during deployment:

Location	Log File Name
Remote UCMDB machine, version 9.02 or later	ucmdb-api.log mam.packaging.log
Data Flow Probe	probeTasks.log probe-infra.log adapters.log
Local UCMDB machine, version 9.02 or later	ucmdb-api.log

If a resource fails to deploy, an error is displayed in the Status column as well as in the log file on the remote machine.

Reference



Integration Studio User Interface

This section includes (in alphabetical order):


- "Create New Integration Point/Edit Integration Point Dialog Box" on page 183
- "Data Push Tab" on page 186
- "Deploy Package to Remote Data Repository using <Integration Point>" on page 186
- "Federation Tab" on page 187
- "Integration Jobs Pane" on page 189
- "Integration Point Pane" on page 194
- "Integration Studio Page" on page 196
- "New Integration Job/Edit Integration Job Dialog Box" on page 197
- "Population Tab" on page 198
- "Topology CI Creation Wizard" on page 198

Create New Integration Point/Edit Integration Point Dialog Box

This dialog box enables you to create a new integration point or edit the properties of an existing integration point.

To access	<p>Do one of the following:</p> <ul style="list-style-type: none"> ➤ Click the Create New Integration Point button  in the Integration Points pane. ➤ Click the Edit Integration Properties button  in the Integration Points pane.
Important information	<p>The list of fields contains all of the items that may be specified when you create an integration point. Not all of the fields are displayed for all adapters.</p> <p>Each mandatory field is marked with an asterisk.</p> <p>Note: You cannot replace the Trigger CI for an existing Jython integration point. Instead, create a new integration point and add the Probe name and trigger parameters to the new instance. For details, see "Topology CI Creation Wizard" on page 198.</p>
Relevant tasks	"Create a CI Topology" on page 179

User interface elements are described below:

UI Elements (A-Z)	Description
Adapter	<p>Select the adapter that your integration point uses. The following is the list of default adapters provided in the Integration Studio:</p> <ul style="list-style-type: none"> ➤ DDMi ➤ Local UCMDB History ➤ Microsoft SMS ➤ Service Center 6.2x ➤ Service Manager 7.0x ➤ Service Manager 7.1x ➤ UCMDB 8.x ➤ UCMDB 9.x ➤ UCMDB API Population <p>For details about each adapter, see "Out-of-the-Box Integrations" on page 203.</p>
Credentials	<p>Enables you to set credentials for relevant adapter integration points. To open the Choose Credentials dialog box, click .</p> <p>For details on adding credentials, see "Supported Protocols" on page 62.</p>
Integration Description	Enter a brief description of the integration point.
Integration Name	Enter a name for the integration point.
Is Integration Activated	<p>Select this checkbox to create an active integration point. You clear the checkbox if you want to deactivate an integration, for instance, to set up an integration point without actually connecting to a remote machine.</p>
Probe Name	<p>The name of the Data Flow Probe used to run population jobs.</p> <p>Note: A Probe installed on a Linux machine is defined as an Integration Probe and appears in this list. For details, see "Install the Data Flow Probe" in the <i>HP Universal CMDB Deployment Guide</i> PDF.</p>

UI Elements (A-Z)	Description
Push Back IDs	Relevant for UCMDB9.x adapters.
Trigger CI Instance	<p>Displays the CI that is to be used by the new integration point as a trigger during integration with CIs on a remote machine.</p> <p>This field is displayed when you choose an adapter that is a discovery adapter of type jython, and for which the Used as Integration Adapter check box is selected in the Adapter Definition tab. For details, see "Adapter Definition Tab" on page 121.</p> <ul style="list-style-type: none"> ▶ Select Existing CI. Enables you to select the trigger CI through which data is collected during integration. For details, see "Element Instances Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i>. ▶ Create New CI. Enables you to create the topology of the CI to be used as the trigger. For details, see "Topology CI Creation Wizard" on page 198.

Note: Additional fields are available, depending on the adapter you select. Descriptions of each field may be viewed by hovering your mouse over that field on the screen. See the *HP Universal CMDB Developer Reference Guide* for details about specific adapters.

Data Push Tab

This tab enables you to:

- ▶ Specify the queries that are used to push data to external data repositories, and to schedule jobs that contain those queries. For details, see "Integration Jobs Pane" on page 189.
- ▶ View statistics results for jobs that have run. For details, see "Statistics Tab" on page 191.

To access	Select the Data Push tab on the Integration Studio page.
Important information	This tab is enabled only when data push is supported by the adapter on which you are basing your integration point.
See also	"New Integration Job/Edit Integration Job Dialog Box" on page 197

Deploy Package to Remote Data Repository using <Integration Point>

Enables you to deploy a package to a remote data repository using an integration point, and to view the results of the deployment.

To access	Click the Deploy a Remote Package button in the Integration Point pane. For details, see "Integration Point Pane" on page 194.
Relevant tasks	"Deploy a Package to a Remote Data Repository" on page 179

User interface elements are described below:

UI Elements (A-Z)	Description
Deployment status	The name and status (success or failure) of the complete package.
Deployed resources	The status (success or failure) of each deployed resource in the package named under Deployment status .
Package Name	A list of all available packages.




Federation Tab


This tab enables you to select which CITs or attributes are to be supported by the integration point. For example, if a TQL query includes a node that represents a specific CIT, the instances of this CIT are accepted from this external data repository.

For details about selecting CIs, see "CI Selector Overview" in the *HP Universal CMDB Modeling Guide*.

To access	Select the Federation tab on the Integration Studio page.
Important information	This tab is enabled only when data federation is supported by the adapter on which you are basing your integration point.

User interface elements are described below:

UI Elements (A-Z)	Description
	Click to clear all selected items.
	Click to invert the selections.
	Click to expand the entire hierarchical tree structure.

UI Elements (A-Z)	Description
	<p>Click to collapse the hierarchical tree structure.</p>
<p>CI Type Retrieval Mode</p>	<ul style="list-style-type: none"> ▶ Retrieve CIs of selected CI Type. All a CI's data, including all its attributes, are retrieved from the data repository. <ul style="list-style-type: none"> Retrieve CIs of the <CI Type name> CI Type from the UCMDDB too. The CI can be federated as well as physically retrieved from the CMDB (if any CI instances exist in the database). ▶ Retrieve selected attributes. The selected attributes are retrieved from the data repository. The CIs must already exist in the CMDB. <ul style="list-style-type: none"> Retrieve the attribute from the UCMDDB too. The attribute can be federated as well as physically retrieved from the CMDB (if any attributes of CI instances exist in the database). <p>Note:</p> <ul style="list-style-type: none"> ▶ A parent CIT and all its child CITs included in an integration point definition must use the same retrieval mode. ▶ You cannot select both CITs and attributes for the same integration point.

UI Elements (A-Z)	Description
Select Attributes	<p>You can define which attributes of an external CIT are to be included in the federation:</p> <ul style="list-style-type: none"> ▶ In the CI Type Retrieval Mode pane, select Retrieve selected attributes. ▶ In the Select Attributes list, select the attributes that are to be included in the federation. ▶ Save the changes. <p>Note: Attributes are defined in the CIT Manager. For details, see "Add/Edit Attribute Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i>.</p>
Supported and Selected CI Types	<p>Displays a hierarchical tree containing the supported and selected CI Types and attributes.</p> <p>When queried by an TQL query, the CITs you select here are configured to retrieve the data from this external data repository.</p> <p>Select the CITs to be supported by this integration point.</p>







Integration Jobs Pane

This pane enables you to schedule integration jobs to run with external data repositories. The Statistics, Query Status, and Job Errors tabs display runtime details about the selected jobs.

To access	<ul style="list-style-type: none"> ▶ Select the Population or Data Push tab on the Integration Studio page. ▶ To access the Statistics, Query Status, or Job Error tabs, select an integration point, select the Population or Data Push tab on the Integration Studio page, then select a job.
Important information	<p>This pane is displayed only when population or data push is supported by the adapter on which you are basing your integration point.</p>

Relevant tasks	<ul style="list-style-type: none"> ➤ "Work with Population Jobs" on page 175 ➤ "Work with Data Push Jobs" on page 177
See also	<ul style="list-style-type: none"> ➤ "Statistics Tab" on page 191 ➤ "Query Status Tab" on page 193 ➤ "Job Errors Tab" on page 194 ➤ "Discovery Scheduler Dialog Box" on page 286

User interface elements are described below:

UI Elements (A-Z)	Description
	Click to create an integration job. For details, see "New Integration Job/Edit Integration Job Dialog Box" on page 197.
	Click to edit an existing integration job.
	Click to delete an integration job from the list.
	<p>Click to refresh the integration job list.</p> <p>Note: If you refresh the list of jobs before you save a new job, you are given a choice:</p> <ul style="list-style-type: none"> ➤ Yes. The job is saved and the integration is refreshed. ➤ No. The job is not saved and the integration is refreshed. ➤ Cancel. The job is not saved and the integration is not refreshed.
	<p>Click to run the selected population or data push job, which synchronizes only the changes in the data since the last job run.</p> <p>By default, scheduled jobs synchronize only changes, except for the first time a job runs. In that case, a full population or data push job runs, in which all relevant data for the job is synchronized.</p>
	Click to run a full population or data push job. This job copies or pushes all the relevant data for the job.
Job Name	Name given to the population or data push job.



UI Elements (A-Z)	Description
Last Synchronization Type	<p>This column is displayed for data push jobs.</p> <p>The type of the last run:</p> <ul style="list-style-type: none"> ▶ None. The job has not yet run. ▶ Changes. The job synchronized only the changes in the data since the last time it ran. ▶ Full. The job synchronized all the relevant data for the job.
Status	<p>Population jobs:</p> <ul style="list-style-type: none"> ▶ Unknown. ▶ Waiting. ▶ Running. The job is currently running. ▶ Succeeded. The job ran successfully. ▶ Succeeded with warnings. The job ran successfully but warnings were reported. ▶ Failed. The job did not run successfully. ▶ Trigger missing. The job cannot run because its trigger CI is missing. <p>Data push jobs:</p> <ul style="list-style-type: none"> ▶ N/A. The job has not yet run since it was defined. ▶ Running. The job is currently running. ▶ Ended. The period between Running and Succeeded or Failed. ▶ Succeeded. The last run was successful. ▶ Failed. The last run was not successful.

Statistics Tab

This tab displays information about the CIs synchronized by the job.

Note: Statistics for population jobs are accumulative and therefore can be filtered, whereas the data push statistics are always relevant for the last job run only.

User interface elements are described below (unlabeled elements are shown in angle brackets):


GUI Element (A-Z)	Description
	<p>Click to refresh the list of CITs.</p>
	<p>Displayed for population jobs only.</p> <p>Select the time range or Probe for which to display statistics about the selected job.</p> <ul style="list-style-type: none"> ➤ By Time Range: <ul style="list-style-type: none"> ➤ All. Displays statistics for all job runs. ➤ From Now/Last Minute/Last Hour/Last Day/Last Week. Choose a period of time for which to display statistics about the CITs. ➤ Custom Range. Click to open the Change Timeframe dialog box: Enter the date or click the arrow to choose a date and time from the calendar, for the From and To dates (or click Now to enter the current date and time). Click Last Day to enter the current date and time in the To box and yesterday's date and time in the From box. Click OK to save the changes. ➤ By Probe: To view statistics for a specific Probe, select to open the Choose Probe dialog box.
<p><Statistics table></p>	<ul style="list-style-type: none"> ➤ CIT. The name of the discovered CIT. Displayed for population jobs only. ➤ Query Name. The name of the query whose data is being pushed. Displayed for data push jobs only. ➤ Created. The number of CIs created in the period selected or for the selected Probe. ➤ Updated. The number of CIs that were updated in the period selected. ➤ Deleted. The number of CIs deleted in the period selected or for the selected Probe.

GUI Element (A–Z)	Description
Last updated	The date and time that the Statistics table was last updated for the selected job.
Valid to	The date when the data was last synchronized.

Query Status Tab

This tab displays information about the queries defined for the job.



User interface elements are described below:

GUI Element (A–Z)	Description
	Click to refresh the list of queries.
Query Name	The name of the query.
Query Status	Population jobs. The latest status of the query after the job finishes running. Data push jobs. Either the current status or the last known status of the query.
Start Time	Displayed for data push jobs only. The time at which data from this query started being pushed.
Finish Time	Displayed for data push jobs only. The time at which data from this query stopped being pushed.

Job Errors Tab

This tab displays the errors or warnings reported during the job run.

User interface elements are described below (unlabeled elements are shown in angle brackets):

GUI Element (A–Z)	Description
	Click to refresh the list of errors.
	Select a row and click this button to view details of a message.
<List of error messages>	<p>Message. A message describing the cause of failure.</p> <p>Severity. For details, see "Error Severity Levels" in <i>HP Universal CMDB Developer Reference Guide</i>.</p> <p>Reported. The time at which the error is being reported by the job.</p> <p>Query. Displayed for data push jobs only. The name of the query for which the error is being reported.</p>

Integration Point Pane








This pane enables you to define integration points, and schedule population and data push jobs.



Integration points are based on adapters, each of which is predefined to transmit information in specific ways. For example, **CMDBAdapter** populates CIs and links from a remote CMDB, in which case the CMDB then has a local copy of these CIs, while the **ServiceManagerAdapter** retrieves data from HP ServiceCenter and HP Service Manager, but HP ServiceCenter or HP Service Manager still retains control.

For details about defining a discovery adapter as an integration adapter, see the **Used as Integration Adapter** field in "Adapter Definition Tab" on page 121.

To access	Located in the left pane of the Integration Studio.
Relevant tasks	"Deploy a Package to a Remote Data Repository" on page 179
See also	<ul style="list-style-type: none"> ▶ "Data Push Tab" on page 186 ▶ "Federation Tab" on page 187 ▶ "Population Tab" on page 198

User interface elements are described below (unlabeled elements are shown in angle brackets>):

UI Elements (A-Z)	Description
	Click to create a new integration point. For details, see "Create New Integration Point/Edit Integration Point Dialog Box" on page 183.
	Click to save the changes you made to the definition of an integration point.
	Click to delete the selected integration point.
	Click to edit a integration point's properties.
	Click to refresh the list of integration points and to fully refresh the selected integration point.
	Click the button to open the Deploy Remote Package dialog box. For details, see "Deploy a Package to a Remote Data Repository" on page 179. Note: This button is enabled for integration points based on the UCMDB9.x adapter (that supports package deployment capabilities).
	Click to export the integration point's configuration in XML format.


UI Elements (A-Z)	Description
	Click to import the integration point's configuration in XML format.
	Click to open the Reconciliation Priority Manager. For details, see "Reconciliation Priority Window" on page 364.
<List of integration points>	Displays the list of previously defined integration points.
<Shortcut menu>	Open Reconciliation Priority Manager. For details, see "Reconciliation Priority Window" on page 364.

Integration Studio Page

This page enables you to create and manage integration points.

To access	Select Data Flow Management > Integration Studio .
------------------	--

User interface elements are described below:




UI Elements (A-Z)	Description
	Reconciliation Priority Manager. Opens the Reconciliation Priority Manager. For details, see "Reconciliation Priority Window" on page 364.
Integration Point pane	Enables you to create integration points and edit their configuration. For details, see "Integration Point Pane" on page 194.
Right pane	Displays data transfer configuration options for an integration point. Depending on the adapter on which you base your integration point, one or more of the following tabs is enabled: <ul style="list-style-type: none"> ➤ "Data Push Tab" on page 186 ➤ "Federation Tab" on page 187 ➤ "Population Tab" on page 198

New Integration Job/Edit Integration Job Dialog Box

This dialog box enables you to create or edit population and data push jobs and to schedule them to be run at specific times.

To access	Click  on the Population or Data Push tabs.
------------------	--

User interface elements are described below:

UI Elements (A-Z)	Description
	Click to add an available integration query to the job definition.
	Click to delete the selected query from the job definition.
Allow Integration Job to delete removed data	For population jobs: enables the deletion of CIs or links per job from the local CMDB. For data push jobs: enables the deletion of CIs or links per query from the remote data repository.
Job Definition	Select integration queries for the job definition. Click  to add an available integration query to the job definition.
Name	Enter a name for the job.
Scheduler Definition	For details about scheduling jobs, see "Scheduler" in the <i>HP Universal CMDB Developer Reference Guide</i> .

Population Tab

This tab enables you to:

- ▶ Schedule jobs that push data to external data repositories. For details, see "Integration Jobs Pane" on page 189.
- ▶ View statistics results for jobs that have run. For details, see "Statistics Tab" on page 191.

To access	Select the Population tab on the Integration Studio page.
Important information	This tab is enabled only when data population is supported by the adapter on which you are basing your integration point.
See also	"New Integration Job/Edit Integration Job Dialog Box" on page 197

Topology CI Creation Wizard

This wizard enables you to save a topology to the CMDB for a new adapter. This adapter can include elements from a defined topology already existing in the CMDB as well as new elements.

For example, say a node and its IP address exist in the CMDB as a defined topology. However, the adapter input query defines a Microsoft SQL Server database element related to that node. This extended topology does not exist in the CMDB. When using the wizard to create the topology, CMDB identifies the existing node and IP address by the properties values you enter, connects the new MSSQL database CI to the topology, and saves the complete topology in the CMDB.

Note: You cannot use an abstract or federated CIT to create a Trigger CI.


To access	<p>Select a discovery Jython adapter in the Create New Integration Point dialog box. In the Trigger CI Instance menu, choose Create New CI.</p> <p>Note: This wizard is available for discovery Jython adapters only, when the Used as Integration Adapter check box is selected. Moreover:</p> <ul style="list-style-type: none"> ▶ All conditions (attributes, cardinality, qualifiers, and so on) are disregarded in the input query. ▶ Only regular links (that is, not join or compound links) are allowed in the input query. <p>For details on the Used as Integration Adapter check box, see "Adapter Definition Tab" on page 121.</p>
Important information	<ul style="list-style-type: none"> ▶ Prerequisite: To ensure that reconciliation rules work with the created topology, prepare details of the CIs (for example, values for key properties) as these details are needed during the wizard creation procedure. ▶ If there are any errors during creation, the Summary page includes an error message and a link to the error details. ▶ At the end of the topology creation, the source CI is defined as the Trigger CI instance.
See also	"Create New Integration Point/Edit Integration Point Dialog Box" on page 183
Wizard Map	<p>The Topology CI Creation wizard contains:</p> <p>Topology Preview > Define CI: <CI name> > Define Credentials > Topology Creation > Summary</p>

Topology Preview

Enables you to preview the topology definition of the integration point.

Wizard Map	The Topology CI Creation wizard contains: Topology Preview > Define CI: <CI name> > Define Credentials > Topology Creation > Summary
-------------------	--

User interface elements are described below:

GUI Element (A-Z)	Description
	Show Legend. Toggles between hiding and displaying the topology legend.
<toolbar and legend>	For details, see "Toolbar Options" in the <i>HP Universal CMDB Modeling Guide</i> .

Define CI: <CI name>

Enables you to define properties of a new CI instance of the CIT.

Important Information	<ul style="list-style-type: none"> ▶ This page of the wizard is displayed for each element in the query. ▶ Several elements of the same CIT may exist in the query.
Wizard Map	The Topology CI Creation wizard contains: Topology Preview > Define CI: <CI name> > Define Credentials > Topology Creation > Summary

User interface elements are described below:

GUI Element (A–Z)	Description
Define New CI Properties	Drill down to the property to be used to identify the CIT. Select the field next to the property name and enter a new value (or choose from existing values). Note: if the selected CIT is abstract or federated, the properties are not displayed.
Select CI Type	Select the concrete CIT for which you are defining a new CI instance.

Define Credentials

Enables you to define credentials for the new CI.

Important Information	<ul style="list-style-type: none"> ▶ Any changes you make here to a protocol (updating, adding, or removing) affect the protocol throughout DFM. Therefore, you must ensure that changes you make (for example, to a password) are valid. If the change is not valid, the Data Flow Probe will fail to connect at the next attempt. ▶ Any updates you make here can be viewed in the Data Flow Probe Setup window. For details, see "Domain Credential References" on page 59 and "Details Tab" on page 51. ▶ This page is displayed if the adapter writer has defined that credentials are needed to access the discovered component.
See Also	For details on using the buttons and shortcut menus, see "Domains and Probes Pane GUI Elements" on page 59 For details on the protocols, see "Supported Protocols" on page 62
Wizard Map	The Topology CI Creation wizard contains: Topology Preview > Define CI: <CI name> > Define Credentials > Topology Creation > Summary

Topology Creation

Enables you to read through the topology details (the CIs and relationships that are to be created) and make changes if required.

Important Information	Review the topology. To make changes, click the Back button.
Wizard Map	The Topology CI Creation wizard contains: Topology Preview > Define CI: <CI name> > Define Credentials > Topology Creation > Summary

Summary

Displays the result of the topology creation.

Important Information	<ul style="list-style-type: none"> ▶ If DFM displays a success message, click Finish. Note: For Population integration points, if at least one query ends with a warning and no errors are encountered, a Success with warnings message is displayed. ▶ A CI in the topology you create may be ignored by the reconciliation process if it matches an existing CI. If the SOURCE CI in the topology is ignored, the topology creation process fails. If another CI is ignored (any other node in the query), creation succeeds. This is because the SOURCE CI is needed by the query to create the trigger CI. If it is ignored, the trigger cannot be identified and used for the integration. For details on the reconciliation process, see "Reconciliation Services" on page 341. ▶ If DFM cannot create the topology, an error message is displayed. Click the link to review the error details in the ui-server.log file, located in the following folder: C:\hp\UCMDB\UCMDBServer\runtime\log\. Then, click Back to fix the error and run the wizard again.
Wizard Map	The Topology CI Creation wizard contains: Topology Preview > Define CI: <CI name> > Define Credentials > Topology Creation > Summary

Out-of-the-Box Integrations

You can use the following predefined adapters to integrate different CMDB sources:

- ▶ **DDMi.** Select to define an adapter that is used for populating and federating data from DDMi. For details, see "Data Dependency and Mapping Inventory Integration with HP Universal CMDB" in the *HP Universal CMDB Discovery and Integration Content Guide* PDF.
- ▶ **Local UCMDB History.** Select to define an adapter that is used for federating data from the local UCMDB History database.
- ▶ **Microsoft SMS.** Select to define an adapter that is used for populating and federating data from Microsoft SMS. For details, see "Microsoft SCCM/SMS Integration with HP Universal CMDB" in the *HP Universal CMDB Discovery and Integration Content Guide* PDF.
- ▶ **ServiceCenter 6.2x.** Select to define an adapter that is used for federating data from HP ServiceCenter version 6.2x. For details, see "HP ServiceCenter/Service Manager Integration" in the *HP Universal CMDB Discovery and Integration Content Guide* PDF.
- ▶ **Service Manager 7.0x.** Select to define an adapter that is used for federating data from HP Service Manager version 7.0x. For details, see "HP ServiceCenter/Service Manager Integration" in the *HP Universal CMDB Discovery and Integration Content Guide* PDF.
- ▶ **Service Manager 7.1x - 9.2x.** Select to define an adapter that is used for federating data from HP Service Manager versions 7.1x-9.2x and pushing data to HP Service Manager versions 7.1x-9.2x. For details, see "HP ServiceCenter/Service Manager Integration" in the *HP Universal CMDB Discovery and Integration Content Guide* PDF.
- ▶ **UCMDB 8.x.** Select to define an adapter that is used for populating data from UCMDB version 8.0x or pushing data to UCMDB version 8.0x. For details, see "Use Cases – Multiple CMDB Deployments" on page 209.

- ▶ **UCMDB 9.x.** Select to define an adapter that is used for populating and federating data from UCMDB version 9.0x. For details, see "Multiple Deployments with Version 9.0x CMDBs" on page 210.
- ▶ **UCMDB API Population.** Select to define an adapter that specifies the reconciliation priority for data that is added to the CMDB using the CMDB API. For details, see "HP Universal CMDB API" in the *HP Universal CMDB Developer Reference Guide*.

You also have the option of adding a custom adapter for a new external data repository. For details, see "Add an Adapter for a New External Data Source" in the *HP Universal CMDB Developer Reference Guide*.

Integration Framework SDK enables you to create new adapters that connect HP Universal CMDB with external products and services. For details, see "Developing Java Adapters" in the *HP Universal CMDB Developer Reference Guide*.

For details about selecting an adapter when creating integrations, see "Create New Integration Point/Edit Integration Point Dialog Box" on page 183.

Troubleshooting and Limitations

This section includes troubleshooting and limitations for the Integrations Studio functionality.


This section includes the following topics:

- ▶ "Limitations on Retrieving Data from Multiple Data Repositories" on page 204
- ▶ "Limitations on All Adapters" on page 205


Limitations on Retrieving Data from Multiple Data Repositories

- ▶ When a virtual link exists between two data repositories, HP Universal CMDB supports mapping in the following cases only:

- The UCMDB integration point lies at one end of the link and multiple data repositories lie at the other end. The Cartesian product is calculated for A's data repository (UCMDB) and B's data repositories (UCMDB, d2, d3).

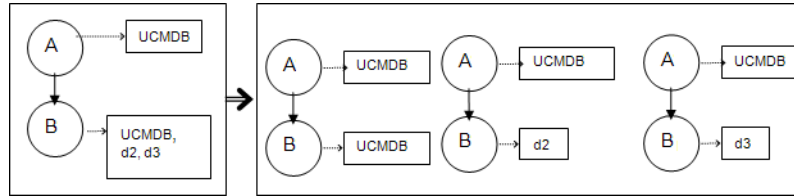

- The same data repositories lie at both ends of the link. The link is an internal link of each data repository and no mapping is required.

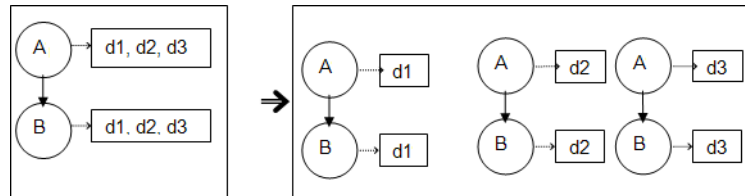

Limitations on All Adapters

- When changes are made in the Modeling Studio and these changes affect the results of a TQL, federated CIs in the view are not updated. This is because federated TQLs are calculated ad-hoc only and are not updated when a view is recalculated. To update the federated CIs, select the view in the CI Selector and click the **Refresh CIs Tree** button. (Note that the recalculation may take a long time.) For details, see "Browse Views Mode" in the *HP Universal CMDB Modeling Guide*.
- Do not choose a CIT to be supported by an external data repository if instances of this CIT exist in the local CMDB, as this can lead to state inconsistency. For example, if there are instances of the CPU CIT in the local CMDB, you must not choose the CPU when defining an external data repository, even if the selected adapter supports it.
- When configuring a population or data push job between two CMDBs, verify that the class model is the same in the two CMDBs.

- ▶ After modifying a TQL query that is used for in a data push job, it is recommended to run a differential synchronization and then a full synchronization. The differential synchronization removes any data that is no longer necessary as a result of the updated query, and the full synchronization creates new baseline data on the target system.

7

Integrating Multiple CMDBs

This chapter includes:

Concepts

- ▶ Integrating Multiple CMDBs Overview on page 208
- ▶ Configuration Management System (CMS) on page 208
- ▶ Global ID on page 209
- ▶ Use Cases – Multiple CMDB Deployments on page 209
- ▶ Multiple Deployments with Version 9.0x CMDBs on page 210
- ▶ Federation in Version 9.0x CMDBs on page 214
- ▶ Multiple Deployments with Version 8.0x CMDBs on page 215

Tasks

- ▶ Perform Initial Synchronization on page 218
- ▶ Set Up Integrations Between Multiple CMDBs (UCMDB Version 9.0x) on page 219
- ▶ Set Up Integrations Between Multiple CMDBs (UCMDB Version 8.0x) on page 222

Reference

Troubleshooting and Limitations on page 225

Concepts

Integrating Multiple CMDBs Overview

Note: Synchronization between multiple CMDBs of different versions can be performed only between UCMDB version 9.02 and UCMDB version 8.05 or later. References to version 8.0x in this chapter refer to version 8.05 or later. If you have UCMDB version 8.04 or earlier installed, you must upgrade to version 8.05.

Multiple CMDBs is a solution that allows setting up a multiple number of CMDBs for delegating the workload and responsibility of the solution to the different CMDBs.

The usage of multiple CMDBs enables increased performance, as the workload is split between different CMDBs on different machines. It increases the capacity, as the data is split between the different CMDBs.

The CMDBs that are used during integration can all be version 9.0x CMDBs or can be split between version 8.0x and version 9.0x CMDBs. When you integrate with a version 8.0x CMDB, you can do the following:

- ▶ populate the version 9.0x CMDB server with data from version 8.0x.
- ▶ push data from a version 9.0x CMDB server to a version 8.0x server.

Configuration Management System (CMS)

The CMS is the central CMDB server and is the authority for configuration management in the multiple CMDBs solution. It is responsible for integrating between the different CMDB server instances and other services in the solution, as well as for generating global IDs. Most of the integrations are defined in the CMS, and other CMDBs or services only access the CMS to access the data from these CMDBs or services.

The CMS allows integration with other services using:

- Population
- Federation
- Data Push
- Data Flow Management Web Service API
- Soap Web Service

Global ID

The global ID is a unique CI ID, generated by the CMS, that identifies that CI across the entire portfolio, making it easier to work in multiple CMDB environments.

Note: In the CMS, the CMDB ID is identical to the global ID.

Use Cases – Multiple CMDB Deployments

Discovery-CMS Solution

This solution enables the division of the workload and Discovery capacity over more than one CMDB.

- Discovery 1 CMDB
- Discovery 2 CMDB
- The central CMDB acting as the CMS

Both Discovery CMDBs are responsible for running different discovery jobs in the domain, and containing all the discovered topology. The CMS populates the node, interface, and IP from both Discovery CMDBs, and federates the node resource CIs (CPU, file system, and printer) from Discovery 1 CMDB. The CMS federates the node resource CIs (OS user, process, and printer) from Discovery 2 CMDB. When a user runs a view that requests these resources on the CMS, they are brought seamlessly using federation.

Multiple Deployments with Version 9.0x CMDBs

This section includes:

- ▶ "Population from UCMDB 9.0x (CMS Synchronization)" on page 210
- ▶ "Query Support" on page 211
- ▶ "Global ID Synchronization" on page 211
- ▶ "Automatic Completion of Reconciliation Data" on page 213

Population from UCMDB 9.0x (CMS Synchronization)

When you use the UCMDB 9.0x adapter to create an integration point, you are able to synchronize data between different CMDB instances using population. For details on population, see "Work with Population Jobs" on page 175.

During population, global IDs are synchronized. For details, see "Global ID Synchronization" on page 211.

Query Support

Two types of queries are supported for population jobs:

- ▶ Live queries—all non-federated TQL queries, when they are used for population with the UCMDb 9.0x adapter.

Live queries require less bandwidth, and cause less load on the source system. There may be a short delay from the time the change is made until the live query mechanism or the population job receives the change (this may take up to several minutes).

Subgraphs and compound relationships are supported in queries. When using compound relationships, you must select **Show full path between source and target CIs** in the Compound Relationship properties of the query.

- ▶ Federated queries—queries that contain at least one federated node or attribute.

When the UCMDb 9.0x adapter is used, federated queries may also be used for population.

Federated queries are calculated each time the integration is performed; the entire result set is retrieved and filtered by the Probe.

The deletion of CIs is not supported. The aging mechanism must be used, since no information about the deletion of CIs or links is populated. For details, see "CI Lifecycle and the Aging Mechanism" in the *HP Universal CMDB Administration Guide*.

Global ID Synchronization


The following examples describe two types of synchronization that can be performed:

- ▶ Two-way ID synchronization

Synchronization of data occurs in both directions between two UCMDb instances.

The CMS uses the population flow to retrieve data from UCMDb-B, which may be any UCMDb. UCMDb-B uses the population flow to populate data from the CMS.


Because synchronization is performed in two directions, global IDs are also updated on UCMDB-B.

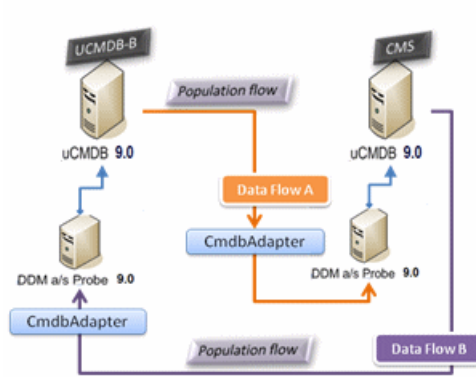

► Pushback of IDs

The CMS uses the population flow to retrieve data from UCMDB-B. CIs are reconciled with the data in the CMS.

The global-ID in the CMS for each CI received is pushed back to UCMDB-B.

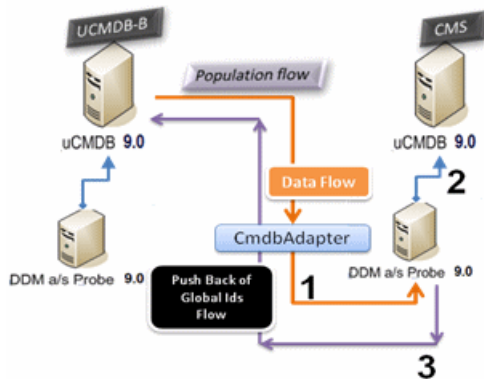

The default state of this option is disabled.

For details about enabling the pushback of IDs, see "Set Up Integrations Between Multiple CMDBs (UCMDB Version 9.0x)" on page 219.

Automatic Completion of Reconciliation Data

The UCMDB 9.0x adapter automatically retrieves data needed for the reconciliation process of the CIs brought by the population flow. The actual data retrieved is determined by the reconciliation rule defined for the CITs of the TQL.

For example, if your population TQL query includes a node but does not have any layout selected, the actual data that enters the CMDB is:

- ▶ Nodes, with layout
 - ▶ name
 - ▶ bios_uuid
 - ▶ serial_number
 - ▶ additional data, according to the defined reconciliation rule
- ▶ IP Addresses, with layout
 - ▶ name
 - ▶ routing_domain
- ▶ Interfaces, with layout
 - ▶ mac_address
 - ▶ interface_name

Note:

- ▶ The automatic completion feature may actually synchronize many more CIs or links than you intend.
 - ▶ The automatic completion feature always retrieves the Global ID.
 - ▶ By default, if data required for the reconciliation of a particular CI cannot be retrieved (for example, if the data is missing in the source), that CI is ignored without causing the entire job to fail. You can change this behavior in the CmdbAdapter configuration. For details, see "Results Management Pane" on page 131.
-

Federation in Version 9.0x CMDBs

Federation allows the CMDB to retrieve data in real time (on-the-fly) from any remote data repository, and combine it with CMDB's internal data to show a complete picture of the configuration it manages, including multiple sources. For more information about federation, see "Work with Federated Data" on page 173.

Using the UCMDB 9.0x adapter to federate data from different CMDBs, enables the federation of any CIT in the model. This means that only a small portion of data from the remote CMDBs can be populated, and the rest of the data is federated on demand. This ability enables the delegation of the information to multiple CMDBs, with the CMS always showing the most updated data available and at the same time not overloading its capacity.

The following is an example of federation with multiple CMDBs:

A CMS populates the Node, Interface, and IP from a Discovery CMDB (a CMDB whose role is to run Discovery), and defines the CPU, File System, OS, User, Printer, and Process CIs as federated from the same source. When a user runs a TQL query or view that has any federated CITs, these specific CIs are brought in real time from the Discovery CMDB. They are therefore as updated as the Discovery CMDB and do not depend on the population schedule to receive updated information. In addition, these CIs only reside on the Discovery CMDB, and do not burden the capacity of the CMS.

The UCMDB 9.0x adapter supports the delegation of the federation capabilities, providing the ability to set up a single point for data retrieval (usually the CMS). Any CMDB or service that uses the CMDB's ability to delegate federation uses the CMDB as a virtual black box, and is unaware of whether data comes directly from the CMS or from an external integration.

Note: When you set up a federation flow, be careful not to cause an endless loop. For example, do not set up CMDB-X to federate data from CMDB-Y, and at the same time CMDB-Y to federate data from CMDB-X.

Multiple Deployments with Version 8.0x CMDBs

Note: The UCMDB 8.0x adapter uses the UCMDB version 8.0x API for both population and data push integrations.

This section includes:

- "Population from version 8.0x UCMDBs" on page 215
- "Push to version 8.0x UCMDBs " on page 216

Population from version 8.0x UCMDBs

The population flow of integration points based on the UCMDB 8.0x adapter operates similarly to the way data is upgraded from version 8.0x to version 9.0x in UCMDB. Data is read from the version 8.0x UCMDB and is transformed using the upgrade XML documents. For details, see "Upgrading HP Universal CMDB from Version 8.0x to Version 9.00" in the the *HP Universal CMDB Deployment Guide* PDF. Since the version 8.0x adapter does not support all of the upgrade methods that are available in the upgrade process, not all CI types can be populated from version 8.0x to version 9.0x in UCMDB.

- Supported changes between version 8.0x and version 9.0x:
 - Name change for both CIs and attributes
 - Hierarchy change for CIs
 - Attributes deleted from version 8.0x
 - Any updates to qualifiers
- Unsupported changes:
 - Attribute type changes
 - Attribute values, since in version 9.0x they are calculated from existing values in version 8.0x

- ▶ Attributes in version 8.0x that are merged to a single attribute in version 9.0x are supported, but if all of the attributes hold a different value, one is picked randomly to populate the merged attribute.

Note:

- ▶ There may be situations where the existing data in version 8.0x is insufficient for the reconciliation engine to identify the data in version 9.0x. For example, if a CI in version 8.0x has an optional attribute X, but attribute X is required in version 9.0x to identify the CI, any CIs that have an empty X attribute are not populated to version 9.0x.
- ▶ To populate any user-defined CI type, the CI type must have upgrade rules defined in one of the upgrade XML documents.

Push to version 8.0x UCMDBs

The push flow provides the capability to push data from a UCMDB version 9.0x server to a UCMDB version 8.0x server, and the data is then downgraded to the version 8.0x class model from version 9.0x. CI types and attribute that exist in version 9.0x but did not exist in version 8.0x are ignored. The following lists changes to the class model between version 8.0x and version 9.0x that are not supported by the push flow:

- ▶ If a CI type has an attribute that was a key attribute in version 8.0x but is optional in version 9.0x, any CI with an empty value in that attribute is not pushed.
- ▶ Attributes that changed their type between versions are not supported.
- ▶ Attributes in version 8.0x that were merged to a single attribute in version 9.0x are supported, but all of the attributes in version 8.0x contain the same value as the single attribute in version 9.0x.
- ▶ Attributes whose values were calculated or transformed during the upgrade from version 8.0x to version 9.0x are not supported.

The UCMDB version 8.0x adapter has two main parts:

- ▶ An XML document that maps the version 9.0x class model to the version 8.0x class model.
- ▶ A Jython script that updates data to a target version 8.0x UCMDB server using the UCMDB version 8.0x API.

To push user-defined CI types that exist both in the version 8.0x and version 9.0x CMDBs, the CI type and all its attributes must exist in the XML mapping file that comes with the UCMDB 8.0x adapter. To update the XML file, edit the **mappings_9x_to_8x.xml** file in the **C:\hp\UCMDB\UCMDBServer\runtime\fcmdb\CodeBase\Cmdb8x-Adapter\mappings** folder in UCMDB. For details, see "Resources Pane" on page 152.

Note: You can replace the **mappings_9x_to_8x.xml** file with a file of a different name, as long as you update the **mappingFile.default** value in the **push.properties** file, in the same directory.

Tasks

Perform Initial Synchronization

This procedure enables you to synchronized CIs and relations between CMDBs, while retaining the original CMDB IDs.

- 1** On the CMS, launch the Web browser and enter the following address:
`http://localhost:8080/jmx-console`.
- 2** Click **UCMDB:service=Multiple CMDB Instances Services** to open the JMX MBEAN View page.
- 3** Click the **fetchAllDataFromAnotherCMDB** method.
- 4** Enter values as required for the following fields:

Note: You must enter information in fields that do not have default values.

- Customer ID
- Remote user name
- Remote password
- Remote host name
- Remote port (default value is 8080)
- Remote Customer name (default value is Default Client)
- Maximum chunk size (default value is 2000)

- CI type to sync (default value is managed_object, causing all CI types to be synchronized)
- Relation type to sync (default value is managed_relationship, causing all relation types to be synchronized)

5 Click **Invoke**.

Set Up Integrations Between Multiple CMDBs (UCMDB Version 9.0x)

The following steps describe how to create integration points and jobs to integrate between multiple CMDBs.

- "Define an integration point" on page 219
- "Define a population job" on page 221
- "Run the population job" on page 221
- "Select CI types and attributes to be federated" on page 221

1 Define an integration point

a Navigate to **Data Flow Management > Integration Studio**.



b Click the **Create New Integration Point** button to open the New Integration Point Dialog Box. For details, see "Create New Integration Point/Edit Integration Point Dialog Box" on page 183.

Enter the following information:

Name	Recommended Value	Description
Adapter	UCMDB 9.x	The adapter that is used to integrate between multiple CMDBs.
Credentials	Remote UCMDB	If you must create a new credential protocol, use the Generic Protocol as a basis. For details, see "Domain Credential References" on page 59.

Name	Recommended Value	Description
Customer Name	<user defined>	The name of the remote UCMDB from which you want to retrieve data.
Hostname/IP	<user defined>	The name or IP address of the remote CMDB machine.
Integration Description	<user defined>	Free text that describes the integration point.
Integration Name	<user defined>	The name you give to the integration point.
Is Integration Activated	selected	Select this check box to create an active integration point.
Port	8080	The port listened to by the HP Universal UCMDB API.
Probe Name	<user defined>	The name of the probe on which the population jobs are run. If this field is left empty, UCMDB uses IP ranges to attempt to select the correct Probe.
Push Back Ids	<user defined>	Specifies whether to push back the global IDs after CIs are populated into the server.
State	<user defined>	The state with which you want to connect when integrating with multi-state CMDBs. <ul style="list-style-type: none"> ➤ Actual ➤ Authorized ➤ Leave this field empty for a single-state UCMDB (default).



- c** Click **Save**.
- d** Click **Test Connection** to ensure that the integration point has been successfully created, and then click **OK**.

2 Define a population job

Select the Population tab to define a population job that uses the integration point you defined in step 1. For details, see "New Integration Job/Edit Integration Job Dialog Box" on page 197.

Note:

- ▶ When integrating between multiple CMDBs, population queries must be set up for the source CMDB.
 - ▶ Select the **Allow Delete** check box if you want your population job to allow deletion of CIs and links from the source CMDB.
-

3 Run the population job



Click the **Run Diff Job** button to make sure that the integration has been successfully configured.

4 Select CI types and attributes to be federated

- a Navigate to **Data Flow Management > Integration Studio**.
- b Click the Federation tab.
- c Select the CI types you want to federate from the source CMDB. If you also want to bring CIs the local CMDB, select the **Retrieve CIs of the <CI Type name> CI Type from the UCMDB too** check box.

If desired, you can select only attributes to be federated. For details, see "Federation Tab" on page 187.



- d Click **Save Integration**.

Set Up Integrations Between Multiple CMDBs (UCMDB Version 8.0x)

The following steps describe how to create integration points and jobs to integrate between multiple CMDBs.

- "Define an integration point" on page 222
- "Define a population job (optional)" on page 223
- "Define a data push job (optional)" on page 223
- "Run the population or data push job" on page 224

1 Define an integration point

- a Navigate to **Data Flow Management > Integration Studio**.
- b Click the **Create New Integration Point** button to open the New Integration Point Dialog Box. For details, see "Create New Integration Point/Edit Integration Point Dialog Box" on page 183.



Enter the following information:

Name	Recommended Value	Description
Adapter	UCMDB 8.x	The adapter that is to be used to integrate between multiple CMDBs.
Credentials	Generic Protocol	If you must create a new credential protocol, use the Generic Protocol as a basis. For details, see "Domain Credential References" on page 59.
Customer ID	<user defined>	The numeric ID of the customer who owns the data on the remote machine.
Hostname/IP	<user defined>	The name or IP address of the remote CMDB machine.
Integration Description	<user defined>	Free text that describes the integration point.

Name	Recommended Value	Description
Integration Name	<user defined>	The name you give to the integration point.
Port	<user defined>	The port listened to by the UCMDB version 8.0x API.
Probe Name	<user defined>	The name of the probe with which the integration point communicates.

- c Click **Test Connection** to ensure that the integration point has been successfully created.

2 Define a population job (optional)

Select the Population tab to define a population job that uses the integration point you defined in step 1. For details, see "New Integration Job/Edit Integration Job Dialog Box" on page 197.

All queries from the remote version 8.0x UCMDB machine are displayed for selection, with no consideration as to the type of query.

The population flow always extracts the entire layout for every query node, without regard to any special layout that may exist (attributes that cannot be upgraded are ignored). If the query contains a link or object that is not supported, it is ignored during population.

3 Define a data push job (optional)

Select the Data Push tab to define a data push job that uses the integration point you defined in step 1. For details, see "New Integration Job/Edit Integration Job Dialog Box" on page 197.

The **Cmdb8x-Adapter** package comes with out-of-the-box TQLs that can be used to push data to a version 8.0x UCMDB machine. These TQLs can be found in the Modeling Studio in the **Integration\Sync_8 queries** folder. It is highly recommended to use these queries, which already contain all of the required TQL definitions necessary to push common data, whenever possible.

When you create your own queries for a push job, make sure all of the data necessary for identifying a CI in UCMDB version 8.0x exists in the query. For example, if a CI type requires the attribute `root_container` in UCMDB version 80.x, the TQL must contain the composition link between the CI that required the attribute `root_container` and its container.

4 Run the population or data push job



Click the **Run Diff Job** button to make sure that the integration has been successfully configured.

Reference

Troubleshooting and Limitations

Version 9.0x Troubleshooting and Limitations

When performing troubleshooting, be sure to check both CMDB server and Probe logs.

- ▶ CMDB server logs
 - ▶ fcldb.log
 - ▶ fcldb.adapters.log
 - ▶ error.log
 - ▶ fcldb.reconciliation.log (for population jobs)
- ▶ Probe logs
 - ▶ wrapperProbeGw.log
 - ▶ fcldb.log
 - ▶ fcldb.adapters.log
 - ▶ probe-infra.log

Following are some problems that you may encounter and their solutions.

Problem. TQL not active/persistent error message.

The Query settings have been changed manually.

Solution. Run full population to reactivate/persist the query.

Problem. The number of CIs that is populated is much larger than the requested amount.

Solution. Since the automatic completion feature for reconciliation is turned on by default, it may populate the CMDB with additional CIs or links, in order to contain sufficient information to insert the CIs into the CMDB.

Problem. Changes are not populated immediately after a job is run.

Changes may take a few minutes to be detected by the live mechanism.

Solution. Wait a few minutes for changes to be populated by your next population job.

Problem. CIs are not populated into the CMDB.

Changes may take a few minutes to be detected by the live mechanism.

Solution. Wait a few minutes for changes to be populated by your next population job.

Check the CMDB reconciliation logs for more information.

Problem. Deletions are not populated.

Solution.

- ▶ Make sure that you have selected the **Allow Delete** check box in the population job properties.
- ▶ Check the query you are running. Deletes are not supported on federated queries, and the aging mechanism must be used.

Problem. Queries that contain compound relationships fail.

Solution. Select **Show full path between source and target CIs** in the query's Compound Relationship properties.

Problem. Authentication fails.

Solution. Since the UCMDB 9.0x adapter uses the UCMDB API for connection, set up an integration user to ensure that you provide proper credentials. For details, see "Create an Integration User" in the *HP Universal CMDB Developer Reference Guide*.

Limitations

If the TQL query for a population job (defined on the source) includes CI types or links that do not exist on the target, or links that are not valid, those types or links are ignored in the target data repository.

Version 8.0x Troubleshooting and Limitations

Logging

If objects or links are not pushed correctly to the remote version 8.0x CMDB machine, these log files may provide information about the reason:

- ▶ **fcmdb.adapters.log** – for any errors that were found while retrieving the data from the version 9.0x CMDB server, or while transforming it to the version 8.0x class model.
- ▶ **wrapperProbeGw.log** (on the Probe) – for any errors that are raised by the UCMDB 8.0x API while trying to add, update, or delete data.
- ▶ **cmdb.reconciliation.log** (on the remote version 8.0x CMDB machine) – use this log to find out why data was not inserted.

Limitations

- ▶ CIs that do not contain any data in properties that were key attributes in UCMDB version 8.0x cannot be pushed to UCMDB 8.x, as there is no way of identifying them.

The **node** CI type is an exception: **node** in UCMDB version 9.02 is mapped to **host** in UCMDB version 8.0x, which requires the **host_key** property. If a node does not have a value in its **host_key** property but the TQL result contains any contained interfaces or ip addresses, the **host_key** property value is calculated by the adapter.

- ▶ Always supply all the necessary reconciliation data when you update data using differential synchronization. For example, if trying to update a node, the TQL should have any linked **ip_address** and **interface** attributes.
- ▶ When a CI type has **root_container** as a required attribute, always add the CI type that contains it and the composition link between them to the synchronization TQL.
- ▶ If attributes that were key attributes in version 8.0x are updated in version 9.0x, a differential push job will create a new CI in version 8.0x. This means that the CI that was previously pushed is not updated, and a new CI is created with the updated data. The old CI may be deleted using the aging mechanism. For details, see "CI Lifecycle and the Aging Mechanism" in the *HP Universal CMDB Administration Guide*.

- ▶ The following relationships are not supported:
 - ▶ Sub-graph relationships
 - ▶ Virtual/compound relationships
 - ▶ Relationships with key attributes (such as client-server)
- ▶ Federated TQLs are not supported for data push jobs.

Part IV

Discovery Control Panel

8

Discovery Control Panel

This chapter includes:

Concepts

- ▶ Discovery Control Panel Overview on page 232
- ▶ Viewing Permissions While Running Jobs on page 234
- ▶ Managing Problems With Error Reporting on page 235
- ▶ The Permissions Document on page 236

Tasks

- ▶ Discovery Control Panel – Basic Mode Workflow on page 238
- ▶ Discovery Control Panel – Advanced Mode Workflow on page 239
- ▶ View Job Information on the Data Flow Probe on page 243
- ▶ Manually Activate a Job on page 244
- ▶ Manage Errors on page 245
- ▶ Find Errors on page 246

Reference

- ▶ Discovery Control Panel User Interface on page 248
- ▶ Operations Commands on page 320
- ▶ Job Operation Parameters on page 329

Concepts

Discovery Control Panel Overview

The Discovery Control Panel pages enable you to activate jobs that discover the components of your system. You activate discovery with one of the following methods:

- ▶ Use **Basic Mode** to run discovery for a specific component (for example, the infrastructure, J2EE applications, or databases), using configurable, default preferences.

For details on the workflow, see "Discovery Control Panel – Basic Mode Workflow" on page 238.

For details on the Discovery wizard, see "Basic Mode Window" on page 251.

Note: Basic Mode is displayed by default when you access the Discovery Control Panel.

- ▶ Use **Advanced Mode** to run discovery to customize a run by making changes to a job.

For details on the workflow, see "Discovery Control Panel – Advanced Mode Workflow" on page 239.

For details on the Discovery wizard, see "Advanced Mode Window" on page 249.

For details on running a specific module, see the *HP Universal CMDB Data Flow Management Guide*.

Jobs are organized in modules as follows:

- ▶ **Cluster and Load Balancing Solutions.** The modules discover Microsoft Cluster, ServiceGuard, Veritas, Alteon LB, Cisco CSS, F5 Big IP, and Microsoft NLB.
- ▶ **Database.** Discovery first finds instances of databases, then of the database resources (for example, users, tables, tablespaces) for each database instance. HP Universal CMDB includes predefined default views of the DB2, Oracle, and Microsoft SQL Server databases.
- ▶ **Enterprise Applications.** The modules discover Active Directory, Microsoft Exchange, Oracle E-Business Suite components, the SAP environment based on Computer Center Management System (CCMS), the Siebel environment (such as the Siebel topology and database), WebSphere MQ, and the UDDI registry Web services.
- ▶ **Discovery-Based Product Integrations.** These modules are needed for integration between UCMDB and NNM Layer 2, Storage Essentials, and EMC Control Center.
- ▶ **J2EE Application Servers.** The modules discover JBoss, Oracle Application Server, WebLogic, and WebSphere components.
- ▶ **Network Connections.** All jobs in these modules run queries against the Data Flow Probe's MySQL database to retrieve network connectivity information inserted by the **Host Resources and Applications** and/or **TCP By Shell/SNMP** and/or **Collect Network Data by Netflow** jobs.
- ▶ **Network Discovery.** The modules discover resources on Windows and UNIX hosts, for example, disk information, running processes or services, host connections, and so on.
- ▶ **Others.** This module holds the jobs necessary to discover document files and directories, discover hosts, import data from external sources, and serve as a template example.
- ▶ **Virtualization Solutions.** The module discovers VMware components.
- ▶ **Web Servers.** The modules discover Apache and Microsoft IIS for Windows, SunOne for Solaris, and IBM HTTP Server.

Note: To view Help on Discovery Control Panel components:

- ▶ For details on the Discovery Modules pane, see "Discovery Modules Pane" on page 281.
 - ▶ For details on the Details tab, see "Details Tab" on page 267.
 - ▶ For details on the Properties tab, see "Properties Tab" on page 308.
 - ▶ For details on the Dependency Map tab, see "Dependency Map Tab" on page 265.
-

Discovery Wizards

As the creation of Discovery wizards entails a very advanced knowledge of Data Flow Management, it is recommended that you contact HP Software Support before beginning the work.

Viewing Permissions While Running Jobs

During a job run, you often need to know which credentials are being used to connect to a component in the system. You also often need to know the effect of a run on network performance, for example, whether the job should be run at night instead of during the day. View Permissions enables you to view the objects and parameters of a job's Jython script commands, as can be seen in the following image:

Permission	Operation	Usage Description	Objects and Parameters
shellprotocol	exec	Basic login	uname ver
shellprotocol	exec	CPU Info	AIX: lsattr grep "proc" AIX: prtconf grep "proc" FreeBSD: dmesg grep "cpu Multiprocessor" FreeBSD: dmesg grep -A 1 "CPU:" FreeBSD: sysctl hw.model hw.ncpu hw.clockrate HPUX: model Linux: cat /proc/cpuinfo SunOS: /usr/sbin/psrinfo -v SunOS: prtconf Windows: reg query HKEY_LOCAL_MACHINE\HARDWARE\DESCRIP...

Note: The information you define here is not dynamic, that is, if an adapter is changed, the information in this dialog box is not updated.

For details, see "Discovery Permissions Window" on page 284.

Example of Using the Discovery Permissions Window:

You are running the Host Connection by Shell job to discover a host running on a UNIX system. An error message in the Discovery Status pane shows that DFM could not access a host through SSH because permission was denied. You display the Discovery Permissions window and see that the command to access the host requires a user with a certain level of permissions. You check the SSH Protocol window and discover that the user defined there does not have that level of permissions.

To resolve the problem, either change the user in the SSH protocol or update the permissions for the existing user in the external system.

Managing Problems With Error Reporting

During discovery, many errors may be uncovered, for example, connection failures, hardware problems, exceptions, time-outs, and so on. DFM displays these errors in Discovery Control Panel, in both Basic and Advanced Mode. You can drill down from the Trigger CI that caused the problem to view the error message itself.

DFM differentiates between errors that can be ignored (for example, an unreachable host) and errors that must be dealt with (for example, credential problems or missing configuration or DLL files). Moreover, DFM reports errors once, even if the same error occurs on successive runs, and reports an error even if it occurs once only.

For details on severity levels, see "Error Severity Levels" in the *HP Universal CMDB Developer Reference Guide*.

Error Table in Database

All DFM errors are saved to the `discovery_problems` table in the Probe Manager database schema. (The error information is saved to the database—and is not handled in the Probe's memory—to guarantee delivery to the server.) The Probe holds the latest list of problems for each Trigger CI. After each run, the Probe checks for changes and reports them in the Discovery Status pane. For details, see "Discovery Status Pane" on page 269.

The Permissions Document

Note: This functionality is available as part of Content Pack 4.00 or later.

You can view a list of DFM jobs together with the protocols and permissions needed to access the job components. For example, you can view information about what is needed to execute a basic login when running the Host Resources by Shell job.

To view the list: `<http://SERVER_NAME:PORT/ucmdb-ui>/docs/permissions.jsp`.

The list is organized by module and consists of the following information:

- Module
- Job
- Protocol
- Operation, usage description, objects and parameters

Example of Permissions Document Contents

Database - Oracle. The module name.

Oracle RAC Topology by Shell. The job name.

Discovers Oracle RAC Topology by Shell. The job description. This section is omitted if no description is defined in the application.

Protocol: Shell. The protocol name: SQL, Shell, WMI, SNMP, and so on.
For a full list, see "Domain Credential References" on page 59.

Operation	Usage Description	Objects and Parameters
file read	Parsing of listener and tnsnames configuration files	cat \$ORACLE_HOME\network\listener.ora cat \$ORACLE_HOME\network\admin\tnsnames.ora

Tasks

Discovery Control Panel – Basic Mode Workflow

This task describes how to begin mapping your system and its components, using the Discovery wizards. You run this workflow to use default values for the components in an infrastructure, database, or J2EE discovery.

Note: For details of running Data Flow Management in Advanced Mode, see "Discovery Control Panel – Advanced Mode Workflow" on page 239.

This task includes the following steps:

- ▶ "Prerequisites" on page 238
- ▶ "Access the Discovery Wizard" on page 238

1 Prerequisites

Verify that the Data Flow Probe is installed. For details on installing the Probe, see "Data Flow Probe Installation on the Windows Platform" or "Data Flow Probe Installation on the Linux Platform" in the *HP Universal CMDB Deployment Guide* PDF.

For details on licensing, see "Licensing Model for HP Universal CMDB" in the *HP Universal CMDB Deployment Guide* PDF.

2 Access the Discovery Wizard

For details, see the relevant wizard: "Infrastructure Discovery Wizard" on page 291, "J2EE Discovery Wizard" on page 298, or "Database Discovery Wizard" on page 258.

Discovery Control Panel – Advanced Mode Workflow

This task describes how to begin mapping your system and its components. You would use this workflow to customize the components of a module.

Note: For details of running discovery in Basic Mode, see "Discovery Control Panel – Basic Mode Workflow" on page 238.

This task includes the following steps:

- "Prerequisites" on page 239
- "Determine Network Range" on page 240
- "Set Relevant Credentials" on page 240
- "Activate Relevant Jobs" on page 241
- "Make Changes to Relevant Adapters" on page 241
- "Monitor the DFM Process" on page 241
- "View Result Statistics" on page 243
- "Troubleshoot the Results" on page 243

1 Prerequisites

- a** Verify that the Data Flow Probe is installed. For details on installing the Probe, see "Data Flow Probe Installation on the Windows Platform" or "Data Flow Probe Installation on the Linux Platform" in the *HP Universal CMDB Deployment Guide* PDF.

For details on licensing, see "Licensing Model for HP Universal CMDB" in the *HP Universal CMDB Deployment Guide* PDF.

- b** Verify that the relevant packages are deployed.

For details, see "Package Manager" in the *HP Universal CMDB Administration Guide*.

2 Determine Network Range

You must define the network range of the network to be discovered. For details, see "Add/Edit IP Range Dialog Box" on page 45.

Note: Adapters try to connect to every IP in a range. Therefore, if a range is wide, network performance may be affected.

3 Set Relevant Credentials

To enable Data Flow Management to connect to servers or applications using specific protocols, you must set the relevant credentials (for example, NTCmd, SNMP, TTY, or WMI). For details on protocol parameters, see "Domain Credential References" on page 59. For details on the Details pane in the Data Flow Probe Setup window, see "Details Tab" on page 51.

Note: Data Flow Management tries to connect to a host by using each credential in turn. DFM then saves the successful credential. The next time DFM connects to this host, it first tries to connect using the successful credential.

4 Activate Relevant Jobs

Once you have defined the network range and set credentials, you can run discovery on specific jobs. For details, see the *HP Universal CMDB Discovery and Integration Content Guide* PDF.

Tip: You can view a full description of a job. Select a module and locate the Description pane in the Properties tab.

Example – Finding SNMP Connections:

You can search for all jobs that discover SNMP connections: in the **Discovery Control Panel > Discovery Modules** pane, click the **Search for Discovery Job** icon. In the **Find Jobs** dialog box, enter **SNMP** in the **Name** box and click **Find All**. For details, see "Find Jobs Dialog Box" on page 290.

5 Make Changes to Relevant Adapters

You can customize adapters to discover infrequent system components. For details on adapter writing, see "Adapter Development and Writing" in the *HP Universal CMDB Developer Reference Guide*.

Caution: Do not make changes to default adapters without consulting HP Software Support.

6 Monitor the DFM Process

For details on monitoring the CIs that are discovered by the run, see "Statistics Results Pane" on page 276.

a Define a query

You create a query that retrieves information about CIs and CITs from the CMDB. For details, see "Define a TQL Query" in the *HP Universal CMDB Modeling Guide*.


If necessary you can trigger queries to manually discover objects. For details, see "Trigger Queries Pane" on page 312.

b Build a View for each query

A view enables you to build a subset of the overall IT universe model, containing only those CIs in the CMDB that relate to a specific discovery. For details, see "Pattern View Editor" in the *HP Universal CMDB Modeling Guide*.

Example – Creating a View to Display Discovered CI Instances:

To view the number of instances found by HP Universal CMDB, select **Modeling > IT Universe Manager**, and display the view you created, as seen in the following illustration:

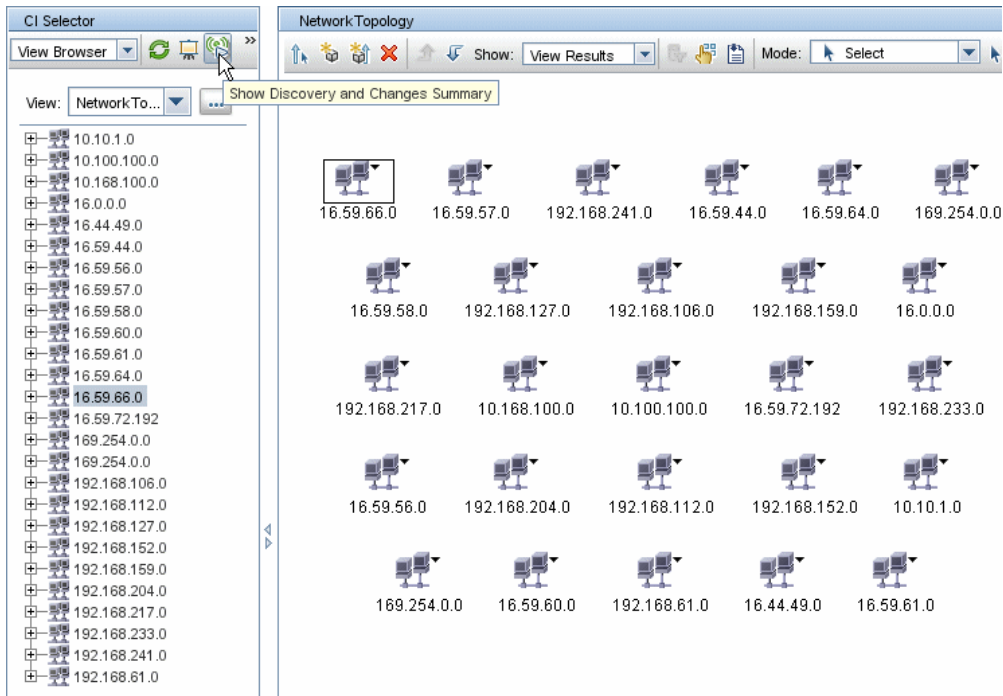

7 View Result Statistics

You can display overall statistics for a job or you can filter the results by time range or by Probe. Each time you log in to HP Universal Cmdb and access Discovery Control Panel, the statistical data is updated so that the data displayed is the latest for the selected module or job.

For details on working with the statistical data, see "Statistics Results Pane" on page 276.

You can view discovered CIs also by accessing the Show Status Snapshot pane. For details, see "Data Flow Probe Status" on page 91.

8 Troubleshoot the Results

You can check DFM results to see which errors are being reported. For details, see "Discovery Status Pane" on page 269.

View Job Information on the Data Flow Probe

This task describes how to invoke job information (for example, job threads and trigger CIs) saved to the Data Flow Probe's MySQL database. You work with the JMX console.

This task includes the following steps:

- "Access the MBean Operations" on page 243
- "Locate the Operation to Invoke" on page 244
- "Run the Operation" on page 244

1 Access the MBean Operations

Use the following procedure to access the JMX console on the Data Flow Probe and to invoke the JMX operations.

- a Launch the Web browser and enter the following address:

```
http://<machine name or IP address>.<domain_name>:1977/
```

where **<machine name or IP address>** is the machine on which the Data Flow Probe is installed. You may have to log in with the user name and password.

- b** Click the **Local_<machine name or IP address> > type=JobsInformation** link.

2 Locate the Operation to Invoke

In the MBean View page, locate the operation. For details, see "Operations Commands" on page 320 and "Job Operation Parameters" on page 329.

3 Run the Operation

Click the button to run the operation. A message is displayed with the results of the operation run.

Reload. The number of seconds between automatic reloads of the JMX interface. **0:** The interface is never reloaded. Click the **Reload** button to manually reload the current page (if more operations have been added or removed).

Unregister. Do not touch (the view becomes inaccessible to the application that is running).

Manually Activate a Job

You can activate a job by clicking the **Activate** button in the Discovery Modules pane. You can manually activate a CI by disabling the query and adding a CI. (You disable a query in the **Edit Probe Limitation for Queries Output** dialog box. You manually add a CI in the Choose CIs to Add dialog box.) The job runs using only the redispached CIs. For details, see "Discovery Modules Pane" on page 281.

Manage Errors

This task describes how to investigate problems that arise during a run.

Note: For details about severity levels and so on, see "Managing Problems With Error Reporting" on page 235.

This task includes the following steps:

- "Prerequisites" on page 247
- "Run the Discovery Wizard or Select the Job" on page 247
- "Locate the Problem CI" on page 247
- "Troubleshoot the Problem" on page 246

1 Prerequisites

Set up DFM. For details, see "Discovery Control Panel – Basic Mode Workflow" on page 238 or "Discovery Control Panel – Advanced Mode Workflow" on page 239.

2 Run the Discovery Wizard or Select the Job


In Basic Mode, you can view error messages for a default job. In Advanced Mode, you can view error messages for one job, one module, or all modules. For details on running a wizard in Basic Mode, see "Discovery Control Panel – Basic Mode Workflow" on page 238. For details on running a job, see "Discovery Control Panel – Advanced Mode Workflow" on page 239.

3 Locate the Problem CI

Use the Discovery Status pane to drill down to the error messages. For details, see "Discovery Status Pane" on page 269.

Example:

DFM displays the error message:

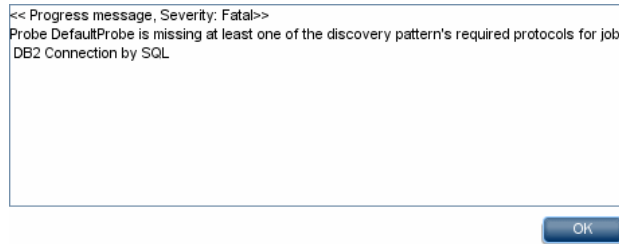

4 Troubleshoot the Problem

- For Fatal errors, you should contact HP Software Support.
- For other errors, check the CIs. For example, a Trigger CI that does not fall within the Probe's range may show an error.
- For details on setting communication logs, see "Execution Options Pane" on page 129.
- For details on managing problems, see "Managing Problems With Error Reporting" on page 235.

Find Errors

This task describes how to investigate problems that arise during a run.

Note: For details about severity levels and so on, see "Managing Problems With Error Reporting" on page 235.

This task includes the following steps:

- "Prerequisites" on page 247
- "Run the Discovery Wizard or Select the Job" on page 247
- "Locate the Problem CI" on page 247

1 Prerequisites

Set up DFM. For details, see Part II, "Data Flow Management Setup."


2 Run the Discovery Wizard or Select the Job

In Basic Mode, you can view error messages for a default job. In Advanced Mode, you can view error messages for one job, one module, or all modules. For details on running a wizard in Basic Mode, see "Discovery Control Panel – Basic Mode Workflow" on page 238. For details on running a job, see "Discovery Control Panel – Advanced Mode Workflow" on page 239.

3 Locate the Problem CI

Use the Discovery Status pane to drill down to the error messages. For details, see "Discovery Status Pane" on page 269.

Example of an error message:

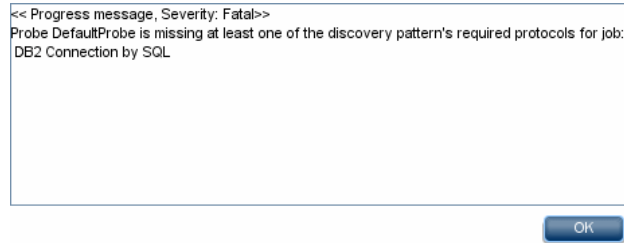

Reference

Discovery Control Panel User Interface

This section describes:

- ▶ Advanced Mode Window on page 249
- ▶ Basic Mode Window on page 251
- ▶ Choose CIs to Add Dialog Box on page 253
- ▶ Choose Discovery Query Dialog Box on page 255
- ▶ Choose Probe Dialog Box on page 256
- ▶ Configuration Item Properties Dialog Box on page 256
- ▶ Create New Discovery Job Window on page 257
- ▶ Database Discovery Wizard on page 258
- ▶ Dependency Map Tab on page 265
- ▶ Details Tab on page 267
- ▶ Discovered by Window on page 280
- ▶ Discovered CIs Window on page 280
- ▶ Discovery Modules Pane on page 281
- ▶ Discovery Permissions Window on page 284
- ▶ Discovery Scheduler Dialog Box on page 286
- ▶ Edit Probe Limitation for Query Output Dialog Box on page 289
- ▶ Edit Time Template Dialog Box on page 289
- ▶ Find Jobs Dialog Box on page 290
- ▶ Infrastructure Discovery Wizard on page 291
- ▶ J2EE Discovery Wizard on page 298
- ▶ Properties Tab on page 308

- Related CIs Window on page 313
- Show Results for Triggered CI Dialog Box on page 314
- Source CIs Dialog Box on page 315
- Time Templates Dialog Box on page 315
- Trigger Query Editor Window on page 315

Advanced Mode Window

Enables you to view and manage modules and jobs, to activate jobs, and to follow job progress.

Advanced mode includes the following panes:

- **Discovery Modules pane.** Each module includes jobs. You activate a module or job to discover a specific group of CIs. For details, see "Discovery Modules Pane" on page 281.

Note: Basic Mode is displayed by default when accessing Discovery Control Panel.

- **Details tab.** Enables you to manage a module's CIs and view CI statistics. For details, see "Details Tab" on page 267.
- **Properties tab.** Enables you to view and administer the properties of modules and jobs. For details, see "Properties Tab" on page 308.

- **Dependency Map.** Displays a visual representation of the real-time progress of the process. For details, see "Dependency Map Tab" on page 265.


To access	Data Flow Management > Discovery Control Panel
Important Information	<p>Each change you make in Discovery Control Panel is delivered to and stored in the CMDB. From there, the changes are sent to the Probe. You can verify that changes have been sent to the Probe by opening the wrapperProbe.log file located in C:\hp\UCMDB\DataFlowProbe\runtime\logs\ and searching for the following lines:</p> <p>processing document domainScopeDocument.bin Processing document domainScopeDocument.bin is done.</p> <p>Note: Basic Mode is displayed by default when accessing Discovery Control Panel.</p>
Relevant tasks	"Discovery Control Panel – Advanced Mode Workflow" on page 239

Basic Mode Window

Enables you to use a Discovery wizard to discover infrastructure, databases, and J2EE applications.

To access	Data Flow Management > Discovery Control Panel
Important Information	<p>Basic mode includes the following panes:</p> <ul style="list-style-type: none"> ▶ List of wizards. Enables you to choose the wizard to run. For details, see "Infrastructure Discovery Wizard" on page 291, "Database Discovery Wizard" on page 258, or "J2EE Discovery Wizard" on page 298. ▶ Summary pane. Enables you to run the wizard and to stop DFM running. For details, see "Summary Pane" on page 252. ▶ Discovery Overview pane. Enables you to: <ul style="list-style-type: none"> ▶ View a brief run status and to drill down to problematic Trigger CIs. For details, see "Discovery Status Pane" on page 269. ▶ View statistics results. For details, see "Statistics Results Pane" on page 276. <p>This pane is displayed once discovery has been run for a component.</p> <p>Note: Basic Mode is displayed by default when accessing Discovery Control Panel.</p> <p>For details on Advanced Mode, see "Advanced Mode Window" on page 249..</p>
Relevant tasks	"Discovery Control Panel – Basic Mode Workflow" on page 238
See also	"Discovery Control Panel Overview" on page 232

User interface elements are described below:

GUI Element (A-Z)	Description
	Click to refresh the list of wizards.
Basic Mode tab	(Currently displayed) Click to run DFM for a specific component (for example, the infrastructure, J2EE applications, or databases), using configurable, default preferences.
Advanced Mode tab	Click to run DFM when you need to customize a run by making changes to a job, adapter, and so on. For details, see "Advanced Mode Window" on page 249.

Summary Pane

Enables you to run a Discovery wizard.

To access	Data Flow Management > Discovery Control Panel
Important Information	<p>Depending on whether a wizard has already run, the Summary pane displays the following information:</p> <ul style="list-style-type: none"> ▶ If a wizard has not yet run, the Summary pane displays the steps to be performed in the wizard and the Configure and Run button. ▶ If a wizard has run, the Summary pane displays a summary of the run parameters, the Configure and Stop Discovery buttons, and the results of the previous run in the Discovery Progress pane. <p>To run a discovery, select a wizard in the left pane and click Configure or Configure and Run to open the Discovery wizard.</p> <p>To stop a discovery run, click Stop Discovery.</p>
Relevant tasks	"Discovery Control Panel – Basic Mode Workflow" on page 238

Choose CIs to Add Dialog Box

Enables you to choose CIs to run with selected jobs.

To access	<ul style="list-style-type: none"> ➤ Data Flow Management > Discovery Control Panel. In the Details tab, locate the Discovery Status pane. Click the Add CI button. ➤ In the Oracle TNSName File Location page of the Database Discovery wizard, click the Add CI button.
------------------	--

User interface elements are described below (unlabeled elements are shown in angle brackets):

GUI Element (A–Z)	Description
Add button	Note: If you choose CIs with an error status to add to the trigger list, a message is displayed when you click the Add button.
<Column title>	Click a column title to change the order of the CITs from ascending to descending order, or vice versa.
<right-click a title>	Choose from the following options: <ul style="list-style-type: none"> ➤ Hide Column. Select to hide a specific column. ➤ Show All Columns. Displayed when a column is hidden. ➤ Select Columns. Select to display or hide columns and to change the order of the columns in the table. Opens the Columns dialog box. ➤ Auto-resize Column. Select to change a column width to fit the contents. For details, see "Select Columns Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i> .

GUI Element (A–Z)	Description
Search CIs	<p>Contains filters with which you can limit the number of CIs that appear in the Search Results pane.</p> <ul style="list-style-type: none"> ▶ By Discovery Query. Select a Discovery query to search for those CIs that match the query. ▶ Show only CIs containing. To search for CIs that include a certain text, enter the text here. ▶ Exact match. Select to search for CIs with the exact match of the text label. (By default, you search by entering part of a text. For example, searching for 10 within the IP CIs finds all the IPs that contain 10 in their address. Entering 10 then selecting Exact match finds no results.) ▶ Search. Click to display the search results.
Search Results	<p>Displays a list of triggered CIs answering to the criteria set in the filter. To add the CIs to the list in the triggered CIs pane, select the CIs. You can make multiple selections.</p> <ul style="list-style-type: none"> ▶ CIT. The CI type of the selected triggered CI. ▶ CI. The label of the triggered CI. ▶ Related Host. The label for the node related to the triggered CI. ▶ Related IPs. The IPs of the related node. ▶ Reported. The time that the CI is added to the Discovery Status table. <p>Page. The list of CIs is divided into pages. The number in the Page box indicates which page is currently displayed. To view other pages, use the up and down arrows, or type the page number, and press Enter.</p> <p>To determine the number of CIs that appear on a page, right-click either the up or down button and choose the required number. The default is 25.</p>

Choose Discovery Query Dialog Box

Enables you to add a trigger TQL to a job.

To access	Click the Add Query button in the Trigger Queries pane.
------------------	--

User interface elements are described below (unlabeled elements are shown in angle brackets):

GUI Element (A–Z)	Description
<Discovery query name>	The query that queries the CMDB for the selected CIT.
Query Preview	Hold the cursor over an element to view details.

Choose Probe Dialog Box

Enables you to filter the Probe list.

To access	Click a Filter button in the Discovery Control Panel > Details tab: <ul style="list-style-type: none"> ▶ Triggered CIs pane Filter button. For details on the menu options, see "Discovery Status Pane" on page 268. ▶ Statistics pane Filter button. For details on the menu options, see "Statistics Results Pane" on page 275.
------------------	---

Configuration Item Properties Dialog Box

Enables you to view CI properties.

To access	In the Discovered CIs dialog box, right-click a CI and choose Properties .
Important Information	For details, see "Configuration Item Properties Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i> .


Create New Discovery Job Window

Enables you to create a job.

To access	Right-click a module in the Discovery Modules pane, and choose Create new > Job .
Important Information	<ul style="list-style-type: none">➤ Job names must be limited to a length of 50 characters.➤ Job names must not start with a numeric value.
See also	For details on the panes in this window, see: <ul style="list-style-type: none">➤ "Discovery Job Details Pane" on page 267➤ "Parameters Pane" on page 310➤ "Trigger Queries Pane" on page 311➤ "Global Configuration Files Pane" on page 126➤ "Discovery Scheduler Pane" on page 307

Database Discovery Wizard

Enables you to discover databases such as DB2, Oracle, Microsoft SQL, and Sybase.

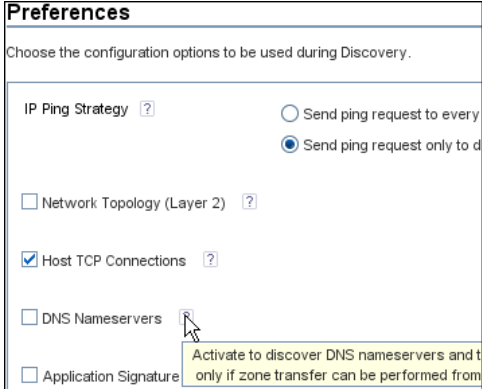


To access	Data Flow Management > Discovery Control Panel > Basic Mode. Select the Database Discovery wizard from the list in the left pane. Click Configure and Run .
Important Information	<p>For more information, hold the pointer over a question mark icon:</p> 
Wizard map	<p>The Database Discovery wizard contains:</p> <p>Database Discovery Wizard > Define Credentials > Database Port Scanning > Custom JDBC Drivers > Oracle TNSName File Location > Schedule Discovery > Summary</p>




Define Credentials

Enables you to configure connection data for each protocol.

Important Information	<ul style="list-style-type: none"> ▶ You configure protocols depending on what must be discovered and which protocols are supported on your site's network. ▶ For a list of protocols, see "Domain Credential References" on page 59. ▶ General information about the wizard is available in "Database Discovery Wizard" on page 257.
Wizard Map	<p>The Database Discovery wizard contains:</p> <p>Database Discovery Wizard > Define Credentials > Database Port Scanning > Custom JDBC Drivers > Oracle TNSName File Location > Schedule Discovery > Summary</p>

User interface elements are described below:

GUI Element (A–Z)	Description
	Add new connection details for selected protocol type.
	Remove a protocol.
	Edit a protocol. Click to open the Protocol Parameters dialog box.

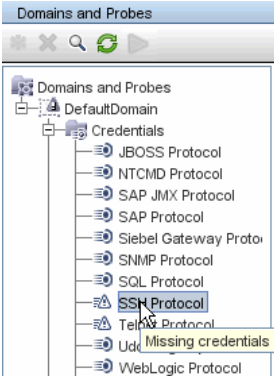

GUI Element (A–Z)	Description
	Move a protocol up or down. Data Flow Management executes all the protocols in the list with the first protocol taking priority.
Protocol	Click to view details on the protocol, including user credentials. Note: A missing credential is represented by an icon  , as shown in the following image: 

Database Port Scanning

Enables you to discover the port itself and subsequently to discover the database.

Important Information	General information about the wizard is available in "Database Discovery Wizard" on page 257.
Wizard Map	The Database Discovery wizard contains: Database Discovery Wizard > Define Credentials > Database Port Scanning > Custom JDBC Drivers > Oracle TNSName File Location > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A–Z)	Description
	<p>Click to add a port to the port list. The Add New Port dialog box opens. Select the ports and click OK.</p> <p>To edit existing system ports, in the Add New Port dialog box, click Edit Port. The Edit Known System Ports dialog box opens. Select the port and click the Edit button. In the dialog box that opens, make changes to the entries and click OK.</p> <p>To add a port to the list, in the Edit Known System Ports dialog box, click the Add button. Enter details of the port name, number and type and click OK.</p>
	<p>Select a port and click the button to remove the port from the list.</p>

Custom JDBC Drivers

Enables you to select the JAR file for the DB2 and Sybase JDBC drivers.

Important Information	General information about the wizard is available in "Database Discovery Wizard" on page 257.
Wizard Map	<p>The Database Discovery wizard contains:</p> <p>Database Discovery Wizard > Define Credentials > Database Port Scanning > Custom JDBC Drivers > Oracle TNSName File Location > Schedule Discovery > Summary</p>

User interface elements are described below:

GUI Element (A–Z)	Description
DB2 JDBC Driver version 8.x	Select the check box and click Import file... to locate the appropriate JAR file in the DB2 JDBC installation, as follows: <ul style="list-style-type: none"> ➤ db2java.zip ➤ db2jcc.jar
DB2 JDBC Driver version 9.x	Select the check box and click Import file... to locate the appropriate JAR file in the DB2 JDBC installation, as follows: <ul style="list-style-type: none"> ➤ db2java.zip ➤ db2jcc.jar ➤ db2jcc_license_cu.jar ➤ db2jcc_license_cisuz.jar
Sybase JDBC Driver	Select the check box and click Import file... to locate the 3pclasses.jar JAR file in the Sybase JDBC installation.



Oracle TNSName File Location

Enables the discovery of Oracle databases. You provide the location of the TNSNames.ora configuration file that contains database information needed to discover Oracle databases, such as port, node, SID, and so on.

Important Information	General information about the wizard is available in "Database Discovery Wizard" on page 257.
Wizard Map	The Database Discovery wizard contains: Database Discovery Wizard > Define Credentials > Database Port Scanning > Custom JDBC Drivers > Oracle TNSName File Location > Schedule Discovery > Summary

User interface elements are described below:


GUI Element (A–Z)	Description
Server host	Select the hosts on which the TNSNames.ora file is located. Click the Add CI button to choose the Trigger CIs that represent these hosts. For details, see "Choose CIs to Add Dialog Box" on page 253.
TNSNames.ora file location	Enter the location of the TNSNames.ora file in the server host system. You can enter several locations (separate the locations by commas). If you terminate the path with a delimiter (for example, <code>c:\temp\</code>), DFM assumes that the file name is <code>tnsnames.ora</code> .

Schedule Discovery

Enables you to define a schedule for a specific job.

Important Information	General information about the wizard is available in "Database Discovery Wizard" on page 257.
Wizard Map	The Database Discovery wizard contains: Database Discovery Wizard > Define Credentials > Database Port Scanning > Custom JDBC Drivers > Oracle TNSName File Location > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A–Z)	Description
	You define a time template in the Discovery Scheduler pane of the Properties tab. For details, see "Discovery Scheduler Pane" on page 307.
Allow Discovery to run at	Choose the time at which the job should run.
Repeat Every	Select how often the job should run.



Summary

Enables you to review the wizard definitions before running a discovery.

Important Information	To make changes to the run, click the Back button. General information about the wizard is available in "Database Discovery Wizard" on page 257.
Wizard Map	The Database Discovery wizard contains: Database Discovery Wizard > Define Credentials > Database Port Scanning > Custom JDBC Drivers > Oracle TNSName File Location > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A–Z)	Description
Run	Click the button to run a discovery.

Dependency Map Tab

Displays a visual representation of the real-time progress of the discovery process. The map displays:

- CIs that were triggered by a job
- CIs that were discovered as a result of the activated job.

To access	Click the Dependency Map tab in the Discovery Control Panel window.
Important Information	<p>Depending which level you select in the Discovery Modules pane, different information is displayed in the Dependency Map tab.</p> <p>If you select:</p> <ul style="list-style-type: none"> ➤ The Discovery Modules root, and select the Show only active Discovery jobs check box, the Dependency Map displays only active jobs and their interdependencies. ➤ The Discovery Modules root, and clear the Show only active Discovery jobs check box, the Dependency Map displays all DFM jobs and their interdependencies. ➤ A module, a topology map is displayed showing the module's active and inactive jobs. ➤ A job, the topology map highlights the job in the module's map.
See also	"Discovered by Window" on page 279

User interface elements are described below (unlabeled elements are shown in angle brackets):

UI Elements (A-Z)	Description
<right-click menu>	<p>Use the right-click menu to view details for a job, CI, or link, for example, the number of CI instances (of a specific type) in the CMDB or the number of CI instances created by a specific job.</p> <p>Depending on which object is selected, the following menu options are displayed:</p> <ul style="list-style-type: none"> ▶ When a job is selected: <ul style="list-style-type: none"> Show discovered CIs. Click to view the CIs discovered by the job. To filter the query, select a CIT from the menu. Show trigger CIs. Click to view the CIs that triggered the job. ▶ When a CI is selected: <ul style="list-style-type: none"> Show all CIT instances. Click to view all CIs of this CI type. ▶ When a link from a CI to a job is selected: <ul style="list-style-type: none"> Show trigger CIs for job. Click to view CIs (of the selected type) that triggered the job. ▶ When a link from a job to a CI is selected: <ul style="list-style-type: none"> Show discovered instances. Click to view CIs (of the selected type) that were discovered by the job.
<Toolbar>	For details, see "Toolbar Options" in the <i>HP Universal CMDB Modeling Guide</i> .
<Tooltip>	Hold the pointer over a CI or job to display a description.
Show only active Discovery jobs	When the Discovery Modules root is selected in the Discovery Modules pane, this check box is displayed. Select to display all active jobs (from any module).




 **Details Tab**

Enables you to view and administer modules and jobs, to follow the progress of the DFM process, and to manage errors during discovery.

To access	Click the Details tab in Discovery Control Panel .
Important Information	<p>Depending which level you select in the Discovery Modules pane, different information is displayed in the Details tab.</p> <p>If you select:</p> <ul style="list-style-type: none"> ▶ The Discovery Modules root or a Discovery module, the Discovery Status and Statistics Results panes are displayed with information and statistics about all active jobs and errors discovered during a run. For details, see "Discovery Status Pane" on page 268 and "Statistics Results Pane" on page 275. ▶ A job, the Discovery Job Details, Discovery Status, and Statistics Results panes are displayed. For details, see "Discovery Job Details Pane" on page 267, "Discovery Status Pane" on page 268, and "Statistics Results Pane" on page 275. ▶ Several jobs or modules, the Selected Items pane is displayed. For details, see "Selected Items Pane" on page 274.
Relevant tasks	"Error Messages Overview" in the <i>HP Universal CMDB Developer Reference Guide</i>

Discovery Job Details Pane

User interface elements are described below:

GUI Element (A–Z)	Description
 Edit Adapter	Click to go to the adapter in the Resources pane.
 View CIs in Map	You can choose to view a map of the CIs and links that are discovered by the adapter, instead of a list. Click the button to open the Discovered Classes Map window. The selected adapter is shown together with its CIs and relationships. Hold the cursor over a CIT to read a description in a tooltip.
 View Permissions	Click to view permissions that are defined for specific adapters. For details, see "Discovery Permissions Window" on page 283. For details on editing these permissions, see "Permission Editor Dialog Box" on page 150.
Adapter	The adapter needed by the job to discover the CIs.
Discovered CIs	The CIs that are discovered by this job.
Input CI Type	The CIT that triggers the CIs for this job.
Job Name	The name and description of the job. Important: Job names must not start with a numeric value.
Required Protocols	The protocols needed by the activated job to access the system components.






Discovery Status Pane




Enables you to view a run status and to drill down to problematic Trigger CIs, to uncover specific problems that DFM encountered during the run, for example, incorrect credentials. You can also add newly-discovered CIs to the trigger CI list.




- ▶ In **Basic Mode**, enables you to view the results of the previous run for the selected job type (that is, infrastructure, database, or J2EE application).
- ▶ In **Advanced Mode**, enables you to view the results of the previous run for a selected module or job, or for all modules.

To access	<ul style="list-style-type: none"> ▶ In Basic Mode, locate the Discovery Overview pane. ▶ In Advanced Mode, select a module or job, click the Details tab, and locate the Discovery Status pane.
Important Information	<ul style="list-style-type: none"> ▶ You can use the SHIFT and CTRL keys to select adjacent and non-adjacent CIs in a list. ▶ Depending which level you select in Advanced Mode in the Discovery Modules pane, information is displayed in the Discovery Status pane for all modules, for a specific module, or for a specific job. ▶ The information in this pane is automatically refreshed every thirty seconds.
Relevant tasks	"Check Status of Application Discovery (Rediscover a View)" in the <i>HP Universal CMDB Modeling Guide</i> .
See also	"Error Messages Overview" in the <i>HP Universal CMDB Developer Reference Guide</i>

User interface elements are described below (unlabeled elements are shown in angle brackets>):

GUI Element (A-Z)	Description
	Click to return to the upper pane.
	Click to drill down to the Trigger CI that includes the problem. Note: This icon is displayed only when you can drill down from error or warning links.
	Click to refresh the status view.
	Click to add a newly-discovered CI to the trigger CI list. For details, see "Choose CIs to Add Dialog Box" on page 253.
	Click to remove a CI from the list, if the CI is no longer of interest. The CI is deleted from the specific job.

GUI Element (A-Z)	Description
	<p>Click and choose an option from the menu:</p> <ul style="list-style-type: none"> ▶ By Status. (This option is available only when the Total number of CIs is displayed.) Displays a list of Trigger CIs: <ul style="list-style-type: none"> ▶ All. Displays all the Trigger CIs. ▶ Waiting for Probe. Displays the Trigger CIs that are ready to be dispatched and are waiting for the Probe to retrieve them. ▶ In Progress. Displays the Trigger CIs that are active and are running on the Probe. ▶ In progress (being removed). Displays the Trigger CIs that are being removed from the Trigger CIs list. ▶ Success, Failed, Warning. Displays only those CIs that have the selected status. ▶ By Probe. Displays only the CIs triggered by a selected Probe. Click to open the Choose Probe dialog box. ▶ By Dispatch Type. Displays a list of CIs according to one of the following options: <ul style="list-style-type: none"> ▶ All. Displays both CIs that are used to manually activate the job and Discovery TQLs that are used to automatically activate the job. ▶ Manually Added. Displays the CIs that are used to manually activate the job. ▶ By Discovery Query. Displays the CIs that are used to automatically activate the job. ▶ Reset. Click to remove any filters.
	<p>Click to display a message box containing an explanation of the failure. (You can also view messages by right-clicking the CI and selecting Show error details.)</p>
	<p>Click to open the Triggered CIs dialog box with additional information about the CI. For details, see "Discovered CIs Window" on page 279.</p>

GUI Element (A-Z)	Description
	<p>► Show results for triggered CI. DFM sends an ad-hoc request to the Probe and retrieves the latest results of the job (CIT name and number of discovered CIs) that is running on a specific trigger CI.</p> <p>This ad-hoc request does not run the job, but brings the results of the previous job run that are stored in the Probe's database. If the job has not yet run for this trigger CI, a message is displayed. See "Show Results for Triggered CI Dialog Box" on page 313.</p> <p>If no communication log exists in the Probe, a message is displayed. You can choose that DFM always creates communication logs. For details, see "Execution Options Pane" on page 129.</p>
	Click to rerun the discovery.
	Find a CI.
<drill down>	<p>You can drill down from a job or a module.</p> <ul style="list-style-type: none"> ► Drill down from a job to view a list of Trigger CIs that are included in the job. ► Drill down from a module to view a list of the jobs in the module and the number of CIs returned by each job. Drill down from a job to its Trigger CIs. <p>Note: A Trigger CI can be present in more than one job.</p>

GUI Element (A-Z)	Description
<right-click CI menu>	<ul style="list-style-type: none"> ▶ Show error details. Displays a list of the different types of errors returned by this CI. For details, see "Error Severity Levels" in the <i>HP Universal CMDB Developer Reference Guide</i>. ▶ Remove CI. Select to delete the CI from the job. The CI is removed from that job only, even if it appears in more than one job. ▶ Rerun Discovery. To run a specific CI or set of CIs, select the CIs. They are added to the list of CIs that the Probe is going to run (Waiting for Probe). ▶ Show results for triggered CI. DFM sends an ad-hoc request to the Probe and retrieves the latest results of the job (CIT name and number of discovered CIs) that is running on a specific trigger CI. This ad-hoc request does not run the job, but brings the results of the previous job run that are stored in the Probe's database. If the job has not yet run for this trigger CI, a message is displayed. See "Show Results for Triggered CI Dialog Box" on page 313. If no communication log exists in the Probe, a message is displayed. You can choose that DFM always creates communication logs. For details, see "Execution Options Pane" on page 129. ▶ Debug. Choose between: <ul style="list-style-type: none"> ▶ View communication log for triggered CI. Opens the log that includes information about the connection between the Probe and the remote machine. This is on condition that you have set the Create communication log to either Always or On failure. For details, see "Execution Options Pane" on page 129. ▶ Go to adapter. Displays the adapter that is included in the job in Adapter Management. ▶ Go to job. Displays the job in which the CI is included. ▶ Edit script. Select a script to open it in a script editor. ▶ Undispatch. Removes the Trigger CI.

GUI Element (A-Z)	Description
Failed	<p>Displays those CIs that returned a severity of type Error or Fatal.</p> <p>Right-click a job to rerun discovery.</p> <p>Double-click a job to display the error message.</p> <p>Right-click an error to deactivate or rerun a job.</p>
In progress	<p>Displays the number of Trigger CIs that are awaiting their turn to be run. Click to view the jobs that are waiting to be run.</p>
Look for	<p>To search for a specific Probe, related host, or related IP, enter part of its name in the box and click Search.</p>
Progress	<p>The indicator shows a summary of the current discovery run, that is, since the specific run was activated.</p>
Success	<p>DFM displays the number of CIs that have been run successfully, that is, without errors.</p> <p>Click to view the jobs (and the number of CIs in each job) that completed successfully.</p> <p>Select a CI and use the right-click CI menu to view information.</p> <p>With warnings. Click to view a warning message for each job.</p> <p>Double-click a message to view the CIs that finished successfully with a warning.</p> <p>Right-click a message to view the right-click CI menu.</p>
Total	<p>Displays the status of all of a job's Trigger CIs. Double click a Warning or Error status to open the Message dialog box.</p>
Waiting for Probe	<p>The Trigger CIs that are either waiting for the Probe or are waiting to run.</p>

Selected Items Pane



User interface elements are described below (unlabeled elements are shown in angle brackets):




GUI Element (A-Z)	Description
<right-click menu>	Edit Scheduling. Click to open the Discovery Scheduler to define a schedule for a specific job. For details, see "Discovery Scheduler Pane" on page 307.
invoke immediately	<ul style="list-style-type: none"> ▶ A check mark signifies that the DFM job runs as soon as the triggered CI reaches the Probe. In this case, the Invoke on new triggered CIs immediately check box is selected in the Properties tab. ▶ If this column does not contain a check mark, the job runs according to the schedule defined in the Schedule Manager.
Job name	The name of the job.
Schedule info	The scheduling information of the job as defined in the Discovery Scheduler.
Trigger Queries	The name of the query that activated the job. For details, see "Trigger Queries Pane" on page 311.

Statistics Results Pane

<p>Important Information</p>	<p>Version 9.02 includes a purging mechanism for managing old DFM result statistics. This mechanism enables faster display of discovery result statuses. That is, the old statistics records are merged and therefore they are still available for the user. This feature is controlled by two system parameters:</p> <ul style="list-style-type: none"> ➤ appilog.collectors.ResetDiscoveryStatisticsIntervalHours.name=Reset Discovery Statistics Interval by Hours. This property defines the interval of merging discovery statistics (the interval for running the purging mechanism). ➤ appilog.collectors.DiscoveryStatisticsArchiveDays.name=Discovery results statistics archive period. This property defines the number of days after which results statistics are being archived (the number of days after which the statistics are considered old).
<p>See also</p>	<ul style="list-style-type: none"> ➤ "Data Push Tab" on page 186 ➤ "Population Tab" on page 198

User interface elements are described below (unlabeled elements are shown in angle brackets>):

GUI Element (A-Z)	Description
	<p>Select a CI and click the View Instances button to view CI instances and their attributes. The Discovered CIs dialog box opens.</p> <p>Under the following conditions, a message is displayed:</p> <ul style="list-style-type: none"> ▶ All the CIs that were discovered by this job were already discovered by another job. ▶ All the CIs that this job discovered have been deleted. ▶ The CI instances were discovered in a previous version. (In version 7.0, you cannot view instances of CIs discovered in a previous version.) <p>Note:</p> <ul style="list-style-type: none"> ▶ You can also view CI instances by double-clicking a row. ▶ CITs with no instantiated instances are displayed.
	<p>Select the time range or Probe for which to display statistics about the CITs.</p> <ul style="list-style-type: none"> ▶ By Time Range: <ul style="list-style-type: none"> ▶ All. Displays statistics for all job runs. ▶ From Now/Last Minute/Last Hour/Last Day/Last Week. Choose a period of time for which to display statistics about the CITs. ▶ Custom Range. Click to open the Change Timeframe dialog box: Enter the date or click the arrow to choose a date and time from the calendar, for the From and To dates (or click Now to enter the current date and time). Click Last Day to enter the current date and time in the To box and yesterday's date and time in the From box. Click OK to save the changes. ▶ By Probe: To view statistics for a specific Probe, select to open the Choose Probe dialog box.

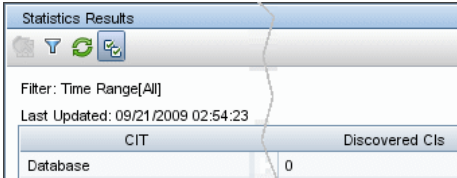GUI Element (A–Z)	Description
	<p>Click to retrieve the latest data from the server (job results are not automatically updated in the Statistics pane).</p>
	<p>Show all declared CI Types. By default, only discovered CITs are listed in the table, that is, the Discovered CIs column includes CITs if the number of CIs found is greater than zero. Click the button to display every CI that can be discovered by the job, even if the Discovered CIs value is zero:</p> 
<Column title>	<p>Click a column title to change the order of the CITs from ascending to descending order, or vice versa.</p>
<right-click a title>	<p>Choose from the following options:</p> <ul style="list-style-type: none"> ▶ Hide Column. Select to hide a specific column. ▶ Show All Columns. Displayed when a column is hidden. ▶ Select Columns. Select to display or hide columns and to change the order of the columns in the table. Opens the Columns dialog box. ▶ Auto-resize Column. Select to change a column width to fit the contents. <p>For details, see "Select Columns Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i>.</p>

GUI Element (A–Z)	Description
CIT	<p>The name of the discovered CIT.</p> <p>You can configure discovery so that any object reported by the job and whose CIT is not defined in the adapter's discovered CITs list is marked in red. Objects include those added by the Probe result mechanism.</p> <p>To set this parameter:</p> <ol style="list-style-type: none"> 1 Select Administration > Infrastructure Settings Manager. 2 Select the General Settings category. 3 Locate the Enable statistics results validation according to adapter parameter. 4 Change the value to True.
Created	The number of CIT instances created in the period selected or for the selected Probe.
Deleted	The number of CIT instances deleted in the period selected or for the selected Probe.
Discovered CIs	The number of CIs that were discovered for each CI type.
Filter	The time range set with the Set Time Range button.
Last updated	The date and time that the statistics table was last updated for a particular job.
Total	The total number of CIs in each column.
Updated	The number of CIT instances that were updated in the period selected.

Discovered by Window

Enables you to view CI instances of a CIT discovered by a job.

To access	<ul style="list-style-type: none"> ▶ In the Statistics Results pane, select a CIT, and click the View instances button. ▶ In the Dependency Map tab, select Show Discovered CIs or Show all instances.
Important Information	<ul style="list-style-type: none"> ▶ The Discovered by <job name> window includes the same information as the Element Instances window. For details, see "Element Instances Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i>. ▶ Depending on whether you select Show discovered CIs or Show all instances in the Dependency Map, you can view either all CIs discovered by a selected job or all CIs of a selected type.

Discovered CIs Window

Enables you to view all CI instances found for a selected TQL node.





To access	<ul style="list-style-type: none"> ▶ Data Flow Management > Discovery Control Panel > Dependency Map tab. Right-click a CIT and select Show Triggered CIs. ▶ In the Discovery Status pane, click the Show additional data button
Important Information	<p>The Triggered CIs window includes the same information as the Element Instances window. For details, see "Element Instances Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i>.</p>








Discovery Modules Pane


Enables you to view and manage modules and jobs. Each module includes the jobs necessary to discover specific CIs.

To access	Data Flow Management > Discovery Control Panel. The default view is called Basic Mode and displays the Discovery Wizard. You can run the J2EE, database, or infrastructure discovery. Click Advanced Mode to view all modules.
Important Information	<p>Caution: Only administrators with an expert knowledge of the DFM process should delete modules.</p> <p>Obsolete. Contains several modules that are no longer relevant but remain for backward compatibility and upgrade purposes. Do not use these modules on new installations.</p> <p>No module. Contains jobs that are not included in any other module.</p>

User interface elements are described below:

GUI Element (A–Z)	Description
	Refresh All. Updates the modules.
	Find Job. Click to open the Find Jobs dialog box. For example, to search for all jobs that discover SNMP connections, click the Filter icon. In the Find Jobs dialog box, enter SNMP in the Name box and click Find All . For details, see "Find Jobs Dialog Box" on page 289.
	Activate Selected Discovery Jobs. You can run one job or several jobs in a module, and one or several modules. Select either the jobs or modules and click Activate .
	Deactivate Selected Discovery Jobs. Select the jobs or modules to be stopped and click Deactivate .

GUI Element (A–Z)	Description
	<p>Represents the module root.</p> <p>To create a module, right-click to enter the name of the module you are creating.</p> <p>Note: A name is case sensitive. Names beginning with an upper case letter appear in the Discovery Modules list before names beginning with a lower case letter.</p>
	<p>Represents a module.</p>
	<p>Represents a job. Click to display information about the job. To view an adapter description, hold the pointer over a job.</p> <p>Jobs contain configuration information derived from adapters and other resources and are the entities controlled by users, for example, when activating or deactivating a module.</p> <p>For details on the right-click menu, see "Right-Click Menu" on page 282.</p>
	<p>One green dot signifies that some of a module's jobs are activated:</p> <div data-bbox="601 939 882 1029" style="border: 1px solid black; padding: 5px;">  </div>
	<p>Three green dots signify that all of a module's jobs are activated:</p> <div data-bbox="601 1138 882 1229" style="border: 1px solid black; padding: 5px;">  </div>

GUI Element (A–Z)	Description
	<p>An exclamation mark signifies that one or more of the jobs is experiencing a problem that could affect the DFM process, for example, a protocol connection failure.</p> <p>To view the reason for the problem, click the (show errors) link in the Discovery Status pane. For details, see "Failed" on page 273.</p> <p>Note: If a problem is resolved by clicking the Refresh All button, the Problem Indicator disappears.</p>
Advanced Mode	(Currently displayed) Click to run DFM to customize a run by making changes to a job, adapter, and so on.
Basic Mode	Click to run DFM for a specific component (for example, the infrastructure, J2EE applications, or databases), using configurable, default preferences. For details, see "Basic Mode Window" on page 251.

Right-Click Menu

GUI Element (A–Z)	Description
Activate	<p>Click a module to run all its jobs. To run a specific job, select and activate it.</p> <p>The Discovery Module discovers CITs and relationships of the types that are described in each job, and places them in the CMDDB. For example, the Class C IPs by ICMP job discovers the Depend, IP, and Member CITs and relationships.</p>
Create new > Job	Click to open the Create New Discovery Job. For details, see "Create New Discovery Job Window" on page 256.
Create new > Module	<p>Click to define a new name for the module root.</p> <p>Note: Module names must be limited to a length of 50 characters.</p>
Deactivate	Stop the module or job from running.
Deactivate all jobs	Click Discovery Modules to display this option.
Delete	Click and answer Yes to the warning message.


GUI Element (A–Z)	Description
Delete job	Click and answer Yes to the warning message.
Go to adapter	Click to edit the adapter in the Adapter Management window.
Edit Scheduling	Click to open the Discovery Scheduler to define a schedule for a specific job.
Rename job	Click to open the Choose Name dialog box. Enter a new name for the job. Note: You cannot rename active jobs.
Rerun Discovery	Click to run the job again using the selected Trigger CIs.
Save as...	Click to clone the job.

Discovery Permissions Window

Enables you to view permissions data for jobs.

To access	Data Flow Management > Discovery Control Panel > Advanced Mode. Select a job. Locate the Discovery Job Details pane in the Details tab. Click the View Permissions button.
See also	<ul style="list-style-type: none"> ➤ "Viewing Permissions While Running Jobs" on page 234 ➤ "Required Permissions Pane" on page 124 ➤ "Permission Editor Dialog Box" on page 150

User interface elements are described below:


GUI Element (A-Z)	Description
	Export a permission object in Excel, PDF, RTF, CSV, or XML format. For details, see "Browse Views Mode" in the <i>HP Universal CMDB Modeling Guide</i> .
Objects and Parameters	The commands that appear in the relevant Jython scripts.
Operation	The action that is being run.
Permission	The name of the protocol as defined for the job.
Usage Description	A description of how the protocol is used.

Discovery Scheduler Dialog Box

Enables you to define a schedule for a specific job, for example, every day Data Flow Management starts running an IP ping sweep on class C networks at 6:00 AM.

<p>To access</p>	<ul style="list-style-type: none"> ▶ Right-click a job and choose Edit scheduling. ▶ Click the Edit Scheduler button in the Discovery Scheduler pane of the Properties tab in the Discovery Control Panel window.
<p>Important Information</p>	<ul style="list-style-type: none"> ▶ The Discovery Scheduler defines the frequency of the discovery (daily, monthly) whereas the time template defines when the job should run (during the day, at night, at weekends only). You can run the same schedule with different time templates. For example, you can define a schedule that runs every day and you can define a time template that runs at night from 01:00 AM to 05:00 AM. A job defined in this way runs every day from 01:00 AM to 05:00 AM. You can define a second time template to run at a different time, and you can use this time template too with the same schedule. ▶ If you change a schedule for a job, DFM next runs the job according to the following calculation: The current date and time plus the selected interval. For example, if you choose Once, the Invocation Time is in one hour. <p>For details on creating a time template, see "Edit Time Template Dialog Box" on page 288.</p>

User interface elements are described below (unlabeled elements are shown in angle brackets):

GUI Element (A-Z)	Description
	Click to validate the Cron expression you entered.
<Frequency>	<ul style="list-style-type: none"> ➤ Once. Define the task to run only once. ➤ Interval. Defines the interval between successive runs. ➤ Daily. Run a task on a daily basis. ➤ Weekly. Run a task on a weekly basis. ➤ Monthly. Run a task on a monthly basis. ➤ Cron. Enter a Cron expression in the correct format.
<Days of month>	<p>(Displayed when you select Monthly.) Click the button to choose the days of the month on which the action must run. The Select Days dialog box opens. Choose the required days by selecting the check boxes. You can select multiple days.</p> <ul style="list-style-type: none"> ➤ Select all. Select all the days. ➤ Unselect all. Clear all the selected days.
<Days of the week>	(Displayed when you select Weekly .) Select the day or days on which the action should run.
End by	<p>Select the date and time when the action should stop running by selecting the End by check box, opening the calendar, selecting the date and time, and clicking OK.</p> <p>Note: This step is optional. If you do not need to specify an ending date, leave the End by check box cleared.</p>

GUI Element (A–Z)	Description
Invocation hour	<p>(Displayed when you select Daily, Weekly, or Monthly.) Select the time to activate the action. Click the button to open the Select Hours dialog box. Choose the required time by selecting the check boxes. You can select multiple times.</p> <ul style="list-style-type: none"> ▶ Select all. Select all the times. ▶ Unselect all. Clear all the selected times. <p>Note: You can also enter the time manually in the Invocation hour box. Separate times by a comma and enter AM or PM after the hour. The manually entered action times are not restricted to the hour and half hour only: you can assign any hour and minute combination. Use the following format: HH:MM AM, for example, 8:15 AM, 11:59 PM.</p>
Invocation Time	<p>(Displayed when you select Once.) Choose the date and time the action should begin running by opening the calendar and choosing a date and time, or accept the default.</p>
<Months of the year>	<p>(Displayed when you select Monthly.) Select the month or months in which the action must run.</p>
Repeat every	<p>(Displayed when you select Interval.) Type a value for the interval between successive runs and choose the required unit of time (minutes, hours, or days).</p> <p>Note: After each change, the next time that the job runs is the current time plus the interval, that is, the job does not start immediately.</p>
Start at	<p>Choose the date and time when the action must begin running by selecting the Start at check box, opening the calendar, selecting the date and time, and clicking OK.</p>
Time zone	<p>Select the time zone according to which the Probe must schedule jobs.</p> <p>The default is <<Data Flow Probe Time Zone>>: the Probe uses its own system-defined time zone. This enables scheduling to take place at different times in different geographical locations.</p> <p>For all Probes to start working at the same time, select a specific time zone. (This assumes that the Probes' system date and time and time zone are correctly configured.)</p>

Edit Probe Limitation for Query Output Dialog Box

Enables you to change the Probes on which a trigger TQL is running. For details on selecting the Probes, see "Selecting Probes" on page 58.

To access	Select a job and click the following button: Data Flow Management > Discovery Control Panel > Properties tab > Trigger Queries pane > Probe Limit box.
------------------	---

Edit Time Template Dialog Box

Enables you to define a time template to use when scheduling jobs.

To access	Click the Add button in the Time Templates dialog box.
Important Information	The name of the time template must be unique.
See also	"Discovery Scheduler Dialog Box" on page 285

User interface elements are described below:

GUI Element (A–Z)	Description
Every day between	Define a daily schedule when a job must run. You can also type in times. You can assign any hour and minute combination.
Time Template name	Enter a unique name.
Week Time	Define a weekly schedule when a job must run. Click to select a time. To select adjacent cells, click and drag the pointer over the table. To clear a time, click a cell a second time.

Find Jobs Dialog Box

Enables you to search for jobs answering to specific criteria. The results of the search are displayed in the Selected Items pane in the Details tab.

To access	Click the Search for Discovery Jobs button in the Discovery Modules pane.
------------------	--

User interface elements are described below:

GUI Element (A–Z)	Description
Direction	Searches forwards or backwards through the modules.
Find All	All jobs meeting the search criteria are highlighted.
Find Discovery job by	Choose between: <ul style="list-style-type: none"> ▶ Name. Enter the name, or part of it, of the job. ▶ Input type. CIs that triggered the job. Click the button to open the Choose Configuration Item Type dialog box. Locate the CI type that you are searching for. ▶ Output type. CIs that are discovered as a result of the activated job.
Find Next	The next job meeting the search criteria is highlighted.

Infrastructure Discovery Wizard

Enables you to run discovery on the networks in your system.




To access	Data Flow Management > Discovery Control Panel > Basic Mode. Select Infrastructure Discovery Wizard from the list in the left pane. Click Configure and Run .
Wizard Map	The Infrastructure Discovery wizard contains: Infrastructure Discovery Wizard > Define IP Ranges > Define Credentials > Preferences > Schedule Discovery > Summary



Define IP Ranges

Enables you to set the network range for discovery for each Probe. The results are retrieved from the addresses in the range you define. You can also define IP addresses that must be excluded from a range.

Important Information	Any changes made here affect the global configuration. General information about the wizard is available in "Infrastructure Discovery Wizard" on page 290.
Wizard Map	The Infrastructure Discovery wizard contains: Infrastructure Discovery Wizard > Define IP Ranges > Define Credentials > Preferences > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A-Z)	Description
	For details, see "Add/Edit IP Range Dialog Box" on page 45.
	Select a range and click the button to remove the range from the list.
	Select a range and click the button to edit an existing range.





GUI Element (A–Z)	Description
	Export a permission object in Excel, PDF, RTF, CSV, or XML format. For details, see "Browse Views Mode" in the <i>HP Universal CMDB Modeling Guide</i> .
	Click to import ranges from a CSV file. Before using this feature, verify that the imported file is a valid CSV file, and that the ranges in the file do not conflict with existing ranges (that is, there are no duplicate or overriding ranges).
Address Ranges	<ul style="list-style-type: none"> ▶ Range. For details on the rules for defining ranges, see "Range" on page 47. ▶ Excluded. You can exclude part of a range. Select the range and click the Add button. In the dialog box, click the Advanced button. For details, see "Exclude Ranges" on page 46.
Data Flow Probes	<p>Enables you to view details on the Probe, including range information. You can also add ranges to, or exclude ranges from, the Probe.</p> <p>For details on defining a Probe, see "Domains and Probes Pane" on page 55.</p>

Define Credentials

Enables you to add, remove and edit a credentials set for protocols.

Important Information	<ul style="list-style-type: none"> ▶ You configure a credentials set depending on what must be discovered and which protocols are supported on your site's network. ▶ For a list of protocols, see "Domain Credential References" on page 59. ▶ General information about the wizard is available in "Infrastructure Discovery Wizard" on page 290.
Wizard Map	<p>The Infrastructure Discovery wizard contains:</p> <p>Infrastructure Discovery Wizard > Define IP Ranges > Define Credentials > Preferences > Schedule Discovery > Summary</p>

User interface elements are described below:

GUI Element (A–Z)	Description
	Add new connection details for selected protocol type. ► For a list of protocols, see "Domain Credential References" on page 59.
	Remove a protocol.
	Edit a protocol. Click to open the Protocol Parameters dialog box.
	Click a button to move a protocol up or down to set the order in which credential sets are attempted. Discovery executes all the protocols in the list with the first protocol taking priority.
Protocol	Click to view details on the protocol, including user credentials.

Preferences

Enables you to choose the configuration options to be used during discovery that are activated by the Infrastructure Discovery wizard.

Important Information	General information about the wizard is available in "Infrastructure Discovery Wizard" on page 290.
Wizard Map	The Infrastructure Discovery wizard contains: Infrastructure Discovery Wizard > Define IP Ranges > Define Credentials > Preferences > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A-Z)	Description
DNS Nameservers	<p>Discovers DNS nameserver machines and the IPs they hold names for.</p> <p>Choose to activate only if zone transfer can be performed from the Probe machine to the nameserver machines, that is, if the appropriate permissions exist on the DNS nameserver machines.</p> <p>Network implications. Discovery tries to connect to DNS nameserver servers.</p>
Failover Cluster	<p>Discovers failover clusters including HP Service Guard, Microsoft Cluster Service and Veritas Cluster.</p>
Host Information	<p>Select the host resources to be discovered. These resources can be either physically or logically part of a host.</p> <p>After Discovery connects to a host, it discovers the following resources:</p> <ul style="list-style-type: none"> ▶ For SNMP agents, the relevant Management Information Base (MIBs). ▶ For WMI agents, the relevant Windows Management Instrumentation Query Language (WQL) queries. <p>Discovery can also execute shell commands on a machine.</p> <p>Network implications. The Software and Services network resources, because of the large quantities of data that they transmit, may cause very high network traffic. For this reason, the default is not to discover them.</p>
Host TCP Connections	<p>Discover TCP communication channels to map dependency relationships between hosts.</p> <p>This discovery requires that at least one protocol has a defined set of credentials. For details, see the previous Define Credentials step.</p> <p>Network implications.</p> <p>Discovery executes Shell commands on a machine to find open ports.</p>

GUI Element (A-Z)	Description
<p>IP Ping Strategy</p>	<p>Choose the strategy for discovering IPs in your environment.</p> <p>This discovery requires that the SNMP protocol be configured in the previous Define Credentials step.</p> <ul style="list-style-type: none"> ▶ Send ping request to every address in defined IP range. Select this option when you know that most of the IP addresses will respond, the network range is small, and most of the IPs in the range are of interest to you (that is, they are part of your network). ▶ Send ping request only to discoverable IPs in a network. Select this option when you know that not all IP addresses will respond and the network range is large. In this case, Discovery first discovers a network, then sends a ping request to all discovered IPs in that network. <p>Versions and Limitations.</p> <p>Verify that you have the correct credentials set for all the machines between the Probe and one of the network's switches.</p>
<p>Network Topology</p>	<p>Activate to discover the connections, on a discovered switch (for example, a host), between a host and its physical port as well as between a host and its logical layout (VLANs, ELANs).</p> <p>This discovery requires that at least one protocol has a defined set of credentials. For details, see the previous Define Credentials step.</p>


GUI Element (A-Z)	Description
Port Scanning	<p>The TCP ports appearing in the Choose TCP ports for port scanning list are scanned to discover open server ports. The ports are scanned on every discovered host.</p> <p>You can add new ports to be scanned, and you can remove existing ports from the list.</p> <p>To choose a port that does not appear in the list:</p> <ol style="list-style-type: none"> 1 Click the Add port button to open the Add New Port dialog box. 2 Click the Add port button and enter the port name and number. 3 Click OK. <p>Network implications.</p> <p>Note that the scanning process may affect performance on the network. Furthermore, you may need to inform machine owners that Discovery will be trying to connect to their machines.</p>
Software identification	<p>Select to discover software elements running on the discovered hosts. As part of software element discovery, the processes and ports that are related to the software element are also discovered. The Software Library dialog box opens. For details, see "Software Library Dialog Box" on page 160.</p> <p>Network implications.</p> <p>A search pattern that is too general causes a toll on performance. For example, do not enter a process name that consists of an asterisk (*) only, as such a filter would try and retrieve all the processes running on all machines.</p>

Schedule Discovery

Enables you to define a schedule for a specific job.

Important Information	For details on scheduling Discovery, see "Discovery Scheduler Dialog Box" on page 285. General information about the wizard is available in "Infrastructure Discovery Wizard" on page 290.
Wizard Map	The Infrastructure Discovery wizard contains: Infrastructure Discovery Wizard > Define IP Ranges > Define Credentials > Preferences > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A–Z)	Description
	You define a time template in the Discovery Scheduler pane of the Properties tab. For details, see "Discovery Scheduler Pane" on page 307.
Allow Discovery to run at	Choose the time at which the job should run.
Repeat Every	Select how often the job should run.

Summary

Enables you to review the definitions before running discovery.

Important Information	Click Run to begin Discovery. General information about the wizard is available in "Infrastructure Discovery Wizard" on page 290.
Wizard Map	The Infrastructure Discovery wizard contains: Infrastructure Discovery Wizard > Define IP Ranges > Define Credentials > Preferences > Schedule Discovery > Summary

J2EE Discovery Wizard

Enables you to run discovery on J2EE applications.



To access	Data Flow Management > Discovery Control Panel > Basic Mode. Select the J2EE Discovery wizard from the list in the left pane. Click Configure and Run .
Important Information	For more information, hold the pointer over a question mark icon.
Wizard Map	The J2EE Discovery wizard contains: J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary




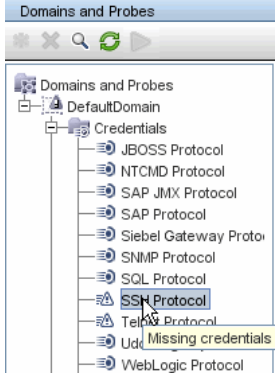
Define Credentials

Enables you to configure connection data for each protocol.

Important Information	<ul style="list-style-type: none"> ▶ You configure protocols depending on what must be discovered and which protocols are supported on your site's network. ▶ For a list of protocols, see "Domain Credential References" on page 59. ▶ General information about the wizard is available in "J2EE Discovery Wizard" on page 297.
Wizard Map	The J2EE Discovery wizard contains: J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A–Z)	Description
	Add new connection details for selected protocol type.
	Remove a protocol.



GUI Element (A–Z)	Description
	Edit a protocol. Click to open the Protocol Parameters dialog box.
	Move a protocol up or down. Discovery executes all the protocols in the list with the first protocol taking priority.
Protocol	<p>Click to view details on the protocol, including user credentials.</p> <p>Note: A missing credential is represented by an icon , as shown in the following image:</p> 

J2EE Port Scanning

Enables you to choose the port number and port type through which to connect to the J2EE application.

Important Information	General information about the wizard is available in "J2EE Discovery Wizard" on page 297.
Wizard Map	<p>The J2EE Discovery wizard contains:</p> <p>J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary</p>

User interface elements are described below:

GUI Element (A–Z)	Description
	<p>Click to add a port to the port list. The Add New Port dialog box opens. Select the ports and click OK.</p> <p>To edit existing system ports, in the Add New Port dialog box, click Edit Port. The Edit Known System Ports dialog box opens. Select the port and click the Edit button. In the dialog box that opens, make changes to the entries and click OK.</p> <p>To add a port to the list, in the Edit Known System Ports dialog box, click the Add button. Enter details of the port name, number and type and click OK.</p>
	<p>Select a port and click the button to remove the port from the list.</p>

 **WebLogic**

Enables you to select the JAR files for specific WebLogic versions.

<p>Important Information</p>	<p>Discovery supports the following WebLogic versions: 6.x, 7.x, 8.x, 9.x, and 10.x.</p> <ol style="list-style-type: none"> 1 To discover WebLogic, obtain the following drivers: <ul style="list-style-type: none"> ▶ weblogic.jar (versions 6.x, 7.x, and 8.x only) ▶ wlcipher.jar (if WebLogic is running on SSL, for all versions) ▶ license.bea (if WebLogic is running on SSL but only for versions 6.x, 7.x, and 8.x) ▶ client trust store JKS file (for example, DemoTrust.jks, but only if WebLogic is running on SSL) ▶ wlclient.jar (versions 9.x and 10.x only) ▶ wljsxclient.jar (versions 9.x and 10.x only) 2 Place the driver under the correct version folder in the following location: C:\hp\UCMDB\DataFlowProbe\runtime\probeManager\discoveryResources\j2ee\weblogic\ <version_folder>. For example, C:\hp\UCMDB\DataFlowProbe\runtime\probeManager\discoveryResources\j2ee\weblogic\ 9.x. 3 On the WebLogic page in the J2EE Discovery wizard, select the check box for the versions to be discovered. Click Import file... to open a browse window. Browse to the appropriate WebLogic JAR file, as listed below. General information about the wizard is available in "J2EE Discovery Wizard" on page 297.
<p>Wizard Map</p>	<p>The J2EE Discovery wizard contains:</p> <p>J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary</p>

User interface elements are described below:

GUI Element (A–Z)	Description
Activate using default JAR files (8.x only)	Select to enable discovery without specifying version-specific JAR files. This is less recommended and works on some environments only.
WebLogic version 6.x	<ul style="list-style-type: none"> ▶ weblogic.jar ▶ For an SSL based discovery, select wlcipher.jar, license.bea, and the JKS file (for example, DemoTrust.jks)
WebLogic version 7.x	<ul style="list-style-type: none"> ▶ weblogic.jar ▶ For an SSL based discovery, select wlcipher.jar, license.bea, and the client trust store JKS file (for example, DemoTrust.jks)
WebLogic version 8.x	<ul style="list-style-type: none"> ▶ weblogic.jar ▶ For an SSL based discovery, select wlcipher.jar, license.bea, and the client trust store JKS file (for example, DemoTrust.jks)
WebLogic version 9.x	<ul style="list-style-type: none"> ▶ wlclient.jar ▶ wljmxclient.jar ▶ For an SSL based discovery, select wlcipher.jar and the client trust store JKS file (for example, DemoTrust.jks)
WebLogic version 10.x	<ul style="list-style-type: none"> ▶ wlclient.jar ▶ wljmxclient.jar ▶ For an SSL based discovery, select wlcipher.jar and the client trust store JKS file (for example, DemoTrust.jks)

 **WebSphere**

Enables you to select the JAR files for specific WebSphere versions.

<p>Important Information</p>	<p>Discovery supports the following WebSphere versions: 5.x, 6.0, and 6.1.</p> <ul style="list-style-type: none"> ▶ To discover WebSphere, obtain the following certificates: <ul style="list-style-type: none"> ▶ client key store JKS file (DummyClientKeyFile.jks if WebSphere is running on SSL and the file is required) ▶ client trust JKS file (DummyClientTrustFile.jks if WebSphere is running on SSL) <p>Out-of-the-box drivers are located on the Probe machine at the following location: C:\hp\UCMDB\DataFlowProbe\runtime\probeManager\discoveryResources\j2ee\websphere</p> <ul style="list-style-type: none"> ▶ Restart the Probe console before running the DFM jobs. <p>General information about the wizard is available in "J2EE Discovery Wizard" on page 297.</p>
<p>Wizard Map</p>	<p>The J2EE Discovery wizard contains:</p> <p>J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary</p>

User interface elements are described below:

GUI Element (A–Z)	Description
Activate using default JAR files (5.x, 6.x only)	Select to enable discovery without specifying version-specific JAR files. This is less recommended and works on some environments only.
WebSphere	<p>Select the check box for the versions to be discovered. Click Import file... to open a browse window. Browse to the appropriate WebSphere JAR file, as follows:</p> <ul style="list-style-type: none"> ➤ admin.jar ➤ com.ibm.mq.pcf.jar ➤ ffdc.jar ➤ iwsorb.jar ➤ j2ee.jar ➤ jflt.jar ➤ jmx.jar ➤ jmx.jar ➤ log.jar ➤ mail.jar ➤ ras.jar ➤ sas.jar ➤ security.jar ➤ soap.jar ➤ utils.jar ➤ wasjmx.jar ➤ websphere_arm_util.jar ➤ wlmclient.jar ➤ wsexception.jar ➤ wssec.jar

 **JBoss**

Enables you to select the JAR files for specific JBoss versions.

Important Information	Discovery supports the following JBoss versions: 3.x, 4.x. General information about the wizard is available in "J2EE Discovery Wizard" on page 297.
Wizard Map	The J2EE Discovery wizard contains: J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A–Z)	Description
Activate using default JAR files (3.x, 4.x only)	Select to enable discovery without specifying version-specific JAR files. This is less recommended and works on some environments only.
JBoss version 3.x and 4.x	Select the check box for the versions to be discovered. Click Import file... to open a browse window. Browse to the jbossall-client.jar JBoss JAR file.

 **Oracle Application Server**

Enables you to discover Oracle application servers.

Important Information	General information about the wizard is available in "J2EE Discovery Wizard" on page 297.
Wizard Map	The J2EE Discovery wizard contains: J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary

User interface elements are described below:


GUI Element (A-Z)	Description
Discover Oracle Application Server (version 10g)	Select to run Discovery for the Oracle Application Server, version 10g.

Schedule Discovery

Enables you to define a schedule for a specific job.

Important Information	General information about the wizard is available in "J2EE Discovery Wizard" on page 297.
Wizard Map	The J2EE Discovery wizard contains: J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A-Z)	Description
	You define a time template in the Discovery Scheduler pane of the Properties tab. For details, see "Discovery Scheduler Pane" on page 307.
Allow Discovery to run at	Choose the time at which the job should run.
Repeat Every	Select how often the job should run.

 **Summary**

Enables you to review the definitions before running discovery.

Important Information	To make changes to the run, click the Back button. General information about the wizard is available in "J2EE Discovery Wizard" on page 297.
Wizard Map	The J2EE Discovery wizard contains: J2EE Discovery Wizard > Define Credentials > J2EE Port Scanning > WebLogic > WebSphere > JBoss > Oracle Application Server > Schedule Discovery > Summary

User interface elements are described below:

GUI Element (A–Z)	Description
Run	Click to run Discovery.

Properties Tab

Enables you to view and administer the properties of modules and jobs.


To access	Click the Properties tab in Discovery Control Panel.
Important Information	<p>Depending which level you select in the Discovery Modules pane, different information is displayed in the Properties tab.</p> <p>If you select:</p> <ul style="list-style-type: none"> ▶ The Discovery Modules root, all active jobs are displayed with scheduling information. Click any of the columns to sort the list by that column. Right-click a job to edit its scheduling. For details, see "Discovery Scheduler Dialog Box" on page 285. ▶ A Discovery module, the Description and Module Jobs panes are displayed. To edit a description, make changes in the Description pane and click OK. See also "Module Jobs Pane" on page 308. ▶ A job, the Parameters, Trigger Queries, Global Configuration Files, and Discovery Scheduler panes are displayed. For details, see "Parameters Pane" on page 310, "Trigger Queries Pane" on page 311, "Global Configuration Files Pane" on page 126, and "Discovery Scheduler Pane" on page 307.

Discovery Scheduler Pane

Enables you to view information about the schedule set up for this job.

To access	Select a job in the Discovery Modules pane in the Discovery Control Panel window.
------------------	---

User interface elements are described below:

GUI Element (A–Z)	Description
	Click to add times to the Allow the discovery to run at list. The Time Templates dialog box opens. To add a time template to the list, in the Time Templates dialog box, click the Add button to open the Edit Time Template dialog box. For details, see "Edit Time Template Dialog Box" on page 288.
Allow the discovery to run at	Choose a template that includes the days and times when the job should run.
Edit scheduler	Click to open the Discovery Scheduler. For details, see "Discovery Scheduler Dialog Box" on page 285.
Invoke on new triggered CIs immediately	Check box selected: The job runs as soon as the Trigger CI reaches the Probe. Check box cleared: the job runs according to the schedule defined in the Schedule Manager.

Global Configuration Files Pane




For details, see "Global Configuration Files Pane" on page 126.

Module Jobs Pane

Enables you to view the active jobs for a specific module.

To access	Select a module in the Discovery Modules pane in the Discovery Control Panel window.
------------------	--

User interface elements are described below:

GUI Element (A–Z)	Description
	Add Discovery Job to Module. Opens the Choose Discovery Jobs dialog box where you can select jobs from more than one zip file. (Use the SHIFT or CTRL key to select several jobs.)
	Remove Selected Discovery Job from Module. Select the job and click the button. (No message is displayed. To restore the job, click the Cancel button.)
	Show results as a map. You can choose to view a map of the CIs and links that are discovered by the adapter, instead of a list. Click the button to open the Discovered Classes Map window. The selected adapter is shown together with its CIs and relationships. Hold the cursor over a CIT to read a description in a tooltip.
<Column title>	<ul style="list-style-type: none"> ▶ Click a column title to change the order of the CITs from ascending to descending order, or vice versa. ▶ Drag a column head to a different location in the table columns. ▶ Right-click a column title to customize the table. Choose from the following options: <ul style="list-style-type: none"> ▶ Hide Column. Select to hide a specific column. ▶ Show All Columns. Displayed when a column is hidden. ▶ Select Columns. Select to display or hide columns and to change the order of the columns in the table. Opens the Columns dialog box. ▶ Auto-resize Column. Select to change a column width to fit the contents. For details, see "Select Columns Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i>.
<List of jobs>	<p>All jobs included in the module. (Displayed when a specific module is selected in the Discovery Modules pane.)</p> <p>Right-click a row to open the Discovery Scheduler for the selected job. For details, see "Discovery Scheduler Dialog Box" on page 285.</p>

GUI Element (A–Z)	Description
Invoke Immediately	<ul style="list-style-type: none"> ▶ A check mark signifies that the Discovery job runs as soon as the triggered CI reaches the Probe. In this case, the Invoke on new triggered CIs immediately check box is selected in the Properties tab. ▶ If this column does not contain a check mark, the job runs according to the schedule defined in the Schedule Manager.
Job Name	<p>The name of the job and the package in which the job is included.</p> <p>(Displayed when a job is selected in the Discovery Modules pane.)</p>
Schedule Information	<p>The scheduling information of the job as defined in the Discovery Scheduler.</p>
Trigger Queries	<p>The name of the TQL that activated the job.</p>

Parameters Pane

Enables you to override adapter behavior.

To view a description, hold the pointer over the parameter.

To access	<p>Select a job in the Discovery Modules pane in the Discovery Control Panel window.</p>
Important Information	<p>You can override a default adapter parameter for a specific job, without affecting the default value.</p>

User interface elements are described below:





GUI Element (A–Z)	Description												
Name	The name given to the adapter.												
Override	<p>Select to override the parameter value in the adapter.</p> <p>When this check box is selected, you can override the default value. For example, to change the <code>protocolType</code> parameter, select the Override check box and change <code>MicrosoftSQLServer</code> to the new value. Click OK in the Properties tab to save the change:</p> <table border="1" data-bbox="668 626 1250 753"> <thead> <tr> <th colspan="3">Parameters</th> </tr> <tr> <th>Override</th> <th>Name</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td><input checked="" type="checkbox"/></td> <td>protocolType</td> <td>MicrosoftSQLServer</td> </tr> <tr> <td colspan="3"> </td> </tr> </tbody> </table> <p>For details on editing parameters in the Adapters Parameters pane, see "Adapter Parameters Pane" on page 127.</p>	Parameters			Override	Name	Value	<input checked="" type="checkbox"/>	protocolType	MicrosoftSQLServer			
Parameters													
Override	Name	Value											
<input checked="" type="checkbox"/>	protocolType	MicrosoftSQLServer											
Value	The value defined in the adapter.												

Trigger Queries Pane

Enables you to define one or more queries to be used as triggers to activate the selected job.

To access	<ul style="list-style-type: none"> ▶ Select a job in the Discovery Modules pane in the Discovery Control Panel window. ▶ Create a job by right-clicking a module in the Discovery Modules pane, and choose Create New Job.
------------------	---

User interface elements are described below:

GUI Element (A–Z)	Description
	Add Query. You can add one or more non-default TQL queries to be used as triggers to activate the selected job. Click to open the Choose Discovery Query dialog box.
	Remove Query. Select the TQL and click the button. (No message is displayed. To restore the query, click the Cancel button.) Note: If a query is removed for an active job, Discovery no longer receives new CIs coming from that query. Existing Trigger CIs that originally came from the query are not removed.
	Click to add or remove Probes for a specific query. For details, see "Edit Probe Limitation for Query Output Dialog Box" on page 288.
	Click to open the Trigger Query Editor. For details, see "Trigger Query Editor Window" on page 314.
Probe Limit	The Probes being used for the discovery process. To add or remove Probes, click the button.
Query Name	The name of the trigger query that activates the job.

Related CIs Window

Enables you to view, in map format, the CIs that are related to a selected CI.

To access	In the Discovered CIs dialog box, right-click a CIT and select Get Related CIs .
Important Information	Related CIs are CIs that are the parent, child, or sibling of an existing CI.

User interface elements are described below (unlabeled elements are shown in angle brackets):



GUI Element (A-Z)	Description
<right-click menu>	For details, see "Shortcut Menu" in the <i>HP Universal CMDB Modeling Guide</i> .
<menu>	For details, see "Toolbar Options" in the <i>HP Universal CMDB Modeling Guide</i> .
<Topology Map>	For details, see "Topology Map Overview" in the <i>HP Universal CMDB Modeling Guide</i> .

Show Results for Triggered CI Dialog Box

Enables you to view the results of running an ad-hoc request to the Probe. Discovery acquires the results by running the job on a selected trigger CI. In the case of an error, a message is displayed.

To access	Discovery Control Panel , select a module or job, select the Details tab. In the Discovery Status pane, drill down to a CI, right-click it, and choose Show Results for Triggered CI .
------------------	--

User interface elements are described below:

GUI Element (A-Z)	Description
	Select a CIT and click to display additional information in the Show Results for Triggered CI dialog box. For details, see "Show Results for Triggered CI Dialog Box" on page 313.
	Click to open a topology map showing a result map for the Triggered CI. Right-click a CIT to view its properties.

Source CIs Dialog Box




The Source CIs dialog box includes the same components as the **Discovered CIs** dialog box. For details, see "Discovered by Window" on page 279.

Time Templates Dialog Box

Enables you to define a daily or weekly schedule to run selected jobs.

To access	Data Flow Management > Discovery Control Panel > Properties tab > Discovery Scheduler pane > Time Template icon
-----------	---

User interface elements are described below:

GUI Element (A–Z)	Description
	Click to add a time template. Opens the Edit Time Template dialog box.
	Select a time template and click to delete.
	Select a time template and click to edit it. Opens the Edit Time Template dialog box.

Trigger Query Editor Window

Enables you to edit a TQL query that has been defined to trigger jobs.

To access	Data Flow Management > Discovery Control Panel > Properties tab > Trigger Queries pane > select a TQL query and click the Open the Query Editor button
-----------	---

Important Information	A Trigger query associated with a job is a subset of the Input query, and defines which specific CIs should be the Trigger CIs for a job. That is, if an Input query queries for IPs running SNMP, a Trigger query queries for IPs running SNMP in the range 195.0.0.0-195.0.0.10.
See also	<ul style="list-style-type: none"> ▶ "Trigger CIs and Trigger Queries" on page 29 ▶ "Input Query Editor Window" on page 145

User interface elements are described below (unlabeled elements are shown in angle brackets):

GUI Element (A–Z)	Description
<Panes>	<ul style="list-style-type: none"> ▶ CI Type Selector Pane ▶ Editing Pane ▶ Information Pane
Query Name	The name of the trigger query that activates the job.

CI Type Selector Pane

Displays a hierarchical tree structure of the CI Types found in the CMDB. For more details, see "CI Type Manager User Interface" in the *HP Universal CMDB Modeling Guide*.

Note: The number of instances of each CIT in the CMDB is displayed to the right of each CIT.

Important Information	To create or modify a TQL query, click and drag nodes to the Editing pane and define the relationship between them. Your changes are saved to the CMDB. For details, see "Add Query Nodes and Relationships to a TQL Query" in the <i>HP Universal CMDB Modeling Guide</i> .
------------------------------	--

Relevant tasks	<ul style="list-style-type: none"> ▶ "Define a TQL Query" in the <i>HP Universal CMDB Modeling Guide</i> ▶ "Create a Pattern View" in the <i>HP Universal CMDB Modeling Guide</i>
-----------------------	---

Editing Pane

Enables you to edit the node selected in the Trigger Queries pane.

User interface elements are described below (unlabeled elements are shown in angle brackets):


GUI Element (A-Z)	Description
<node>	Click to display information about the node in the information pane.
<right-click menu>	For details, see "Shortcut Menu Options" in the <i>HP Universal CMDB Modeling Guide</i> .
<Toolbar>	For details, see "Toolbar Options" in the <i>HP Universal CMDB Modeling Guide</i>

Information Pane


Displays the properties, conditions, and cardinality for the selected node and relationship.

Important Information

Hold the pointer over a node to view information:

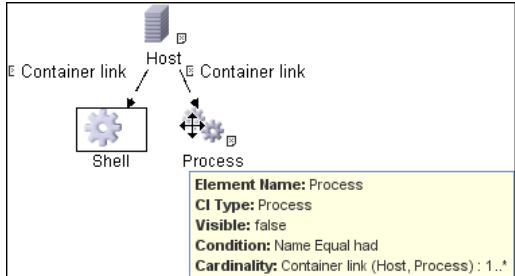

A small green indicator is displayed next to the tabs that include information:

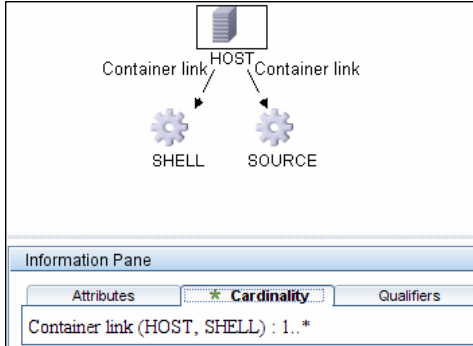

User interface elements are described below:

GUI Element (A-Z)	Description
Edit button	To view information, select a node or relationship in the Editing pane, select the tab in the Information Pane, and click the Edit button. For details on the Node Condition dialog box, see "Query Node/Relationship Properties Dialog Box" in the <i>HP Universal CMDB Modeling Guide</i> .
Attributes	Displays the attribute conditions defined for the node or the relationship. For details, see "Attribute Tab" in the <i>HP Universal CMDB Modeling Guide</i> .
Cardinality	Cardinality defines how many nodes you expect to have at the other end of a relationship. For example, in a relationship between host and IP, if the cardinality is 1:3, the TQL retrieves only those hosts that are connected to between one and three IPs. For details, see "Cardinality Tab" in the <i>HP Universal CMDB Modeling Guide</i> .
Details	<ul style="list-style-type: none"> ➤ CI Type. The CIT of the selected node/relationship. ➤ Visible. A tick signifies that the selected node or relationship is visible in the topology map. When the node/relationship is not visible, a box <input type="checkbox"/> is displayed to the right of the selected node/relationship in the Editing pane: <div data-bbox="578 1008 872 1216" style="text-align: center;"> </div> <ul style="list-style-type: none"> ➤ Include subtypes. Display both the selected CI and its descendants in the topology map.
Qualifiers	Displays the qualifier conditions defined for the node or the relationship. For details, see "Qualifier Tab" in the <i>HP Universal CMDB Modeling Guide</i> .

GUI Element (A-Z)	Description
Selected Identities	Displays the element instances that are used to define what should be included in the TQL results. For details, see "Identity Tab" in the <i>HP Universal CMDB Modeling Guide</i> .

Operations Commands

For details on viewing job information, see "View Job Information on the Data Flow Probe" on page 243.

activateJob

Enter the name of a job and click the button to activate the job immediately. This operation returns a message, for example, <job name> was triggered.

Note: The following message is displayed if the job has not been activated and there is no information about the job in the Probe's database:

Job '<job name>' does not exist in the Jobs Execution table (job was not activated!).

activateJobOnDestination

Enter the name of a job and a Trigger CI and click the button to activate the job immediately on a specific Trigger CI. This operation returns a message, for example, The operation returned with the value: Job <job name> was triggered on destination <CI name>.

Note: Both the **JobID** and **triggerCI** fields are mandatory.

start/stop

These operations start and stop the `JobsInformation` service. Do not use these operations; instead, restart the Probe itself.

viewJobErrorsSummary

Enter the name of a job to return a list of error messages reported on this job, together with the error severity, the last time that the error was reported, and the number of Trigger CIs that have the error.

For details on the job operation parameters, see "Job Operation Parameters" on page 328.

Click the entry in the **Number of trigger CIs** column to view a list of one job's trigger CIs with errors in the `viewJobTriggeredCIsWithErrorId` page.

viewJobExecHistory

Enter the name of a job to retrieve a history of job invocations. A message is displayed showing the job invocations (the last invocation is shown first).

For details on the job operation parameters, see "Job Operation Parameters" on page 328.

For each invocation the number of Triggered CIs and the total running time is shown. The Execution Details column shows at which times the job was executed. If the Probe shut down in the middle of a job execution and then resumed running or if there were blackout periods during the job execution, several time ranges are shown.

viewJobProblems

Enter the name of a job or the name of a trigger CI to retrieve a list of Trigger CIs that have problems.

Note: You must fill in at least one of the fields.

For details on the job operation parameters, see "Job Operation Parameters" on page 328.

viewJobResultCilnstances

Fill in one or more of the parameters to return a list of CIs that have been discovered by a job.

For details on the job operation parameters, see "Job Operation Parameters" on page 328.

The Object State Holder column displays the code for the CI or relationship defined in the CMDB. For details on creating object state holders for common CITs, see **modeling.py** in "Jython Libraries and Utilities" in the the *HP Universal CMDB Developer Reference Guide*. For details on the ObjectStateHolder method, see the *HP Universal CMDB Data Flow Management API Reference*.

viewJobResults

Fill in one or more of the parameters to return a list of CIs that have been discovered by a job.

For details on the job operation parameters, see "Job Operation Parameters" on page 328.

When **Hide Touched CIs Info** is set to **True**, the results page displays the following information:

Column	Description
Job Name	Displayed if the jobID field is left empty. The job name as it appears in Data Flow Management. Click a job to go to its viewJobStatus page, to view its status and scheduling information.
CI Type	Click to filter the list to show results for one CIT only.

Column	Description
Total CIs	Click to go to the viewJobResultCiInstances page, to view a list of all CIs that have been discovered by a job.
Triggered CIs	Click to go to the viewJobTriggeredCIs page, to view a list of all Trigger CIs that have been discovered by a job.
Last Discover Time	The date and time that the job was invoked.

When **Hide Touched CIs Info** is set to **False**, the results page displays the following information:


Column	Description
Job Name	Displayed if the jobID field is left empty. The job name as it appears in Data Flow Management. Click a job to go to its viewJobStatus page, to view its status and scheduling information.
CI Type	Click to filter the list to show results for one CIT only.
Touched CIs	Click to go to the viewJobResultCiInstances page, to view a list of those CIs discovered by the job that are Touched CIs . For details, see "Job Operation Parameters" on page 328.
Non Touched CIs	Click to go to the viewJobResultCiInstances page, to view a list of those CIs discovered by the job that are not Touched CIs.
Triggered CIs for Touched CIs	Click to go to the viewJobTriggeredCIs page, to view a list of those Trigger CIs included in a job that are Touched CIs.
Triggered CIs for Non Touched CIs	Click to go to the viewJobTriggeredCIs page, to view a list of those Trigger CIs included in the job that are not Touched CIs.
Last Discover Time	The date and time that the job was invoked.

You can further filter results in the results page by entering text filters in one of the fields, and clicking the **Search** button.

viewJobsStatuses

Click the **viewJobsStatuses** button to return status and scheduling information for all jobs. You can choose to filter the results. For details, see "Job Operation Parameters" on page 328.

The results page displays the following information:

Column	Description
No.	The number of the job in the list.
Job Name	<p>The job name as it appears in Data Flow Management, for example:</p>  <p>Click a job to go to its viewJobStatus page, to view its status and scheduling information.</p>
Status	<p>The severity of the job's status, as calculated by the Probe.</p> <p>Blocked. Not in use.</p> <p>Removed. The job is no longer active.</p> <p>Running. The job is currently running.</p> <p>Scheduled. The job is scheduled to run. For details on scheduling jobs, see "Discovery Scheduler Dialog Box" on page 285.</p> <p>A red background signifies that a thread has run longer than expected and may be stuck. A green background signifies that the job is running as expected.</p>
Errors	The number of errors for a specific job. Click to go to the viewJobErrorsSummary page, to view a list of error messages reported on this job.

Column	Description
Triggered CIs	The Trigger CIs that have been run by the job. Click to go to the viewJobTriggeredCIs page.
Last Invocation	The date and time that the job was last run.
Next Invocation	The date and time that the job is next scheduled to run.
Last Total run duration (seconds)	The total time that it took for the job to run in the last invocation. Compare this result with the average time taken for a job to run. The discrepancy is probably due to periods of time when a job waits for another job to finish.
Avg run duration (seconds)	The average time that the job ran, calculated from all previous invocations.
Recurrence	The number of times that the job was invoked. Click to go to the viewJobExecHistory page, to retrieve a history of job invocations.
Results	The number of CITs that have been discovered by the job. Click to go to the viewJobResults page to view the CITs.

viewJobStatus

Enter the name of a job to return its status and scheduling information.

For details on the job operation parameters, see "Job Operation Parameters" on page 328.

The results page displays the following information:

Column	Description
Threading info	The total number of worker threads created by the invocation, the free worker threads, and the stuck worker threads.
Total work time	The time that the Probe took to run this job.

Column	Description
Tasks waiting for execution	A list of jobs together with the number of Trigger CIs that are awaiting activation.
Max. Threads	The number of threads that are serving this job.
Progress	<p>A summary of the current run, that is, since the specific run was activated.</p> <p>For example, Progress: 2017 / 6851 destinations (29%) means that out of 6851 CIs, 2017 CIs have already run.</p>
Working Threads information	<p>Thread Name. The thread that is now running this job. Click to go to the viewJobThreadDump page. You use this page when a thread is running for a long time, and you must verify that this is because the thread is working hard, and not because there is a problem.</p> <p>Curr Dest. ID. The name of the node on which the job is running.</p> <p>Curr Dest. IP. The IP for which the job is discovering information.</p> <p>Work Time (Sec). The length of time that this thread is running.</p> <p>Communication Log. Click to go to the viewCommunicationLog page, to view an XML file that logs the connection between the Probe and a remote machine. For details, see the Create communication logs field in the "Execution Options Pane" on page 129.</p>

Column	Description
<p>Discovery Jobs Information table</p>	<p>Status. The severity of the job's status, as calculated by the Probe. For details, see "Status" on page 323.</p> <p>Errors. Click to go to viewJobErrorsSummary page, to view a list of error messages reported on this job.</p> <p>Triggered CIs. Click to go to viewJobTriggeredCIs page, to view a list of Trigger CIs that are part of a job.</p> <p>Last invocation. The date and time that the job was last run.</p> <p>Next invocation. The date and time that the job is next scheduled to run.</p> <p>Last Total run duration (seconds). For details, see "Last Total run duration (seconds)" on page 324.</p> <p>Avg run duration (seconds). For details, see "Avg run duration (seconds)" on page 324.</p> <p>Recurrence. The number of times that the job was invoked. Click to go to viewJobExecHistory page, to view a history of job invocations.</p>
<p>Results</p>	<p>The number of CITs that have been discovered by the job. Click to go to the viewJobResults page to view the CITs.</p>

viewJobTriggeredCIs

Fill in one or more of the parameters to return a list of Trigger CIs that are part of a job.

For details on the job operation parameters, see "Job Operation Parameters" on page 328.

The results page displays the following information:

Column	Description
No.	The number of the job in the list.
Triggered CI ID	The CI instances that have been discovered by the job. Click to go to the viewJobResults page to view information about their CITs.
Last Execution	The date and time that the job was last run.
Service Exec. Duration (ms)	<p>The maximum time that it took for a job to run in the last invocation, not including periods when the job did not run. Compare this result with the total execution duration.</p> <p>For example, when several jobs run simultaneously, but there is only one CPU, a job might have to wait for another job to finish. The service duration does not include this waiting time, whereas the total duration does.</p>
Total Exec. Duration (ms)	The time that it took for a job to run in the last invocation, including the periods when the job did not run.
Last Run Status	The status of the last run, that is, whether the run succeeded or failed. In case of failure, click to go to the viewJobProblems page, to view a list of Trigger CIs with problems.
Priority	
adapterID	The name of the machine on which the job is running.
attributeValues	
credentialsID	
destinationID	

viewJobTriggeredCIsWithErrorId

Note: This operation is part of the inner interface and serves as a helper function. Do not use this page to view Trigger CIs information; instead, use the `viewJobTriggeredCIs` page.

Job Operation Parameters

The following list includes job operation parameters.

- ▶ **ciType.** The name of the CI type (for example, ip, host).
- ▶ **data.** A textual field in the `DiscoveryResults` table that contains information about the discovered object. For example:

```
<object class="ip">
  <attribute name="ip_probename" type="String">EBRUTER02</attribute>
  <attribute name="ip_address" type="String">16.59.58.200</attribute>
  <attribute name="ip_domain" type="String">DefaultDomain</attribute>
</object>
```


- ▶ **Error Id.** The error message hash string (error hash ID) that is displayed in the `Jobs_Problems` table.
- ▶ **HideRemovedJobs. True:** do not display jobs that have run previously and are not relevant to the current run.
- ▶ **Hide Touched CIs Info.** Touched CIs are CIs which were discovered in previous invocations. DFM already has information about these CIs, so there is no need for the Probe to send the information to the server again. The server identifies that these CIs are relevant and that there is no need to enforce the aging mechanism on them. For details on aging, see "The Aging Mechanism Overview" in the *HP Universal CMDB Administration Guide*.

True: the table displays the total number of CIs and the total number of Trigger CIs for each CIT. **False:** The table displays the total number of CIs and Trigger CIs divided between touched CIs and non-touched CIs.

- **includeNonTouched.** Enables filtering the table to view non-touched CIs. Choose between viewing non-touched CIs only, all CIs (touched and non-touched), or none:

	Non-touched CIs	All CIs	No CIs
(boolean)includeTouchedCis	<input type="radio"/> True <input checked="" type="radio"/> False	<input checked="" type="radio"/> True <input type="radio"/> False	<input type="radio"/> True <input checked="" type="radio"/> False
(boolean)includeNonTouchedCis	<input checked="" type="radio"/> True <input type="radio"/> False	<input checked="" type="radio"/> True <input type="radio"/> False	<input type="radio"/> True <input checked="" type="radio"/> False

- **includeNonTouchedCIs.** See **includeNonTouched.**
- **includeTouched.** Enables filtering the table to view touched CIs. Choose between viewing touched CIs only, all CIs (touched and non-touched), or none.
- **includeTouchedCIs.** See **includeTouched.**
- **jobID.** The name of the job, for example, **Host Resources and Applications by SNMP:**



- **maxRows.** The maximum number of rows that should be displayed in the results table. The default is 100 or 1000.
- **maxTriggeredCIs.** See **maxRows.**
- **objectID.** The CMDB object ID.
- **showRemovedJobs.** Shows information about jobs that are not currently scheduled to run, but that have run previously. These jobs take the state of **REMOVED.**
- **showResults.** Indicates whether to display the **Show Results** column. If the Show Results column is present, you can navigate from **viewJobsStatuses** to **viewJobResults.**
- **triggerCI.** The CMDB object ID of the trigger for a job.
- **triggeredCiID.** See **triggerCI.**

Part V

Reconciliation

9

Reconciliation

This chapter includes:

Concepts

- ▶ Reconciliation Overview on page 334
- ▶ Stable ID on page 335
- ▶ Identification Configuration on page 335
- ▶ Reconciliation Services on page 341

Tasks

- ▶ Add an Identification Rule to an Existing CIT on page 346
- ▶ Create an Identification Rule Document on page 346

Reference

- ▶ Identification Rule Schema on page 349

Concepts

Reconciliation Overview

Reconciliation is the process of identifying and matching entities from different data repositories (for example, UCMDB Discovery, DDMi, ticketing, or BSM). This process is designed to avoid duplicate CIs in UCMDB.

Many different data collectors can send CIs to UCMDB. In actuality, each different source might be providing information about the same CI. The reconciliation engine is responsible for identifying and matching entities from different data collectors and storing them, without duplicating CIs, in UCMDB.

Three main services provide support for the reconciliation engine:

- ▶ **Data Identification.** Responsible for comparing input CIs, according to reconciliation rules. For details, see "Identification Service" on page 341.
- ▶ **Data In.** Responsible for inserting data into UCMDB. This service decides:
 - ▶ whether to merge data into existing CIs in UCMDB
 - ▶ whether to ignore input CIs in the case of multiple matches

For details, see "Data In Service" on page 342.

- ▶ **Merge.** Responsible for merging CIs (used in Federation and Data In flows). Merging is done according to the reconciliation priority definitions. For details, see "Reconciliation Priority" on page 357.

These services operate during reconciliation for inserting data from different sources into UCMDB, and during federation for connecting or merging information from different data repositories during TQL calculations.

The reconciliation engine contains out-of-the-box identification and match criteria rules for most usable and problematic CITs, such as node, running software, and so on.

Stable ID

UCMDB now generates stable IDs during CI creation. This means that the ID of the CI is no longer calculated from the CI's properties. This stable ID therefore remains the same when the name, attribute name, or property values (during normalization) change.

Identification Configuration

The reconciliation engine uses XML configuration files that contain identification and match criteria to determine how CIs are identified during federation or data insertion. Configuration files for out-of-the-box CI types are provided when packages are deployed, but you can modify the provided files or create additional files. For details, see "Create an Identification Rule Document" on page 346.

The following rules are used during reconciliation:

- 1** Identification criteria – a set of criteria that defines all possible conditions to find all candidate CIs for matching to a newly introduced CI.
- 2** Match criteria – There are two types of match criteria:
 - ▶ Match verification criteria – a set of criteria that are applied to all candidates left over after performing step 1 (identification). Match verification ends successfully only when all applied verification criteria are true or NA (missing data).
 - ▶ Match validation criteria – an ordered set of criteria that are applied to all candidates left over after performing match verification. For each criterion, the following results are possible:
 - a true result implies a match
 - a false result implies no match
 - NA (missing data) causes reconciliation to proceed to the next criterion. If all validation criterion are NA, then the all candidates left after match verification will be implied as matched.

Identification and Match Criteria Configuration

Due to the discovery method (local or remote), the available credentials (for example, remote access to SNMP or WMI), and specific system security settings (for example, the system responds to a ping), an integration point may have access to only a limited set of attributes when identifying a CI. For example, IP range discovery detects two IP addresses (10.12.123.101 and 16.45.77.145), and creates two nodes. However, detailed system discovery may detect that those two IP addresses are actually configured on two network interfaces in the same node.

This means that you cannot always rely on a single matching set of attributes for identification – other possible attributes that can potentially help to identify the CI should also be listed. In the previous example, the node identification attributes can be the IP address and the network interface. If you use the IP address to identify the CI, you see that all three discovered nodes are the same node.

However, suppose that detailed system discovery detects a node with IP address 10.12.123.101 and network interface MAC1. At some point, that node was shut down, and the the same IP address (10.12.123.101) was given to another node with network interface MAC2. These two nodes have the same IP address; however; it is obviously not the same CI. Performing match validation on the network interface data helps us to realize that it is not the same node.

The identification criteria are used to select candidates, and the match criteria are used to approve the identification result or dismiss it. For example, while handling input CI A, we may get identification candidates B and C, and the match criteria will dismiss B. In that case, we are left with C, which means that A is identified as B.

Identification Criteria

Data that the reconciliation engine receives from different data sources may contain different subsets of the attributes (topology) necessary for identifying a CI. The identification criteria should contain all potential attributes on which CI matching can be done.

Specifications

Each identification criterion defines a potential condition for CI matching. The criterion can be an attribute such as node name, or topology such as IP address. A criterion may contain two or more conditions, to create a more complex matching rule. It may also contain different condition operators such as equals or contains, or it may contain some master value that defines a value in the CI that will always allow a match.

During the identification process, all identification criteria are running to find all candidate CIs for matching.

Possible Node Identification Criteria

- HW ID
- Network interface (containing a condition operator)
- Node name
- IP address (containing a condition operator)

These node identification criteria show all possible node attributes that can be used for node matching. For example, if there are two nodes with the same HW ID or the same IP address, these nodes are candidates for matching.

Match Criteria

While identification criteria list all potential attributes for matching the data, match criteria contain the attributes that are essential for matching CIs, if any exist. This means that if two CIs are marked as candidates to be matched by the identification criteria, the match criteria will check if the data exists in both CIs in order to match the condition.

Match criteria are also used during the Data In process in case of multiple matches, to make the decision to merge CIs from the CMDB. The CIs are merged only if the match criteria are satisfied. If one of the CIs does not satisfy the match criteria, the merge is not performed.

Specifications

A match criterion is satisfied if two candidate CIs have the same essential data (as defined in the that criterion), the data matches the condition, or if at least one of the CIs has no essential data.

Match criteria can be divided into two categories:

- Match verification criteria – if the verification criterion is not satisfied on two candidate CIs, these CIs are not matched.
- Match validation criterion – if the criterion with higher priority is satisfied (without missing data) on two candidate CIs, the validation criterion with lower priority is even not checked and the CIs are marked as matched. Similarly, if the validation criterion with higher priority is refuted on two candidate CIs, the criterion with lower priority is even not checked and the CIs are marked as not matched.

Possible Node Match Criteria

- Match verification criteria uses the discovered OS data for verification. This means that if two nodes have discovered OS data and this data does not match, these two nodes are not matched.
- Match validation criteria (ordered from higher to lowest priority):
 - HW ID with an **equals** operator
 - Network interface with a **contains** operator
 - Node name with an **equals** operator

This means that if two nodes with the same HW ID are discovered, they are marked as matched even if they have different network interfaces or node names. On the other hand, if the discovered HW IDs on the nodes are not the same, the nodes are not marked as matched even if the network interfaces and node names are the same. The network interface rule is checked only if one of the nodes has no discovered HW ID.

Examples of Identification Configuration

Sample "vlan" CI Type Identification Configuration

```
<identification-config type="vlan">
  <identification-criteria>
    <identification-criterion>
      <attribute-condition attributeName="vlan_id"/>
      <connected-ci-condition ciType="physical_port" linkType="membership">
        <overlap-fixed-operator number-of-matches="1"/>
      </connected-ci-condition>
    </identification-criterion>
  </identification-criteria>
</identification-config>
```

Sample "Installed Software" CI Type Identification Configuration

```

<identification-config type="installed_software"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="C:\StarTeam\UCMDB\mam\ws\assets\dc\backend
\reconciliation\src\main\resources\schemal\reconciliation.xsd"
description="Installed Software is identified by a combination of their container
Node and either its Name or DML Product Name.
Two similarly identified installed software will be considered different entities in case of
mismatch of either File System Path, DML Product Name or its Name.">
  <identification-criteria>
    <identification-criterion>
      <attribute-condition attributeName="dml_product_name"/>
      <attribute-condition attributeName="root_container"/>
    </identification-criterion>
    <identification-criterion>
      <attribute-condition attributeName="name"/>
      <attribute-condition attributeName="root_container"/>
    </identification-criterion>
  </identification-criteria>
  <match>
    <verification-criteria>
      <verification-criterion>
        <attribute-condition attributeName="file_system_path"/>
      </verification-criterion>
    </verification-criteria>
    <validation-criteria>
      <validation-criterion priority="1">
        <attribute-condition attributeName="dml_product_name"/>
      </validation-criterion>
      <validation-criterion priority="2">
        <attribute-condition attributeName="name"/>
      </validation-criterion>
    </validation-criteria>
  </match>
</identification-config>

```

Reconciliation Services

This section includes:

- "Identification Service" on page 341
- "Data In Service" on page 342
- "Merge Service" on page 345

Identification Service

The Identification service uses identification and match criteria to identify CIs. The process is as follows:

- 1** Finding matching candidates: Find all CIs that are matched with Input CI at least by one identification criterion.
- 2** For all candidate CIs from step 1, run match verification criteria. If one of the verification criteria is not satisfied for any CI, remove that CI from the candidates list.
- 3** For the remaining CIs from step 2, run match validation criteria one by one:
 - a** When the first validation criterion is satisfied, stop and mark the current candidate CI as matched.
 - b** When the first validation criterion is refuted (the data exists but does not match), mark the current candidate CI as unmatched.
 - c** If none of the validation criteria are satisfied or refuted, mark the current candidate CI as matched.

Identification Process Example

The following items are used in this example:

Input node name = n1, ip_address = ip1, MAC address = m1, os = nt

UCMDB nodes ▶ N1 = name=n2
 ▶ N2 = ip_address=ip1,ip2
 ▶ N3 = name=n3, MAC address = m1, hw_id = id1, os = unix)

- 1** For each UCMDB node, run the identification criteria:
 - ▶ If node N1 does not match any identification criteria, it will not be added to the candidates list.
 - ▶ If node N2 matches the IP identification criterion of the input node, it will be added to the candidates list.
 - ▶ If node N3 does not match the input node by the IP identification criterion, but does match by the MAC address identification criterion, it will be added to the candidates list.

The candidates list is: N2 and N3.

- 2** For each node in the candidates list, run OS match verification criteria. Node N3 does not satisfy this rule, since its OS is UNIX and the input node's OS is NT. Therefore, N3 will be removed from the candidates list.

The candidates list is: N2.

- 3** Run the match validation criteria one by one on node N2. Since node N2 has no data conflicts, the match validation criteria are approved and N2 is marked as matched.

The result of identification process is: N2.

Data In Service

After the Identification service runs, the identified data is merged and inserted into the UCMDB by the Data In service.

One of the major problems that the Data In service solves is deciding what to do if the input CI matches multiple UCMDB CIs. There are three options:

- ▶ merge all matched CIs into one
- ▶ ignore the input CI

The Data In service uses match criteria to make the decision. The process is as follows:


- 1 Merge the input CI with each matching UCMDDB CI.
- 2 For each pair of CIs resulting from step 1, run match criteria (verification and validation criteria).

If at least one pair does not pass the match criteria check, the CIs are not merged. If all pairs pass the match criteria check, the CIs are merged.


- 3 If the CIs are not merged, the Data In service decides to ignore the input CI. This occurs when the current match criterion causes a pair to fail the match criteria checking, and as a result the service does not merge the CIs.

Multiple Matching Examples

- Multiple matching by different identification criteria without conflicts
 - Input bulk data




- Identified data in the CMDB

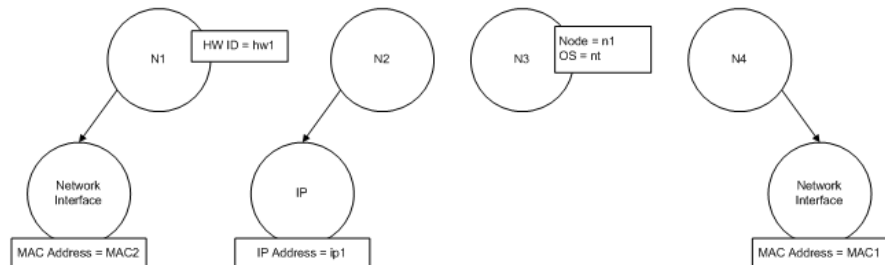

In this example, the input node matches four nodes in the CMDB having different identification criteria, and there are no conflicts with any of the CMDB matched nodes. The process is as follows:


- Merge the input CI with each matched CI in the CMDB.

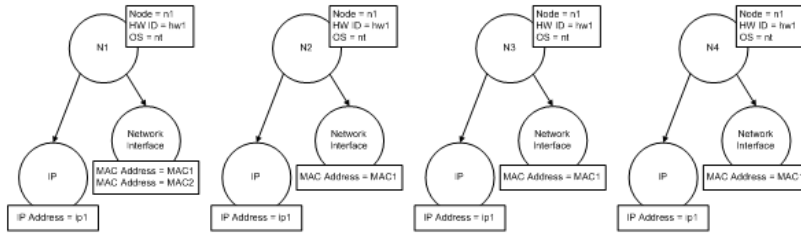


- Check for conflicts between the resulting merged CIs. In this example, there is no conflict between the merged CIs. Nodes N2, N3, and N4 are the same CI; therefore, it is obvious that there is no conflict between them. The only difference between nodes N1 and N2 is the additional MAC address in N1. Since the MAC address match validation criterion uses the **contains** operator, there is no conflict between nodes N1 and N2 either.

The decision here is to merge all CIs into one.


- Multiple matching by different identification criteria with conflicts
 - Input bulk data



► Identified data in the CMDB

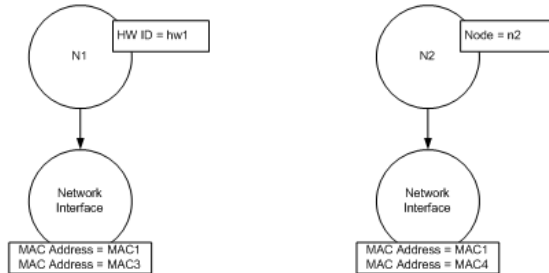

► Merge the input CI with each matched CI in the CMDB.

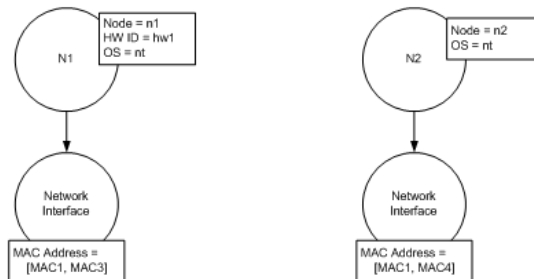

In this example, the input node matches two nodes in the CMDB having different identification criteria, and there are conflicts with the CMDB matched nodes.

- Merge the input CI with each matched CI in the CMDB.
- Check the conflicts between the resulting merged CIs. In this example, nodes N1 and N2 have conflicting MAC address match criteria.

The decision is to not merge all CIs to one.

The decision of whether to ignore data or pass it on for manual reconciliation depends on the flag setting for the MAC address match criterion.

Merge Service

The merge service is responsible for merging two or more CIs into one CI. This service is being used by the Data In service and the Federation service.

Tasks

Add an Identification Rule to an Existing CIT

- 1 Assign the CIT qualifier `RANDOM_GENERATED_ID` and make sure there are no key attributes in the CIT. For details, see "Qualifiers Page" in the *HP Universal CMDB Modeling Guide*.
- 2 Create an XML reconciliation file that contains identification rules. For details, see "Create an Identification Rule Document" on page 346.
- 3 Create a package that contains the XML identification file. The XML file should be located in a folder called **identification** at the root level in the package. For details, see "Create a Custom Package" in the *HP Universal CMDB Administration Guide*.
- 4 Deploy the package. For details, see "Deploy a Package" in the *HP Universal CMDB Administration Guide*.

Create an Identification Rule Document

This task describes how to prepare the XML schema for an identification rule file. For details about the schema elements and attributes, see "Identification Rule Schema" on page 349.

The identification rule document is an XML file that describes the required reconciliation data for a specific CI type. This identification rule is applied to the CI type and each of its descendants, unless one of them has a identification rule of its own.

You can create an identification rule document from a blank document or use existing information as a basis. To do this:

- 1 Navigate to **Modeling > CI Type Manager**.
- 2 Click on the Details tab.
- 3 Select the information in the Identification field.

Example of the identification section

```

<identification-criteria>
  <identification-criterion>
    <connected-ci-condition ciType="interface" linkType="composition">
      <overlap-operator match-percent="66"/>
      <attribute-condition attributeName="mac_address"/>
    </connected-ci-condition>
  </identification-criterion>
  <identification-criterion>
    <attribute-condition attributeName="name" operator="EqualIgnoreCase"/>
  </identification-criterion>
  <identification-criterion>
    <connected-ci-condition ciType="ip_address" linkType="containment">
      <overlap-operator match-percent="66"/>
      <attribute-condition attributeName="name"/>
      <attribute-condition attributeName="routing_domain"/>
    </connected-ci-condition>
  </identification-criterion>
  <identification-criterion>
    <attribute-condition attributeName="bios_uuid"/>
  </identification-criterion>
</identification-criteria>

```

In this example:

- ▶ A 66% match of the `mac_address` attribute from the connected interfaces CI types is required.
- ▶ The name attribute is not case sensitive.
- ▶ The rule requires both the `ip_address` name and `routing_domain` to be the same.
- ▶ Only one of the identification criteria needs to be fulfilled for the reconciliation engine to find a possible match.

Example of the match section

```
<match>
  <verification-criteria>
    <verification-criterion>
      <attribute-condition attributeName="os_family"/>
    </verification-criterion>
  </verification-criteria>
  <validation-criteria>
    <validation-criterion priority="1">
      <attribute-condition attributeName="bios_uuid"/>
    </validation-criterion>
    <validation-criterion priority="2">
      <connected-ci-condition ciType="interface" linkType="composition">
        <overlap-operator match-percent="66"/>
        <attribute-condition attributeName="mac_address"/>
      </connected-ci-condition>
    </validation-criterion>
    <validation-criterion priority="3">
      <attribute-condition attributeName="name"/>
    </validation-criterion>
  </validation-criteria>
</match>
```

In this example:

- ▶ The structure of the conditions is the same as those conditions in the Identification field.
- ▶ Only one priority criterion is given in this example, but there may be many criteria with the same priority.

Reference

Identification Rule Schema

Element		Attributes
Name and Path	Description	
identification-config	The parent element for the identification rule document.	<p>Name. description</p> <p>Description. A textual description of the identification rule.</p> <p>Is required. Optional</p> <p>Type. String</p>
		<p>Name. type</p> <p>Description. The CI type to which the identification rule will apply.</p> <p>Is required. Required</p> <p>Type. String</p>
identification-criteria (Identification-config)	The parent element for all the possible identification criteria for the CI type. For details, see "Identification Criteria" on page 336. The identification criteria may contain many identification-criterion elements. Can appear at most once.	

Element		Attributes
Name and Path	Description	
match (Identification-config)	The parent element for all the possible match criteria for the CI type. For details, see "Match Criteria" on page 337. Can appear at most once.	
multiple-match-resolving (Identification-config)	When two or more CIs of the CI type are identified to one another, they may be of any descendant CI type as well. This element states that one of the descendant CI types is preferred over the others. Can appear at most once.	<p>Name. preferred-type</p> <p>Description. Specifies the CI type of the CI that will be preferred when there are multiple matches which cannot be merged.</p> <p>Is required. Optional</p> <p>Type. String</p>
Preferred-property (identification-config multiple-match-resolving)	This element specifies the property value of the CI that will be preferred when there are multiple matches which cannot be merged.	<p>Name. name</p> <p>Description. The name of the property.</p> <p>Is required. Required</p> <p>Type. String</p>
		<p>Name. value</p> <p>Description. The value of the property.</p> <p>Is required. required</p> <p>Type. String</p>
		<p>Name. priority</p> <p>Description. The priority of this preferred property.</p> <p>Is required. Optional</p> <p>Type. Integer</p>

Element		Attributes
Name and Path	Description	
identification-criterion (Identification-config identification-criteria)	This element defines a single identification criterion. The criterion may contain many conditions for identification, and for the criterion to return True , all of them must return True .	Name. targetType Description. Indicates for which CI type this criterion is valid. If this attribute is omitted, then the criterion is applied to any derived type. Is required. Optional Type. String
		Name. isTargetTypeDerived Description. Specifies whether the target type is a derived type of the current CI type. Is required. Optional Type. String
key-attributes-condition (identification-config identification-criteria identification-criterion)	This special condition states that the CI type is identified by its key properties and CI type name, and not by any identification criteria. If this condition exists, it should be the only one in the criterion, as well the only criterion in the identification section. Can appear at most once.	

Element		Attributes
Name and Path	Description	
attribute-condition (identification-config)	Defines a condition based on an attribute.	Name. attributeName Description. The name of the attribute. Is required. Required Type. String
identification-criteria identification-criterion -OR- identification-config		Name. masterValue Description. For the purpose of fulfilling the condition, the value defined here is considered equal to any other value. Is required. Optional Type. String
identification-criteria identification-criterion connected-ci-condition -OR- identification-config		Name. operator Description. Specifies whether the equality of attribute values should be case sensitive or not. The default is case sensitive. Is required. Optional Type. One of the values: Equals or EqualsIgnoreCase
match		
validation-criteria)		Name. includeNullValue Description. Specifies whether a CI should still be considered as a valid value if it has a null (empty) value in the attribute, and the condition will process normally; or is the condition ignored and the reconciliation engine moves to the next criterion. Default value is False. Is required. Optional Type. Boolean

Element		Attributes
Name and Path	Description	
connected-ci-condition (Identification-config identification-criteria identification-criterion -OR- identification-config match verification-criteria -OR- identification-config match)	Defines a condition based on connected CIs. The connected condition may contain attribute conditions. If no attribute conditions exist, the condition matches the connected CI type using its own identification rule.	<p>Name. ciType</p> <p>Description. The type of CI that is assumed to be connected to the CI type to which this rule belongs using the linkType attribute.</p> <p>Is required. Required</p> <p>Type. String</p>
		<p>Name. linkType</p> <p>Description. The type of link that the ciType attribute uses to connect to the CI type to which this rule belongs</p> <p>Is required. Required</p> <p>Type. String</p>
		<p>Name. isDirectionForward</p> <p>Description. The direction of the link. Default value is True (from the rule's CI type to ciType).</p> <p>Is required. Optional</p> <p>Type. Boolean</p>
overlap-fixed-operator (Identification-config identification-criteria identification-criterion connected-ci-condition)	Defines the fixed number of matches to connected CIs that are needed to fulfill the condition for the connected-ci-condition element to return True . Either this or overlap-operator must exist.	<p>Name. number-of-matches</p> <p>Description. The number of matches.</p> <p>Is required. Required</p> <p>Type. Integer</p>

Element		Attributes
Name and Path	Description	
overlap-operator (Identification-config identification-criteria identification-criterion connected-ci-condition)	Defines the percent of connected CIs (from the total input number of connected CIs) that are needed to fulfill the condition for the connected-ci-condition element to return True . Either this or overlap-fixed-operator must exist.	Name. match-percent Description. The percent of matches. Is required. Required Type. Integer between 1 and 100
verification-criteria (Identification-config match)	The parent element for all the possible verification criteria for the CI type. For details, see "Match Criteria" on page 337. The verification criteria must contain at least one verification-criterion element. Can appear at most once.	

Element		Attributes
Name and Path	Description	
verification-criterion (Identification-config match verification-criteria)	This element defines a single verification criterion. The criterion may contain many conditions for verification.	<p>Name. targetType</p> <p>Description. The derived CI type for which this criterion is valid. If this attribute is omitted, then the criterion is applied to any derived type.</p> <p>Is required. Optional</p> <p>Type. String</p>
		<p>Name. isTargetTypeDerived</p> <p>Description. Specifies whether the target type is a derived type of the current CI type.</p> <p>Is required. Optional</p> <p>Type. Boolean</p>
		<p>Name. numberOfConflictsToFailIdentification</p> <p>Description. The number of conflicting conditions that will cause the current criterion to fail. Default Value: 1.</p> <p>Is required. Optional</p> <p>Type. Integer</p>
validation-criteria (Identification-config match)	The parent element for all possible validation criteria for the CI type. For details, see "Match Criteria" on page 337. The validation criteria must contain at least one validation-criterion element. Can appear at most once.	

Element		Attributes
Name and Path	Description	
validation-criterion (Identification-config match validation-criteria)	This element defines a single validation criterion. The criterion may contain many conditions for validation.	<p>Name. priority</p> <p>Description. The criterion's priority.</p> <p>Is required. Required</p> <p>Type. Integer</p>
		<p>Name. targetType</p> <p>Description. The derived CI type for which this criterion is valid. If this attribute is omitted, then the criterion is applied to any derived type.</p> <p>Is required. Optional</p> <p>Type. String</p>
		<p>Name. isTargetTypeDerived</p> <p>Description. Specifies whether the target type is a derived type of the current CI type.</p> <p>Is required. Optional</p> <p>Type. Boolean</p>
		<p>Name. numberOfConflictsToFailIdentification</p> <p>Description. The number of conflicting conditions that will cause the current criterion to fail. Default Value: 1.</p> <p>Is required. Optional</p> <p>Type. Integer</p>

10

Reconciliation Priority

This chapter includes:

Concepts

- Reconciliation Priority Overview on page 358

Tasks

- Add Reconciliation Priorities to an Existing CIT on page 359
- Create a Reconciliation Priority Document on page 359

Reference

- Reconciliation Priority Schema on page 361
- Reconciliation Priority Manager User Interface on page 362

Concepts

Reconciliation Priority Overview

Reconciliation Priority (conflict resolution) specifies how matched CIs are merged. You set these priorities in the Reconciliation Priority Manager. For details, see "Reconciliation Priority Window" on page 364.

For details about the reconciliation process and its rules, see "Reconciliation" on page 333.

Reconciliation Priority Configuration

When a CI is matched with another CI, they should be merged. This behavior becomes relevant in the following situations:

- ▶ During Data In service – to insert an already existing CI into the CMDB.
- ▶ During Federation – when multiple data repositories supply the same CI with different values.

To solve this problem, you can define priorities for each data repository to each CIT and attribute.

For details, see "Reconciliation Priority Window" on page 364.

Tasks

Add Reconciliation Priorities to an Existing CIT

- 1** Create an XML reconciliation file that contains reconciliation priorities. For details, see "Create a Reconciliation Priority Document" on page 359.
- 2** Create a package that contains the XML priorities file. The XML file should be located in a folder called **reconciliationPriority** at the root level in the package. For details, see "Create a Custom Package" in the *HP Universal CMDB Administration Guide*.
- 3** Deploy the package. For details, see "Deploy a Package" in the *HP Universal CMDB Administration Guide*.

Create a Reconciliation Priority Document

This task describes how to prepare the XML file according to the reconciliation priority schema. For details about the schema elements and attributes, see "Reconciliation Priority Schema" on page 361.

The reconciliation priorities document is an XML file that describes the priorities of integration points in the Data In flow for a specific CI type. The priority is applied to the CI type and each of its descendants, unless one of them has a priority of its own for a given integration point.

You can create a reconciliation priority document from a blank XML document.

Example

```
<reconciliation-priority-config type="node">
  <reconciliation-priority dataStoreName="CMS_Sync" priority="80"/>
  <reconciliation-priority dataStoreName="DDMI_DS" priority="70"/>
  <attributes-reconciliation-priorities>
    <attribute-reconciliation-priorities attribute-name="name">
      <reconciliation-priority dataStoreName="DDMI_DS" priority="100"/>
    </attribute-reconciliation-priorities>
    <attribute-reconciliation-priorities attribute-name="snmp_sys_name">
      <reconciliation-priority dataStoreName="CMS_Sync" priority="50"/>
    </attribute-reconciliation-priorities>
  </attributes-reconciliation-priorities>
</reconciliation-priority-config>
```

In this example:

- 1** The document handles only two data repositories: CMS_Sync and DDMI_DS. There may be other data repositories that already exist in the UCMDB or that will be created afterwards. This means that even though we could have given a data repository the highest priority (100) and the other the lowest priority (1), it is unwise to do so, since this leaves no room to integrate future or existing data repositories to the priority system.
- 2** We first define a priority value for all attributes of **node**. This is optional, and if omitted defaults to 100.
- 3** For specific attributes we changed one of the data repositories. The other has the same value as the one defined at the top of the document.

Reference

Reconciliation Priority Schema

Element		Attributes
Name and Path	Description	
reconciliation-priority-config	The parent element of a reconciliation priority section for a specific CI type.	<p>Name. type</p> <p>Description. The CI type to which the reconciliation priorities will apply.</p> <p>Is required. Required</p> <p>Type. String</p>
reconciliation-priority (reconciliation-priority-config -OR- reconciliation-priority-config attributes-reconciliation-priorities)	When this appears under the reconciliation-priority-config element, it defines priorities for all attributes in an integration point. When it appears under the attributes-reconciliation-priorities element, it defines a priority for a specific attribute. Must appear at least once when it is the child of the attributes-reconciliation-priorities element.	<p>Name. dataStoreName</p> <p>Description. The name of the integration point.</p> <p>Is required. Required</p> <p>Type. String</p> <hr/> <p>Name. priority</p> <p>Description. The priority of the dataStoreName attribute.</p> <p>Is required. Required</p> <p>Type. String</p>

Element		Attributes
Name and Path	Description	
attributes-reconciliation-priorities (reconciliation-priority-config)	The parent element for the section of the document that defines priorities for specific attributes. Can appear at most once.	
attribute-reconciliation-priorities reconciliation-priority-config attributes-reconciliation-priorities)	Defines the priorities of integration points for specific attributes of the current CI type.	<p>Name. attribute-name</p> <p>Description. The name of the attribute for which to define priorities.</p> <p>Is required. Required</p> <p>Type. String</p>

Reconciliation Priority Manager User Interface

This section includes (in alphabetical order):

- ▶ Authoritative Sources Pane on page 363
- ▶ CI Types and Attributes Pane on page 364
- ▶ Reconciliation Priority Window on page 364

Authoritative Sources Pane

When you select a CI or attribute in the Reconciliation Priority Manager, the Authoritative Sources lists all integration points that contain the selected item.

User interface elements are described below:

UI Elements (A-Z)	Description
Inherited From	The name of the node from which the priority level is inherited.
Integration Name	The name of the integration point that contains the selected attribute.
Overrides	<p>Displays the list of any priority overrides on a CI Type or attribute, in order from highest to lowest.</p> <p>Overrides are marked when a descendant overrides the priority of the specific integration point for a specific CIT.</p>
Priority	<p>Displays the priority that is assigned to a particular CI Type or attribute. The default priority level is for all items is 100. If you change the priority of a node, the new value propagates downwards to all descendants of that particular node.</p> <p>To change the priority of an item, do the following:</p> <ul style="list-style-type: none"> ▶ Click in the Priority field and enter a new value. ▶ Press Enter. ▶ Click Save to save the values you changed.




CI Types and Attributes Pane

The CI Types and Attributes pane displays the list of CI types and attributes that are supported by the selected integration point.

When you select a node in the CI Types and Attributes tree, all integration points that support the selected item are displayed in the right pane. If you have selected a specific integration point, its name is highlighted in the right pane. You can then change the reconciliation priority for that integration point only.

If there is a manual override on an item in the tree, that item and all its parent items will be displayed with an asterisk next to the CI Type.

User interface elements are described below:

UI Elements (A-Z)	Description
	Click to expand the entire hierarchical tree structure.
	Click to collapse the hierarchical tree structure.
	Click to display attributes that are not marked as Visible in the Attributes pane of the CI Type Manager. For details, see "Attributes Page" in the <i>HP Universal CMDB Modeling Guide</i> .


Reconciliation Priority Window

This window enables you to specify the reconciliation priority for a particular integration point, CIT, or attribute.

The Reconciliation Priority Manager provides a centralized location where you can view and change the reconciliation priority for all integration points.

Note: In the Integration Point Pane, you can modify the reconciliation priority for the selected integration point only. For details, see "Integration Studio" on page 167.

For details about the reconciliation engine, see "Reconciliation" on page 333.

To access	Do one of the following: <ul style="list-style-type: none"> ➤ Select Data Flow Management > Reconciliation Priority. ➤ Select Data Flow Management > Integration Studio and click .
Relevant tasks	<ul style="list-style-type: none"> ➤ "Work with Federated Data" on page 173 ➤ "Work with Population Jobs" on page 175 ➤ "Work with Data Push Jobs" on page 177

User interface elements are described below:

UI Elements (A-Z)	Description
Integration	Enables you to select a specific integration point for which to specify the reconciliation priority, or to set priorities for all integration points.

Index

A

- activateJob
 - JMX operations 320
- activateJobOnDestination
 - JMX operations 320
- Adapter Definition tab 121
- Adapter Management 23, 101
 - tab 127
 - user interface 120
 - window 134
- Adapter Parameters pane 127
- Adapter Source Editor window 135
- adapters 26
 - managing 101
 - managing configuration 114
- Add IP Range dialog box 45
- Add New Probe dialog box 48, 49
- Add Policy dialog box 47
- Advanced Mode window
 - Discovery Control Panel 249
- agentless discovery 29
- applicationSignature.xml 108
- Attribute Assignment Editor dialog box 136
- attributes
 - retrieving from external data source 170
- Authoritative Sources pane 363
- automatic deletion 102

B

- Basic Mode window
 - Discovery Control Panel 251
- Books Online 13

C

- candidates for deletion 102
- Choose CIs to Add dialog box 253
- Choose Discovered Class dialog box 138
- Choose Discovery Jobs dialog box 50
- Choose Discovery TQL dialog box 255
- Choose Probe to Filter dialog box 256
- CI Types and Attributes pane 364
- CIs
 - and relationships, handling deleted 102
 - automatic deletion 102, 107
 - candidates for deletion 102
 - view current status of discovered 93
- Configuration File pane 140
- configuration files 120
 - discovery 108
- Configuration Item Properties dialog box 256
- cpVersion
 - use attribute to verify content update 113
- Create New Discovery Job window 257
- credentials
 - protocols 59
- Custom JDBC Drivers page
 - Database Discovery wizard 261

D

- Data Flow Management
 - architecture 24
 - components 25
 - introduction 19
 - job overview 28
 - module overview 27
 - wizards 28

Index

- Data Flow Probe 25
 - add 42
 - automatic CIs deletion 107
 - data validation 38
 - delete results that have not yet been transmitted 43
 - Details pane 52
 - filtering results 116
 - getting started 40
 - launching as a service 41
 - launching from the Start menu 41
 - logs 83
 - selecting 58
 - set up 23
 - setting up 35
 - viewing job information 243
 - Data Flow Probe Setup user interface 44
 - Data Flow Probe Setup window 50
 - Data Flow Probe Status 23, 91
 - (Job name) dialog box 94
 - user interface 94
 - window 96
 - Data Flow Probes pane 53
 - data push jobs 177
 - Data Push tab 186
 - data repository
 - deploy package to remote 179
 - data sources
 - retrieving data from multiple 170
 - Database Discovery wizard 258
 - Custom JDBC Drivers page 261
 - Database Port Scanning page 260
 - Define Credentials page 259
 - Oracle TNSName File Location page 262
 - Schedule Discovery page 263
 - Summary page 264
 - Database Port Scanning page
 - Database Discovery wizard 260
 - DDM Community 23, 163
 - Define Credentials page
 - Database Discovery wizard 259
 - Infrastructure Discovery wizard 292
 - J2EE Discovery wizard 298
 - Define IP Ranges page
 - Infrastructure Discovery wizard 291
 - Dependency Map tab 265
 - Description pane 52
 - Details pane 52
 - Details tab 51, 267
 - Discovered by window 280
 - Discovered CIs window 280
 - Discovered CITs pane 125
 - discovery
 - running software 104
 - Discovery and Integration Content Packs 164
 - Discovery Control Panel 22, 231
 - Advanced Mode window 249
 - advanced mode workflow 239
 - Basic Mode window 251
 - basic mode workflow 238
 - overview 232
 - user interface 248
 - view permissions 234
 - Discovery Modules pane 281
 - Discovery Permissions window 284
 - Discovery Scheduler dialog box 286
 - Discovery Status pane
 - problem management 235
 - DiscoveryProbe.properties file 87
 - documentation updates 16
 - documentation, online 12
 - domain credentials 59
 - Domains and Probes pane 55
- ## E
- Edit Integration Job dialog box 197
 - Edit IP Range dialog box 45
 - Edit Policy dialog box 47
 - Edit Probe Limitations for TQL Output dialog box 289
 - Edit Process dialog box 141
 - Edit Related Probes dialog box 56
 - Edit Time Template dialog box 289
 - Edit Timetable dialog box 56
 - errors
 - finding in messages 246
 - managing 245
 - Execution Options pane 129

F

- federated data
 - working with 173
- federation
 - with multiple version 9.0x CMDBs 214
- Federation tab 187
- Find Jobs dialog box 143, 290
- Find Resource dialog box 143
- Find Text dialog box 144

G

- Global Configuration Files pane 126
- globalFiltering.xml
 - filtering Probe results 116

H

- HP Software Support Web site 15
- HP Software Web site 16
- HP Universal CMDB
 - launching 40
- HP SIM protocol 63

I

- identification criteria for reconciliation 336
- identifying processes 105
- Infrastructure Discovery wizard
 - Define Credentials page 292
 - Define IP Ranges page 291
 - Preferences page 293
 - Summary page 297
- Infrastructure discovery wizard 291
- Infrastructure wizard
 - Schedule Discovery page 297
- Input pane 122
- input queries 27
- Input Query Editor window 145
- integration
 - setting up between multiple version 8.0x CMDBs 222
 - setting up between multiple version 9.0x CMDBs 219
- integration point
 - deploy package to remote data repository 186

- Integration Point pane 194
- Integration Studio 22, 182
 - Data Push tab 186
 - Federation tab 187
 - Integration Point pane 194
 - Job Definition pane 189
 - overview 168
 - Population tab 198
- Integration Studio page 196
- integrations
 - out-of-the-box 203

J

- J2EE Discovery wizard 298
 - Define Credentials page 298
 - J2EE Port Scanning page 299
- JBoss page 305
 - Oracle Application Server page 305
 - Schedule Discovery page 306
 - Summary page 307
 - WebLogic page 301
 - WebSphere page 303
- J2EE Port Scanning page
 - J2EE Discovery wizard 299
- JBoss
 - protocol 63, 64
- JBoss page
 - J2EE Discovery wizard 305
- JMX operations
 - activateJob 320
 - activateJobOnDestination 320
 - start/stop 321
 - viewJobErrorsSummary 321
 - viewJobExecHistory 321
 - viewJobProblems 321
 - viewJobResultCiInstances 322
 - viewJobResults 322
 - viewJobsStatuses 324
 - viewJobStatus 325
 - viewJobTriggeredCIs 327
 - viewJobTriggeredCIsWithErrorId 329
- Job Definition pane 189
- Job Execution Policy pane 53

Index

jobs

- execution policies 36
- manually activating 244
- operation commands 320
- running when job execution policy running 38
- viewing information through the JMX application 243

K

Knowledge Base 15

L

LDAP

- protocol 64

logs

- Probe Gateway 85
- Probe Manager 86

M

multiple CMDBs

- content management system (CMS) 208
- for version 8.0x 215
- for version 9.0 210
- global ID 209
- integrating 207, 208
- troubleshooting 225
- use cases 209

N

naming conventions 30

NetApp

- protocol 65

New Integration Job dialog box 197

NNM protocol 66

NTCMD protocol 67

O

oidToHostClass.xml 119

online documentation 12

Online Help 13

online resources 15

Oracle Application Server page

J2EE Discovery wizard 305

Oracle TNSName File Location page

Database Discovery wizard 262

P

package

deploy to remote data repository 179

deploy to remote data repository

using integration point 186

Permission Editor dialog box 150

Permissions document 234, 236

Permissions Objects and Parameters pane

151

population jobs 175

Population tab 198

portNumberToPortName.xml 106

ports

adding new attributes 111

defining 111

marking new entries 111

Preferences page

Infrastructure Discovery wizard 293

Probe Gateway

logs 85

Probe Manager

logs 86

Probe Selection pane 128

problem management 235

Properties tab 308

Protocol Parameters dialog box 57

protocols

definitions 26

domain credentials 59

HP SIM 63

JBoss 63, 64

LDAP 64

NetApp 65

NNM 66

NTCMD 67

Remedy 67

SANscreen 67

SAP 68

SAP JMX 68

- Siebel Gateway 69
 - SNMP 70
 - SQL 72
 - SSH 73
 - Telnet 76
 - UDDI registry 78
 - VMware Infrastructure 79
 - WebLogic 80
 - WebSphere 81
 - WMI 82
- Q**
- queries
 - building a view 242
 - defining 242
- R**
- Ranges pane 54
 - Readme 12
 - reconciliation
 - adding priorities 359
 - configuration 335
 - conflict resolution 358
 - identification and match criteria 336
 - identification schema 349
 - overview 334
 - Reconciliation Priority
 - Authoritative Sources pane 363
 - CI Types and Attributes pane 364
 - reconciliation priority document 359
 - Reconciliation Priority manager 357
 - Reconciliation Priority Manager user
 - interface 362
 - Related CIs window 313
 - Remedy protocol 67
 - Required Discovery Protocols pane 125
 - Required Permissions pane 124
 - resource files 119
 - Resources pane 152
 - Result Grouping pane 134
 - results
 - filtering 39
 - running software
 - discovery 104, 108
 - identifying processes 105
- S**
- SANscreen
 - protocol 67
 - SAP JMX protocol 68
 - SAP protocol 68
 - Schedule Discovery page
 - Database Discovery wizard 263
 - Infrastructure wizard 297
 - J2EE Discovery wizard 306
 - Scope Definition dialog box 57
 - Script Editor window 155
 - Script pane 156
 - Show Results for Triggered CI dialog box 314
 - Siebel Gateway protocol 69
 - SiteScope
 - sending zipped bulk data to UCMDB 30
 - SNMP protocol 70
 - Software Identification Rule Editor dialog
 - box 158
 - Software Library dialog box 160
 - Source CIs dialog box 315
 - SQL protocol 72
 - SSH protocol 73
 - stable ID 335
 - start/stop
 - JMX operations 321
 - Statistics Results pane 98, 276
 - Summary page
 - Database Discovery wizard 264
 - Infrastructure Discovery wizard 297
 - J2EE Discovery wizard 307
- T**
- Telnet protocol 76
 - Time Templates dialog box 315
 - topology
 - create 179
 - Topology CI Creation wizard 198
 - Trigger CIs 29
 - trigger queries 29
 - Trigger Query Editor window 315

Index

troubleshooting

- not all networks and IPs discovered 31
- not all TCP ports discovered 31
- results do not appear in map view 31
- transferring Probe from domain to domain 88

Troubleshooting and Knowledge Base 15

troubleshooting and limitations 30

U

Universal Description Discovery and Integration (UDDI) registry protocol 78

update

- use cpVersion attribute to verify 113

updates, documentation 16

Used Scripts pane 123

V

view permissions 234

viewJobErrorsSummary
JMX operations 321

viewJobExecHistory
JMX operations 321

viewJobProblems
JMX operations 321

viewJobResultCiInstances
JMX operations 322

viewJobResults
JMX operations 322

viewJobsStatuses
JMX operations 324

viewJobStatus
JMX operations 325

viewJobTriggeredCIs
JMX operations 327

viewJobTriggeredCIsWithErrorId
JMX operations 329

VMware

- protocol 79

W

WebLogic

- page in J2EE Discovery wizard 301
- protocol 80

WebSphere

- page in J2EE Discovery wizard 303
- protocol 81

What's New 12

wizard

- Database Discovery 258
- J2EE Discovery 298

WMI protocol 82

X

XML files

- identification rule document 346