

**HP OPENVIEW for UNIX  
Smart Plug-in for  
Microsoft® Exchange Server**

**Users Guide**



**Smart Plug-in for Exchange Server  
Version A.08.20**

**October 2004**

**© Copyright 2002-2004 Hewlett-Packard Development Company, L.P**

---

## Legal Notices

### Warranty

*Hewlett-Packard makes no warranty of any kind with regard to this document, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Hewlett-Packard shall not be held liable for errors contained herein or direct, indirect, special, incidental or consequential damages in connection with the furnishing, performance, or use of this material.*

A copy of the specific warranty terms applicable to your Hewlett-Packard product can be obtained from your local Sales and Service Office.

### Restricted Rights Legend

Use, duplication, or disclosure by the U.S. Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause in DFARS 252.227-7013.

Hewlett-Packard Company  
United States of America

Rights for non-DOD U.S. Government Departments and Agencies are as set forth in FAR 52.227-19(c)(1,2).

### Copyright Notices

© Copyright 2004 Hewlett-Packard Development Company, L.P., all rights reserved.

No part of this document may be copied, reproduced, or translated into another language without the prior written consent of Hewlett-Packard Company. The information contained in this material is subject to change without notice.

### Trademark Notices

Microsoft®, Exchange Server®, and Windows NT® are U.S. registered trademarks of Microsoft Corporation.

Pentium® is a U.S. registered trademark of Intel Corporation.

Crystal Reports® is registered trademark of Seagate Software.

Sun Solaris® is registered trademark of Sun Microsystems.

All other product names are the property of their respective trademark or service mark holders and are hereby acknowledged.

---

# Conventions

|                 |   |
|-----------------|---|
| <b>Boldface</b> | Words in <b>boldface</b> type represent programs and commands.  |
| Capitalization  | Capitalized first letters represent company or product names.   |
| Computer font   | Words in <code>computer font</code> represent file or path names, command syntax statements, prompts or messages that appear on your screen, or text you should type on your workstation or terminal. |
| <i>Italics</i>  | Words in <i>italics</i> represent variables in syntax statements or words that are emphasized in the text.  |
| { }             | Represents required elements in a syntax statement. When several elements are separated by the   symbol, you must select one of the elements.   |
| [ ]             | Represents optional elements in a syntax statement.   |

---

# Printing History

New editions are complete revisions of the manual. The release date for each edition is listed below.

|                     |                |
|---------------------|----------------|
| Edition 1 (A.03.21) | May 2002       |
| Edition 2 (A.03.30) | August 2002    |
| Edition 3 (A.07.00) | September 2003 |
| Edition 4 (A.07.00) | October 2003   |
| Edition 5 (A.07.20) | November 2003  |
| Edition 5 (A.08.00) | March 2004     |
| Edition 6 (A.08.10) | June 2004      |
| Edition 7 (A.08.20) | October 2004   |

---

## File Locations

The *HP OpenView Smart Plug-ins CD-ROM* is a collection of OpenView Operations Smart Plug-ins (SPIs) and OpenView supplementary management applications, for HP OpenView Operations for UNIX. The collection offers the convenience of having all SPIs on a single medium with a single Software Distributor depot. The Smart Plug-in for MS Exchange Server files are located according to operating system, as follows:

### Program Files:

```
cdrom/OV_DEPOT/11.OHPUX.sdtape SPI-EXCHANGE-OVO
cdrom/OV_DEPOT/SOLARIS.sdtape SPI-EXCHANGE-OVO
cdrom/OV_REPORTER/EXCHANGE_SPI_A.08.20/EXSPI-Reporter.msi
cdrom/OV_REPORTER/EXCHANGE_SPI_A.08.20/EXSPI-Reporter.jp.msi
cdrom/OV_REPORTER/EXCHANGE_SPI_A.08.20/EXSPI-Reporter.ko.msi
cdrom/OV_REPORTER/EXCHANGE_SPI_A.08.20/EXSPI-Reporter.zh_CN.msi
```

### Documentation Files:

```
OV_DOC/EXCHANGE_SPI_A.08.20/release_notes.txt
OV_DOC/EXCHANGE_SPI_A.08.20/exspi_users_guide.pdf
OV_DOC/EXCHANGE_SPI_A.08.20/exspi_ref_guide.pdf
```

---

# Contents

|   |             |
|---|-------------|
| <b>Chapter 1: Concepts .....</b>                                | <b>1-1</b>  |
| Introduction .....  | 1-2         |
| What the Exchange SPI does .....                                | 1-3         |
| OVO UNIX 8 DCE and HTTPS Agents .....                           | 1-4         |
| Upgrading an Exchange node from DCE to HTTPS: .....             | 1-4         |
| How the Exchange SPI works .....                                | 1-5         |
| How data collection occurs .....                                | 1-5         |
| Where data is stored .....                                      | 1-5         |
| How data is displayed .....                                     | 1-5         |
| Exchange organization .....                                     | 1-6         |
| Exchange SPI components .....                                   | 1-7         |
| 1. Exchange SPI Template groups and Templates .....             | 1-8         |
| 2. Exchange SPI Application groups and Applications .....       | 1-10        |
| 3. Exchange SPI Message groups and Messages .....               | 1-15        |
| 4. Exchange SPI Reports and Graphs .....                        | 1-16        |
| <br>  |             |
| <b>Chapter 2: User Privileges .....</b>                         | <b>2-19</b> |
| Introduction .....  | 2-20        |
| User Privileges .....   | 2-21        |
| Creating a Service Account with Proper Access Permissions ..... | 2-22        |
| Exchange 5.5 nodes in a Windows NT Domain .....                 | 2-23        |
| Create User Account .....                                       | 2-23        |
| Grant Exchange Access Permissions to User Account .....         | 2-28        |
| Exchange 5.5 nodes in a Windows 2000 Domain .....               | 2-31        |
| Create User Account .....                                       | 2-31        |
| Grant Exchange Access Permissions to User Account .....         | 2-39        |
| Exchange 2000/2003 nodes in Windows 2000/2003 Domain .....      | 2-41        |
| Enable Viewing of Administrative Groups folder .....            | 2-41        |
| Create User Account .....                                       | 2-43        |

|  |             |
|--|-------------|
| <b>Chapter 3: Installation &amp; Configuration .....</b>   | <b>3-51</b> |
| Introduction .....   | 3-52        |
| Prior to Installation .....  | 3-53        |
| Template Groups: installation considerations .....   | 3-54        |
| Installation and Basic Configuration .....   | 3-55        |
| Task 1: Install Exchange SPI on Management Server .....  | 3-55        |
| Task 2: Add Nodes to the Node group EXSPI .....  | 3-56        |
| Task 3: Install OVO Agents on MS Exchange servers .....  | 3-56        |
| Task 4: Install OVO Agent on OVO management server .....   | 3-57        |
| Task 5: Assign responsibilities for OVO operator .....   | 3-57        |
| Task 6: Distribute Exchange SPI actions, commands, monitors .....                                  | 3-58        |
| Task 7: Run the EXSPI Add DataSource application and Configure Datasources .....                   | 3-60        |
| Task 8: Assign/Distribute Quick Start Templates .....  | 3-63        |
| Advanced Configuration .....   | 3-65        |
| Task 1: Create the special service account .....   | 3-65        |
| Task 2: Grant Exchange access permissions to service account .....                                 | 3-66        |
| Task 3: Run the EXSPI Node Config application and configure service account on managed nodes ..... | 3-66        |
| Task 4: Enable Message Tracking .....  | 3-67        |
| 4a: Enabling Message Tracking for Exchange 5.5 .....   | 3-67        |
| 4b: Enabling Message Tracking for Exchange 2000 and 2003 .....                                     | 3-69        |
| Task 5: Run the EXSPI MBOX Config application and create mailboxes .....                           | 3-71        |
| Task 6: Set Up Message Ping server connections and alarms .....                                    | 3-73        |
| Task 7: Assign/Distribute Advanced/Add-On Templates .....  | 3-80        |
| Deinstalling Exchange SPI .....  | 3-81        |
| Removing Exchange SPI software from the management server .....                                    | 3-81        |
| De-assigning Exchange SPI templates from managed nodes .....                                       | 3-82        |
| Removing Exchange SPI from managed nodes .....   | 3-82        |
| Deleting Templates, Applications and Message groups from the management server .....               | 3-83        |

|   |              |
|---|--------------|
| <b>Chapter 4: Using Exchange SPI .....</b>                      | <b>4-85</b>  |
| Introduction .....  | 4-86         |
| Daily Tasks .....   | 4-87         |
| Exspi Template Group Requirements .....                         | 4-89         |
| Changing the Data Collection Agent Setup .....                  | 4-93         |
| Command Line Parameters .....                                   | 4-94         |
| <br>  |              |
| <b>Chapter 5: Clustering Support .....</b>                      | <b>5-97</b>  |
| Using Exchange SPI in high availability environments .....      | 5-98         |
| Exchange Cluster Configuration application .....                | 5-102        |
| Data Collection on virtual servers .....                        | 5-104        |
| Seeing virtual servers in reports and graphs .....              | 5-104        |
| Setting up End-to-End Message Ping on an Exchange Cluster ..... | 5-104        |
| What happens during a failover: .....                           | 5-105        |
| <br>  |              |
| <b>Chapter 6: Customizations .....</b>                          | <b>6-107</b> |
| Introduction .....  | 6-108        |
| Choosing metrics to monitor Exchange .....                      | 6-109        |
| Basic Customization .....                                       | 6-110        |
| Creating Custom Groupings .....                                 | 6-110        |
| Creating Custom Templates .....                                 | 6-111        |
| Modifying Message Generation .....                              | 6-111        |
| Modifying Metric Template Conditions .....                      | 6-113        |
| Customizing the Threshold.....                                  | 6-116        |
| Customizing Schedules.....                                      | 6-117        |
| The Tag Feature.....  | 6-119        |
| Advanced Customization .....                                    | 6-120        |
| Changing the Windows User Account name.....                     | 6-120        |
| Changing the Mailbox name.....                                  | 6-120        |
| Returning to original factory settings .....                    | 6-121        |
| <br>  |              |
| <b>Chapter 7: Integration with Reporter .....</b>               | <b>7-123</b> |
| Introduction .....  | 7-124        |
| Installing Exchange SPI Report Templates .....                  | 7-125        |
| Report Requirements .....                                       | 7-126        |
| Templates to distribute for Exchange SPI Reports .....          | 7-126        |
| Data Collection for Graphing and Reporting .....                | 7-131        |
| Reports for ALL Exchange versions .....                         | 7-138        |

|  |       |
|--|-------|
| Detail reports for all Exchange versions .....           | 7-138 |
| Summary reports for all Exchange versions .....          | 7-139 |
| Reports for Exchange 2000 and 2003 .....                 | 7-140 |
| Detail reports for Exchange 2000/2003 servers .....      | 7-140 |
| Summary reports for Exchange 2000/2003 servers .....     | 7-142 |
| Reports for Exchange 5.5 only .....                      | 7-143 |
| Detail reports for Exchange 5.5 servers .....            | 7-143 |
| Summary reports for Exchange 5.5 servers .....           | 7-143 |
| Using Exchange SPI Reports and Graphs .....              | 7-144 |
| Distributing the Quick Start Template Group .....        | 7-144 |
| Configure/Distribute Reporter Collection Templates ..... | 7-145 |
| 1. Complete the Advanced Configuration procedure .....   | 7-145 |
| 2. Distribute Reporter Collection templates .....        | 7-145 |
| Deinstalling Exchange SPI Reporter .....                 | 7-146 |
| Exchange SPI Graphs .....                                | 7-147 |
| To invoke graphs: .....                                  | 7-147 |
| Information Store .....                                  | 7-148 |
| Messaging .....  | 7-149 |
| System Information .....                                 | 7-150 |
| Transaction Log Disk Space (Exchange 5.5 only) .....     | 7-150 |
| Generating Graphs from an Exchange SPI DSI Logfile ..... | 7-151 |

## **Chapter 8: Troubleshooting .....8-153**

|   |       |
|---|-------|
| Introduction .....  | 8-154 |
| Self-Healing Information for enhanced troubleshooting .....       | 8-155 |
| Using the Self-Healing Info application .....                     | 8-155 |
| Verifying Exchange SPI Installation on the Management Server .... | 8-157 |
| The Exchange SPI Error Log .....                                  | 8-159 |
| Turning on Tracing .....  | 8-160 |
| Disabling Tracing .....   | 8-161 |
| Common Errors .....   | 8-162 |
| Verifying MSXSPI account has right privileges .....               | 8-164 |
| Verifying MeasureWare Integration .....                           | 8-165 |
| Advanced Configuration Template Failures .....                    | 8-166 |

|  |            |
|--|------------|
| <b>Appendix A: File Names.....</b>                   | <b>169</b> |
| Introduction .....                                   | A-170      |
| Management Server Files .....                        | A-171      |
| Templates for opccfgupld (OVO Upload Facility) ..... | A-171      |
| Miscellaneous Management Server Files .....          | A-172      |
| Management Server/Managed Node Files .....           | A-173      |
| Monitor Files .....                                  | A-173      |
| Command Files .....                                  | A-174      |
| Windows Managed Node Files .....                     | A-177      |
| Monitor Templates .....                              | A-177      |
| Logging and Trace Files .....                        | A-178      |
| <br>   |            |
| <b>Appendix B: Components .....</b>                  | <b>179</b> |
| Component Interaction .....                          | B-181      |
| Exchange SPI Templates .....                         | B-183      |
| MS Exchange version and EXSPI prefix .....           | B-183      |
| Table of Exchange 2000/2003 templates .....          | B-185      |
| EXSPI-60 Quick Start .....                           | B-185      |
| EXSPI-60 Add-Ons .....                               | B-190      |
| EXSPI-60 Advanced .....                              | B-195      |
| Table of Exchange 5.5 templates .....                | B-196      |
| EXSPI-55 Quick Start .....                           | B-196      |
| EXSPI-55 Add-Ons .....                               | B-199      |
| EXSPI-55 Advanced .....                              | B-201      |
| <br>   |            |
| <b>Index.....</b>                                    | <b>203</b> |



---

**Concepts**

## Introduction

This chapter introduces the basic concepts of the HP OpenView Smart Plug-in for Microsoft® Exchange Server (Exchange SPI), version A.08.20, which works together with HP OpenView Operations for UNIX versions 7.x and 8.x, to monitor Microsoft Exchange 5.5, 2000 and 2003.

The chapter includes the following sections:

- ❑ What the Exchange SPI does
- ❑ OVO UNIX 8.0 DCE and HTTPS agents
- ❑ How the Exchange SPI works
- ❑ Exchange organization
- ❑ Exchange SPI components:
  - Exchange SPI Template groups and Templates
  - Exchange SPI Application groups and Applications
  - Exchange SPI Message groups and Messages
  - Exchange SPI Reports and Graphs

---

## What the Exchange SPI does

The Exchange SPI adds Exchange 5.5, 2000 and 2003 server-monitoring capabilities to HP OpenView Operations for UNIX, allowing you to oversee your distributed Exchange environment from a central, easy-to-use console. In so doing, you can:

- Increase Exchange availability and performance
- Lower support costs associated with the Exchange service
- Improve capacity management and planning for Exchange

With the Exchange SPI integrated into the OVO console, you can apply the HP OpenView performance and problem management processes that you use for networks and systems to monitor MS Exchange.

After setup, the Exchange SPI will monitor critical Exchange application/database resources including:

- Processes (for monitoring the amount of CPU time being used by core Exchange processes)
- Inactive Processes (for monitoring core MS Exchange processes for activity and status)
- Exchange Services (for monitoring Exchange Server processes for activity levels)
- Message Transfer Agent (MTA) and Simple Mail Transfer Protocol (SMTP) message process data
- MTA Work Queue and SMTP Queues
- IS Public and Private/Mailbox Average Delivery Time
- Cluster environments.

Information comes to you in the OpenView Operations console through service maps, messages, alerts, reports and graphs.

## **OVO UNIX 8 DCE AND HTTPS AGENTS**

The Exchange SPI supports the new HTTPS agent, which comes with out-of-the-box HTTP authentication and SSL encryption, with server and client certificates, guaranteeing secure communication with the HP OpenView Operations central management servers. The new agent is available for all popular operating system platforms, including HP-UX, Microsoft Windows, Linux, and Solaris.

When you upgrade from OVO 7.x to OVO 8.x and install the new agent, no manual configuration is necessary.

### **UPGRADING AN EXCHANGE NODE FROM DCE TO HTTPS:**

If an Exchange server node is already managed under a DCE agent, make sure the OVPA log files are cleared before remanaging it under HTTPS.

To clean the log files, run the following command:

```
C:\usr\OV\bin\OpC\monitor\ddfutil.exe  
"C:\usr\OV\exspi\dsi\log\exspi_log" -rm all
```

## **How the Exchange SPI works**

Like other Smart Plug-ins, the Exchange SPI collects data that is targeted and gathered according to rules and schedule specifications contained within the Exchange SPI templates.

### **HOW DATA COLLECTION OCCURS**

When the collection's scheduled time occurs, the Exchange SPI collector/analyzer program is executed and if required, forwards metric values to OVO and the HP data collecting agent. At the same time, OVO checks against predefined threshold settings and triggers alarms when violations occur.

### **WHERE DATA IS STORED**


The collected data is written to a log file residing on the managed node, at pre-defined intervals.

### **HOW DATA IS DISPLAYED**

Messages appear in the OVO Message Browser with message details containing instruction text to help diagnose and remedy problems. If PerfView is present, metric values are available as graphs and if Reporter is installed, reports are available.

## Exchange organization

The Exchange organization in an enterprise can be extremely complex, the diagram below might help in keeping an overview:

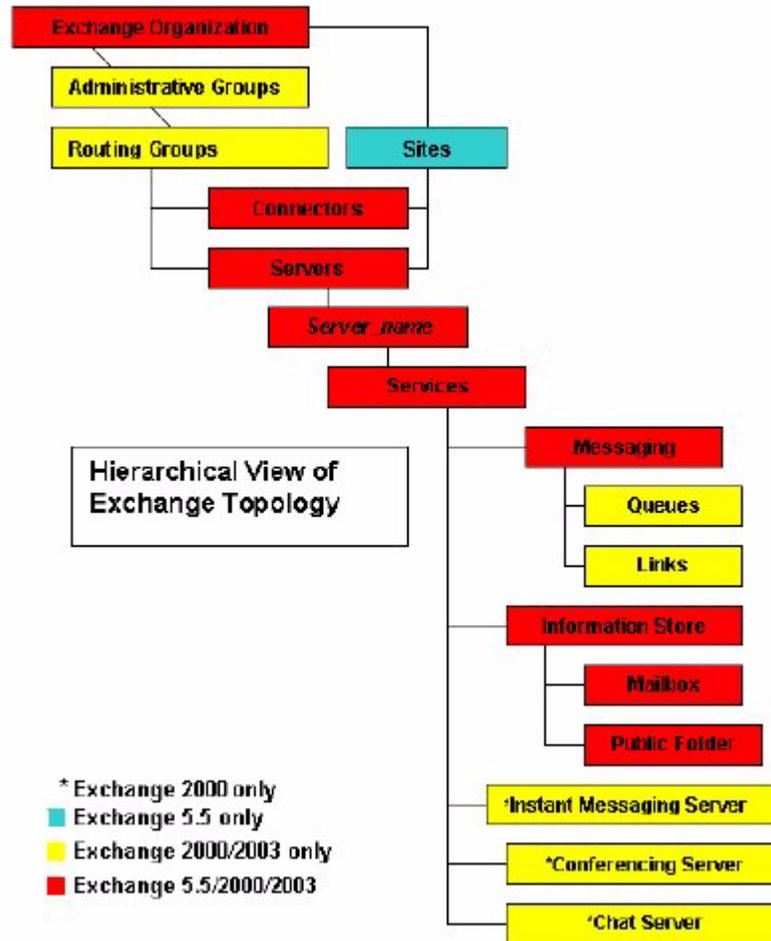


## Exchange SPI components

The following components appear in the OpenView for UNIX GUI when Exchange SPI is installed:

1. Exchange SPI Template groups and Templates
2. Exchange SPI Application groups and Applications
3. Exchange SPI Message groups and Messages
4. Exchange SPI Reports and Graphs

## 1. EXCHANGE SPI TEMPLATE GROUPS AND TEMPLATES

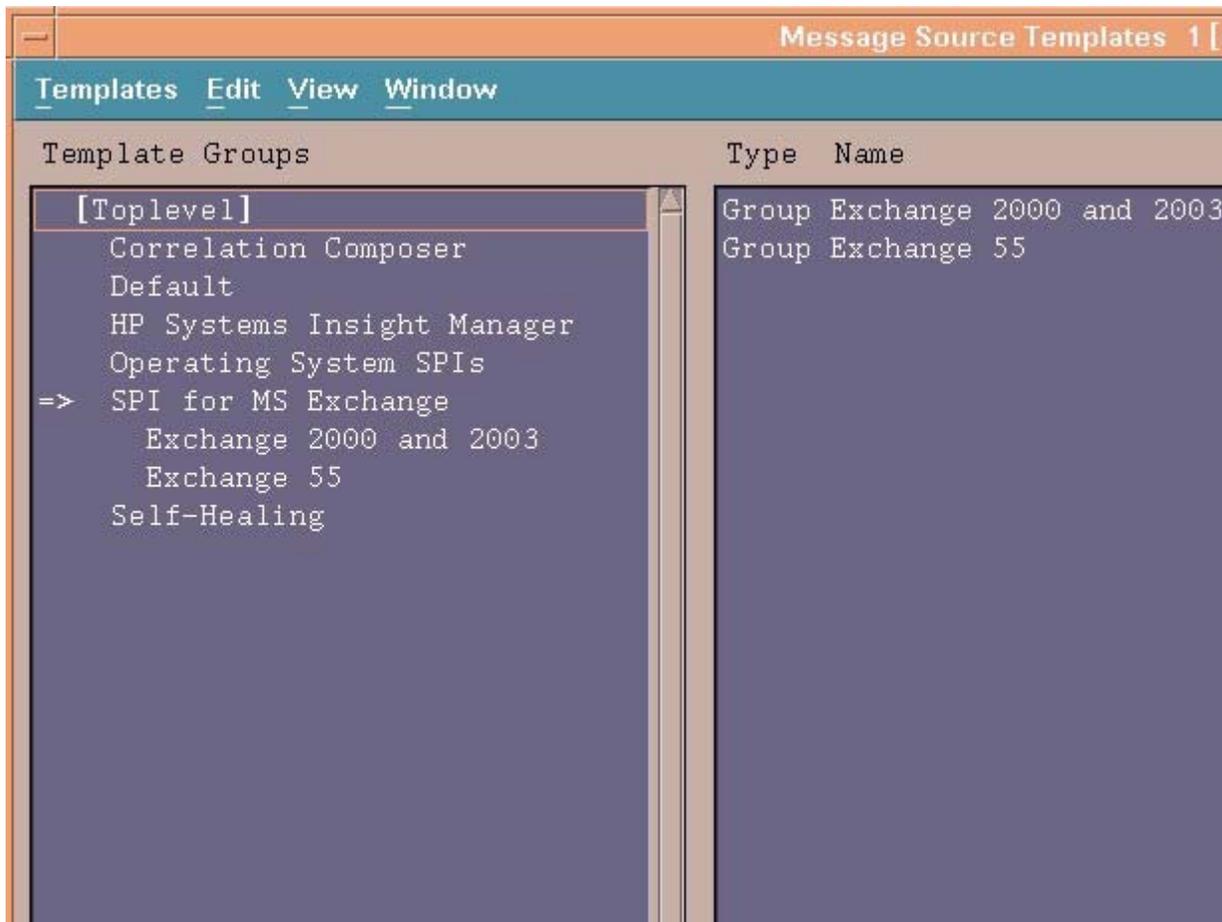

### Templates

NOTE: In OVOU 8 and later, templates are referred to as policies.

Templates measure collected data against predefined rules, generating alarms and messages to assist in problem analysis and resolution. Corrective actions are suggested in help text available in the message details.

Templates can be distributed as groups or individually. For a complete listing of templates, see Appendix B, beginning on page 183.

## Template groups

The **EXSPI Quick Start** template group contains templates that are easy to install and distribute and require no special customization. Many templates in the **EXSPI Add-Ons** and **EXSPI Advanced** template groups require a more advanced configuration procedure. Before getting started, review template requirements in *Exspi Template Group Requirements chapter 4 page 89*.

## Template types

Within the Exchange group are:

- **Schedule** templates that determine when and what metrics are collected
- **Monitor** templates that implement the actual metric condition (threshold, object, message text, instructions, etc.)
- **Message** templates that intercept the Exchange SPI messages
- **Logfile encapsulator** templates that monitor for Exchange server related messages in the Windows event log, and send them to the OVO Message browser.

For information on customizing template settings, see *Basic Customization chapter 6 page 110*.

---

**NOTE:**


This version of the Exchange SPI monitors MS Exchange 2003, 2000 and 5.5. Template and Template group names contain the version number in the prefix: **65** refers to Exchange 2003 only, **60** refers to Exchange 2000 and 2003, and **55** to Exchange 5.5 only. For example, where an Exchange 5.5 template group has the name **EXSPI-55 Event Log Errors**, the equivalent Exchange 2000 and 2003 template group is **EXSPI-60EventLogErrors**. In this guide, templates/template groups relevant to all Exchange versions are referred as **EXSPI-55/60 <template name>**.

---

## 2. EXCHANGE SPI APPLICATION GROUPS AND APPLICATIONS

The Exchange SPI applications are available in the OVO Application Bank under the application group, **EXSPI Admin**, which contains the Exchange 2000 and 2003, and Exchange 5.5 application groups.

*EXSPI Admin application group in the Application Bank window.*

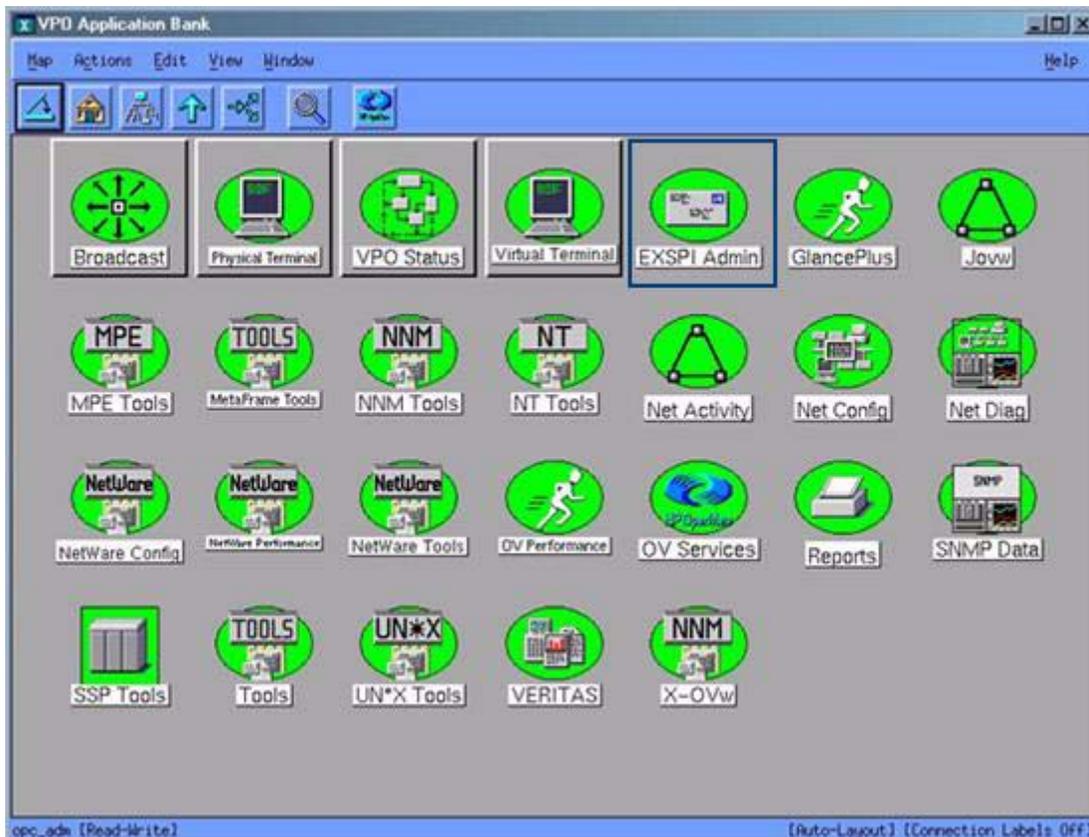

In the Application Group for each version of Exchange are the following applications :

- **EXSPI Add DataSource:** Exchange SPI application to configure data sources and start the logging of data.

- **EXSPI Graphs:** Contains graphs that can be generated from selected metric monitors. Note: Only PerfView graphs are supported.
- **EXSPI MBOX Config:** Starts the mailbox configuration program that automatically creates a mailbox.
  - For Exchange 5.5: the mailbox is created with service account as the owner, so the service account must be created prior to running the application, see *Creating a Service Account with Proper Access Permissions chapter 2 page 22*.
  - The script supports two options. The syntax is:  
`exspi_e2k_cfg [-m mailBoxName] [ -ou OU ]`  
-m (optional parameter) is the mailBoxName prefix.  
-ou (optional parameter) is the Organizational Unit.  
If the -m parameter is not specified, the default prefix is MSXSPI. The mailbox enabled service account is created as MSXSPI<hostname>. This mailbox name is added to the exspi\defaults file as line MAILBOX mailBoxName.  
If the -ou parameter is not specified, the mailbox will be created in the USERS container.
  - By default a mailbox named MSXSPI<hostname> is created on the Exchange server where "hostname " is the name of the Exchange server.
  - The mailbox is created hidden from the GAL.
- **EXSPI Node Config:** Configures the service account with special Exchange privileges (MSXSPI) on the managed node. This account is for templates distributed in the Advanced Configuration section.
- **EXSPI Ping Config:** Configures the Advanced Configuration Template: End To End Message Ping.
- **Self-Healing Info:** This application gathers system information (command output, configuration, log and trace files), and writes this data to a file which HP support services can use during troubleshooting. For more information, see *Self-Healing Information for enhanced troubleshooting chapter 8 page 155*.
- **Enable Message Tracking** (for Exchange 2000 and 2003 only): Turning message tracking on will cause the Exchange server to write tracking log files. The Exchange SPI track log schedule template parses these log files to collect data for the four tracklog reports: Exchange Top

Destinations, Exchange Top Recipients, Exchange Top Senders, and Exchange Top Sources.


- **Enable EXSPI Tracing:** Enables tracing; default setting is OFF. This application is generally used for troubleshooting. When tracing is turned on the results are written to:  
%OvAgentDir%\exspi\log\trace.  
Note: The trace file will grow very large. It is advisable to leave tracing enabled only long enough to recreate the problem, or in order to comply with HP support instructions.
- **Disable EXSPI Tracing:** Disables tracing; (default tracing setting is OFF).
- **Enable Data Logging:** Starts Exchange SPI data logging, the default setting is ON. This is normally used after Disable Data Logging, to restart data logging.
- **Disable Data Logging:** Stops Exchange SPI from logging data.
- **Exchange Cluster Config:** The Exchange Cluster Config application prints apminfo data, which can be used to create the *apminfo.xml* file used by the Exchange SPI to recognize clustered instances. For further information about Exchange SPI monitoring clusters, see *Using Exchange SPI in high availability environments chapter 5 page 98*.  
**Regarding privileges:** This application can be run as any account that has the ability to read wmi, such as a Domain admin or an Exchange admin account
- **Mount Exchange DB:** This application can search for and mount dismounted mailboxes or public folder store databases. It requires the user name and password of a special account that has Exchange administrative privileges, as the application must be modified with this info before executing, see *Creating a Service Account with Proper Access Permissions chapter 2 page 22*.

The application can take one or all of the following parameters:

- **-s** Search for dismounted databases.

- **-m** Search for dismounted databases and attempt to mount any found.
- **-p** Print the output.
- **-a** Forward an alarm message to the OVO Management server.
- **-t** Timeout: the time the tool can take to re-mount a dismounted database (in seconds). If not provided, the script will automatically set the timeout value to be 5 seconds. If the database cannot be remounted within the time frame given, you can set a higher timeout value, e.g. 30 seconds. If remounting the dismounted database still fails, and there is not an error in the output of the tool, there is probably a problem with the Exchange information store service.

Exchange 5.5 Exchange SPI Applications.

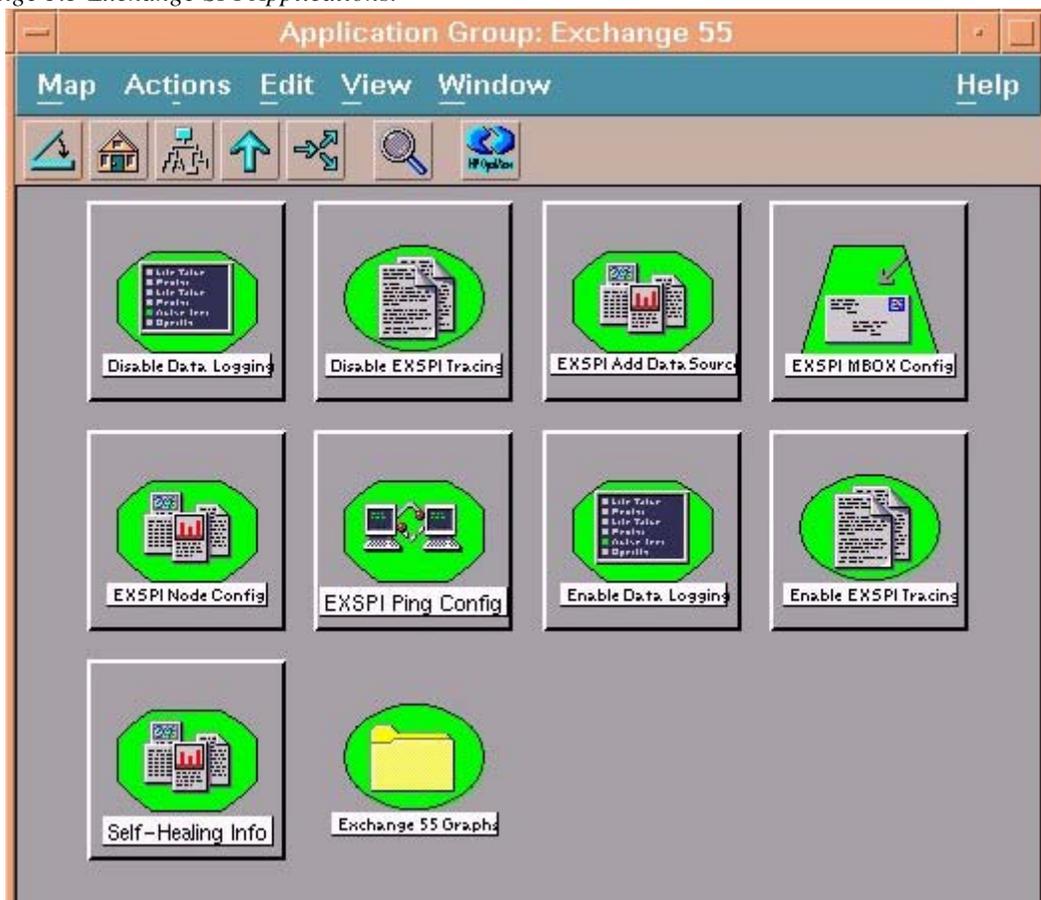


Chapter 1: Concepts  
Exchange SPI components

*Exchange 2000 and 2003 Exchange SPI Applications*



### 3. EXCHANGE SPI MESSAGE GROUPS AND MESSAGES

*OVO Message Group Bank window*

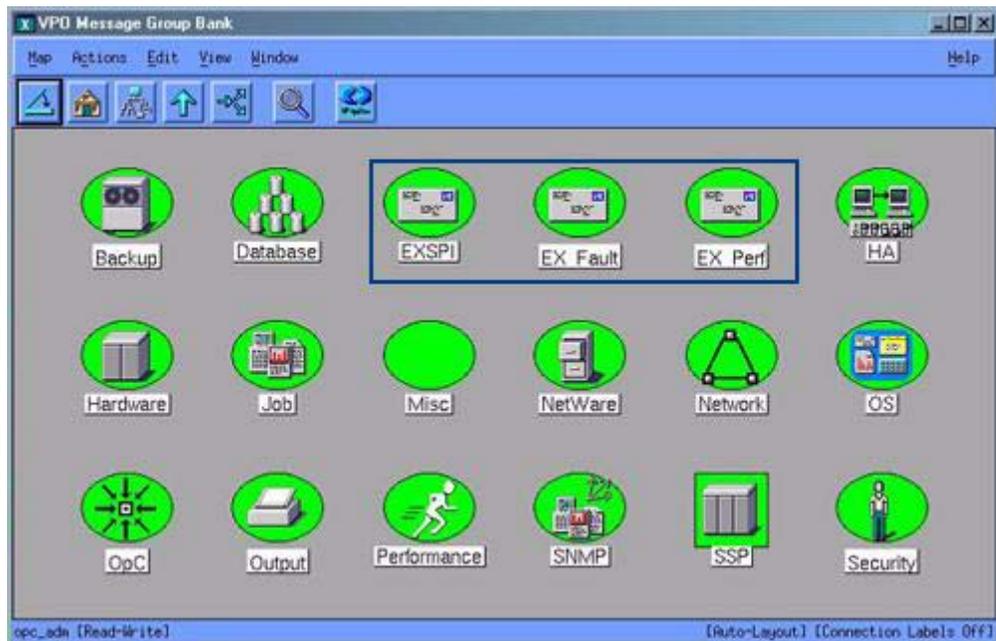

There are three Exchange SPI message groups located in the OVO Message Group Bank window and all messages generated by the Exchange SPI fall into one of these message groups. They are:

1. **EXSPI:** contains messages generated by Exchange-SPI programs. They contain instruction text to help to diagnose/remedy problems.
2. **EX\_Perf:** contains messages regarding Exchange performance.
3. **EX\_Fault:** contains messages regarding error conditions.

Exchange SPI messages are associated with Services in the service map.

## 4. EXCHANGE SPI REPORTS AND GRAPHS

### Exchange SPI Reports

Exchange SPI reports come in a separate package, `EXSPI-Reporter.msi` which can be found in the HP OpenView Operations for Unix Application CD-ROM. HP OV Reporter can be used to access the Exchange SPI data source, `EXSPI_DATA` present on the managed node and generate reports using Seagate Crystal Reports. These reports are broadly classified as Summary and Detail reports.

- **Summary** reports show data for all servers.
- **Detail** reports show information by system. See *Reports for Exchange 2000 and 2003* chapter 7 page 140, and *Reports for Exchange 5.5 only* chapter 7 page 143, for complete lists of out-of-the-box Exchange SPI reports.


### Exchange SPI Graphs

Exchange SPI includes a set of preconfigured graphs that can be viewed in HP Perfview. PerfView graphs require that an OpenView Performance Agent (also known as MeasureWare Agent) is running on the managed node. Upon installation of Exchange SPI, these graphs are located in the Application Bank under: EXSPI Admin > Exchange [2000 and 2003/55] > Exchange [2000 and 2003/55] Graphs.

The graphs are categorized as: Information Store, Messaging, System Information and Transaction Log File Size (Exchange 5.5 only). For more information, see *Exchange SPI Graphs* chapter 7 page 147.

In addition, data from any Exchange SPI server can be graphed using PerfView and data from the Exchange SPI OVO data collecting agent DSI logfiles. For more information, see *Generating Graphs from an Exchange SPI DSI Logfile* chapter 7 page 151.

*PerfView Graph Generated from Exchange SPI Data*

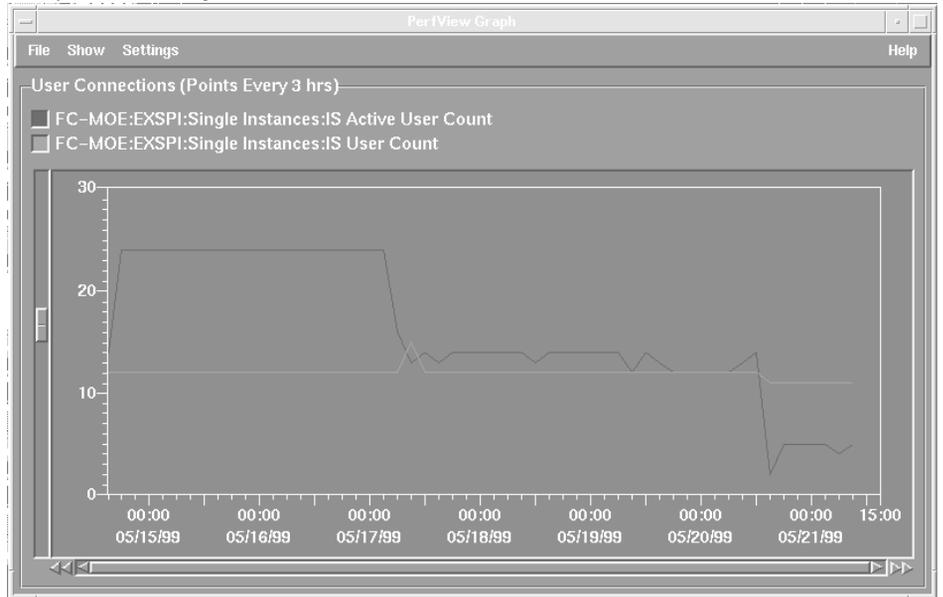



---

## **User Privileges**

---

## Introduction

The Exchange SPI collects data from many sources. In order to collect the many types of data, the Exchange SPI requires advanced user credentials.

This chapter outlines:

- ❑ Which templates/applications have user account requirements
- ❑ How to create the service account and grant proper access permissions in the following environments:
  - Exchange 5.5 nodes in a Windows NT domain
  - Exchange 5.5 nodes in a Windows 2000 domain
  - Exchange 2000/2003 nodes in a Windows 2000/2003 domain

---

## User Privileges

There are 2 levels of user privilege needed by the Exchange SPI:

### 1. \$AGENT\_USER

All templates in the Quick Start group, and some templates in the Add-Ons and Advanced groups, run under this type of account. No customization to templates is required, only threshold changes if desired.

### 2. Service account user with special Exchange privileges

**TEMPLATES:** Some templates in the Add-Ons and most templates in the Advanced group run under this type of account:

- EXSPI Advanced > EXSPI End to End Message Ping > EXSPI-55/60 End to End Message Ping. These templates use the mailbox created by the Exchange SPI application Mailbox Config.
- EXSPI Advanced > EXSPI Reporter Collection > all templates.

**APPLICATIONS:** The following applications need to run with this special type of service account:

- Enable Message Tracking
- EXSPI MBOX Config.

## Creating a Service Account with Proper Access Permissions

Some templates and applications require a service account for each logon domain where Exchange servers reside (see *Exspi Template Group Requirements* chapter 4 page 89). This service account enables the Exchange SPI to access information from the Exchange database.

The service account must be created and the access privileges granted. Procedures are outlined according to operating system environment, in the following manner:

- Case 1: For Exchange 5.5 nodes in a Windows NT Domain (Note: Windows NT is only supported under OVO 7).
- Case 2: For Exchange 5.5 nodes in a Windows 2000 Domain
- Case 3: For Exchange 2000/2003 nodes in a Windows 2000/2003 Domain


---

# Exchange 5.5 nodes in a Windows NT Domain

## CREATE USER ACCOUNT

1. Log on as Domain Administrator of the domain to which the Exchange server belongs.
2. Select **Start > Programs > Administrative Tools (common) > User Manager** for Domain.
3. Select **User > New User**. In the dialog that appears create a new user as follows:


*User Manager dialog*

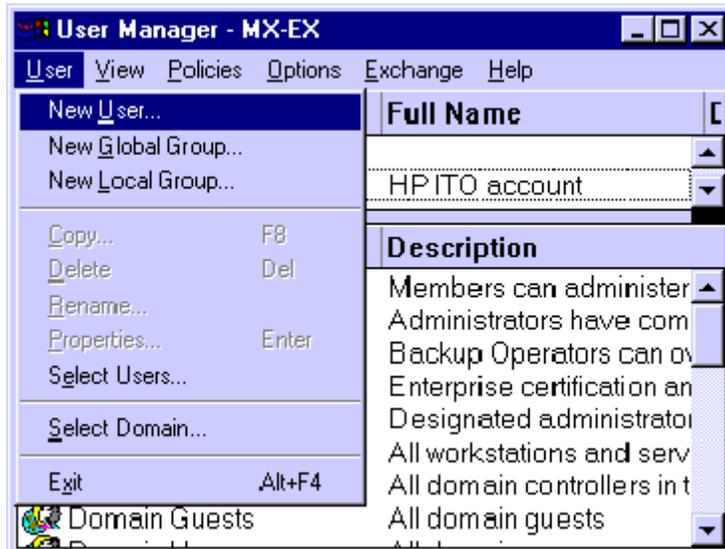

|                            |                      |
|----------------------------|----------------------|
| Username:                  | MSXSPI               |
| Full Name:                 | OVO Exchange SPI     |
| Description:               | Exchange SPI for OVO |
| Password/Confirm Password: | *****                |

**NOTE:** Remember this password; you will need it later to update applications and templates.

*New User dialog*

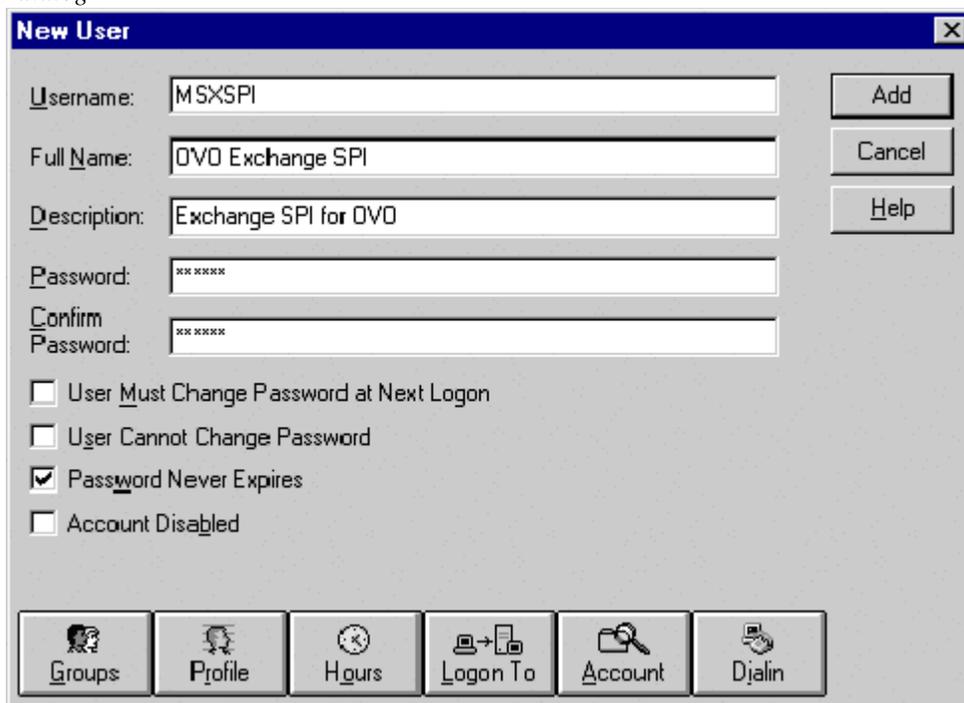


This password must be entered *but will not be authenticated later.*

4. Deselect **User Must Change password at Next Logon** and select **Password Never Expires**.

- Click the **Groups** button to display the **Group Memberships** window.

*Group Memberships dialog*

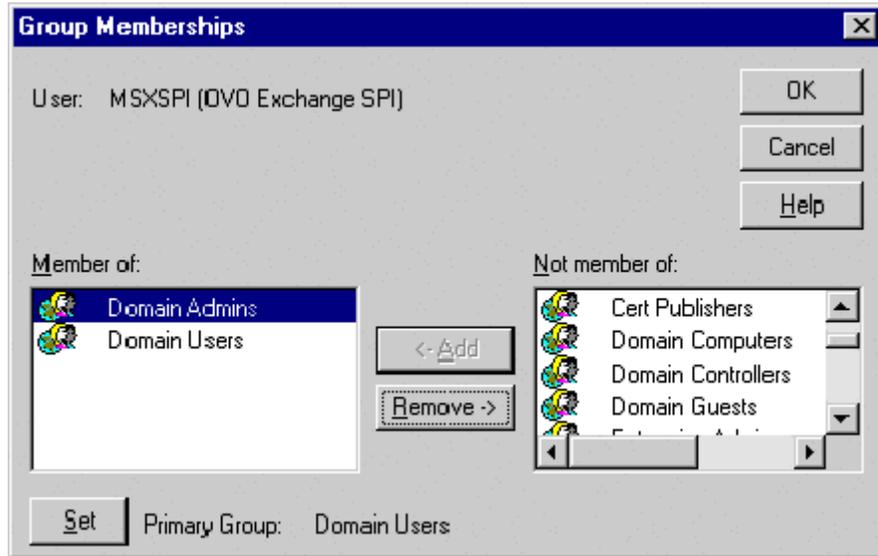

- At the right, from the **Not a member of:** box select the **Domain Admins** user, click **Add**, and **OK** to close the **Group Memberships** window.
- To include necessary information, click buttons in the **New User** window:




|           |  |
|-----------|--|
| Profile:  | No User Profile should be specified.             |
| Hours:    | All hours of the day and week should be allowed. |
| Logon To: | All workstations should be specified.            |
| Account:  | Should never expire/should be Global Account.    |

- Click **Add** to add this user. (If the **Exchange Add Mailbox** window is

displayed, select **Cancel** to close it).


9. Click the **Close** button to close the **New User** window.
10. From the **User Manager** menu bar select **Templates > User Rights...**

*User Manager dialog*

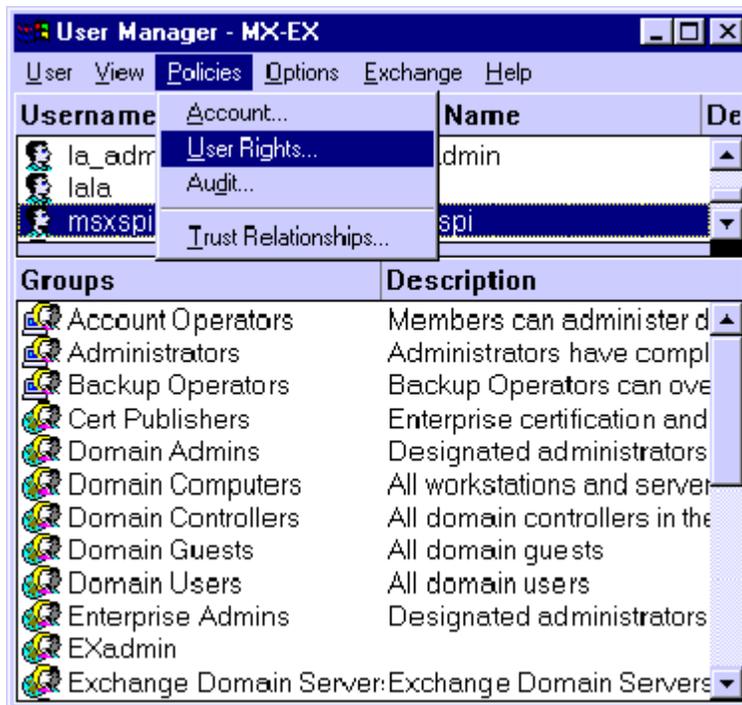


11. Check the **Show Advanced User Rights** checkbox.
12. From the drop-down list select **Log on as a service** in the **Right** field

*Selecting Log on as a service for User Rights.*

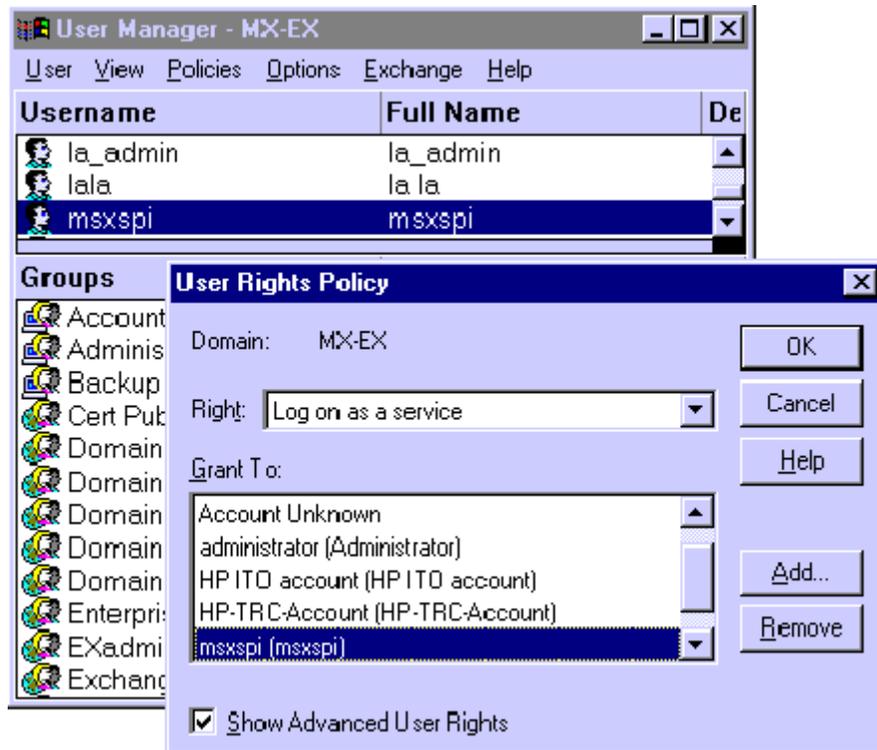

13. Click the **Add** button to open the **Add Users and Groups** window.
14. Click the **Show Users** button.
15. Select the user account just added (*MSXSPI*), click **Add**, then **OK**.

*Adding the new User Account*

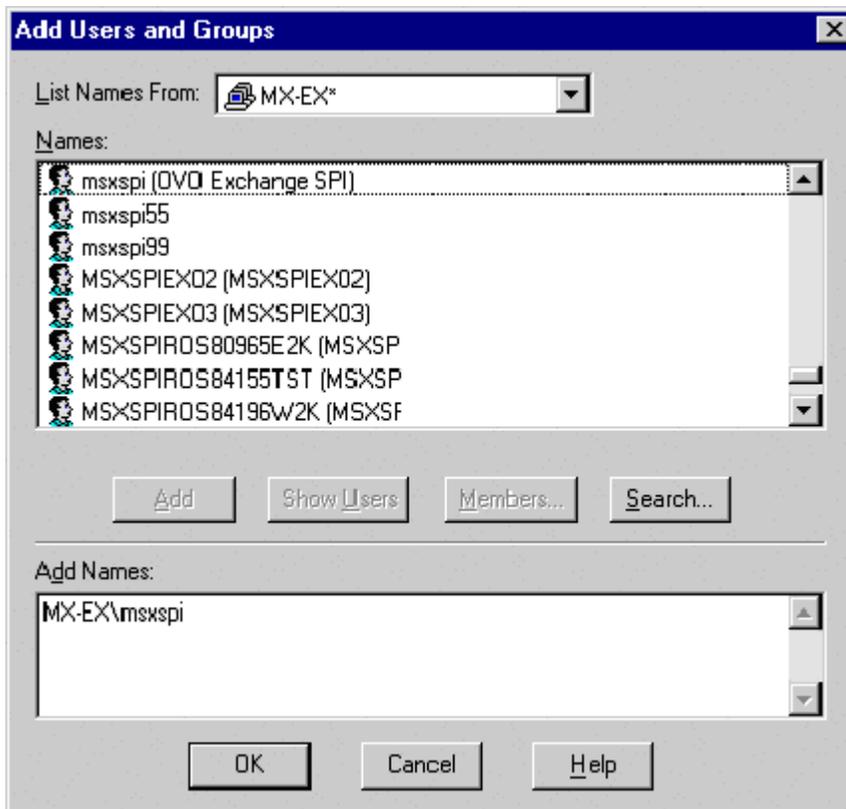

16. Repeat steps 12-15 to add the **Profile system performance** right.


## **GRANT EXCHANGE ACCESS PERMISSIONS TO USER ACCOUNT**

In order for the user account (in this example *MSXSPI*) to have access to a mailbox as well as the Exchange IS Public and Private databases, it must have Exchange Admin permissions. Use Exchange Administrator to grant these permissions at the site level.

1. Select **Start > Program > Microsoft Exchange > Microsoft Exchange Administrator**.

2. For each Exchange site where Advanced templates are to be distributed:
  - a. In the left pane within the tree, select <site\_name>.
  - b. From the File menu select **Properties**.
  - c. In the Properties window, select the **Permission** tab and click **Add** to open the **Add Users and Groups** window.
  - d. Select the user account previously created (*MSXSPI*), and click **Add**.
  - e. Click OK to add the user, and close the **Add Users and Groups** window.
  - f. Verify the user has the role of **Admin**.

*Verifying the User role*

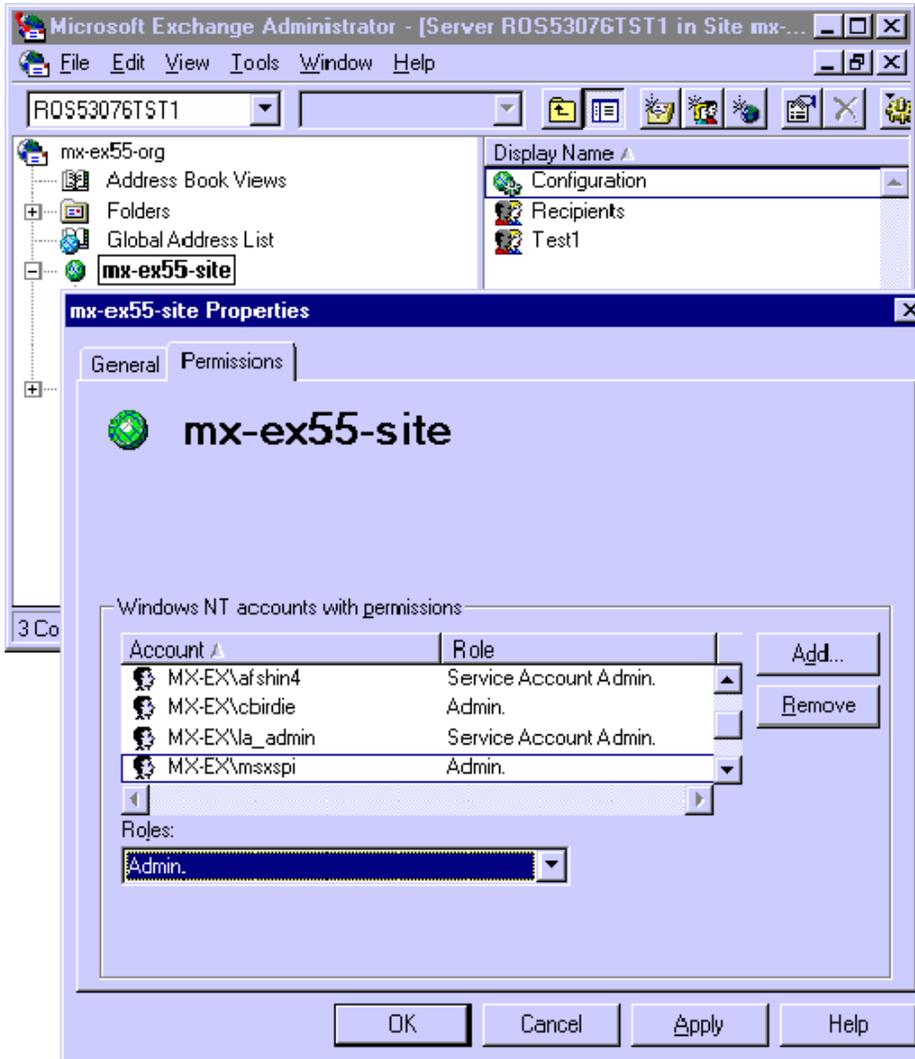


g. Click **OK** to save the changes.

## **Exchange 5.5 nodes in a Windows 2000 Domain**

### **CREATE USER ACCOUNT**

1. Log on to the system that hosts the managed node's domain.
2. Select **Start > Programs > Administrative Tools > Active Directory Users and Computers**.
3. Expand the Active Directory of Users and Computers, right-click **Users**, and select **New > User**.

*Selecting New User dialog*

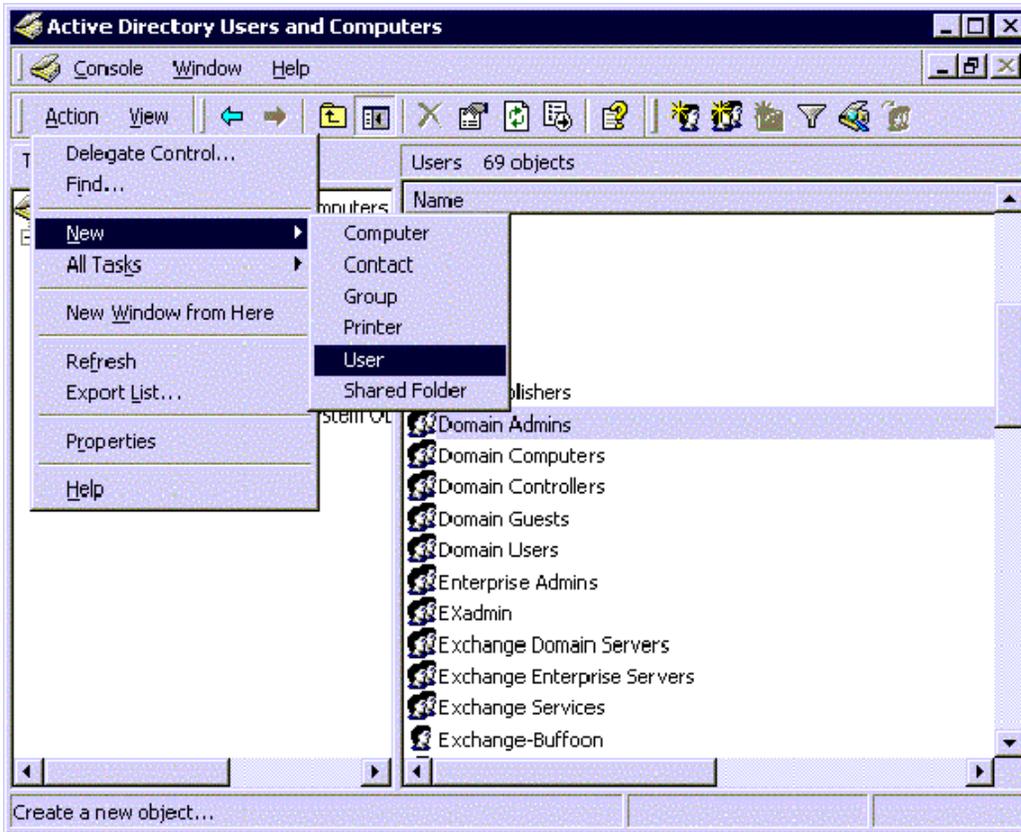

4. In the dialog box that appears, enter the user name just created (in this example *MSXSPI*) as the **First Name** and as the **User logon name**.

*New object dialog*

The screenshot shows the 'New Object - User' dialog box. At the top, it says 'Create in: mx-ex.ov.rose.hp.com/Users'. Below this, there are several input fields: 'First name:' with 'MSXSPI', 'Initials:' (empty), 'Last name:' (empty), 'Full name:' with 'MSXSPI', 'User logon name:' with 'MSXSPI' and a dropdown menu showing '@mx-ex.ov.rose.hp.com', and 'User logon name (pre-Windows 2000):' with 'MX-EX\' and 'MSXSPI'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

5. In the next window, enter **Password/Confirm Password** for the user account (MSXSPI).
6. Select **Password Never Expires**. Then click **Next**

*Setting User Privileges.*

**New Object - User**

Create in: mx-ex.ov.rose.hp.com/Users

Password: [masked]

Confirm password: [masked]

User must change password at next logon

User cannot change password


Password never expires

Account is disabled

< Back   Next >   Cancel

7. In the **New Object** dialog, deselect **Create an Exchange mailbox**, and click **Next**.

*Deselect Create an Exchange Mailbox*

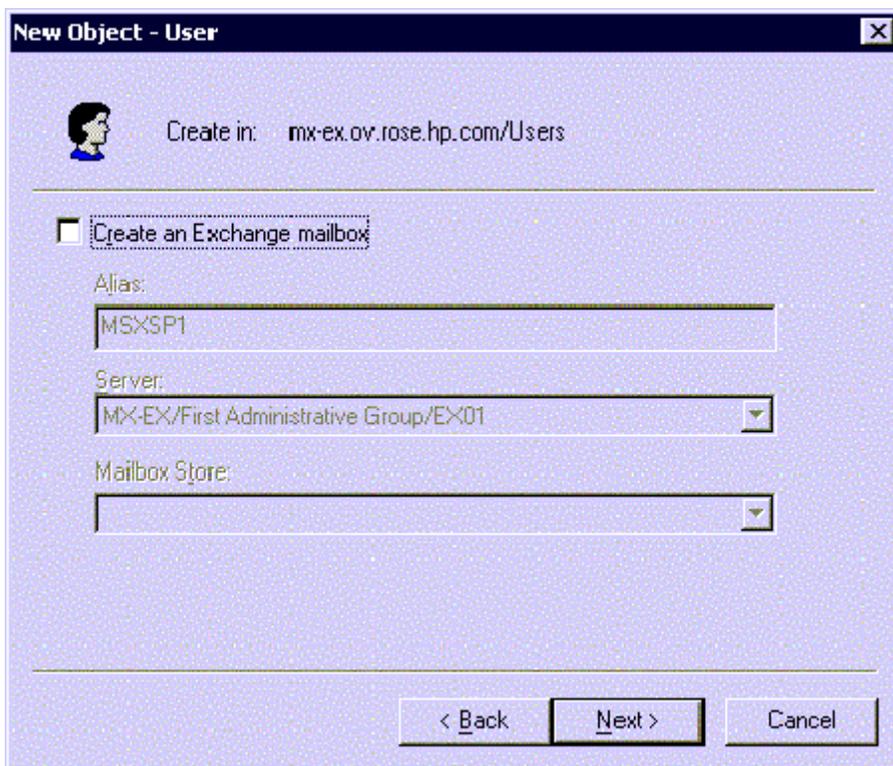

8. In the next dialog, complete creating the user by clicking **Finish**.
9. You are now back at the **Active Directory Users and Computers** dialog. In the right pane, right-click on the user just created (in this example *MSXSPI*) and select **Properties**.
10. In the **MSXSPI Properties** page, select the **General** tab. Enter "Exchange SPI for OpenView Operations for Windows" in the **Description** field.

*Properties dialog*

**msxspi Properties** [?] [X]

Published Certificates | Member Of | Dial-in | Object | Security  
Environment | Sessions | Remote control | Terminal Services Profile  
Exchange General | E-mail Addresses  
Exchange Features | Exchange Advanced  
General | Address | Account | Profile | Telephones | Organization

 msxspi

First name:  Initials:

Last name:

Display name:

Description:

Office:


Telephone number:

E-mail:

Web page:

11. Select the **Member Of** tab. Click **Add**

*Setting User account privileges*

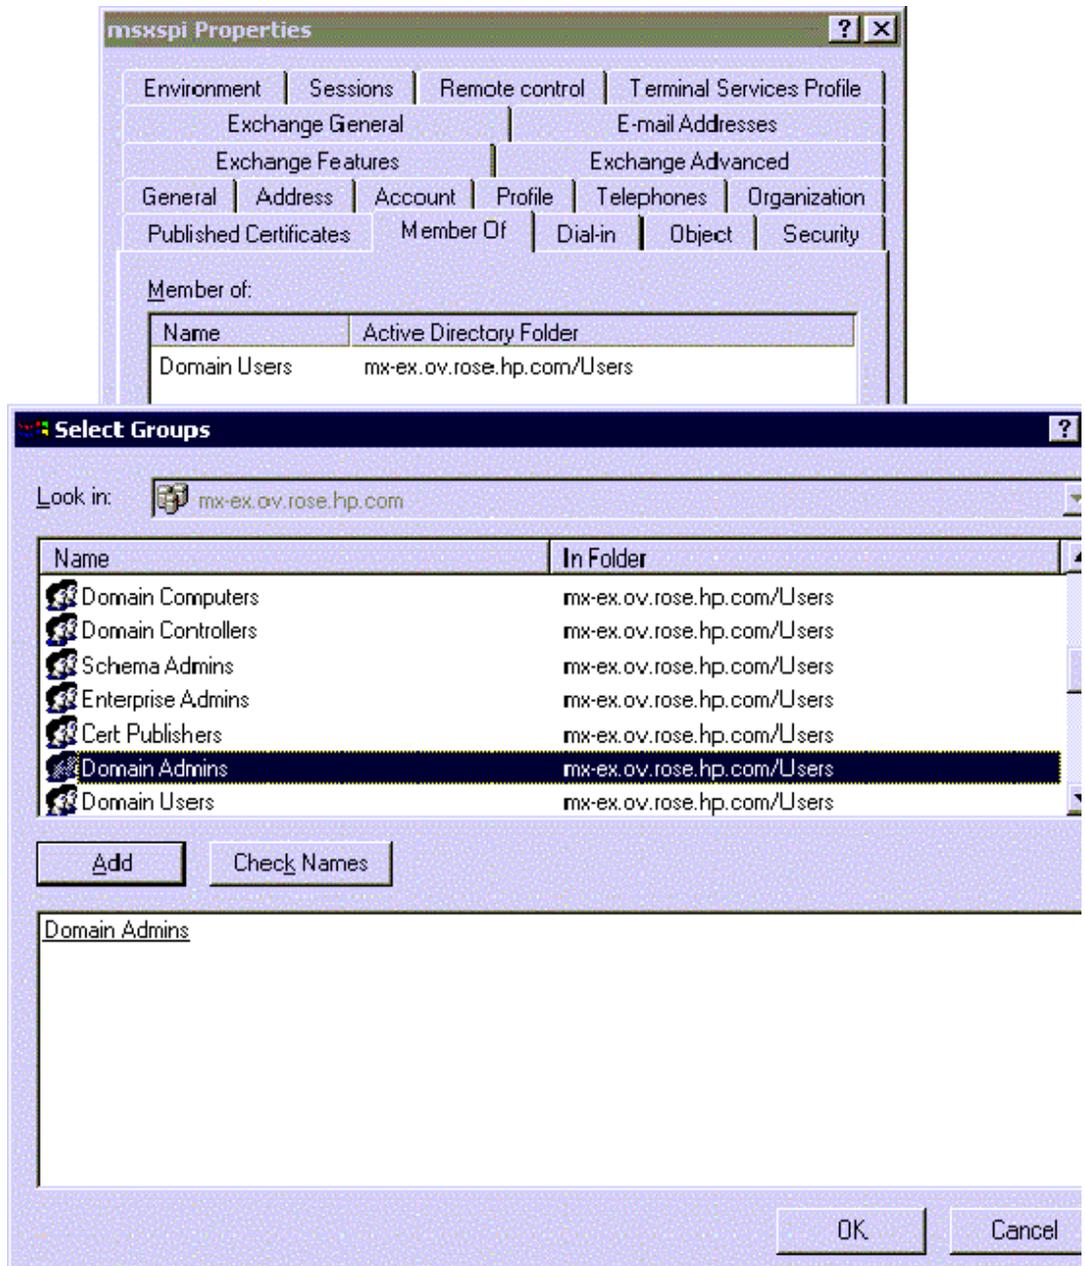


12. In the **Select Group** dialog select **Domain Admins** from the top pane.

Click **Add**, then **OK**.

13. The new user (MSXSPI) is now a member of Domain Admins group. Click **OK** and exit the **Active Directory Users and Computer** dialog.

*New User with new Membership status*

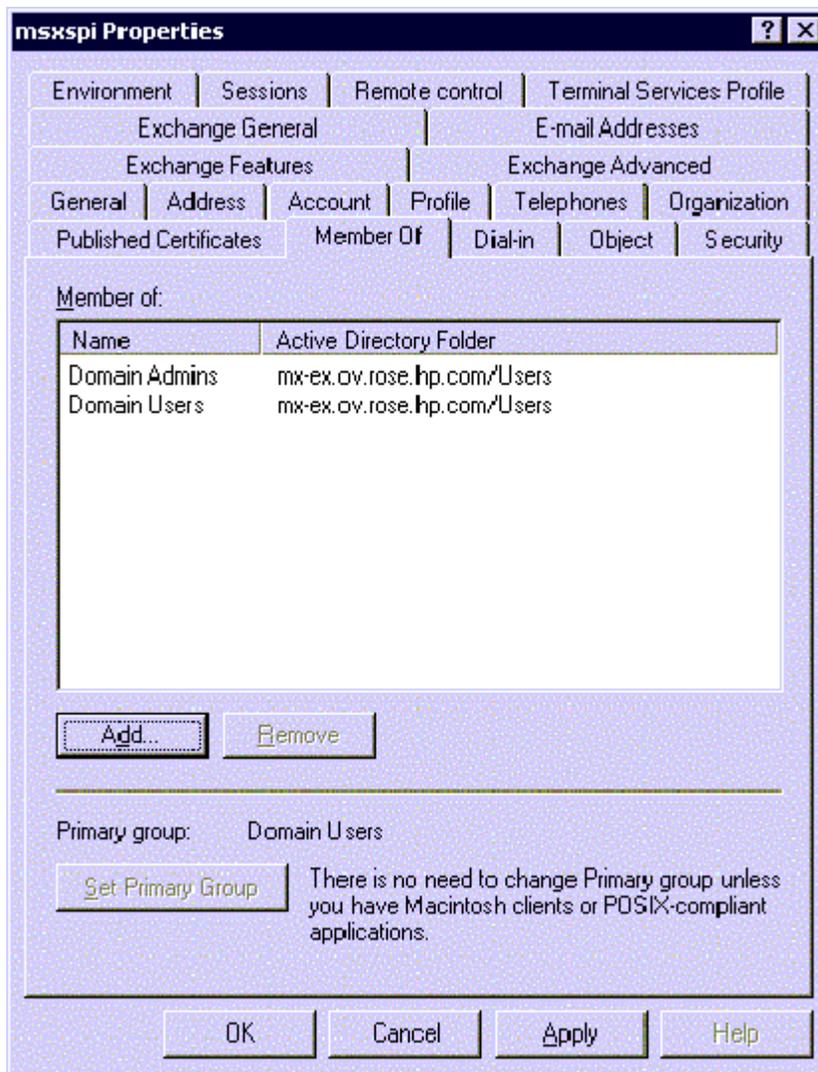


## GRANT EXCHANGE ACCESS PERMISSIONS TO USER ACCOUNT

In order for the user account *MSXSPI* to have access to a mailbox as well as the Exchange IS Public and Private databases, it must have certain Exchange Admin permissions. Use Exchange Administrator to grant these permissions at the site level.

1. Select **Start > Program > Microsoft Exchange > Microsoft Exchange Administrator**.
2. For each Exchange site where Advanced templates are to be distributed:
  - a.. In the left pane within the tree, select **<site\_name>**.
  - b. From the File menu select **Properties**.
  - c. In the Properties window, select the **Permission** tab and click **Add** to open the **Add Users and Groups** window.
  - d. Select the user account previously created (MSXSPI), and click **Add**.
  - e. Click OK to add the user, and close the **Add Users and Groups** window.
  - f. Verify the user has the role of **Admin**.

Verifying User roles.

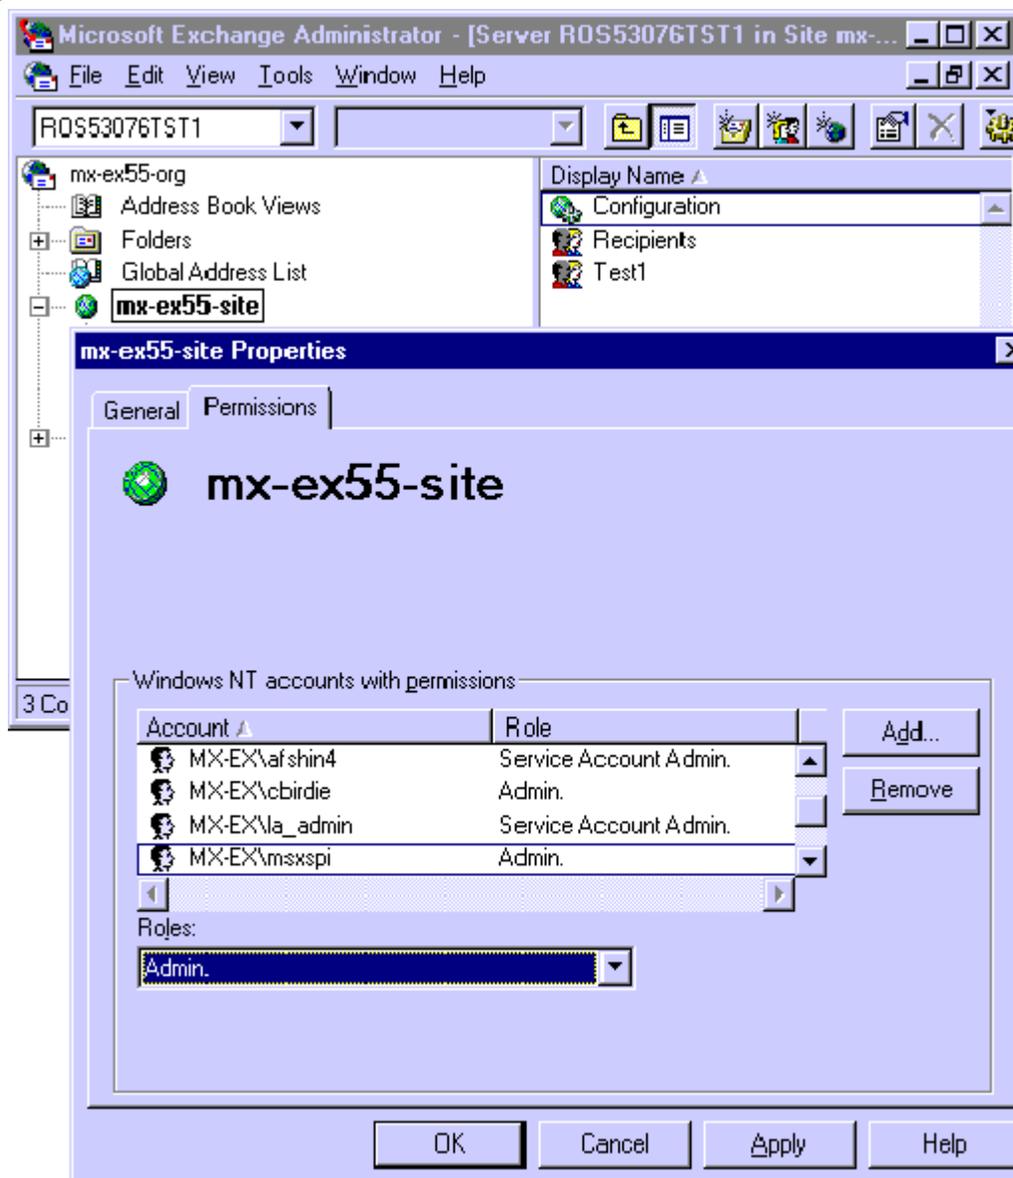

g. Click **OK** to save the changes.

## Exchange 2000/2003 nodes in Windows 2000/2003 Domain

To create a service account with special Exchange privileges for Exchange 2000/2003 nodes the following steps are required:


- Enable viewing of the Administrative Groups folder
- Create the service account
- Add the service account user to the Local Administrators group.

### ENABLE VIEWING OF ADMINISTRATIVE GROUPS FOLDER

To create the user account it is necessary to first enable viewing the administrative groups folder:

1. Open the Exchange server **Properties**
2. Select **Display administrative groups**.
3. Click **Apply** and **OK**.


*Exchange Server Properties Dialog*

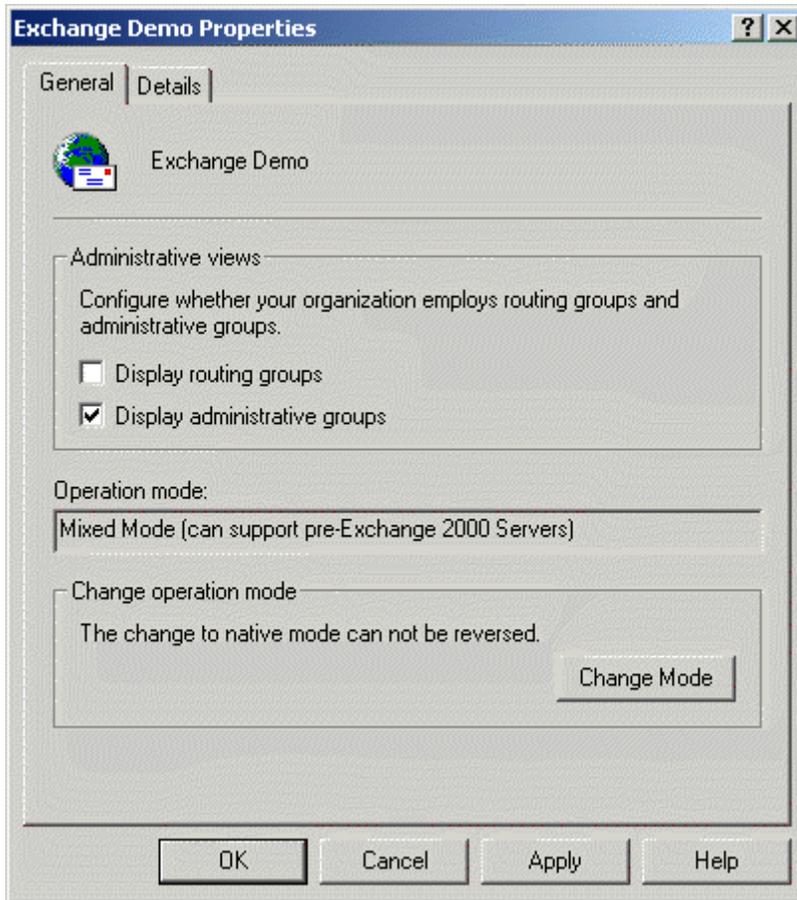

## CREATE USER ACCOUNT

1. Log on to the system that hosts the managed node's domain.
2. Select **Start > Settings > Control Panel > Administrative Tools > Active Directory Users and Computers**.
3. Expand the Active Directory Users and Computers and right-click **Users** and select **New > User**.

*Active Directory Users and Computers dialog*

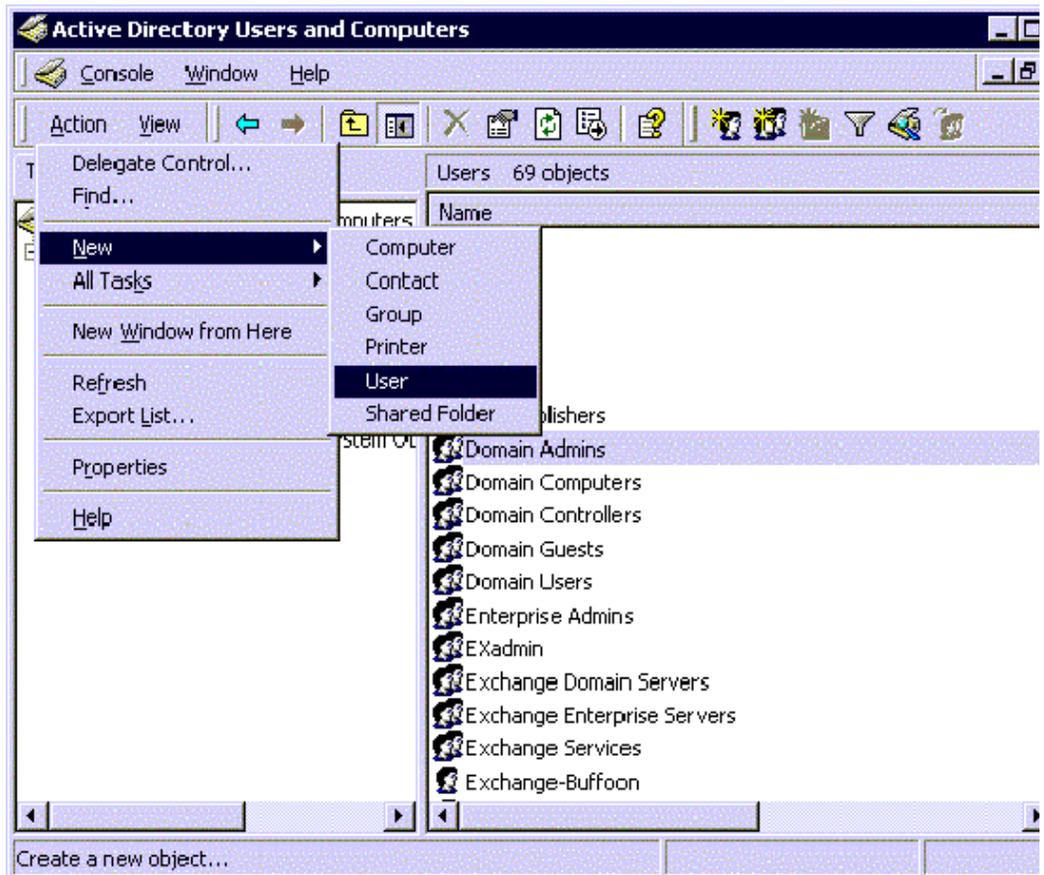


4. In the **New Object - User** dialog, enter a user name for the new service

account into the **First Name** and the **User logon name** fields.

You must create a service account with these privileges in each Windows domain.


*Entering the new service account name*

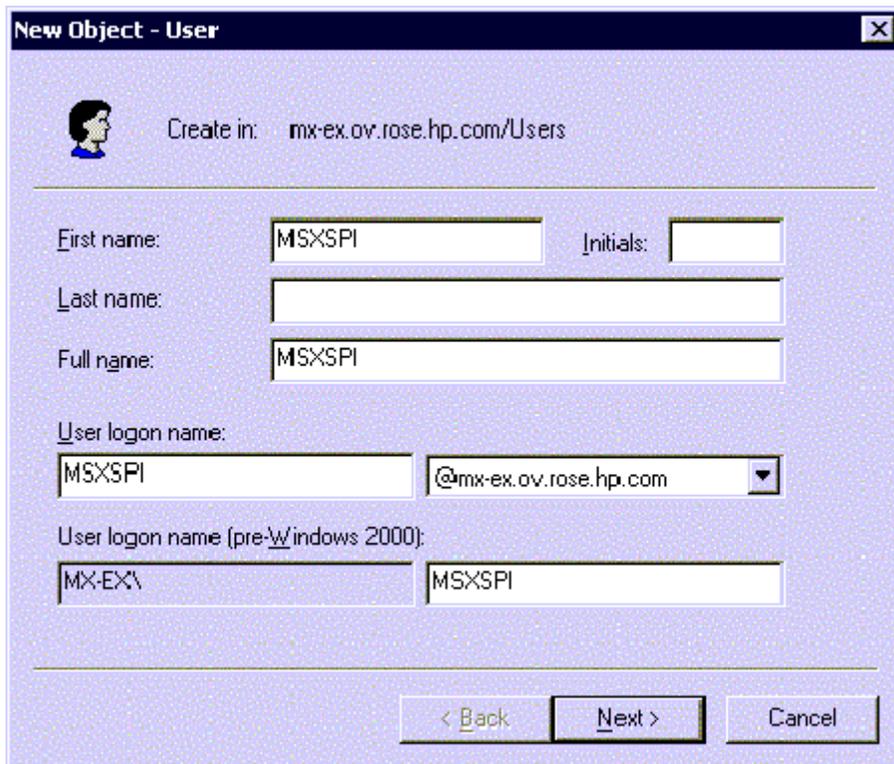

The screenshot shows the 'New Object - User' dialog box. At the top, it says 'Create in: mx-ex.ov.rose.hp.com/Users'. Below this, there are several input fields: 'First name' with 'MSXSPI', 'Initials' (empty), 'Last name' (empty), 'Full name' with 'MSXSPI', 'User logon name' with 'MSXSPI' and a dropdown menu showing '@mx-ex.ov.rose.hp.com', and 'User logon name (pre-Windows 2000)' with 'MX-EX\' and 'MSXSPI'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.


5. In the next window, enter **Password/Confirm Password** for the service account.
6. Select **Password Never Expires**. Then click **Next**.

*Setting password properties*

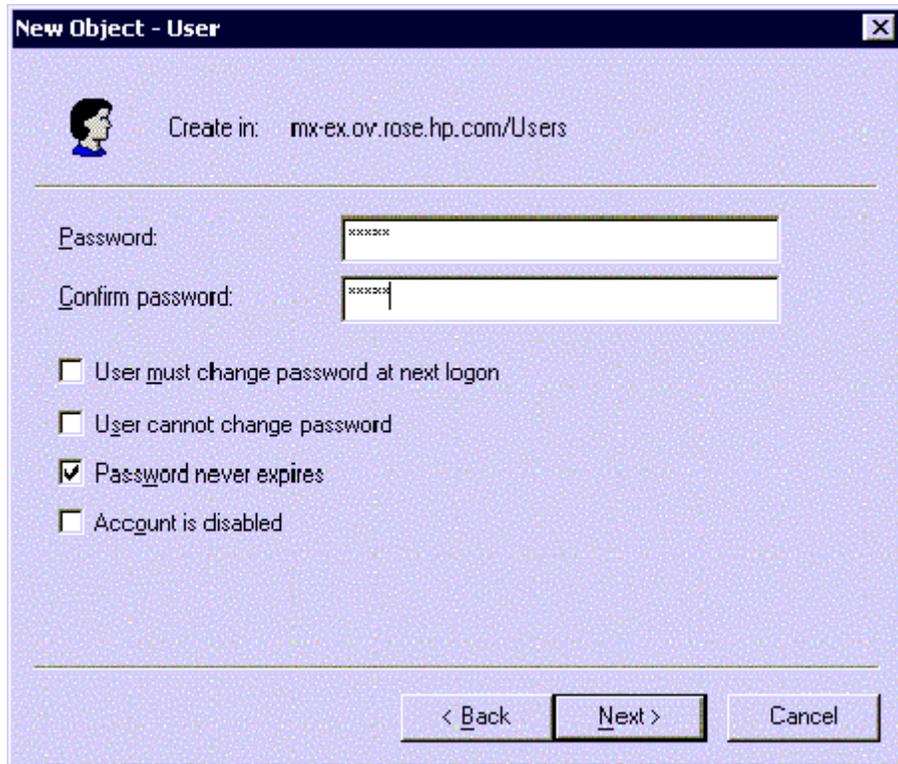


7. In the **New Object** dialog, deselect **Create an Exchange mailbox**, and click **Next**

*Deselecting creating a mailbox*

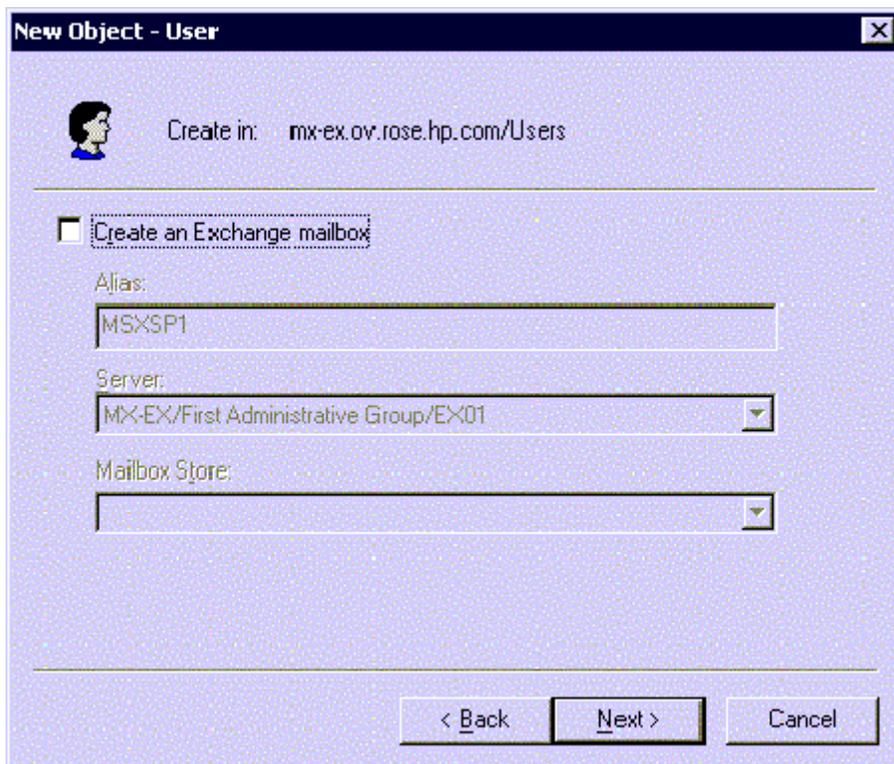


8. In the next dialog, complete creating the user by clicking **Finish**.
9. You are now back at the **Active Directory Users and Computers** dialog. In the right pane, right-click on the service account user just created and select **Properties**.
10. In the service account **Properties** page, select the **General** tab. Enter *OVO Exchange SPI* in the **Display name** and **Description** fields.

*Entering names in Properties dialog*

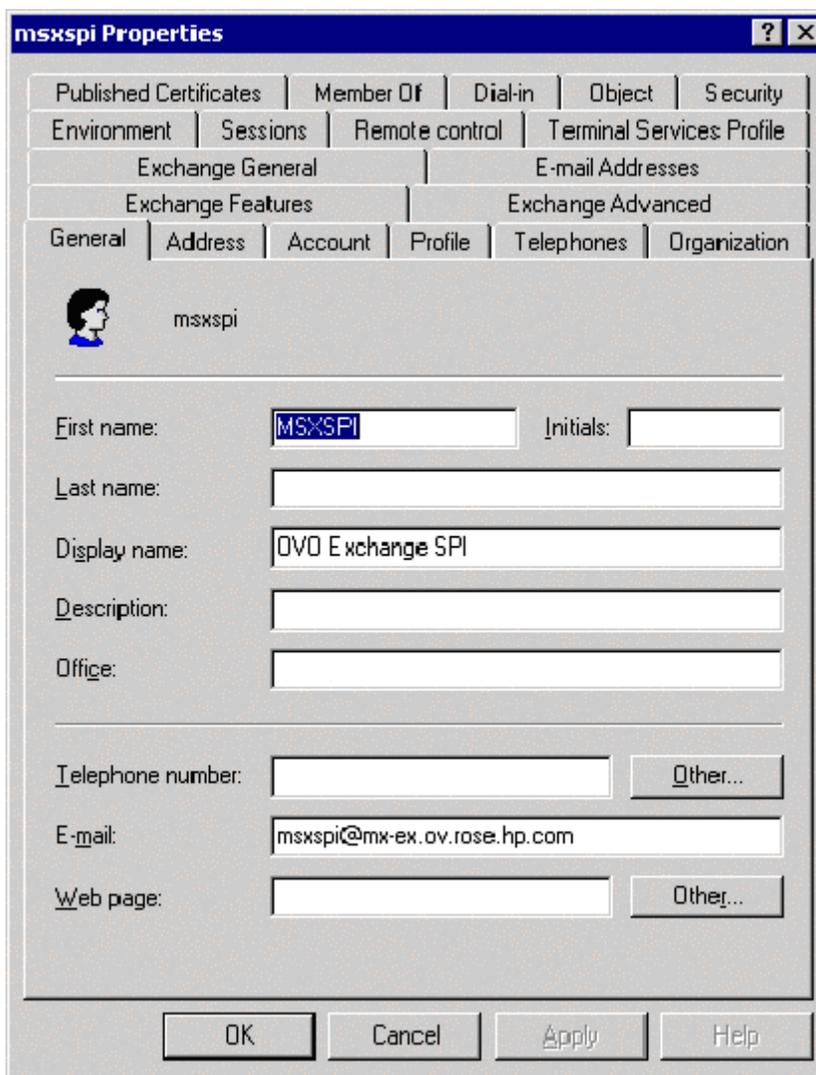

11. Select the **Member Of** tab, and click **Add**.
12. In the **Select Group** dialog select **Exchange Domain Servers** from the top pane.
13. Click **OK** and exit the **Active Directory Users and Computer** dialog.


*Confirming membership privileges*

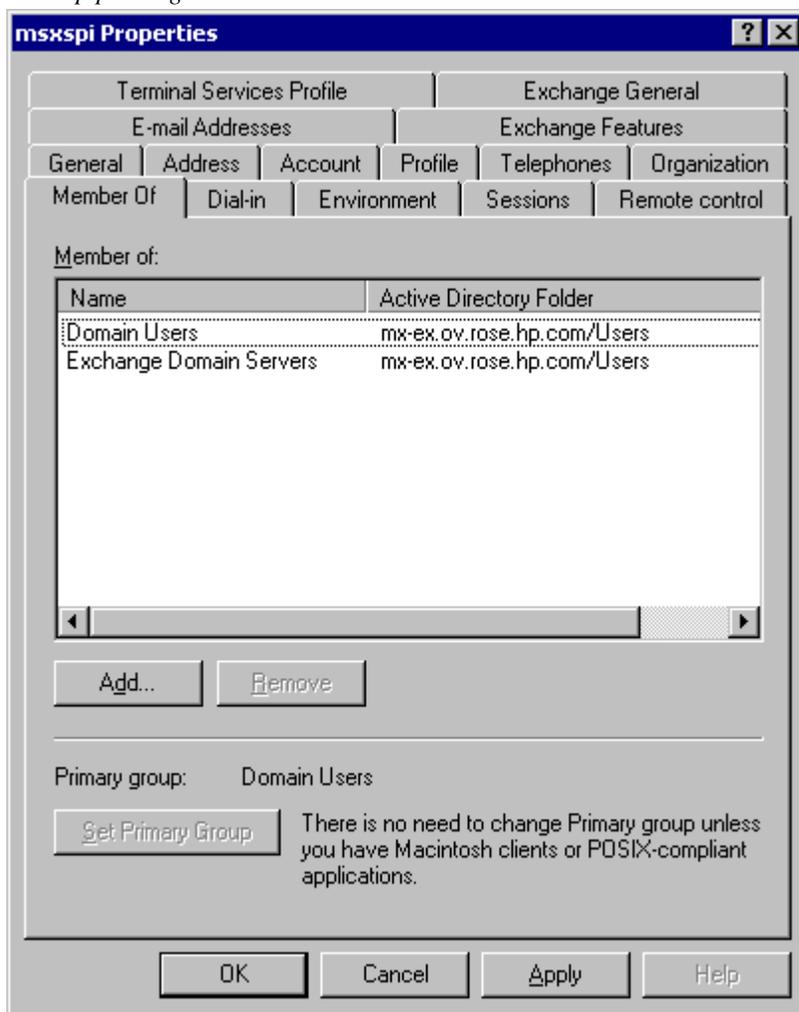

14. Add the service account user to the Local Administrators group on the Exchange server.
  - a. On each targeted Exchange 2000/2003 server, select **Start > Settings > Control Panel**.

- b. Double click **Administrative Tools**. Double click **Computer Management**, then open the **Local Users and Groups** folder. Select and open the **Groups** folder, then double click **Administrators**.
- c. In the **Administrators Properties** dialog, click the **Add** button. Select the correct Domain from the **Look in** drop down list. Select the new service account user from the list, and click **Add**. Click **Apply** and then **OK**.

*Adding service account user to Local Administrators group*

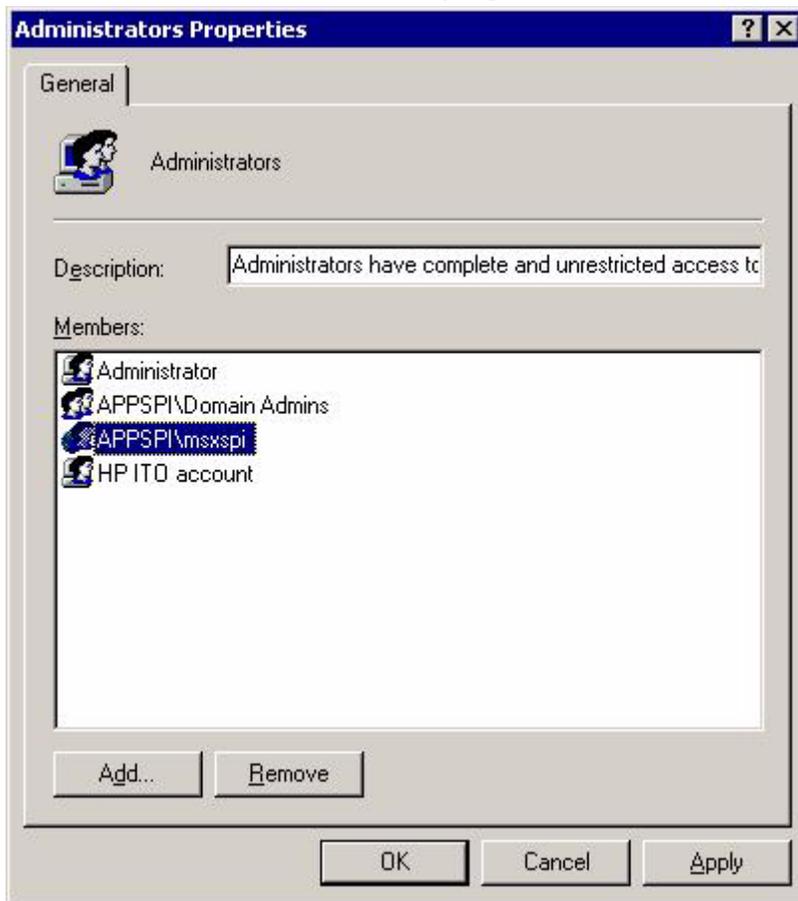

---

NOTE:

---

It can sometimes take a few hours for new group membership and rights to be applied to a service account

---

## **Installation & Configuration**

---

## Introduction

This chapter offers instructions for installing, configuring and removing Exchange SPI components. It covers the following topics:

- ❑ Prior to installing Exchange SPI
- ❑ Installing and configuring the Exchange SPI
  - Template Groups: installation considerations
  - Installation and Basic Configuration
  - Advanced Configuration
- ❑ Removing the Exchange SPI
- ❑ Deleting Exchange SPI templates, applications and message groups.

---

## Prior to Installation

- This release is targeted at OVO for UNIX 7.x or higher. Please verify your current OVO version.
- Before installing this version of the Exchange SPI, any previous version of the Exchange SPI must be removed, see *Deinstalling Exchange SPI* chapter 3 page 81.
- The installation of Exchange SPI depends on the following pieces of software, verify that they are present on the management server before installing the Exchange SPI:
  - DSI2DDF A.01.30.00 or higher (for OVO7 and OVO8/DCE)  
A.02.00.00 or higher (for OVO8/HTTPS).
  - SPI-SHS-OVO (version = A.01.00).
- Every installation of the Exchange SPI requires a basic configuration procedure which is detailed in the section *Installation and Basic Configuration* chapter 3 page 55.
- A more advanced configuration procedure is required before distributing some of the Add-Ons and Advanced templates, for example those for collecting Exchange folder and mailbox information, and testing connections between servers. See *Advanced Configuration* chapter 3 page 65 for the advanced configuration procedures.
- Some templates require a service account with special Exchange privileges. See *Exspi Template Group Requirements* chapter 4 page 89 for template requirements, and see *Creating a Service Account with Proper Access Permissions* chapter 2 page 22 for procedures.
- Exchange SPI requires a data collection agent - OpenView Performance Agent [also known as MeasureWare Agent] or OpenView Operations Subagent 12 [included with OpenView Operations 7.0 and 8.0], to collect data for reporting and graphing purposes. Use the Exchange SPI application **EXSPI Add DataSource** to configure the data source and

start logging data.

- Exchange SPI graphs require HP OpenView PerfView. Exchange SPI reports require HP OpenView Reporter, and the Exchange SPI EXSPI-Reporter.msi must be installed on a Windows node in the same domain where Exchange SPI is managing nodes.

## TEMPLATE GROUPS: INSTALLATION CONSIDERATIONS

After installation, you can view the Exchange SPI templates using the **Templates>Reload Templates** command in the Message Source Templates window.

---

**NOTE:**

In OVO for UNIX version 8.0 and later, templates are referred as policies.

Exchange SPI templates are located under the SPI for Exchange group and can be distributed as groups or individually. The groups are as follows:

- **SPI for MS Exchange:** under this folder are the version specific folders **Exchange 55**, and **Exchange 2000 and 2003**. Template groups are prefixed with **55** for Exchange 5.5 and **60** for Exchange 2000 and 2003. The requirements for each group are as follows:
  - **EXSPI-xx-Quick Start** templates, in general require the HP ITO Account, see *Exspi Template Group Requirements* chapter 4 page 89.
  - **EXSPI-xx-Add-Ons** templates are designed to monitor specific software components, which may or may not be installed on the MS Exchange Server (for example, Lotus Notes must be installed for the EXSPI-60 Lotus Notes Connector templates to work). Select templates for the software components you are using on the targeted MS Exchange Server.
  - **EXSPI-xx-Advanced** templates and **EXSPI-xx-Add-Ons** generally require a service account with special Exchange privileges. See *Creating a Service Account with Proper Access Permissions* chapter 2 page 22 for details.

All data collection templates require that a data collection agent (the OV Performance or OVO subagent) is installed and running on the managed node.

---

## Installation and Basic Configuration

The **Basic** Exchange SPI configuration is designed to get you started quickly, using the Quick Start template group that requires only the HP ITO Account as a basis for server monitoring. Many of the templates in the Add-Ons and Advanced template groups require a service account with special Exchange privileges, which requires the more **Advanced** configuration procedure covered later in this chapter.

When the basic installation and configuration procedure is complete, you will have completed the following tasks:

- ❑ **Task 1:** Install Exchange SPI on the management server.
- ❑ **Task 2:** Add nodes to the node group EXSPI.
- ❑ **Task 3:** Install OVO agents on all MS Exchange server systems (required if the OVO Windows agent is not yet distributed).
- ❑ **Task 4:** Install OVO agents on the management server (needed for some of the OV utilities that are used by Exchange SPI applications).
- ❑ **Task 5:** Assign responsibilities for the OVO Operator.
- ❑ **Task 6:** Distribute Exchange SPI actions, commands, monitors to the Exchange servers.
- ❑ **Task 7:** Run the **EXSPI Add Data Source** application, and configure data sources.
- ❑ **Task 8:** Assign and distribute Quick Start template groups to managed nodes running MS Exchange server.

### TASK 1: INSTALL EXCHANGE SPI ON MANAGEMENT SERVER

**Prerequisite:** It is not necessary to stop OVO sessions before beginning the Exchange SPI installation, however the following need to be installed on the management server:

- OpenView Operations (OVO) for UNIX version 7.x or higher

- DSI2DDF A.01.30.00 or higher for OVO7 and OVO8/DCE, and A.02.00.00 or higher for OVO8/HTTPS.

---

**NOTE:**

---

The instructions that follow show the command line usage of `swinstall`. For HP-UX systems you can also use the graphical user interface (GUI), but the procedure is not covered here.

The Exchange SPI is available on the *HP OpenView Operations for UNIX Applications CD-ROM*. There are two CDs in the Applications CD-ROM set, the first contains the products' management server install packages, and the second contains the *OpenView Reporter* and *OpenView Performance Manager* integrations for the applications. At this point use the first CD.

For an **HP-UX 11.0** management server, enter:

```
swinstall -s /cdrom/OV_DEPOT/11.OHPUX.sdtape SPI-EXCHANGE-OVO
```

For a **Solaris** management server, enter:

```
swinstall -s /cdrom/OV_DEPOT/SOLARIS.sdtape SPI-EXCHANGE-OVO
```

## **TASK 2: ADD NODES TO THE NODE GROUP EXSPI**

Upon installation Exchange SPI creates a Node Group **EXSPI**. All Exchange nodes to be managed should be added to this node group, so that tasks such as installing agent software, running applications, and distributing actions/commands/monitor/templates can be done for the whole node group, instead of needing to select each node.

## **TASK 3: INSTALL OVO AGENTS ON MS EXCHANGE SERVERS**

Install an OVO Windows agent on all MS Exchange servers. (If you need details for installing the OVO agent, refer to the *OVO Installation Guide for the Management Server*.)

## **TASK 4: INSTALL OVO AGENT ON OVO MANAGEMENT SERVER**

Install an OVO UNIX agent on the OVO Management Server. (For details on installing the OVO agent, refer to the *OVO Installation Guide for the Management Server*.)

---

**NOTE:**

---


This is required for the Exchange SPI applications that run on the management server.

## **TASK 5: ASSIGN RESPONSIBILITIES FOR OVO OPERATOR**

All target hosts for Exchange SPI must be OVO managed nodes and must be running on an OVO intelligent agent.

1. Log on to OVO as the OVO administrator (`opc_admin`).
2. Select **Window > User Bank**
  - a. Select the **opc\_admin** user
  - b. Choose **Actions > User > Modify**
  - c. Press the **Responsibilities** button and use the Responsibilities for Operator (`opc_admin`) window to view messages.

*The Responsibilities for Operator window*

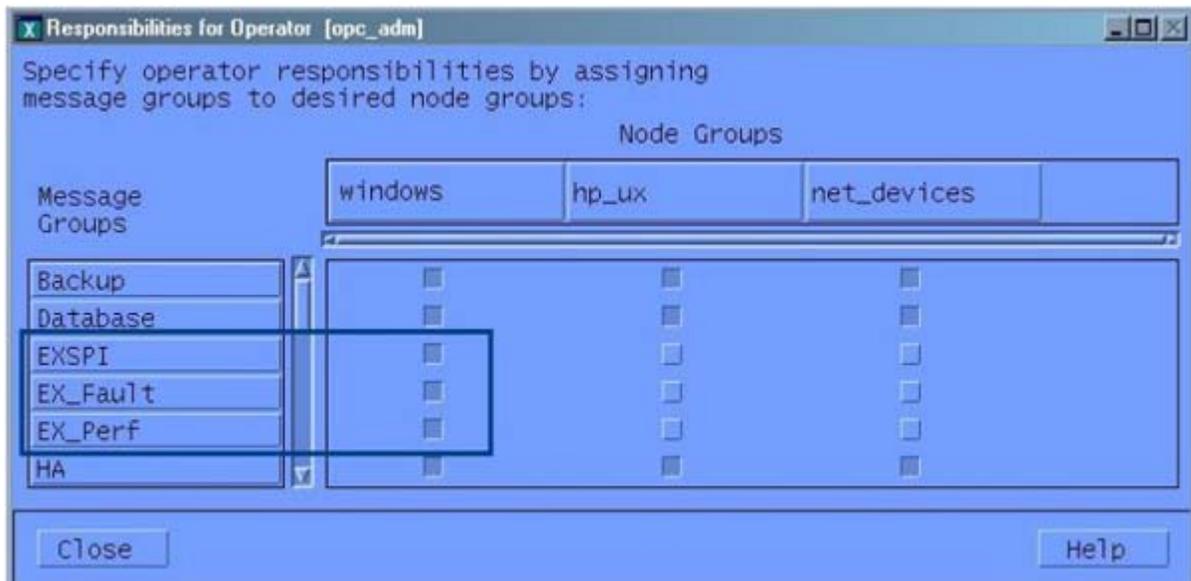


3. In the Node Group that contains your Exchange managed node, select the following Exchange SPI message groups:
  - EXSPI
  - EX\_Fault
  - EX\_Perf
4. Use the **Actions > Browser > Start/Reload** from the OVO User Bank menu.

## **TASK 6: DISTRIBUTE EXCHANGE SPI ACTIONS, COMMANDS, MONITORS**

To collect Exchange data, you must complete the following steps:

1. Distribute Exchange SPI actions, commands, monitors to the Exchange servers by selecting **Actions>Agents>Install/Update SW & Config** from the OVO Node Bank menu.

*Install/Update OVO Software and Configuration window*

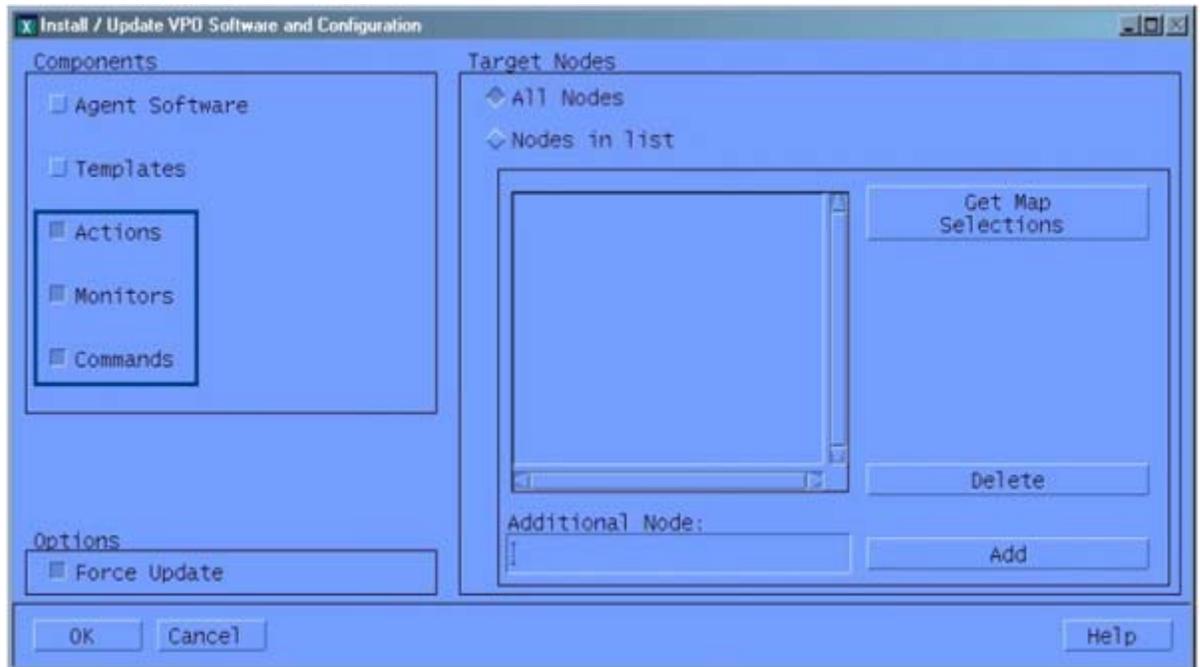

2. In the Install/Update OVO Software and Configuration window check the following checkboxes to select components:
  - Actions
  - Monitors
  - Commands
3. Check the **Nodes in List Requiring Update** checkbox.
4. Check the **Force Update** checkbox.
5. If a node was not selected previously, select the node in the Node Bank and use **Get Map Selections** to add the Exchange server(s) to the target node(s) list.
6. Click **OK**.

7. The following message is displayed in the message browser:


The following configuration information was successfully distributed: Actions, Commands, Monitors

### **TASK 7: RUN THE EXSPI ADD DATASOURCE APPLICATION AND CONFIGURE DATASOURCES**

The OVO data collection agent collects, logs, and timestamps data from individual systems. If you use OV Performance Agent (MeasureWare Agent), you can use PerfView to graph the data; if you use OpenView Reporter, you can use it to generate reports displayed as Web pages.

1. At the OVO console, from the Window menu, select **Application Bank>EXSPI Admin**.
2. To create data sources for the OVO data collection agent, run **EXSPI Add DataSource** for each managed node.

*Adding Datasource for HP OpenView Subagent (CODA)*

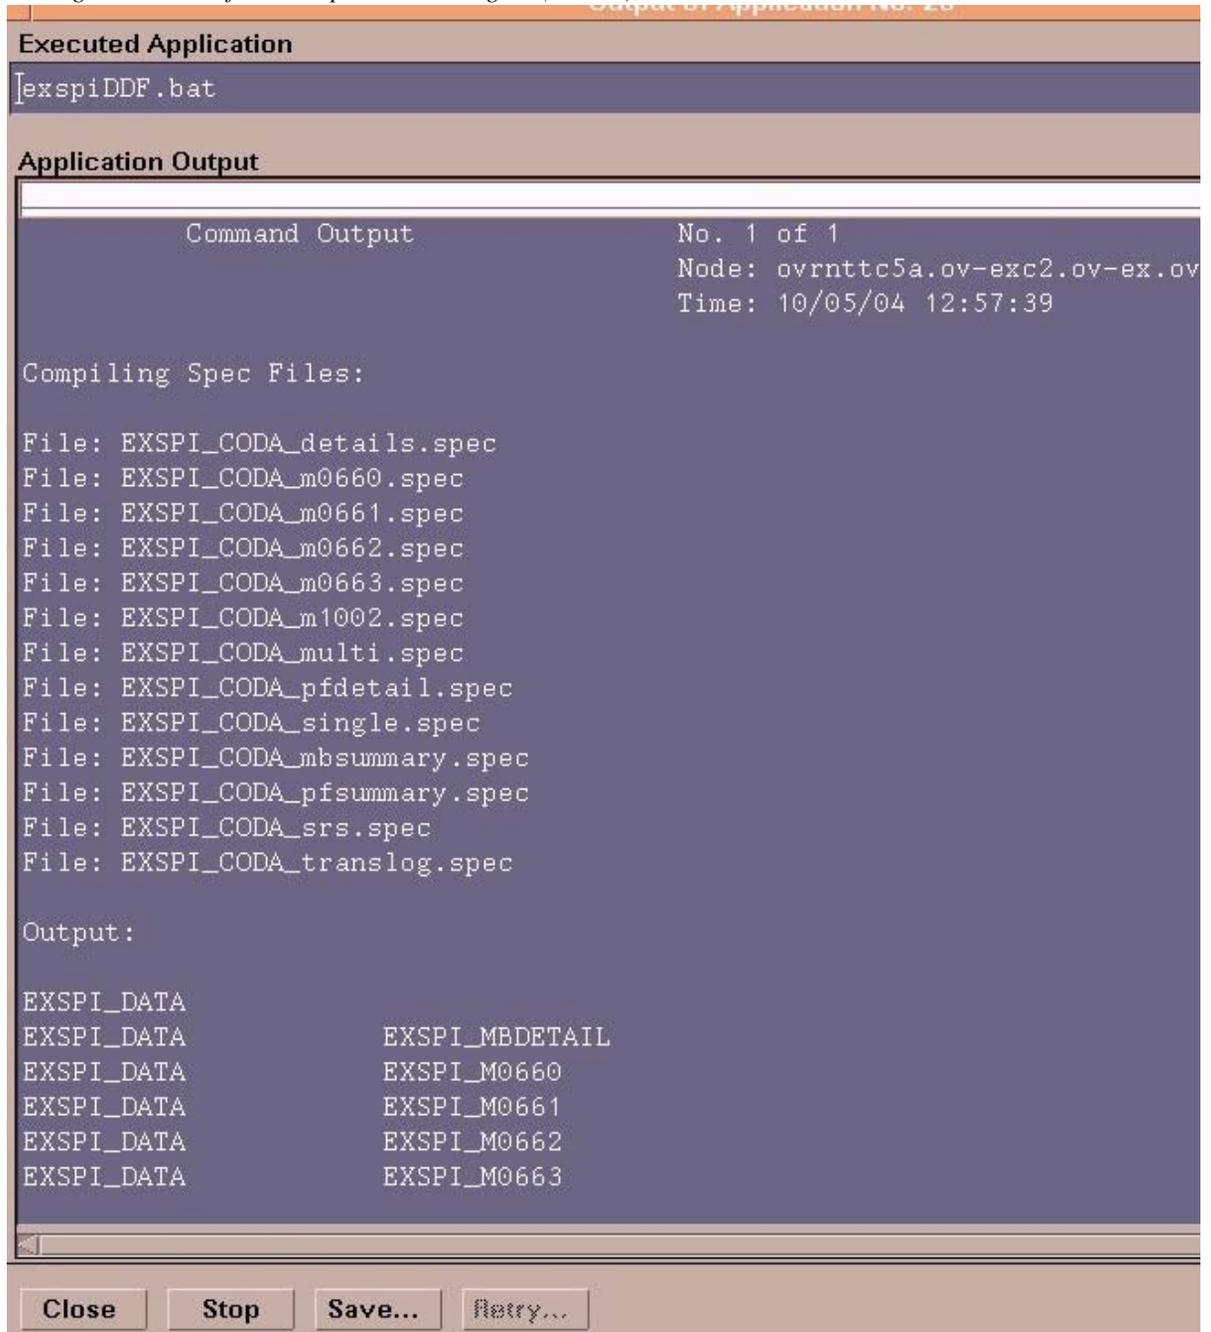

*Adding Datasource for OV Performance Agent (MWA)*

```
Command Output                                     No. 1 of 1
                                                    Node: ov-ext10.ov-exc2.ov-ex.ov
                                                    Time: 10/05/04 13:10:27

CLASS EXSPI_MBDDETAIL = 100815
LABEL "IS Details"
INDEX BY DAY
MAX INDEXES 35
ROLL BY DAY
RECORDS PER HOUR 12;

METRICS

INSTANCE_KEY = 81500
# INSTANCE_KEY CODA_CATEGORYTYPE = KEY
Label "INSTANCE_KEY"
TYPE TEXT LENGTH 256;

INTERVAL_KEY = 81501
# INTERVAL_KEY CODA_CATEGORYTYPE = ATTRIBUTE
Label "INTERVAL_KEY"
TYPE TEXT LENGTH 64;

MAILBOX_NAME = 81502
# MAILBOX_NAME CODA_CATEGORYTYPE = ATTRIBUTE
Label "MAILBOX_NAME"
TYPE TEXT LENGTH 128;

SERVER_NAME = 81503
```

## TASK 8: ASSIGN/DISTRIBUTE QUICK START TEMPLATES

---

**NOTE:**

---

In OVO for UNIX version 8 and later, templates are referred to as policies.


To assign and distribute templates to managed nodes:

1. Open the OVO Node Bank.
2. Select the desired managed node(s) designated to run Exchange SPI.
3. To assign (select) the templates for distribution, select **Actions>Agents>Assign Templates** from the menu bar.
4. In the Define Configuration window select **Add**.
5. In the Add Configuration window select **Open Template Window...**
6. In the Message Source Templates window double-click the **SPI for Exchange** group to display the subgroups.
7. Select, and double-click **Exchange 2000 and 2003** or **Exchange 5.5**.
8. Select the desired **EXSPI** template group or individual template(s).
9. Click **Get Template Selections** from the Add Configuration window.
10. Click **OK** from the Add Configuration window.
11. Click **OK** from the Define Configuration window.

The desired templates have been selected for distribution. Next, distribute them to the managed nodes.

12. To distribute the assigned templates, select **Actions >Agents>Install/Update SW & Config** from the Node Bank menu.
13. In the **Install/Update OVO Software and Configuration** window check the **Templates** checkbox to select it.

*Distributing templates*

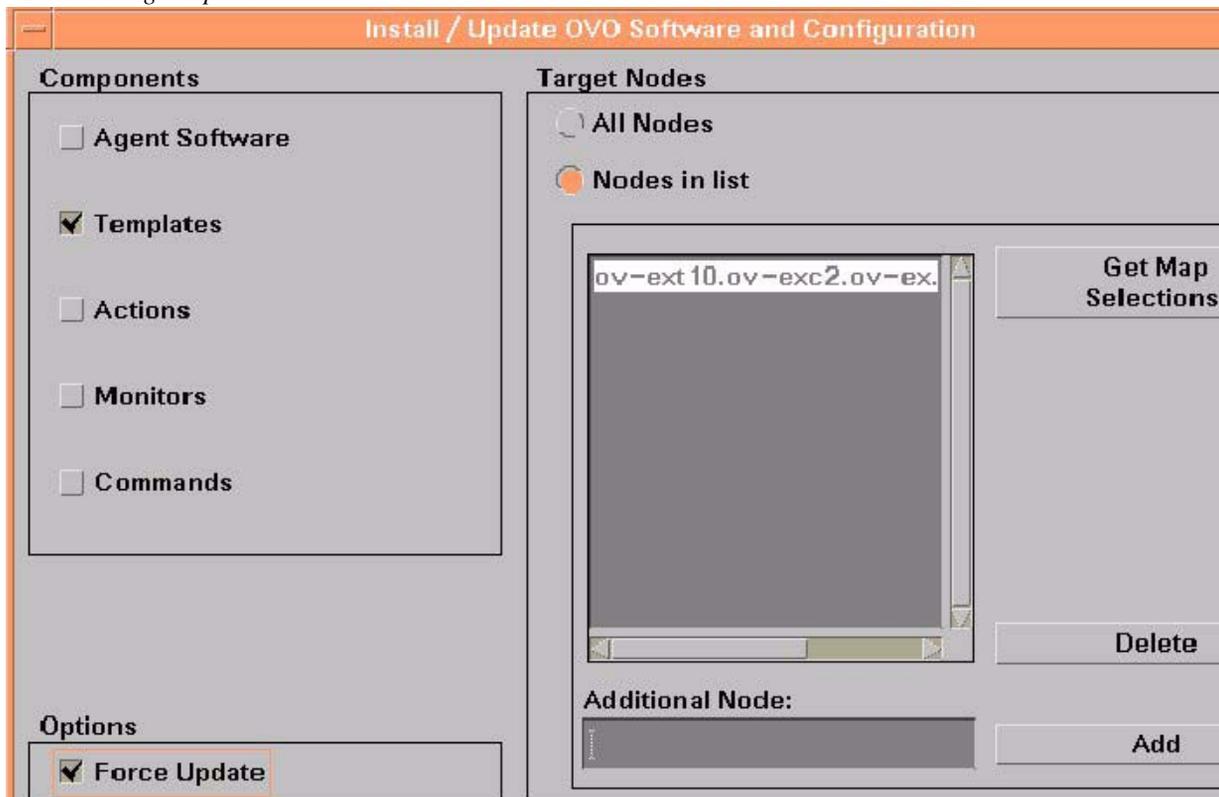

14. Check the **Nodes in List** and the **Force Update** checkboxes.
15. If a node was not selected previously, select the node in the node bank and click **Get Map Selections** to list the target node(s), then click **OK** to distribute templates to the managed node(s).
16. The following message displays in the message browser:

The following configuration information was successfully distributed: Templates

You have now completed the standard Exchange SPI installation and configuration process. The Exchange SPI templates are distributed to the selected managed nodes and Exchange SPI monitors will begin running.

---

## Advanced Configuration

**Prerequisite:** Complete tasks in the section *Installation and Basic Configuration* chapter 3 page 55.

Advanced configuration covers the distribution of templates that require a service account with special Exchange privileges. When finished, you will have completed the following tasks:

- ❑ **Task 1:** Create the service account.
- ❑ **Task 2:** Grant Exchange access permissions to the user.
- ❑ **Task 3:** Run the **EXSPI Node Config** application and configure the service account on managed nodes.
- ❑ **Task 4:** Enable message tracking.
- ❑ **Task 5:** Run the **EXSPI MBOX Config** application, and create a MSXSPI<host\_name> mailbox for each Exchange server.
- ❑ **Task 6:** Run the **EXSPI Ping Config** application to configure MS Exchange servers for End to End Message Ping.
- ❑ **Task 7:** Assign/distribute Add-On and Advanced templates.

The Exchange SPI can be configured to accommodate cluster environments where fail-overs allow uninterrupted Exchange availability, see *Using Exchange SPI in high availability environments* chapter 5 page 98 for more information.

### TASK 1: CREATE THE SPECIAL SERVICE ACCOUNT

A service account with special Exchange privileges is needed for each Windows logon domain where your managed Exchange servers reside. See the procedures in *Creating a Service Account with Proper Access Permissions* chapter 2 page 22 for details on creating this type of account in Windows NT and Windows 2000/2003 operating environments.


## **TASK 2: GRANT EXCHANGE ACCESS PERMISSIONS TO SERVICE ACCOUNT**

See the procedures in *User Privileges* chapter 2 page 21, where the procedures for granting proper access permissions for each combination of Exchange/Windows environment is outlined.

## **TASK 3: RUN THE EXSPI NODE CONFIG APPLICATION AND CONFIGURE SERVICE ACCOUNT ON MANAGED NODES**

1. Select all the desired Exchange managed nodes.
2. Drag these nodes and drop them on the **EXSPI Node Config** application located in the EXSPI Admin application group.
3. When prompted, enter the domain, user and password for the user account (created in *Task 1: Create the special service account* chapter 3 page 65).  
**NOTE:** When you run this application, be sure to enter the correct domain name, user and password. This domain is not the DNS domain name but the NT domain name.

*EXSPI Node configuration window*

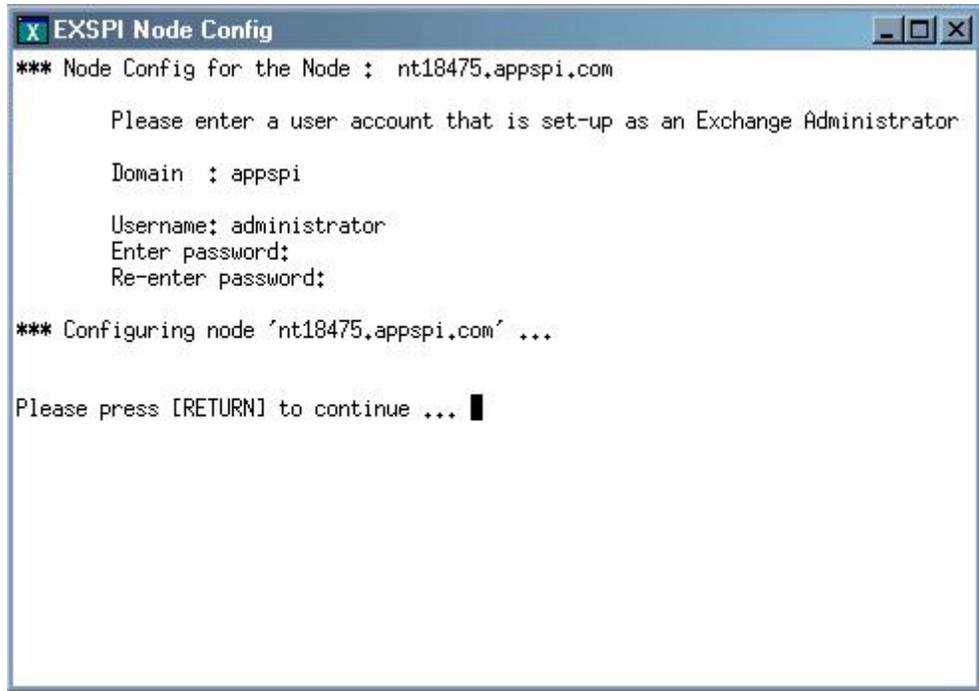

---

**NOTE:** If Exchange nodes are managed at a later date, perform this procedure for all newly managed Exchange nodes.

---

## **TASK 4: ENABLE MESSAGE TRACKING**


To ensure that all messages routed through a server are added to the OVO message tracking logs you need to enable message tracking. You can record information about the sender, the message, and the recipient. If you need to log more detailed information, you can also record the subject line of the Email message.

### **4A: ENABLING MESSAGE TRACKING FOR EXCHANGE 5.5**

1. Select **Start > Programs > Microsoft Exchange > Microsoft Exchange Administrator**.


2. Expand the site level and Configuration to view selections beneath it.
3. In the details pane double-click **Information Store Site Configuration**.
4. In the **Information Store Site Configuration Properties** dialog, check **Enable message tracking**, and select **OK**.

*Information Store Site Configuration dialog*

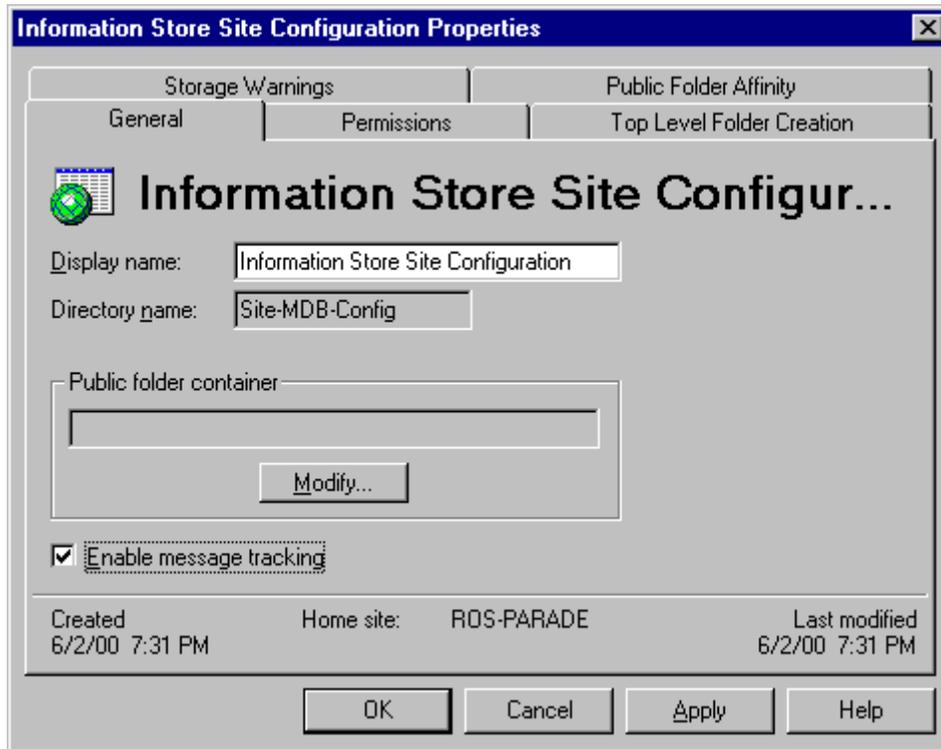

5. Repeat steps 3 and 4 for MTA Site Configuration.

*MTA Site Configuration dialog*

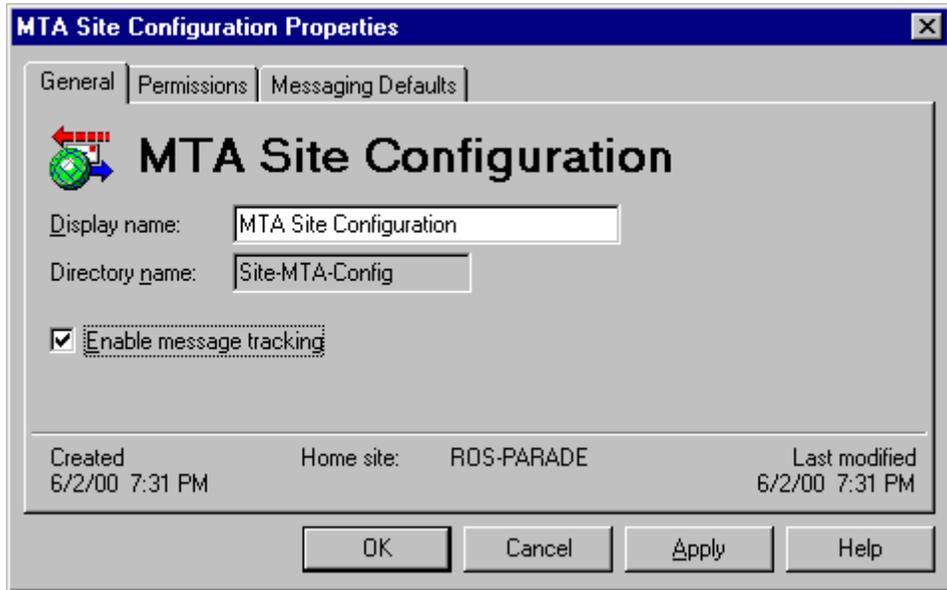

If the Internet Mail Service connector does not exist, skip the following steps.

6. In the left pane select **Connections**.


In the right pane select Internet Mail Service, check the Enable message tracking checkbox, and click **OK**.

## **4B: ENABLING MESSAGE TRACKING FOR EXCHANGE 2000 AND 2003**

Use the Exchange SPI application **Enable Message Tracking** to set message tracking on, for servers only. All messages that are routed through the selected servers will then be added to the message tracking logs. This information is collected by the EXSPI-60 Dc-TrackLog Data collection templates. You can record information about the sender, the message, and the recipient. If you need to log more detailed information, you can also record the subject line of Email messages.

The **Enable Message Tracking** application needs to be modified to include the user name and password of a service account that has Exchange administrative privileges. Open the Enable Message Tracking application, and add the *user name* and *password*.to the **Execute as User** field, before executing.

*Enabling Message Tracking for Exchange 2000 and 2003*

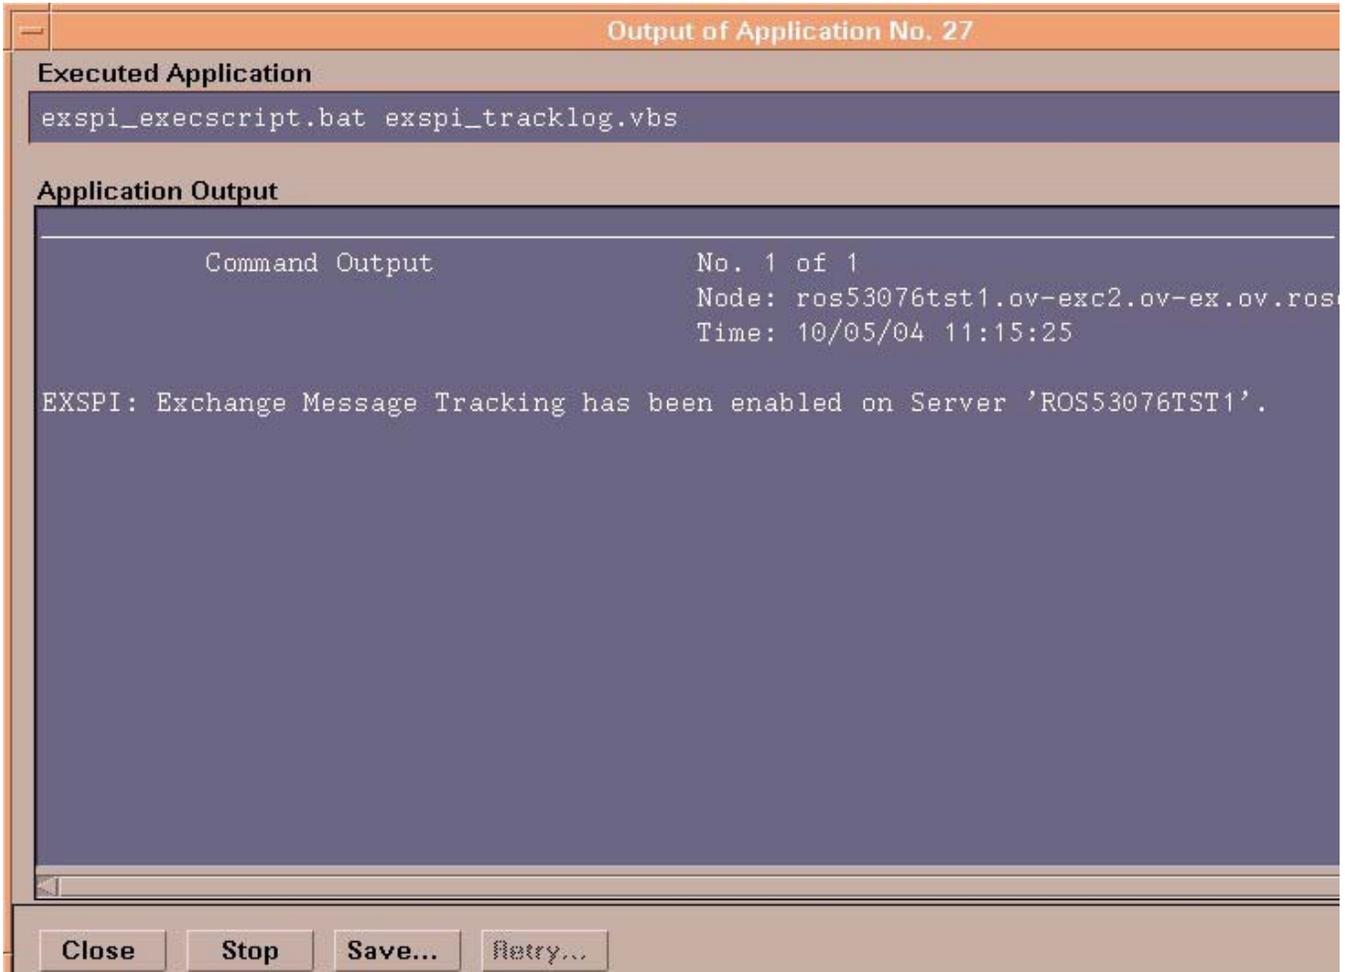

## TASK 5: RUN THE EXSPI MBOX CONFIG APPLICATION AND CREATE MAILBOXES

In addition to the MSXSPI user, a mailbox is required for accessing mailbox and folder information, necessary for End to End Message Ping and Reporter Collection templates. Use the Exchange SPI application **MBOX Config** (located in the EXSPI Admin application group) to create the mailbox:

1. Modify the **MBOX Config** application. The user name and password of a service account with Exchange administrative privileges needs to be given for the application to execute. (Change the **Execute as User** field, add *user name* and *password*.)
2. Run the **EXSPI MBOX Config** application to configure mailboxes for the Exchange servers (you can select multiple nodes simultaneously).

For each Exchange server a mailbox is created with the prefix MSXSPI and Windows hostname. For an Exchange 5.5 server, EXSPI MBOX Config application creates a mailbox MSXSPI<host\_name> for the primary Windows account MSXSPI. For an Exchange 2000 or 2003 server, it creates the mailbox MSXSPI<host\_name> for account MSXSPI<host\_name> (which it also creates.)


For example, for the node **rosspi4.rose.hp.com** (Internet name) and Windows name **ROSSPI4** a mailbox is created called MSXSPIROSSPI4.

---

NOTE:

In order to create a different mailbox with a different name, see the procedure *Changing the Mailbox name* chapter 6 page 120.

*MBox Config application output*

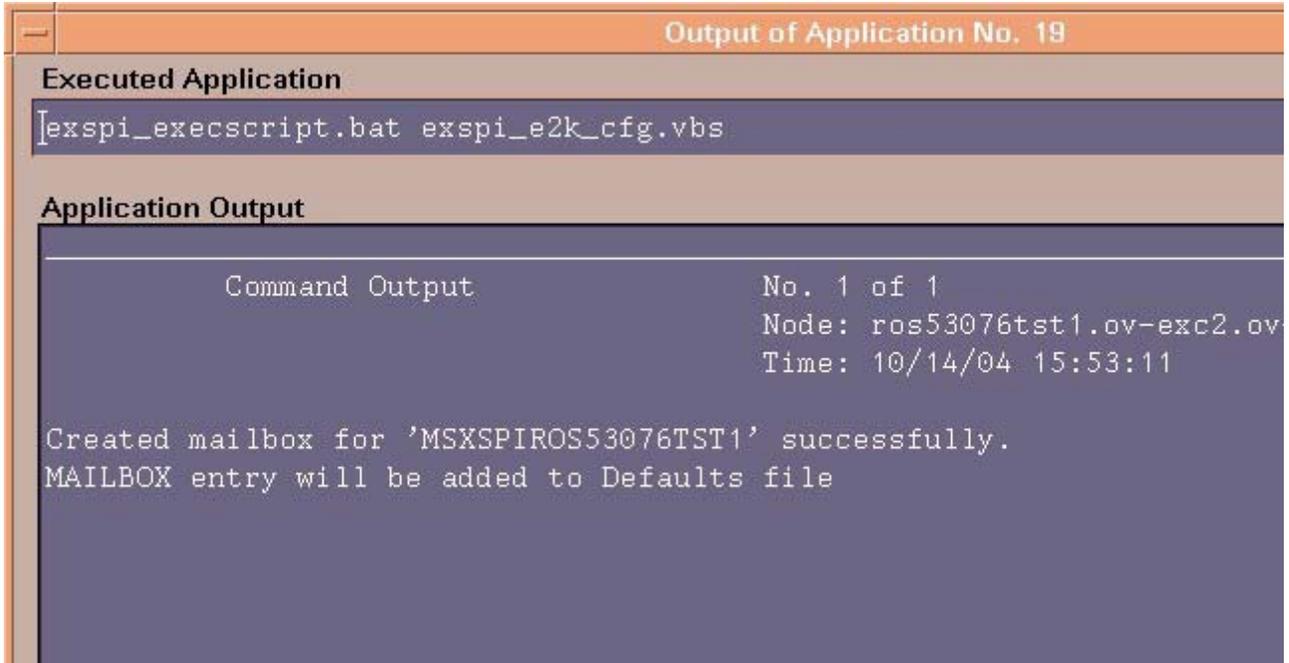

```
Output of Application No. 19
Executed Application
[exspi_execscript.bat exspi_e2k_cfg.vbs
Application Output
Command Output                               No. 1 of 1
                                               Node: ros53076tst1.ov-exc2.ov
                                               Time: 10/14/04 15:53:11
Created mailbox for 'MSXSPIROS53076TST1' successfully.
MAILBOX entry will be added to Defaults file
```

**NOTE:**

If you receive an error in the above step or you cannot automatically create mailboxes, you must manually complete the following on each Exchange server:

- For each Exchange server create a mailbox with the prefix **MSXSPI** and Windows hostname.
- For Exchange 5.5, create this mailbox with primary Windows account **MSXSPI**.
- For Exchange 2000 or 2003, create this mailbox with primary Windows account **MSXSPIROSSPI4** (this must first be created).

## **TASK 6: SET UP MESSAGE PING SERVER CONNECTIONS AND ALARMS**

To measure the round trip time required for a message to travel from one server to another and then back to the originating server, you can use the *EXSPI-60/55 End to End Message Ping* template group.

---

**NOTE:**

---

With Exchange SPI version A.08.00 and later, pinging Exchange 5.5 servers from an Exchange 2000/2003 server, or vice versa, is not supported.

Before you can use the End to End Message Ping templates, you must configure the pair of servers that you want to test.


### **For Exchange 5.5 servers:**

To configure the servers, complete the following steps:

1. Run the **EXSPI Ping Config** application on the OVO management server.

The EXSPI Ping Config application opens a default file as follows:

*Format of the file for Exchange 5.5 EXSPI Ping Config*

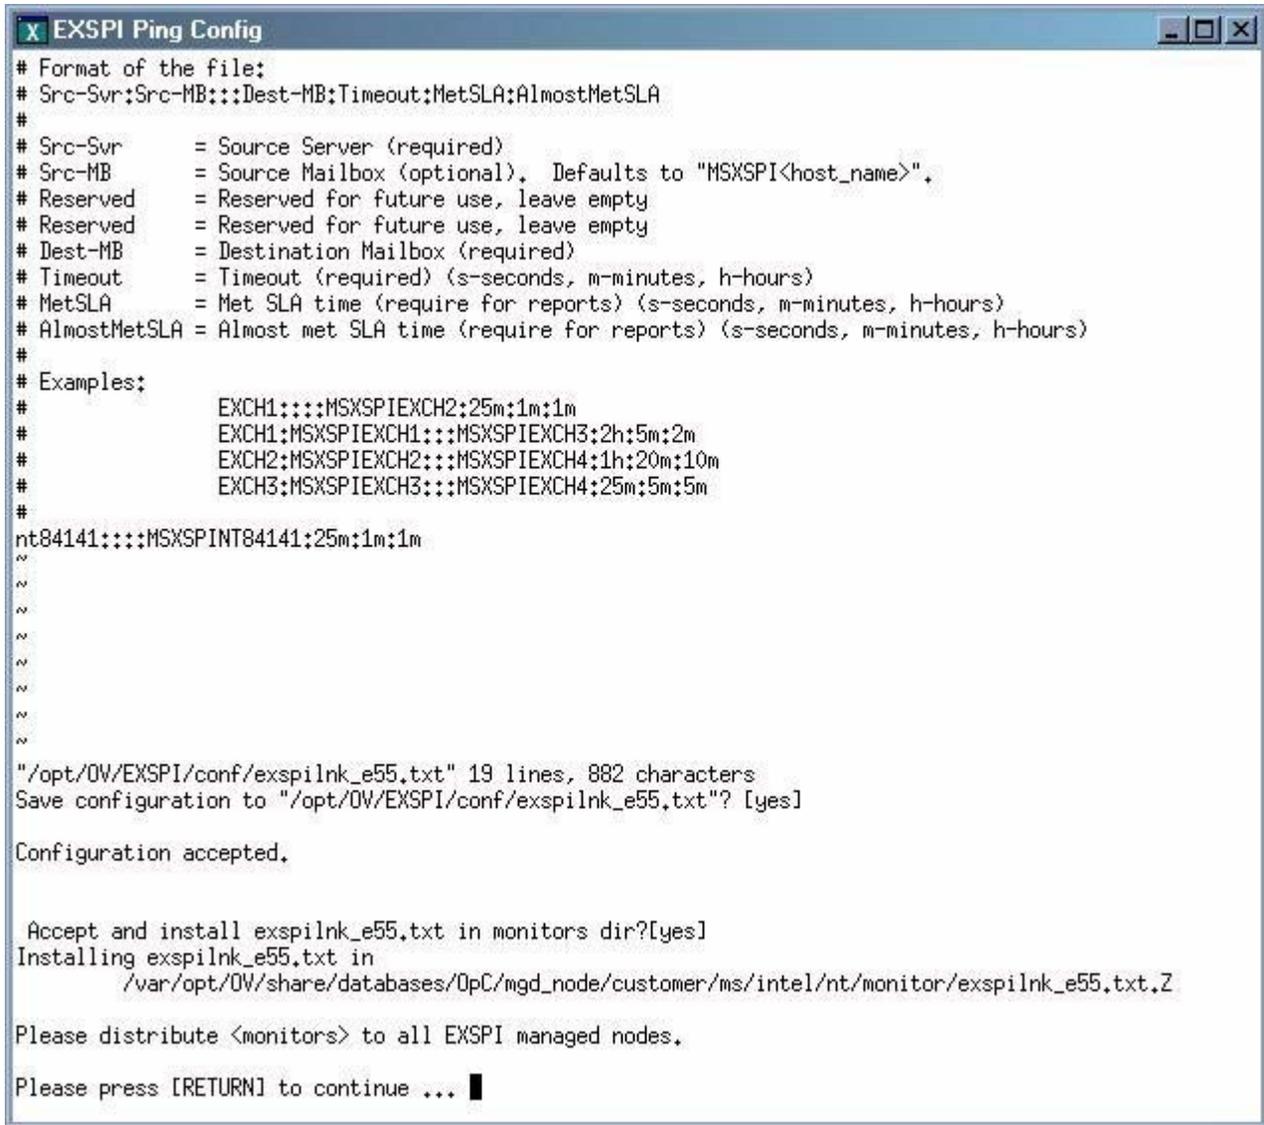

```
x EXSPI Ping Config
# Format of the file:
# Src-Svr:Src-MB:::Dest-MB:Timeout:MetSLA:AlmostMetSLA
#
# Src-Svr      = Source Server (required)
# Src-MB      = Source Mailbox (optional). Defaults to "MSXSPI<host_name>".
# Reserved    = Reserved for future use, leave empty
# Reserved    = Reserved for future use, leave empty
# Dest-MB     = Destination Mailbox (required)
# Timeout     = Timeout (required) (s-seconds, m-minutes, h-hours)
# MetSLA     = Met SLA time (require for reports) (s-seconds, m-minutes, h-hours)
# AlmostMetSLA = Almost met SLA time (require for reports) (s-seconds, m-minutes, h-hours)
#
# Examples:
#           EXCH1:::MSXSPIEXCH2:25m:1m:1m
#           EXCH1:MSXSPIEXCH1:::MSXSPIEXCH3:2h:5m:2m
#           EXCH2:MSXSPIEXCH2:::MSXSPIEXCH4:1h:20m:10m
#           EXCH3:MSXSPIEXCH3:::MSXSPIEXCH4:25m:5m:5m
#
nt84141:::MSXSPIEXCH1:25m:1m:1m
~
~
~
~
~
~
~
~/opt/OV/EXSPI/conf/exspilnk_e55.txt" 19 lines, 882 characters
Save configuration to "/opt/OV/EXSPI/conf/exspilnk_e55.txt"? [yes]

Configuration accepted.

Accept and install exspilnk_e55.txt in monitors dir?[yes]
Installing exspilnk_e55.txt in
    /var/opt/OV/share/databases/OpC/mgd_node/customer/ms/intel/nt/monitor/exspilnk_e55.txt.Z

Please distribute <monitors> to all EXSPI managed nodes.

Please press [RETURN] to continue ... █
```

2. Enter information about the servers to replace each entry separated by a colon (:) in the format

```
Src-Srv:Src-MB:::Dest-MB:Timeout:MetSLA:AlmostMetSLA
```

- **Source Server** - The server that the ping originates *from*. Each server where EX-SPI is distributed has the same file, so the EX-SPI collector/analyzer will parse this file and use all lines where the Source Server matches the server where it is run from.
- **Destination Server** - The destination server, used only for SMTP systems, is necessary only when the site directory does not contain the destination mailbox. In this case, SMTP is used and the field would contain the SMTP server name (the server following the "@"; for example, the entry for mailbox "brendan\_belcastro@am.exch.hp.com", would contain "am.exch.hp.com."
- **Destination Mailbox** (required) -The mailbox to send the ping *to*. This field is usually the only required destination entry.
- **Timeout** (required) (s-seconds, m-minutes, h-hours): - If a sent message does not return in the defined timeout interval, EXSPI logs it as a failure and sends a message to OVO. Failed messages are tallied in terms of count and percentage within a report. The timeout value must be larger than the values for **MetSLA** and **AlmostMetSLA** so that a returned message can be processed using these values. It may have **Exceeded SLA** even though it has not exceeded the timeout interval. A **Failed/Timeout** message occurs, therefore, only when the message never returns and the timeout period is exceeded.

---

## NOTE

The minimum timeout value should be set slightly less than the collection interval. For example, if the collection interval for metric 1002 is 30 minutes (the default), the timeout should be set to at least 25 minutes. The logic is that because the next measurement occurs only every 30 minutes, you should allow up to that amount of time for any messages to return before "giving up" and generating a failure. If you keep the timeout value within the collection interval and the reply message does return, it can be processed as Met, Almost Met or Exceeded as opposed to Failed/Timeout.

---

- **MetSLA** (required for reports) (s-seconds, m-minutes, h-hours) - If the round trip time is greater than this value, the message is logged as either Almost Met SLA or Exceeded SLA. This value is required if data is being sent to MeasureWare Agent DSI for reporting (-l option when running `exspi_e2k.exe` or `exspi_e55.exe`). It is optional if only using alarms.
- **AlmostMetSLA** (required for reports) (s-seconds, m-minutes, h-hours) - If the round trip time is greater than the MetSLA value but less than or equal to MetSLA plus AlmostMetSLA, the message is logged as Almost Met SLA. Otherwise, when the round trip time is higher than MetSLA plus AlmostMetSLA, it is logged as Clearly Exceeded SLA. This parameter is required if data is being logged to MeasureWare Agent DSI (-l option when running `exspi_e2k.exe` or `exspi_e55.exe`), optional if only using alarms.

---

**NOTE**

*Timeout*, *MetSLA*, and *AlmostMetSLA* values can have optional identifiers that denote the measurement units the value represents; for example, 4m (4 minutes) 30s (30 seconds) or 1h (1 hour). The default unit is seconds; for example, the entry 4 is recognized as 4 seconds.

---

### **Procedure for EXSPI Ping Config for Exchange 2000/2003 servers**

1. Select the Exchange managed nodes that you wish to configure in the VPO Node Bank.
2. Drag these nodes and drop them on the **EXSPI Ping Config** application located in the **EXSPI Admin** application group, under the appropriate Exchange version.
3. A window appears with the configuration file, as shown in the figure below.
4. Edit the file as necessary, then click **Esc**.
5. You will be prompted to save the configuration. Accept the default choice [Yes].
6. A validation will be performed to check if the Timeout is greater than the sum of MetSLA and AlmostMetSLA. After validation, you will be

prompted to accept and install the configuration file in the monitors directory:

```
/var/opt/OV/share/databases/OpC/mgd_node/customer/ms/nt/monitor/
```

7. You have completed configuring the end-to-end Ping, now distribute monitors to the required EXSPI managed nodes. For details about distributing the monitors, see *Task 6: Distribute Exchange SPI actions, commands, monitors* chapter 3 page 58.

**The format of the Exchange 2000/2003 EXSPI Ping Config file is:**

```
Src-Srv:Dest-Srv:Timeout:MetSLA:AlmostMetSLA
```

The user only needs to fill in the following fields:

- Src-Srv
- Dest-Srv
- Timeout (to be entered in seconds, with no suffix)
- MetSLA (to be entered in seconds, with no suffix)
- AlmostMetSLA (to be entered in seconds, with no suffix).

*EXSPI Ping Config for Exchange 2000 and 2003*

```
EXSPI Ping Config
# Format of the file:
# Src-Svr;Dest-Svr;Timeout;MetSLA;AlmostMetSLA
#
# Src-Svr      = Source Server (required)
# Dest-Svr     = Destination Server (required)
# Timeout      = Timeout (required) (in seconds)
#              Note: Timeout should be greater than MetSLA + AlmostMetSLA
# MetSLA       = Met SLA time (required for reports) (in seconds)
# AlmostMetSLA = Almost met SLA time (required for reports) (in seconds)
#
# Examples:
#           EXCH1:EXCH2:100:5:5
#           EXCH1:EXCH3:60:5:5
#           EXCH2:EXCH4:100:20:10
#           EXCH3:EXCH4:30:5:5
#
NT84215:NT18475:100:10:10
..
..
```

### **Set Up Different Conditions/ Thresholds for Different Server Pairs Using OVO Object Field & Alarming**

*(OVO High Level Expertise Recommended)*

Alarms can be set to occur with metric EXSPI-60 1002 (Ping). Because you may need to set different thresholds for multiple server pairs, the following examples are offered. The examples show the syntax to insert in the template Conditions, using the OVO object pattern fields so that you can set differing thresholds. Metric 1002 sends the "FromMailbox,ToMailbox" in the object pattern fields with the following definitions:

FromMailbox = **FromServer:FromMailbox**  
ToMailbox = **[ToServer]:ToMailbox**  
where **[ToServer]** is optional

| Config Entry  | Object  |
|---|---|
| EXCH1:MSXSPIEXCH2:25m:1m:1m                             | EXCH1:MSXSPIEXCH1,;MSXSPIEXCH2                |
| EXCH1:MAILBOXEXCH1:MAILOXEXCH3:2h:5m:2m                 | EXCH1:MAILBOXEXCH1,;MAILOXEXCH3               |
| EXCH2:MAILBOXEXCH2:MAILOXEXCH4:1h:20m:10m               | EXCH2:MAILBOXEXCH2,;MAILOXEXCH4               |
| EXCH3:MSXSPIEXCH3:EXCH4.AM.HP.COM:MSXSPIEXCH4:25m:5m:5m | EXCH3:MSXSPIEXCH3,EXCH4.AM.HP.COM:MSXSPIEXCH4 |

For example:

| ConditionName & Type                             | Condition Object Pattern   | Threshold | Explanation   |
|--|--|-----------|---|
| EXSPI-60 1002.1<br>+Message on Matched Condition | EXCH1:MSXSPIEXCH1,;MSXSPIEXCH2                                   | 120       | Threshold condition for ping between System EXCH1 and mailbox MSXSPIEXCH2 on system EXCH2. Object pattern is case sensitive.                            |
| EXSPI-60 1002.2<br>+Message on MatchedCondition  | EXCH1:MSXSPIEXCH1,;MSXSPIEXCH3                                   | 240       | Threshold condition for ping between System EXCH1 and mailbox MSXSPIEXCH3 on system EXCH3. Object pattern is case sensitive.                            |
| EXSPI-60 1002.3<br>-Suppress Matched Condition   | EXCH1:MSXSPIEXCH1,;MSXSPIEXCH2<br>EXCH1:MSXSPIEXCH1,;MSXSPIEXCH3 |           | If the threshold was not exceeded for these two system pairs, you must suppress the message if either of these system pairs gets past 1002.1 or 1002.2. |
| EXSPI-60 1002.4<br>+Message on Matched Condition |  | 60        | A blank object pattern to catch all remaining system pairs.   |

## **TASK 7: ASSIGN/DISTRIBUTE ADVANCED/ADD-ON TEMPLATES**

After completing the advanced configuration steps, you can assign and distribute templates from the EXSPI Advanced and Add-On template groups to the managed node(s) running MS Exchange server. Please refer to *Task 8: Assign/Distribute Quick Start Templates* chapter 3 page 63 for procedures.

The EXSPI Advanced template groups contain two logfile templates which capture Exchange warning and information events. Because Exchange generates numerous warning and information events, you might want to assign these templates only for troubleshooting Exchange:

- Logfile EXSPI-60/55 Exchange Information
- Logfile EXSPI-60/55 Exchange Warnings

You have now completed the advanced configuration installation process. The Exchange SPI is ready to use.

---

## Deinstalling Exchange SPI

This process completely removes the Exchange SPI installation from the OVO management server. Any customized templates or copies of Exchange SPI default templates residing in other OVO template groups should also be removed.

To reinstall Exchange SPI components with the original factory settings, see *Returning to original factory settings* chapter 6 page 121.

Follow these steps in order to ensure a proper removal of the Exchange SPI:

### REMOVING EXCHANGE SPI SOFTWARE FROM THE MANAGEMENT SERVER

**NOTE:**The **swremove** program removes the files from the file system only. The following components must be deleted manually:

- EXSPI Admin group must be removed from the Application bank (see steps 9-12 in *Deleting Exchange SPI templates, applications and message groups* section below).
  - EXSPI, EX\_Perf and EX\_Fault must be removed from the OVO Message group bank (see step 5 in *Deleting Exchange SPI templates, applications and message groups* section below).
  - EXSPI templates need to be deleted (see steps 1-4 in *Deleting Exchange SPI templates, applications and message groups* section below).
1. Open a terminal window and log on as `root`.
  2. In the terminal window run **swremove** by entering:  
`/usr/sbin/swremove SPI-EXCHANGE-OVO`

## DE-ASSIGNING EXCHANGE SPI TEMPLATES FROM MANAGED NODES

After successfully removing the Exchange SPI from the management server using **swremove**, follow these steps to remove Exchange SPI templates from your managed nodes:

1. Open the OVO Node Bank.
2. To deassign the templates from the node, select **Actions>Agents>Assign Templates** from the menu bar.
3. In the Define Configuration window select all Exchange SPI templates or template groups, including any user-customized templates.
4. Click **Remove Templates**.
5. Click **OK**.

## REMOVING EXCHANGE SPI FROM MANAGED NODES

After successfully removing the Exchange SPI from the management server using **swremove**, follow these steps to remove the Exchange SPI software from your managed nodes:

1. Select Actions: **Agents>Install/Update SW & Config** from the menu bar.
2. Check the following checkboxes to select these components for removal:
  - Templates
  - Actions
  - Monitors
  - Commands
3. Click the **Nodes in List Requiring Update** button.
4. If you did not select a node previously, click the **Get Map Selections** button to list the target node(s).

5. Click the **Force Update** button.
6. Click **OK**. The following message appears in the message browser:

The following configuration information was successfully distributed:

Templates Actions Commands Monitors

The Exchange SPI templates and software have now been removed from the selected managed node(s). The Exchange SPI templates still reside in the OVO data repository and must be deleted manually. Continue with *Deleting Templates, Applications and Message groups from the management server* chapter 3 page 83.

## DELETING TEMPLATES, APPLICATIONS AND MESSAGE GROUPS FROM THE MANAGEMENT SERVER

After successful completion of **swremove**, Exchange SPI templates and certain applications (**EXSPI admin group**) and message groups (**EXSPI EX\_Perf** and **EX\_Fault**), must be deleted manually.

1. To delete the Exchange SPI Message Source templates, select **Window: Message Source Templates** from the menu bar.
2. Open all Exchange SPI template groups and use SHIFT+click to select all templates for deletion.
3. Select **Delete from All** to delete the templates.
4. Click **Yes** to the message: Do you really want to delete the template(s) ?
5. To delete from the EXSPI messages group, from the menu bar select **Window>Message Group Bank**.
6. Select the **EXSPI EX\_Perf** and **EX\_Fault** message groups.
7. From the menu bar select **Actions>Message Group>Delete**.

## Deinstalling Exchange SPI

8. Click **Yes** to the message: Do you really want to delete the message groups?
9. To delete any Exchange SPI application groups and their contents, select **Window: Application Bank** from the menu bar.
10. Select all Exchange **EXSPI Admin** Applications and Graphs.
11. From the menu bar select **Action>Application>Delete**.
12. Click **Yes** to the message: Do you really want to delete the application groups.

---

## **Using Exchange SPI**

---

## Introduction

Like all HP OpenView SMART Plug-Ins, the Exchange SPI is easy to use. This chapter describes some special usage features and functionality, including:

- ❑ Daily Tasks
- ❑ Exchange SPI template group requirements
- ❑ Changing the OpenView data collection agent setup
- ❑ Command Line Parameters

---

## Daily Tasks


A daily task list for monitoring with the Exchange SPI follows:

1. Use the OVO message browser to watch for warning and critical messages or multiple alarms. Read the associated instruction text.
2. Adjust alarm thresholds if too many alarms are being generated (see “Customize the Threshold” later in this chapter).
3. Use the OVO graphing and reporting applications to drill down for additional information, or to view history or trends.
4. Check the active Message Browser frequently. Note the message group a metric belongs to:
  - ***EXSPI***. Messages generated by EX-SPI programs. They contain instruction text to help to diagnose/remedy problems.
  - ***EX\_Perf***. Messages regarding performance.
  - ***EX\_Fault***. Messages regarding error conditions.
5. Click `Perform Action` (if available) from the message or message browser to automatically perform a pre-defined operator action. Click `Details` from the message or message browser to view details of the set action.

Daily Tasks

6. Click **Instructions** from the message browser or the message itself to read and follow suggested instructions to help diagnose/remedy problems (see example below).

*Sample Instruction Text from Exchange SPI Alarm Message*

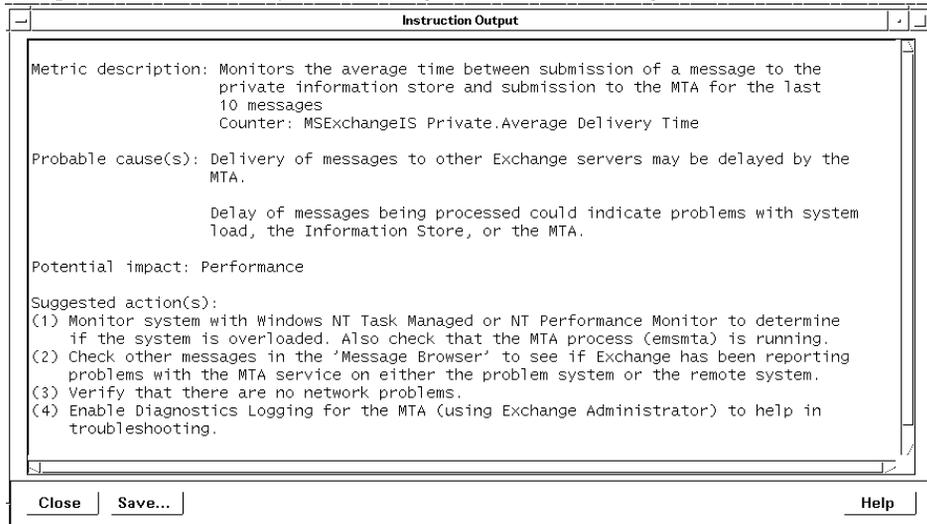

7. Use MeasureWare Agent to export data if desired. Consult the *MeasureWare Agent User's Guide* for details.

---

## Exspi Template Group Requirements

---

NOTE:

Important Microsoft Information on the Web: Before you distribute Exchange SPI templates, please refer to the Microsoft article “PRB: Performance Object Is Not Displayed in Performance Monitor” at this URL:

<http://support.microsoft.com/support/kb/articles/Q248/9/93.ASP>. The article contains information on editing the Windows registry so that performance objects (tracked by Performance Monitor) are always enabled. A disabled performance object could cause an Exchange SPI template to fail. By following the instructions in the article, you can ensure that templates are able to collect Exchange performance data as expected.

---

Some templates in the SPI for Exchange template groups require that particular software components/services are installed on Exchange server systems before the distributed templates will work, and some require the existence of a service account with special Exchange privileges. To create such an account, see *Creating a Service Account with Proper Access Permissions* chapter 2 page 22.

Use the following tables to decide which templates you want to install. In the template prerequisites table you can see whether or not a template group/subgroup works with Exchange 5.5, Exchange 2000 or Exchange 2003, as well as any required configuration. Template Group Descriptions show you what type of data/functionality the template group offers.

---

NOTE:

In OVO for UNIX version 8.0 and later, templates are referred as policies.

**Table 1: EXSPI Template Group Prerequisites for Exchange 5.5**

| <b>EXCHANGE 5.5<br/>Template Group/ Subgroup</b>          | <b>Required<br/>Exchange<br/>Service</b> | <b>Required Manual Configuration</b>   |
|---|--|--|
| <b>EXSPI-55 Quick Start</b>                               | N/A                                      | N/A  |
| <b>EXSPI-55 Add-Ons</b><br>EXSPI cc:Mail Connector        | cc:Mail Connector                        | N/A  |
| EXSPI Internet Mail Services                              | Internet Mail Service (IMS)              | N/A  |
| EXSPI Lotus Notes Connector                               | Lotus Notes Connector                    | N/A  |
| EXSPI News Service  | N/A                                      | N/A  |
| <b>EXSPI-55 Advanced</b><br>EXSPI End to End Message Ping |  | Create MSXSPI service account with correct permissions<br><br>Edit the MBOX Config Application to contain User Password<br><br>Create mailbox using MBOX Config application<br><br>Configure EXSPI End to End Message Ping template to set up server pairs |
| EXSPI Event Log Warnings & Information                    |  | Use for troubleshooting  |
| EXSPI Reporter Collection                                 |  | Create MSXSPI service account and password   |

**Table 2: EXSPI Template Group Prerequisites for Exchange 2000 and 2003**

| Exchange 2000 and 2003<br>Template Group/ Subgroup | Required Exchange Service             | Required Manual Configuration  |
|--|---------------------------------------|--|
| <b>EXSPI-60 Quick Start</b><br>All templates       | N/A                                   | N/A  |
| <b>EXSPI-60 Add-Ons</b><br>EXSPI cc:Mail Connector | cc:Mail Connector                     | N/A  |
| EXSPI Chat Service (Exchange 2000 only)            | Exchange Chat Service                 | N/A  |
| EXSPI Conferencing Service (Exchange 2000 only)    | Exchange Conferencing Server          | N/A  |
| EXSPI MCU Server (Exchange 2000 only)              | MCU Server                            | N/A  |
| EXSPI Instant Messaging (Exchange 2000 only)       | Exchange Instant Messaging Service    | Some templates in this group require the creation of a service account (see <i>Advanced Configuration</i> chapter 3 page 65.). |
| EXSPI Lotus Notes Connector                        | Lotus Notes Connector                 | N/A  |
| EXSPI NNTP   | Network News Transfer Protocol (NNTP) | N/A  |
| Transaction Log                                    |                                       | Some templates in this group require the creation of a service account (see <i>Advanced Configuration</i> chapter 3 page 65.). |

Chapter 4: Using Exchange SPI  
 Exspi Template Group Requirements

| Exchange 2000 and 2003<br>Template Group/ Subgroup        | Required Exchange Service | Required Manual Configuration   |
|---|---------------------------|---|
| <b>EXSPI-60 Advanced</b><br>EXSPI End to End Message Ping | N/A                       | For each node where the template is to be distributed:<br>Create MSXSPI service account with correct permissions<br>Edit the MBOX Config application to add the User Name and Password of the service account.<br>Create mailbox using MBOX Config application.<br>Edit Enable Message Tracking to add the User Name and Password of the service account.<br>Configure EXSPI End to End Message Ping template to set up server pairs. |
| EXSPI Event Log Warnings & Information                    | N/A                       | Use for troubleshooting   |
| EXSPI Reporter Collection                                 | N/A                       | Create MSXSPI service account and password  |

---

## Changing the Data Collection Agent Setup

The HP OpenView Exchange SPI can detect whether or not you are using OpenView Performance Agent (also known as MeasureWare Agent). If you are, your new Exchange SPI installation will automatically use it as well. As a result, if you use PerfView, your new installation also supports that configuration.

If for any reason you decide that you want to use the new HP OpenView subagent included with OVO 7.0 or 8.0, you can configure managed nodes to do so. Note that this configuration does not support PerfView.

To override the use of OpenView Performance Agent, set up an empty file named `nocoda.opt` and store it on the managed node in a specific location. The location will vary according to the managed node operating system as shown below.

| Managed Node O/S  | File Location                                    |
|-------------------|--|
| HP-UX and Solaris | <code>/var/opt/OV/conf/dsi2ddf/nocoda.opt</code> |
| Windows           | <code>\usr\ov\conf\dsi2ddf\nocoda.opt</code>     |

### To create the File:

1. (If necessary) on the managed node according to the path shown in the preceding table, create the **dsi2ddf** directory.
2. Use a text editor to open a new file.
3. Save the file as **nocoda.opt** in the managed node's **dsi2ddf** directory.

---

## Command Line Parameters

The collector/analyzer executable **exspi\_e2k.exe** can be used with the following command line parameters:

| Parameter                       | Description   |
|---------------------------------|---|
| <b>-m &lt;metric range&gt;</b>  | <b>-m</b> (metric range) is used to specify the metric number or range of metric numbers.   |
| <b>-t &lt;tag&gt;</b>           | <b>-t</b> (tag) allows the collector/analyzer to use a different set of templates than those originally provided with the Exchange SPI when collecting metrics.<br><br><b>NOTE:</b> Additional information about the tag feature is found at the end of the “Customizing Exchange SPI” section. |
| <b>-p -m &lt;range&gt; [-v]</b> | <b>-p</b> (print) executes specified metrics and prints their values to standard output, for example:<br><b>&lt;exspi_e2k.exe or exspi_e55.exe&gt; -p -m 1-1001</b>   |
| <b>-a</b>                       | <b>-a</b> directs the collector/analyzer to send the metric value to OVO for alarm generating   |
| <b>-s</b>                       | <b>-s</b> executes the collector as the special service account user (MSXSPI). Requires completion of the advanced configuration (see <i>Advanced Configuration</i> chapter 3 page 65).   |

| Parameter  | Description   |
|--|---|
| <p><b>-l -m &lt;metric range&gt;</b><br/><b>-x &lt;extended_option&gt;</b></p> | <p>Data collection metrics start at 0500. Types:</p> <p><b>Value:</b> logs the actual value</p> <p><b>Delta:</b> logs the difference between current and previous</p> <p><b>Average:</b> logs the average over a specific interval (e.g. 1h)</p> <p>where:</p> <p><b>-l</b> collector logs data to logfile instead of reporting it to OVO</p> <p><b>-x &lt;extended_option&gt;</b> is one of:</p> <p><b>logtype:</b> is either "value, delta, or avg"</p> <p><b>logfreq:</b> can only be "hourly" and is used only with "avg"</p> <p><b>runfreq:</b> tells the collector the interval in seconds. If the schedule interval of EXSPI is every 10 minutes, the runfreq option must be set to <math>10 * 60 = 600</math>: <b>-x runfreq=600</b>. The runfreq option can only be used with "avg."</p> <p><b>mbox:</b> followed by "<i>=&lt;mailbox_name&gt;</i>" allows specification of certain mailboxes with certain metrics, specifically metrics:<br/>611,612,622,623,630,631,632,640 and 641</p> <p>Example of a command line using this option:<br/>exspi -p -m 611 -x mbox=obrabb</p> |



---

**Clustering Support**

## Using Exchange SPI in high availability environments

The Exchange SPI can be configured to accommodate cluster environments where fail-overs allow uninterrupted Exchange availability.

Synchronized with the cluster environment, Exchange SPI monitoring can be made to switch off for the failed node and switch on for the active node.

For recognizing clustered Exchange instances, Exchange SPI relies on XML configuration files. These files allow the OVO agent to automatically enable instance monitoring on the currently active node after disabling instance monitoring on the inactive node.

The Exchange SPI setup for a cluster environment requires the following steps:

- Add the nodes to be managed.
- Modify, if necessary, the Exchange SPI monitoring configuration file included with the Exchange SPI (`msexchange.apm.xml`).
- Create the clustered application configuration file (`apminfo.xml`) that associates Exchange SPI-monitored instances (Exchange virtual servers), with their corresponding cluster resource groups.
- Restart the agent on the managed node.

### **Step 1: Add the Exchange Cluster nodes to be managed.**

Add the Exchange cluster nodes to be managed.

### **Step 2: Modify the Exchange SPI monitoring configuration file (if necessary)**

The Exchange SPI includes a monitoring configuration file, (`msexchange.apm.xml`), which is an XML file that describes the templates that should be cluster-aware.

The `(msexchange.apm.xml` file works in conjunction with the clustered application configuration file (`apminfo.xml`) that you need to create for your Exchange cluster.

The purpose of the Exchange SPI `msexchange.apm.xml` file is to list all the Exchange SPI templates on the managed node, in order that these templates can be disabled/enabled, as appropriate, for inactive/active managed nodes.

**NOTE:** The Exchange SPI `msexchange.apm.xml` file is normally ready to use with no configuring. However, if you have renamed any templates, you need to modify the file accordingly. The file is in the monitor directory on the management server. After modifying this file, you need to redistribute the monitors to the Exchange nodes that are part of the Exchange cluster.

**NOTE:** If the Exchange Cluster is managed under OVO 8 / HTTPS then `msexchange.apm.xml` needs to be manually copied from:

```
$OvDataDir\bin\instrumentation
```

to

```
$OvDataDir\bin\instrumentation\conf
```

for each managed node.

### **Step 3: Create the clustered application configuration file**

`Apminfo.xml` is an XML file that describes the cluster instances (Exchange virtual servers).

`Apminfo.xml`, working in conjunction with the Exchange SPI monitoring configuration file (`msexchange.apm.xml`), allows you to associate Exchange SPI monitored instances (Exchange virtual servers) with their associating cluster resource groups. As a result, when a resource group is moved from one node in a cluster to another node in the same cluster, monitoring stops on the failed node and starts on the new node.

To generate the content of this file:

a. Launch the Exchange SPI Exchange Cluster Configuration application on an Exchange cluster node, see ‘Exchange Cluster Configuration application’ chapter 5 page 102.

b. Save the generated output in a temporary file by clicking on the **Save..** button.

c. Open this temporary file and remove all the lines above:

```
<?xml version="1.0" ?>
```

d. Save the remaining lines as the completed `apminfo.xml` file.

If the node is managed under OVO 7 and OVO 8 / DCE, save it to:

```
%OvAgentDir%\conf\OpC
```

If the node is managed under OVO 8 / HTTPS, save it to:

```
<OVO_DATADIR>\conf\conf
```

Note: You can get the full path name for `OVO_DATADIR` by running the following command from a CMD window on the managed node:

```
opcagt -type -verbose
```

#### **Step 4: Restart the agent on the managed node**

After constructing and saving `apminfo.xml`, stop and restart the OVO agent by running the following commands on each node:


```
opcagt -kill  
opcagt -start
```

## Example apminfo.xml file

The following is an example apminfo.xml file, where **ExchResGroup1** and **ExchResGroup2** are the names of the Exchange resource groups corresponding to **EXCHVIRTSESV1** and **EXCHVIRTSESV2** instances (virtual servers):

```
<?xml version="1.0" ?>
<APMClusterConfiguration>
  <Application>
    <Name>msexchange</Name>
    <Instance>
      <Name>EXCHVIRTSESV1</Name>
      <Package>ExchResGroup1</Package>
    </Instance>
    <Instance>
      <Name>EXCHVIRTSESV2</Name>
      <Package>ExchResGroup2</Package>
    </Instance>
  </Application>
</APMClusterConfiguration>
```

*Example Exchange resource group*

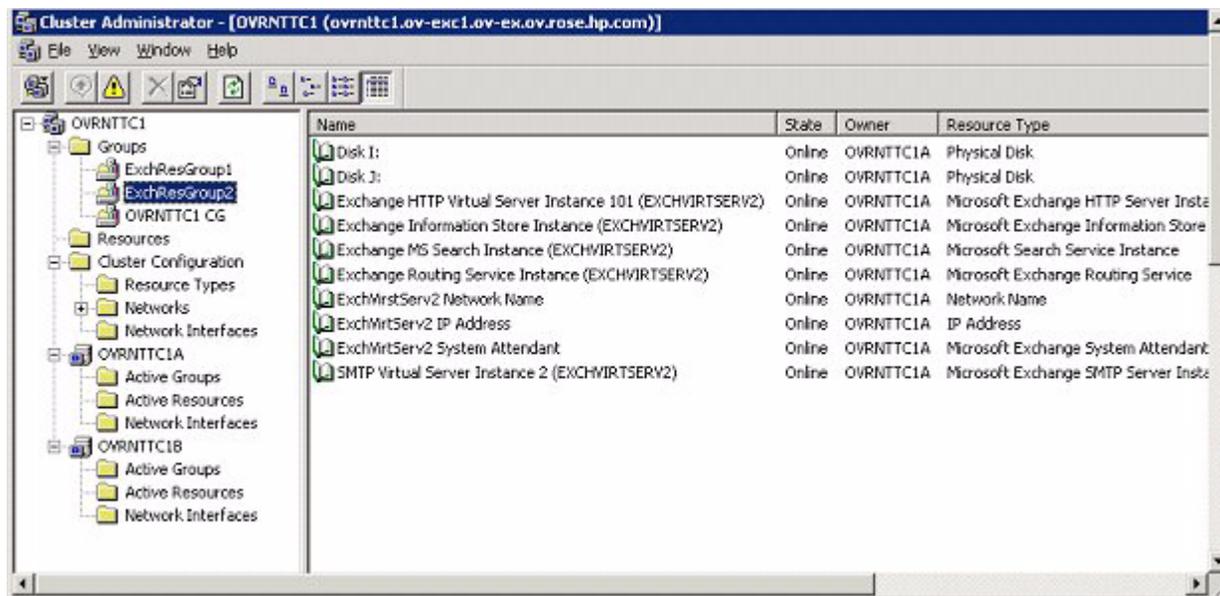


## EXCHANGE CLUSTER CONFIGURATION APPLICATION

Use the Exchange Cluster Configuration application to generate the content of the `apminfo.xml` file. To execute this application:

1. Select all the Exchange managed nodes you wish to configure in the OVO Node Bank.
2. Drag these nodes and drop them on the **Exchange Cluster Config** application located in the **EXSPI Admin > Exchange 2000 and 2003** application group.
3. Use the generated output to construct the `apminfo.xml`. For details, refer to ‘Step 3: Create the clustered application configuration file’ chapter 5 page 99).

*Example output of Cluster Configuration application*

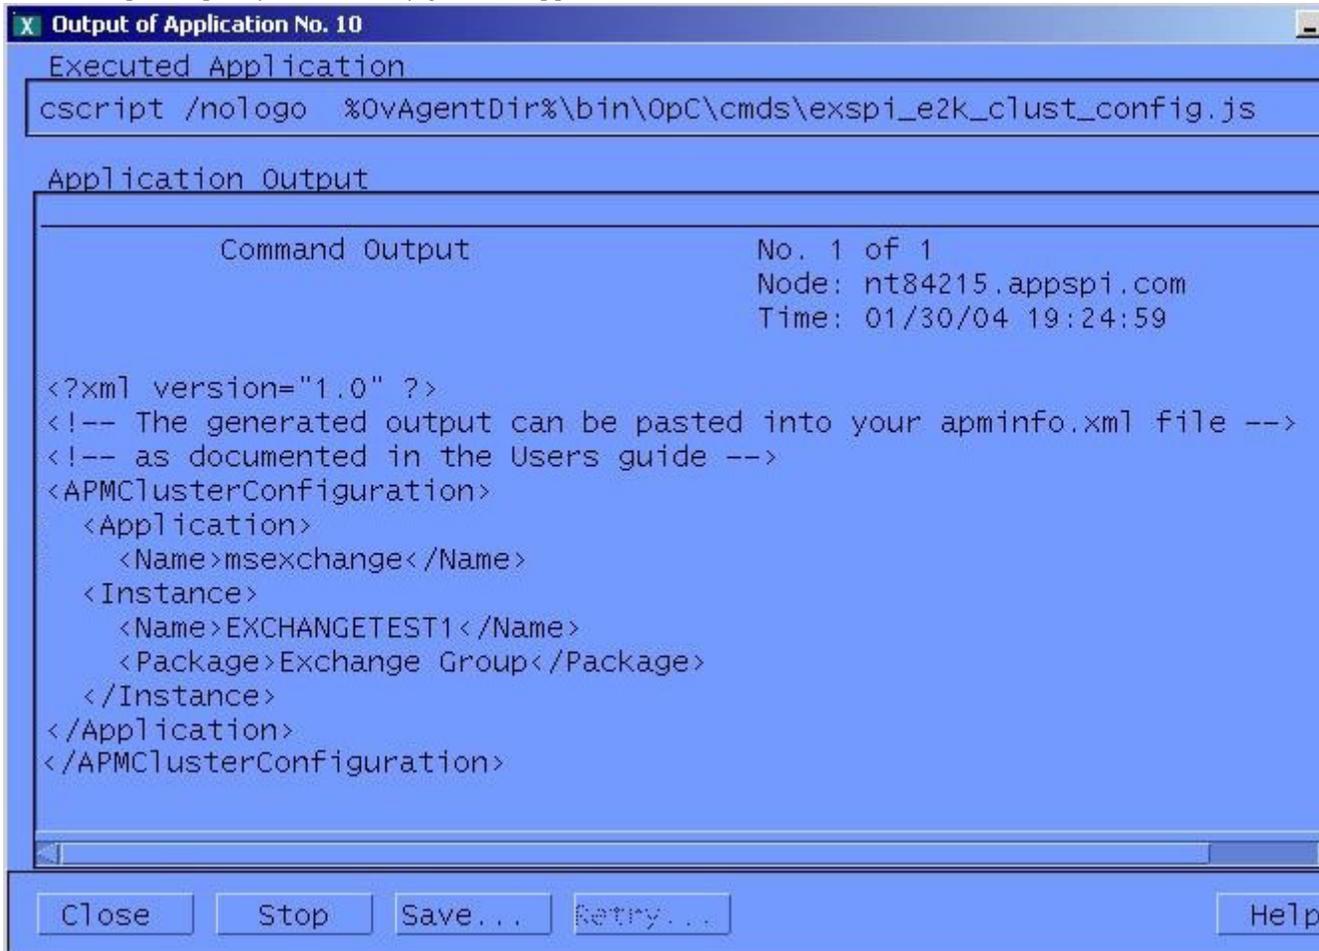

```
Executed Application
cscript /nologo %0vAgentDir%\bin\OpC\cmds\exspi_e2k_clust_config.js

Application Output

Command Output                               No. 1 of 1
                                               Node: nt84215.appspi.com
                                               Time: 01/30/04 19:24:59

<?xml version="1.0" ?>
<!-- The generated output can be pasted into your apminfo.xml file -->
<!-- as documented in the Users guide -->
<APMClusterConfiguration>
  <Application>
    <Name>msexchange</Name>
    <Instance>
      <Name>EXCHANGETEST1</Name>
      <Package>Exchange Group</Package>
    </Instance>
  </Application>
</APMClusterConfiguration>
```

**NOTE:** After constructing and saving `apminfo.xml`, you need to restart the agent on the node, using the following commands:

```
Opcagt -kill
Opcagt -start
```

## DATA COLLECTION ON VIRTUAL SERVERS

In order for reports and graphs to show data for any nodes, appropriate data collection templates need to be distributed to those nodes. See the section “Using Exchange SPI Reports and Graphs” chapter 7 page 144.

Run the **Enable Message Tracking** application on all nodes in the cluster before distributing the **EXSPI 6.0 Dc-TrackingLog Data** template, so that the tracking log reports will generate. The application must run on the physical nodes of a cluster where the Exchange virtual server is running.

## SEEING VIRTUAL SERVERS IN REPORTS AND GRAPHS

The Exchange SPI will show Exchange virtual servers in reports and graphs as though they were physical Exchange servers.

## SETTING UP END-TO-END MESSAGE PING ON AN EXCHANGE CLUSTER

Using Exchange SPI, End-to-End Message Ping can be configured on Exchange clusters.

1. Run the **EXSPI MBox Config** application on all nodes in the cluster. The application must run on the physical nodes of a cluster where the Exchange virtual server is running on. This is a necessary step for configuring and distributing End-to-End Message Ping.
2. Follow the directions in *Task 6: Set Up Message Ping server connections and alarms* chapter 3 page 73.

## **WHAT HAPPENS DURING A FAILOVER:**

When a failover happens, dependencies to the failed node will be removed and replaced with new dependencies to the newly active node. For example, if EXCHVIRTSESV1 moves from OVRNTTC1B to OVRNTTC1A, the dependencies to OVRNTTC1B will automatically be removed and will be replaced with a new set of dependencies to OVRNTTC1A..

NOTE: When a failover happens, messages that occurred before the failover will not be propagated to the virtual node

NOTE: For this mechanism to work EXSPI-60-Exchange cluster discovery Event Log template must be distributed.



---

**Customizations**

---

## Introduction

This chapter outlines the following customization procedures:

- Choosing metrics to monitor Exchange
- Customizing the Exchange SPI
  - Basic Customization procedures
    - Creating custom groupings
    - Creating custom templates
    - Modifying message generation
    - Modifying metric template conditions
    - Customizing the Threshold
    - Customizing Schedules
    - The Tag Feature
  - Advanced Customization procedures
    - Changing the Windows User Account Name
    - Changing the Mailbox Name
- Returning to original factory settings

---

## Choosing metrics to monitor Exchange

Before beginning customization, first decide which metrics can remain without changing the thresholds, (see “Exchange SPI Metric Specifications” later in this chapter or the *Exchange SPI Reference Manual*).

---

### NOTE

It is recommended that you make a copy of the original template group and use the copy for customization purposes

---

## Basic Customization


---

### Creating Custom Groupings

Create custom template groups as follows:

1. Log onto OVO as the OVO Administrator.
2. Select **Window>Message Source Templates**.
3. In the Message Source Templates window select the desired template group and click the **Add...** button (if Add Logfile... is displayed, pull down the list and select Add Group) and select a name and description for this group.
4. To copy templates to the new group:
  - In the Message Source Templates window, double-click to open the group containing the desired templates.
  - Select the templates to copy and choose **Edit>Copy from the Message Source Templates** menu to copy the templates.
  - Return to the newly created template group and choose **Edit>Paste** from the menu.

### Creating a New Template Group

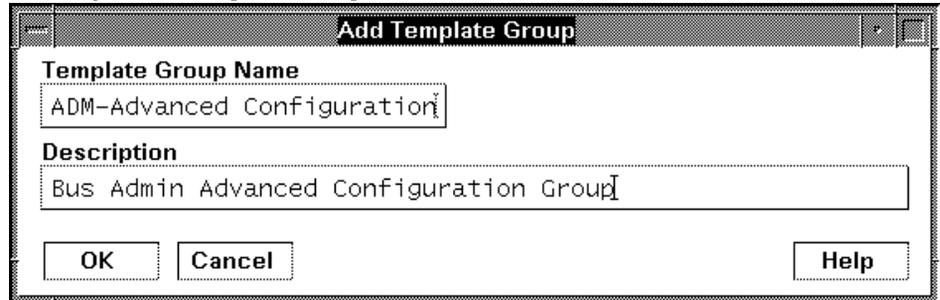

---

## Creating Custom Templates

You can create a custom template by copying an original template, making any desired changes, and saving it with a new name.

When the OVO environment scales, the Exchange SPI *tag feature* provides a way to partition templates into groups with each group customized in a specific manner.

---

## Modifying Message Generation

Alarms are generated with `Reset`, `without Reset` or `Continuously`. To change the `Metric Generation Type` (usually in conjunction with the `Threshold`, `Polling Interval` and `Reset value`) follow these steps:

1. Select the **Message Source Templates** window.
2. Double-click to open the template group containing the metric to modify.
3. Click the **Modify** button.

Modifying Message Generation

**Modify Threshold Monitor**

**Monitor Name** [EXSPI-60-0016] **Description** [MTA Rejected Inbound Associations]

**Monitor** [External] **Monitor Program or MIB ID** [ ]

**Polling Interval** [ ] **On Node** [ ]

**Threshold Type**  Maximum  Minimum

**Message Generation**  with Reset  without Reset

**Message Defaults**

| Severity  | Node | Application | Message Group | Object |
|-----------|------|-------------|---------------|--------|
| [warning] | [ ]  | [EXSPI-MTA] | [EX_Perf]     | [ ]    |

**Service Name** [EXSPI\_E2K:e2kservices:msg@@<\$MSG\_NODE\_ID>]

[Instructions...] [Message Correlation...] [Adv]

4. Select one of the Message Generation types:

- **with Reset:** Alarms are generated after the monitoring threshold has been exceeded. No additional alarms are generated until metrics drop below a specified Reset threshold and subsequently exceed the monitoring threshold.
- **without Reset:** Alarms are generated after the monitoring threshold has been exceeded. No additional alarms are generated until metrics drop

below the threshold and subsequently exceed it.

- **Continuous:** Alarms are generated continuously when metrics exceed the threshold.


---

## Modifying Metric Template Conditions

Modify metric attributes as follows.

1. Select the **Message Source Templates** window.
2. Double-click the template group containing the metric to modify.
3. Double-click the desired metric
4. In the Message and Suppress Conditions window select the condition to modify and click the **Modify** button.

*The Message and Suppress Conditions Window*

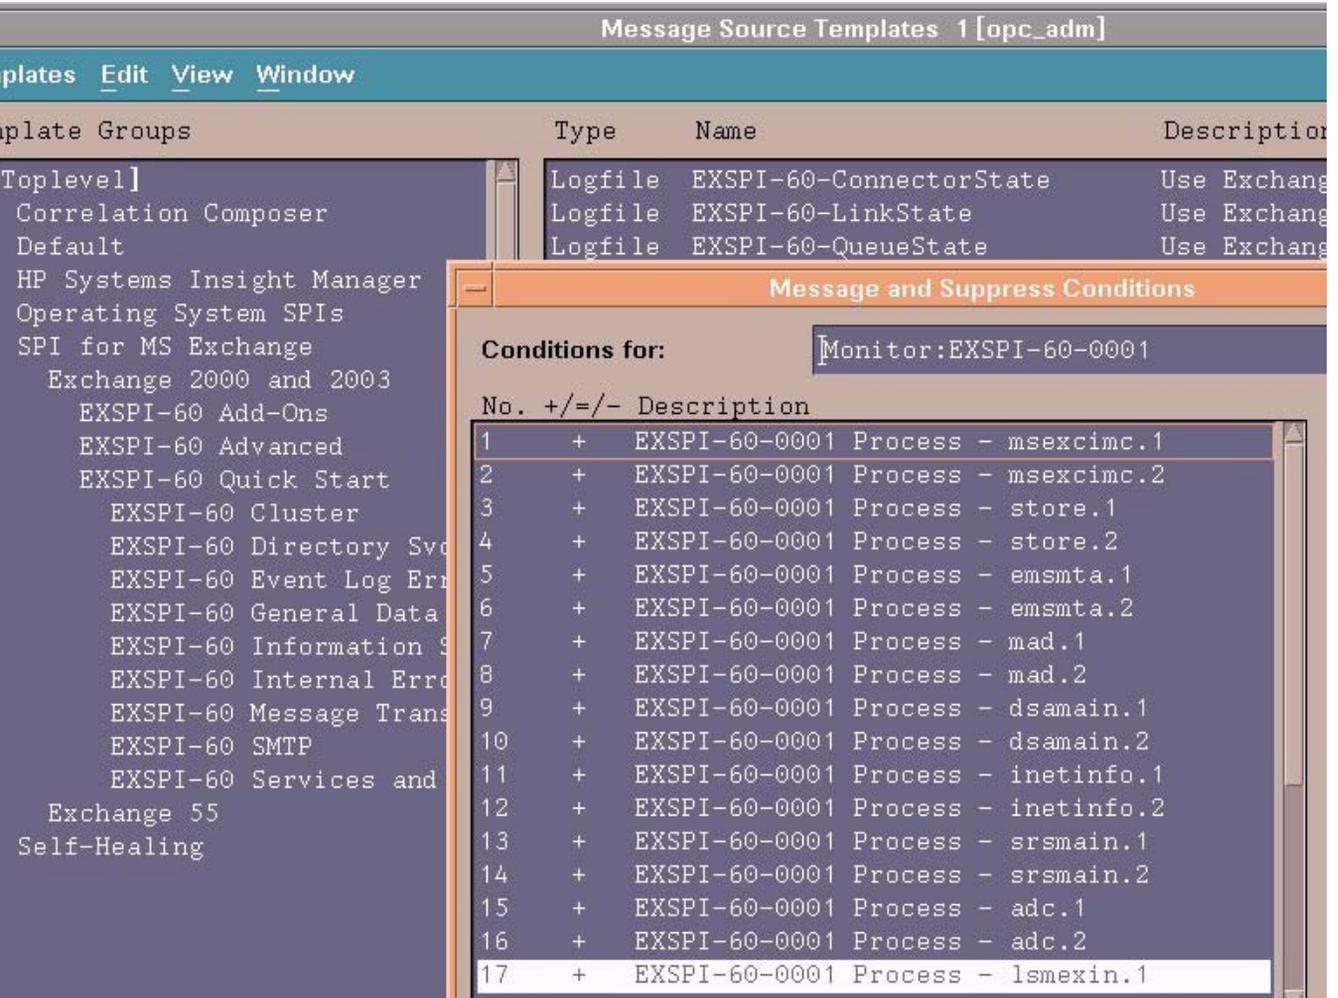

5. The Condition window displays.

The following attributes can be easily modified:

**Threshold.** Set the desired threshold.

**Reset.** This is a limit under which the object's value must drop (or exceed for minimum thresholds) to return the alarm state of the object to normal.

After an object's alarm state has returned to normal, a new message can

be issued if the monitored parameter again exceeds (or drops below for minimum thresholds) the threshold value. Do not enter a value if you do not wish to impose a reset limit. Note that you can enter a reset value greater than the threshold value (or less for minimum threshold types), which has the same effect as if you don't specify a reset value.

**Duration.** Most metrics are defined as `Message Generate` type without `Reset` and without a `Duration`. Please consult the *OVO Concepts Guide* or online Help prior to modifying this field.

**Severity.** Click the `[Severity]` button and select the desired severity setting.

**Message Text.** Be careful not to modify any of the parameters in a message. Parameters are surrounded by `<>` brackets and begin with `$`.

**Actions.** This field provides the ability to add custom programs. Two types of actions are available:

- **Operator initiated:** These actions are only performed upon the initiation of an operator.

- **Automatic:** These actions are performed automatically when the metric alarms.

---

**NOTE**

---

Some metrics have an operator-initiated action which will display a graph if PerfView is installed on the management server.

---


## Customizing the Threshold

Customize the threshold as needed. To do so, copy the existing condition to use as the default, and modify the original condition to serve as the exception.

Follow these steps:

1. Double-click the metric you want to customize (for example, EXSPI-60-0001).
1. In the Message and Suppress Conditions window select the desired condition and select the **Copy** button to make a copy of the condition.
2. Enter a name for the condition; for example, EXSPI-60-0001.3.
3. Click **OK** to close EXSPI-60-0001.3. This will be the default condition.
4. Select the original condition, EXSPI-60-0001.1.
5. Click the **Modify** button to display the Condition window.
6. In the **Object Pattern** field, enter the desired characters to use for pattern matching (see the OVO online help or the *OVO Administrators Task Guide* for pattern matching syntax).
7. Click the **Test Pattern Matching...** button to test the pattern and verify pattern matching (you must set up a match file first).
8. Change the value in the value in the Threshold field.

*Testing Pattern Matching from the Condition Window*

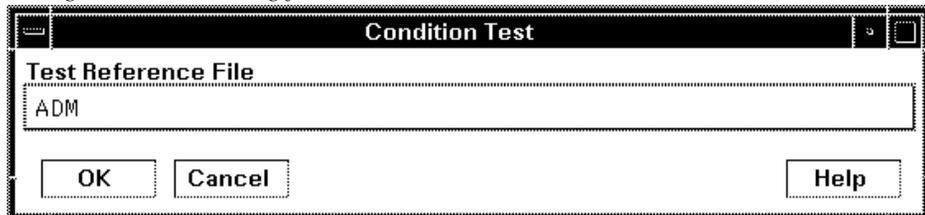

## Customizing Schedules

Schedule templates define the schedule by which the collector/analyzer will gather metric information. To modify a schedule template, follow these steps:

1. Select **Window>Message Source Templates** and double-click the template group containing the template to modify.
2. Double-click the desired template
3. In the **Modify Scheduled Actions** change any of the schedule information or other parameters.
4. Click **OK** to close and save the changes.
5. Distribute the template to the desired managed node(s).

*Customizing a Schedule Template*

Modify Scheduled Action

Scheduled Action Name: EXSPI-55-15m-Transaction Log

Description: Scheduler for metrics in Transaction L

Schedule

Minute: 0,15,30,45

Hour: 0-23

Day of the Month: [dropdown]

Month: [dropdown]

Year: [dropdown]

Day of the Week: [dropdown]

Command: exspi\_e55.exe -a -m 5 -s

Execute as user: HP ITO account

Send message before start of action  
Configure Start Message...

Send message if action completed successfully  
Configure Success Message...

Send message if action failed  
Configure Failure Message...

Send Output of Action

OK Cancel

---

## The Tag Feature

When servers are dedicated to specific sites or business units, you may find it more effective if those servers do not all share the same set of Exchange SPI templates. In such cases, the tag feature is useful in allowing you to change existing templates and rename them. In this way you can associate template assignments with specific servers and the areas with which they are associated. For example, you might create a business administration group of templates and tag those templates with “ADM-” or a branch office group and tag those with “BR-.”

The tag feature allows you to create custom templates in a quick way. To summarize the steps, you:

- Make copies of existing monitor templates that you want to modify.
- (optional) Modify the monitor template settings.
- Save each modified template under the same name with a prefix.
- Enter each metric and - *<prefix tag>* after the collector/analyzer command in the **Program Monitor or MIB ID** box of the schedule template.

Using this method allows the collector/analyzer to recognize a set of templates different from those originally provided with the Exchange SPI. This method allows you to enlarge the single set of templates to adjust to differing conditions among the servers you use.

To use this feature, make copies of the original Exchange SPI templates. The names you give these new templates must contain a prefix with the original template name. To tell the collector/ analyzer to use this new template rather than the original template, specify the tag option on the schedule template command line.

New collector templates can also be created in this way, for example:

```
exspi_e2k -m 16 -t ADM-
```

In this case the new collector template is called "ADM-EXSPI-15min."

## Advanced Customization

---

### Changing the Windows User Account name

A Windows user account, used for creating a mailbox, is referenced in the EXSPI MBOX Config application. To change the account name, edit the EXSPI Mbox Config application and change the user name setting. This application requires a user with Exchange administrative privileges.

---

### Changing the Mailbox name

For all schedule templates in the template group EXSPI-60 Data Collection (Adv), add `-x <mailbox_name>` to the command which is executed under the schedule. For example:

```
exspi_e2k -l-s -m 630,631,632 -x logtype=value -x  
mbox=MSXSPI
```

The default mailbox `MSXSPI <hostname>` can be changed by supplying the mailbox name to EXSPI MBOX Config:

Use the OVO Customized Startup to start **EXSPI MBOX Config**, and add `-m <mailbox name prefix> [-ou <organizational unit>]` to the Application Parameter box.

---

#### NOTE

Do not add the domain before the user name. The user must be in the domain where the Exchange Server is located, and cannot be a local user.

---

---

## Returning to original factory settings

To re-install all Exchange SPI templates, applications and message groups with original factory settings, run the following command:

```
/opt/OV/bin/OpC/opccfgupld -verbose -replace  
/var/opt/OV/share/tmp/OpC_appl/EXSPI/exspiset
```

---

### **CAUTION**

Any customization of the original templates will be overwritten.



---

## **Integration with Reporter**

---

## Introduction

This chapter describes how to install and generate reports within Reporter from Exchange SPI data. It contains the following sections:

- ❑ Installing Exchange SPI reports
- ❑ Exchange SPI report template requirements
- ❑ Table of data collection templates for reporting and graphing
- ❑ Exchange SPI report list
- ❑ Using Exchange SPI reports and graphs
  - Distributing the Quick Start data collection templates
  - Distributing Reporter Collection templates
  - Exchange SPI graphs
  - Deinstalling Exchange SPI Reporter templates

## Installing Exchange SPI Report Templates

To install Reporter reports on the system where Reporter is installed:

1. Double-click **EXSPI-Reporter.msi** on the HP OpenView Operations for Unix Application CD-ROM. This opens the EXSPI-Reporter InstallShield Wizard.
2. Click **Next** on the welcoming dialog.
3. The next dialog confirms that EXSPI-Reporter is now installed, click **Finish** to exit the wizard.
4. Open Reporter to see the **SPI for Exchange** folder under **Reports**.
5. Open the SPI for Exchange group of reports, and see the groupings of Exchange reports. As you select each group, see in the details pane the individual reports available in that group.

---

## Report Requirements

### TEMPLATES TO DISTRIBUTE FOR EXCHANGE SPI REPORTS

Exchange SPI reports display data collected from EXSPI templates distributed to Exchange servers.

In the table that follows, the location is relative to the folders SPI for Exchange \ Exchange 5.5 AND Exchange 2000 and 2003. Some templates are specific to particular versions of Exchange, when this is the case the location is also specific to this version, all other reports are relevant to all versions of Exchange.

The specific templates required for OVO to generate particular reports are as follows:

| <b>Report Name<br/>(SUMMARY For<br/>All Systems)</b>       | <b>Template Name</b>   | <b>Metric ID<br/>Logged</b>               | <b>Location</b>  |
|--|--|---|--|
| Exchange 2003<br>and 2000 System<br>Information<br>Summary | Dc-Mailbox IS Sum. Data<br>Dc-Public IS Sum.Data<br>Dc-Exchange Info             | 610-611, 614,<br>620-621,<br>623-624, 656 | EXSPI Advanced<br>\EXSPI Reporter<br>Collection                            |
| Exchange 2003<br>and 2000 Top 100<br>Mailboxes             | Dc-Mailbox Data  | 630,632,633,634<br>815                    | Exchange 2000 and 2003<br>\EXSPI Advanced<br>\EXSPI Reporter<br>Collection |
| Exchange SLA<br>Message Delivery                           | End to End Message Ping  | 1002                                      | EXSPI Advanced<br>\EXSPI End to End<br>Message Ping                        |
| Exchange System<br>Information<br>Summary                  | Dc-Private/Mailbox IS<br>Sum. Data<br>Dc-Public IS Sum. Data<br>Dc-Exchange Info | 610-611, 614,<br>620-621,<br>623,624, 656 | EXSPI Advanced<br>\EXSPI Reporter<br>Collection                            |

| <b>Report Name<br/>(SUMMARY For<br/>All Systems)</b> | <b>Template Name</b>  | <b>Metric ID<br/>Logged</b> | <b>Location</b>  |
|--|---|-----------------------------|--|
| Exchange Top 100 Mailboxes                           | Dc-Mailbox Data   | 630-632                     | Exchange 5.5<br>\EXSPI Advanced<br>\EXSPI Reporter<br>Collection |
| Exchange Top 100 Public Folders                      | Dc-Public Folder Data   | 640, 641                    | EXSPI Advanced<br>\EXSPI Reporter<br>Collection                  |
| Exchange Messaging Trends for all Servers            | Dc-MTA Message Volume   | 530-535                     | EXSPI Quick Start<br>\EXSPI Message Transfer Agent               |
|  | Dc-IS Private Msg Vol OR<br>Dc-IS Mailbox Msg Vol<br>Dc-IS Public Msg Vol | 540-543<br>550-552          | EXSPI Quick Start<br>\EXSPI Information Store                    |
|  | Dc-IMS Message Volume   | 590-591                     | Exchange 5.5<br>\EXSPI Add-Ons<br>\EXSPI Internet Mail Services  |
|  | Dc-SMTP Message Volume  | 670-675                     | Exchange 2000 and 2003<br>\EXSPI Add-Ons<br>\EXSPI SMTP          |

| <b>Report Name<br/>(DETAIL-shows<br/>data grouped by<br/>single systems)</b> | <b>Template Name</b>                                | <b>Metric ID<br/>Logged</b> | <b>Location</b>   |
|--|---|-----------------------------|---|
| Exchange 2000 Chat Trends  | EXSPI-6.0 Dc-Chat Service Clients and Channels.data | 837-838                     | Exchange 2000 and 2003<br>\EXSPI Add-Ons<br>\EXSPI Chat Service         |
| Exchange 2000 Conferencing Trends  | EXSPI-6.0 Dc-ConfTrends.data                        | 800, 810, 809, 808          | Exchange 2000 and 2003<br>\EXSPI Add-Ons<br>\EXSPI Conferencing Service |

## Report Requirements

| <b>Report Name<br/>(DETAIL-shows<br/>data grouped by<br/>single systems)</b> | <b>Template Name</b>   | <b>Metric ID<br/>Logged</b>            | <b>Location</b>  |
|--|--|--|--|
| Exchange 2000<br>MCU Trends  | EXSPI-6.0 Dc-MCU   | 811-814                                | Exchange 2000 and 2003<br>\\EXSPI Add-Ons<br>\\EXSPI Conferencing<br>Service |
| Exchange 2000<br>Instant Messaging<br>Users growth                           | EXSPI-6.0 1d-Dc-Instant<br>Messaging                                 | 843                                    | Exchange 2000 and 2003<br>\\EXSPI Add-Ons<br>\\EXSPI Instant<br>Messaging    |
| Exchange 2000<br>Instant Messaging<br>Availability and<br>Usage Trends       | EXSPI-6.0 1hr-Dc-Instant<br>Messaging DC                             | 841, 845                               | Exchange 2000 and 2003<br>\\EXSPI Add-Ons<br>\\EXSPI Instant<br>Messaging    |
| Exchange 2003<br>and 2000 Inactive<br>Mailboxes                              | EXSPI 6.0 Dc-Mailbox<br>Data   | 603,633,634,<br>815                    | Exchange 2000 and 2003<br>\\EXSPI Advanced<br>\\EXSPI Reporter<br>Collection |
| Exchange 2003<br>and 2000 Mailbox<br>Details                                 | EXSPI 6.0 Dc-Mailbox<br>Data   | 630-632,634,815                        | Exchange 2000 and 2003<br>\\EXSPI Advanced<br>\\EXSPI Reporter<br>Collection |
| Exchange 2003<br>and 2000 Mailbox<br>Summary                                 | EXSPI 6.0 Dc-Mailbox IS<br>Sum. Data<br>EXSPI 6.0 Dc-Mailbox<br>Data | 610-613, 624,<br>630-632, 815          | Exchange 2000 and 2003<br>\\EXSPI Advanced<br>\\EXSPI Reporter<br>Collection |
| Exchange 2003<br>and 2000 Mailbox<br>Usage Trends                            | EXSPI-6.0 Dc-Mailbox<br>IS Sum. Data                                 | 610-613                                | Exchange 2000 and 2003<br>\\EXSPI Advanced<br>\\EXSPI Reporter<br>Collection |
| Exchange 2003<br>and 2000 Mailbox<br>Store Stats                             | Dc-Mailbox IS Sum. Data<br>& Dc-Mailbox Data                         | 71, 614, 630,<br>631, 632, 634,<br>815 | EXSPI Advanced\\EXSPI<br>Reporter Collection                                 |
| Exchange 2003<br>and 2000 Public<br>Folder Store Stats                       | Dc-Public IS Sum. Data &<br>Dc-Public Folder Data                    | 73, 624, 640, 641                      | EXSPI Advanced\\EXSPI<br>Reporter Collection                                 |

| <b>Report Name<br/>(DETAIL-shows data grouped by single systems)</b> | <b>Template Name</b>  | <b>Metric ID Logged</b> | <b>Location</b>   |
|--|---|-------------------------|---|
| Exchange 2003 and 2000 Transaction Log Stats                         | Dc-Transaction Log Space Usage  | 7                       | EXSPI Add-Ons\EXSPI Transaction Log                       |
| Exchange User Connections  | Dc-User Connections   | 520-521                 | EXSPI Quick Start \EXSPI Services and Processes           |
| Exchange Folder Summary  | Dc-Public IS Sum. Data<br>Dc-Public Folder Data                           | 620-624,<br>640-641     | \EXSPI Advanced EXSPI Reporter Collection                 |
| Exchange Folder Usage Trends   | Dc-Public IS Sum. Data  | 620-622                 | \EXSPI Advanced EXSPI Reporter Collection                 |
| Exchange IMS Messaging Trends  | EXSPI-5.5 Dc-IMS Message Volume   | 590-593                 | Exchange 5.5 \EXSPI Add-Ons \EXSPI Internet Mail Services |
| Exchange Mailbox Details   | Dc-Mailbox Data   | 630-632                 | \EXSPI Advanced EXSPI Reporter Collection                 |
| Exchange Mailbox Summary   | Dc-Private/Mailbox IS Sum. Data<br>Dc-Mailbox Data                        | 610-613,<br>630-632     | \EXSPI Advanced EXSPI Reporter Collection                 |
| Exchange Mailbox Usage Trends  | Dc-Private/Mailbox IS Sum. Data   | 610-612                 | \EXSPI Advanced EXSPI Reporter Collection                 |
| Exchange Messaging Trends  | Dc-MTA Message Volume   | 530-535                 | EXSPI Quick Start \EXSPI Message Transfer Agent           |
|  | Dc-IS Private Msg Vol OR<br>Dc-IS Mailbox Msg Vol<br>Dc-IS Public Msg Vol | 540-543<br>550-552      | EXSPI Quick Start \EXSPI Information Store                |

## Report Requirements

| <b>Report Name<br/>(DETAIL-shows<br/>data grouped by<br/>single systems)</b> | <b>Template Name</b>      | <b>Metric ID<br/>Logged</b> | <b>Location</b>   |
|--|---------------------------|-----------------------------|---|
|  | Dc-SMTP Message<br>Volume | 670-675                     | Exchange 2000 and 2003<br>\EXSPI Quick Start<br>\EXSPI General Data<br>Collection |
| Exchange Top<br>Destinations   | Dc-TrackLog Data          | 662                         | EXSPI Advanced<br>\EXSPI Reporter<br>Collection                                   |
| Exchange Top<br>Recipients   | Dc-TrackLog Data          | 661                         | EXSPI Advanced<br>\EXSPI Reporter<br>Collection                                   |
| Exchange Top<br>Senders  | Dc-TrackLog Data          | 660                         | EXSPI Advanced<br>\EXSPI Reporter<br>Collection                                   |
| Exchange Top<br>Sources  | Dc-TrackLog Data          | 663                         | EXSPI Advanced<br>\EXSPI Reporter<br>Collection                                   |

## Data Collection for Graphing and Reporting

The Exchange SPI collects data for graphing and reporting through data collection templates. Exchange and Windows data is collected, summarized, and forwarded to the OVO data collecting agent. Reporter can be used to access the data source EXSPI\_DATA and write reports using Seagate Crystal Reports.

Data is collected through the following data collection templates:

**Table 1: Quick Start Data Collector Templates**

| Data Collector Name        | Scheduled Times | Metric IDs   | Table        |
|----------------------------|-----------------|--|--------------|
| Dc-SMTP Message Volume     | Hourly          | 670: SMTP Server.Messages Sent Total<br>671: SMTP Server.Messages Received Total<br>672: SMTP Server.Bytes Sent Total<br>673: SMTP Server.Bytes Received Total<br>674: SMTP Server.Message Bytes Sent Total<br>675: SMTP Server.Message Bytes Received Total<br><b>Note:</b> These are running totals since the SMTP service started. The Exchange SPI calculates a delta value between readings and logs this value to show message volume. | EXSPI_MULTI  |
| Dc-SMTP Message Queues     | Hourly          | 50: SMTP Server.Categorizer Queue Length<br>51: SMTP Server.Local Queue Length<br>52: SMTP Server.Local Retry Queue Length<br>53: SMTP Server.Messages Pending Routing<br>54: SMTP Server.Remote Queue Length<br>55: SMTP Server.Remote Retry Queue Length   | EXSPI_MULTI  |
| Measurement Data Collector | Hourly          | Writes the EXSPI_SINGLE values to the datastore each hour.   | EXSPI_SINGLE |
| Create Coda Data Sources   | Every 10 mins   | Creates database source EXSPIDATA with objects: EXSPI_SINGLE, EXSPI_MULTI, EXSPI_M0660, EXSPI_M0661, EXSPI_M0662, EXSPI_M0663, EXSPI_M1002, EXSPI_PFDDETAIL, EXSPI_MBDDETAIL, EXSPI_MBSUMMARY, EXSPI_PFSUMMARY, EXSPI_TRANLOG, EXSPI_SRS   | n/a          |

**Table 1: Quick Start Data Collector Templates**

| Data Collector Name           | Scheduled Times  | Metric IDs  | Table   |
|-------------------------------|--|---|---|
| Dc-IS Msg Delivery Time       | Every 10 minutes (0,10,20,30,40,50)<br><br>For hours: 6-18 Weekdays only<br><br>*This must be scheduled every 10 mins beginning at the 0 minute. | 581: MExchangeIS Mailbox.Average Local Delivery Time<br>582: MExchangeIS Mailbox.Average Delivery Time<br>583: MExchangeIS Public.Average Local Delivery Time<br>584: MExchangeIS Public.Average Delivery Time<br><b>Note:</b> The average value over all samples over all database instances in the hour is logged to EXSPI_SINGLE, while the average value over all samples is logged per instance to EXSPI_MULTI         | EXSPI_MULTI (for each Database instance)<br><br>EXSPI_SINGLE (total over all Databases) |
| Dc-IS Private Mailbox Msg Vol | Hourly<br><br>For hours: 6 - 18 Weekdays only  | 540: MExchangeIS Mailbox.Local deliveries<br>541: MExchangeIS Mailbox.Messages Delivered<br>542: MExchangeIS Mailbox.Messages Sent<br>543: MExchangeIS Mailbox.Messages Submitted<br>544: MExchangeIS Mailbox.Message Recipients Delivered<br><b>Note:</b> These are running totals since the STORE service started. The Exchange SPI calculates a delta value between readings and logs this value to show message volume. | EXSPI_MULTI (for each Database instance)<br><br>EXSPI_SINGLE (total over all Databases) |

**Table 1: Quick Start Data Collector Templates**

| Data Collector Name       | Scheduled Times   | Metric IDs   | Table   |
|---------------------------|---|--|---|
| Dc-IS Public Msg Vol      | Hourly<br><br>For hours: 6-18<br>Weekdays only  | 550: MExchangeIS Public.Messages Delivered<br>551: MExchangeIS Public.Messages Sent<br>552: MExchangeIS Public.Messages Submitted<br>553: MExchangeIS Public.Message Recipients Delivered<br><b>Note:</b> These are running totals since the STORE service started. The Exchange SPI calculates a delta value between readings and logs this value to show message volume.   | EXSPI_MULTI (for each Database instance)<br><br>EXSPI_SINGLE (total over all Databases)   |
| Dc-MTA & IS Queue Lengths | Every 10 minutes (0,10,20,30,40,50)<br>For hours: 6-18<br>Weekdays only<br>*This must be scheduled every 10 mins beginning at the 0 minute. | 570: MExchangeMTA.Work Queue Length less MExchangeMTA.Deferred Delivery Msgs<br>571: MExchangeIS Mailbox.Send Queue Size<br>572: MExchangeIS Mailbox.Receive Queue Size<br>573: MExchangeIS Public.Send Queue Size<br>574: MExchangeIS Public.Receive Queue Size<br><b>Note:</b> The average value over all samples over all database instances in the hour is logged to EXSPI_SINGLE, while the average value over all samples is logged per instance to EXSPI_MULTI. | EXSPI_MULTI (for each Database instance)<br><br>EXSPI_SINGLE (total over all Databases)<br><br>EXSPI_SINGLE for MTA work Queue Length |

**Table 1: Quick Start Data Collector Templates**

| Data Collector Name   | Scheduled Times                            | Metric IDs   | Table        |
|-----------------------|--|--|--------------|
| Dc-MTA Message Volume | Hourly<br>For hours: 6-18<br>Weekdays only | 530: MExchangeMTA.Inbound Messages Total<br>531: MExchangeMTA.Outbound Messages Total<br>532: MExchangeMTA.Total Recipients Inbound<br>533: MExchangeMTA.Total Recipients Outbound<br>534: MExchangeMTA.Inbound Bytes Total<br>535: MExchangeMTA.Outbound Bytes Total<br><b>Note:</b> These are running totals since the MTA service started. The Exchange SPI calculates a delta value between readings and logs this value to show message volume. | EXSPI_SINGLE |
| Dc-User Connections   | Hourly<br>For hours: 7-18<br>Weekdays only | 520: MExchangeIS.Active User Count<br>521: MExchangeIS.User Count  | EXSPI_SINGLE |

**Table 2: Add-Ons Data Collector Templates**

| <b>Data Collector Name</b>         | <b>Scheduled Times</b>                             | <b>Metric IDs</b>  | <b>Table</b>   |
|------------------------------------|--|--|----------------|
| Dc-Chat Data Collection            | 30 minutes<br>Weekdays only                        | 837: Microsoft Exchange Chat Service.Clients<br>838: Microsoft Exchange Chat Service.Channels  | EXSPI_MULTI    |
| Dc-ConfTrends                      | 30 minutes<br><br>For hours: 7-18<br>Weekdays only | 800: MExchangeCONF.Active Conferences<br>808: MExchangeDcsMgr.Local Conferences<br>809: MExchangeDcsMgr.Remote Conferences<br>810: MExchangeDcsMgr.Active MCUs   | EXSPI_MULTI    |
| Dc-MCU                             | 30 minutes<br>For hours: 7-18<br>Weekdays only     | 811: MExchangeT120.Data Messages Received<br>812: MExchangeT120.Data Messages Sent<br>813: MExchangeT120.KBytes Received<br>814: MExchangeT120.KBytes Sent<br><b>Note:</b> These are running totals since the Conferencing service started. The Exchange SPI calculates a delta value between readings and logs this value to show message volume. | EXSPI_MULTI    |
| Dc-Instant Messaging Enabled Users | Hourly   | 843: Number IM enabled users on Server   | EXSPI_MULTI    |
| Dc-Instant Messaging               | Hourly   | 841: MExchangeIM Virtual Servers.Current Users Online<br>842: MExchangeIM Virtual Servers.Current Subscriptions<br>845: MExchangeIM.Failed Requests/sec<br>846: MExchangeIM.Rejected Requests/sec  | EXSPI_MULTI    |
| Dc-SRS Data Space Usage            | Hourly   | 112, 113, 114  | EXSPI_SRS      |
| Dc-Transaction Log Space Usage     | Hourly   | 7: Log File Size<br>Free Space on Volume<br>Total Size of Volume<br>Percentage Free on Volume  | EXSPI_TRANSLOG |



| <b>Data Collector Name</b> | <b>Scheduled Times</b> | <b>Metric IDs</b>   | <b>Table</b>   |
|----------------------------|------------------------|---|--|
| Dc-TrackLog Data           | Weekly                 | 660: Email Senders<br>661: Email Recipients<br>662: Email Destinations<br>663: Email Sources  | EXSPI_M0660<br>EXSPI_M0661<br>EXSPI_M0662<br>EXSPI_M0663 |
| End to End                 | 15 minutes             | 1002: SLA values of:<br>Met SLA<br>Almost Met SLA<br>This schedule not only executes the sending of messages it also logs the data to the data store. | EXSPI_M1002  |

## Reports for ALL Exchange versions

These reports gather data from all OVO managed Exchange servers, regardless of version.

### DETAIL REPORTS FOR ALL EXCHANGE VERSIONS

- **Exchange Folder Usage Trends:** Contains graphs showing trends in database size, number of messages and average size of public folders. The trends are shown for the time period selected when the report is generated.
- **Exchange Messaging Trends:** Provides trend graphs showing messaging volume for the Message Transfer Agent, Information Store and SMTP server message volume.
- **Exchange Mailbox Usage Trends:** Contains graphs showing trends in database size, number of messages, and average size of mailboxes. The trends are shown for the time period selected when the report is generated.
- **Exchange Top Destinations:** Identifies the top Email destinations (local, other Exchange sites, internet, gateway) for Email being sent by an Exchange server.
- **Exchange Top Recipients:** Identifies the top recipients of Email for an Exchange server.
- **Exchange Top Senders:** Identifies the top senders of Email for an Exchange server. Only Email sent by users that have Exchange mailboxes is counted. Email sent by clients such as Netscape and UNIX that do not have a corresponding Exchange mailbox are not counted.
- **Exchange Top Sources:** Identifies the top Email sources (local, other Exchange sites, internet, gateway) for Email being received by an Exchange server.

- **Exchange User Connections:** Provides a trend graph showing open and active user connections for the selected Exchange server.

## SUMMARY REPORTS FOR ALL EXCHANGE VERSIONS

- **Exchange System Information Summary:** Contains summary information about the OS and Exchange versions, mailboxes and public folders.
- **Exchange Messaging Trends for All Servers:** Provides trend graphs showing messaging volume for the Message Transfer Agent, the Information Store, the Internet Mail Service across all Exchange servers, and the SMTP server messaging volume.
- **Exchange Message Delivery SLA (Service Level Agreement):** Provides a trend graph showing how message delivery, messages read, and directory read service levels are being met across all monitored connections.

## Reports for Exchange 2000 and 2003

### DETAIL REPORTS FOR EXCHANGE 2000/2003 SERVERS

Detail reports provide information by system. One report is generated with a section for each system. The content of each report is as follows:

- **Exchange 2000 Chat Trends:** Provides averaged information on the number of client chat connections and channels for hours of the day over the time period indicated.
- **Exchange 2000 Conferencing Trends:** Provides averaged information on the number of conferences and active MCUs for hours of the day over the time period indicated.
- **Exchange 2003 and 2000 Folder Summary:** Provides summary information about the public folders on the server.
- **Exchange 2003 and 2000 Folder Usage Trends:** Contains graphs showing trends in database size, number of messages and average size of public folders. The trends are shown for the time period selected when the report is generated.
- **Exchange 2003 and 2000 Inactive Folders:** This report lists all the folders on the server that have not been accessed. The report also lists folders that have not been accessed in 20, 40 and 60 or more days.
- **Exchange 2003 and 2000 Inactive Mailboxes:** This report lists all the mailboxes on the server that have not been accessed. The report also lists mailboxes that have not been accessed in 20, 40 and 60 or more days.
- **Exchange 2000 Instant Messaging Availability Trends:** Shows instant messaging usage trends.
- **Exchange 2000 Instant Messaging Users Growth:** Shows the number of users that are Instant Messaging enabled over the time period

indicated.

- **Exchange 2003 and 2000 Mailbox Details:** Provides detailed information about the mailboxes on the server including summary totals, size distribution, and top mail users.
- **Exchange 2003 and 2000 Mailbox Store Stats:** Provides database volume statistics for Mailbox Store database files, for each managed Exchange Server. The report gives a snapshot of the volume usage, as of the most recent data collection.
- **Exchange 2003 and 2000 Mailbox Summary:** Provides summary information about the mailboxes on the server including summary totals, size distribution, and top mail users.
- **Exchange 2003 and 2000 Mailbox Usage Trends:** Contains graphs showing trends in database size, number of messages, and average size of mailboxes. The trends are associated per storage group and are shown for the time period selected when the report is generated.
- **Exchange 2000 MCU Trends:** Provides averaged information on the number of conferences and active MCU's for hours of the day over the time period indicated.
- **Exchange 2003 and 2000 Public Folder Store Stats:** Provides database volume statistics for Public Folder Store database files, for each managed Exchange Server. The report gives a snapshot of the volume usage, as of the most recent data collection.
- **Exchange 2003 and 2000 Transaction Log Stats:** Provides information concerning usage and availability of storage, by and for the Exchange Transaction log.

## **SUMMARY REPORTS FOR EXCHANGE 2000/2003 SERVERS**

Summary reports show data for ALL Exchange 2000 and 2003 servers. The content of each report is as follows

- **Exchange 2003 and 2000 System Information Summary:** Contains summary information about the OS and Exchange versions, mailboxes and public folders.
- **Exchange 2003 and 2000 Top 100 Mailboxes:** Lists the top 100 mailboxes by disk space usage across all mailbox databases.
- **Exchange Top 100 Public Folders:** Lists the top 100 public folders by disk space usage.

## Reports for Exchange 5.5 only

### DETAIL REPORTS FOR EXCHANGE 5.5 SERVERS

Detail reports provide information by system. One report is generated with a section for each system. The content of each report is as follows:

- **Exchange 5.5 Folder Summary:** Provides summary information about the public folders on the server.
- **Exchange 5.5 Mailbox Details:** Provides detailed information about the mailboxes on the server.
- **Exchange 5.5 Mailbox Summary:** Provides summary information about the mailboxes on the server including summary totals, size distribution, and top mail users.
- **Exchange 5.5 IMS Messaging Trends:** Provides trend graphs showing messaging volume for the Internet Mail Service.

### SUMMARY REPORTS FOR EXCHANGE 5.5 SERVERS

Summary reports show data for ALL Exchange 5.5 servers. The content of each report is as follows:

- **Exchange Top 100 Mailboxes:** Lists the top 100 mailboxes by disk space usage.
- **Exchange Top 100 Public Folders:** Lists the top 100 public folders by disk space usage.

## Using Exchange SPI Reports and Graphs

Exchange SPI report and graph generation require that you complete the following:

- Distribute the Quick Start template group for data collection templates.
- Configure and distribute Exchange SPI reporter collection templates.

---

### NOTE:

#### Time Interval for Exchange SPI Reports or Graphs

Exchange SPI reports and graphs will not be available until data has been gathered to the management server from the managed nodes. This occurs each night, so at least one day of activity is needed for the reports to populate. Where a report or graph type requires data from a Sat/Sun collection, those reports/graphs will require a weekend to pass.

---

## Distributing the Quick Start Template Group

In order to collect data for reports and graphs the General Data Collection templates in the Quick Start template group need to be distributed.

For the procedure to distribute templates, see *Task 8: Assign/Distribute Quick Start Templates* chapter 3 page 63.

## Configure/Distribute Reporter Collection Templates

For any Exchange server system on which you would like to receive reports, you need to distribute Exchange SPI templates from the **EXSPI Advanced > EXSPI Reporter Collection** group.

To configure the Reporter Collection templates two steps are required:

1. Complete the Advanced Configuration procedure.
2. Distribute Reporter Collection templates.

### **1. COMPLETE THE ADVANCED CONFIGURATION PROCEDURE**

For detailed steps, see *Advanced Configuration* chapter 3 page 65.

### **2. DISTRIBUTE REPORTER COLLECTION TEMPLATES**

The reporter collection templates need to be distributed to any managed nodes where data is to be collected for reporting and graphing. For the procedure to distribute templates, see *Task 8: Assign/Distribute Quick Start Templates* chapter 3 page 63.

## Deinstalling Exchange SPI Reporter

Remove the Exchange SPI reporter in one of the following ways:

1. Using the Windows **Start** menu.
2. Using the EXSPI-Reporter InstallShield wizard.

### Using the Windows Start menu:

1. Select **Start > Settings > Control Panel > Add/Remove Programs**.
2. Select **EXSPI-Reporter**.
3. Click **Remove**.

### Using the EXSPI-Reporter InstallShield wizard.

1. Double-click **EXSPI-Reporter.msi**. This opens the EXSPI-Reporter InstallShield Wizard. Click **Next** on the Welcome screen.
2. Confirm the next screen by clicking **Remove**.
3. The InstallShield Wizard has deinstalled EXSPI-Reporter. Click **Finish**.


## Exchange SPI Graphs

Exchange SPI comes with a set of preconfigured PerfView graphs. These graphs require that OpenView PerfAgent (aka MW Agent) be running on the managed node, see *Exchange SPI Graphs* chapter 7 page 147.

Open the Exchange 5.5, or 2000/2003 Graphs window in the version specific Application Group


### TO INVOKE GRAPHS:

1. Select relevant Exchange managed nodes in the VPO Node Bank.
2. Drag these nodes and drop them on the desired graph.

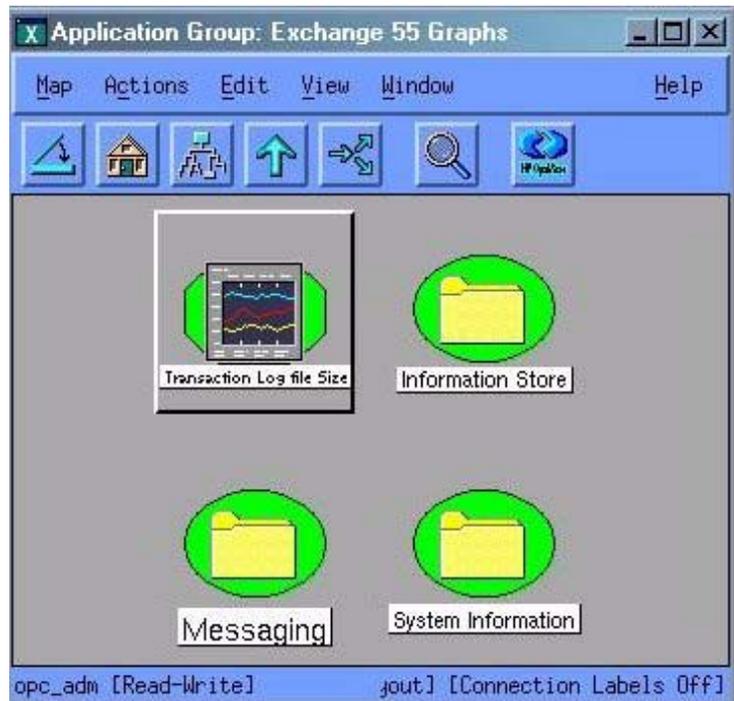

Exchange SPI graphs are the same for each Exchange version, except the Transaction Log file size graph is only for Exchange 5.5.

## INFORMATION STORE

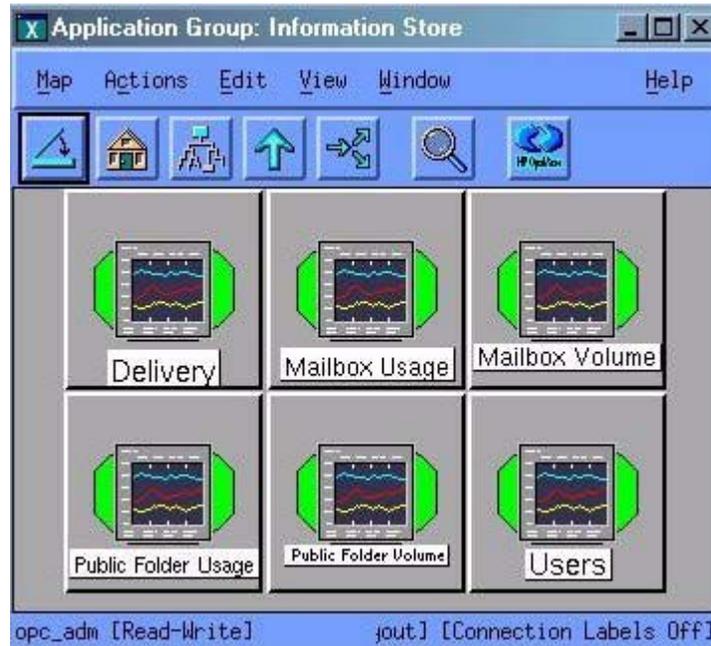

**Delivery:** This graph shows hourly metrics for the average delivery times of messages to Exchange Server private and public mailboxes.

**Mailbox Usage:** This graph shows Exchange Server Mailbox usage.


**Mailbox Volume:** This graph shows Exchange Server Mailbox volume.

**Public Folder Usage:** This graph shows Exchange Server Public Folder usage.

**Public Folder Volume:** This graph shows Exchange Server Public Folder volume.

**Users:** This graph shows information store user count metrics for the current day.

## MESSAGING

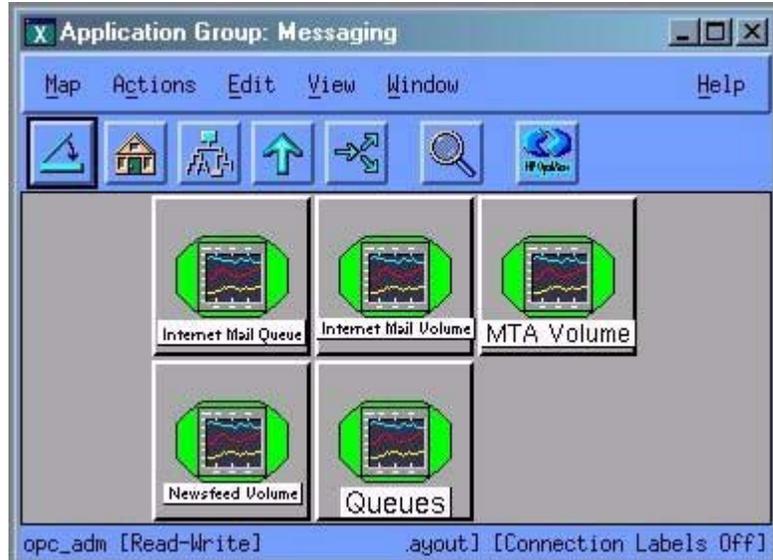

**Internet Mail Queue:** This graph shows the Exchange Server Internet Mail Service queue count.


**Internet Mail Volume:** This graph shows Exchange Server Internet Mail Connector volume.

**MTA Volume:** This graph shows Exchange Server Message Transfer Agent volume.

**Newsfeed Volume:** This graph shows Exchange Server newsfeed volume.

**Queues:** This graph show Exchange Server queue lengths.

## SYSTEM INFORMATION

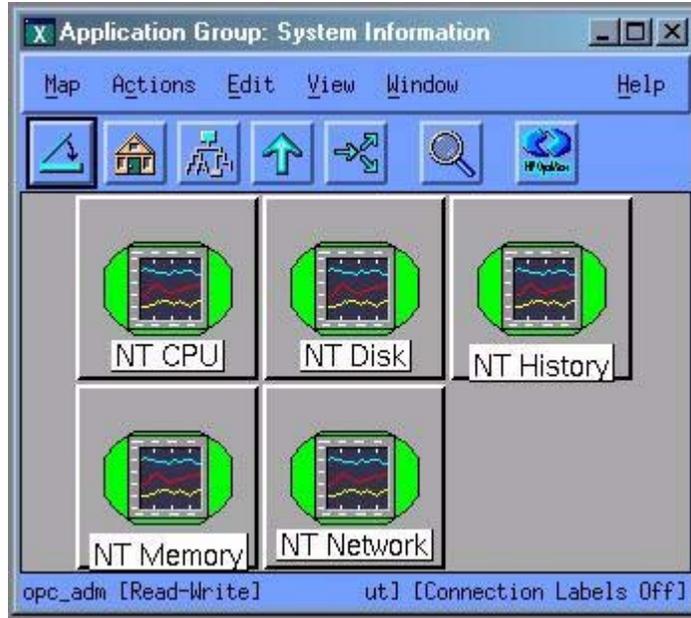

System Information for the following areas of performance are made available in graph format:

- NT CPU
- NT Disk
- NT History
- NT Memory
- NT Network

## TRANSACTION LOG DISK SPACE (EXCHANGE 5.5 ONLY)

This graph shows Transaction Log Disk Space usage on Exchange 5.5 servers.

## Generating Graphs from an Exchange SPI DSI Logfile

PerfView graphs require an OVO agent to be running on the targeted management server. You can generate PerfView graphs from the Exchange version specific Exchange SPI Application Group window, and then opening the Exchange 5.5, or 2000/2003 Graphs window. Graphs display the metric data collected by the Exchange SPI data collector.

In addition, data from any Exchange SPI server can be graphed using PerfView and data from Exchange SPI MeasureWare DSI logfiles.

Simple instructions for generating the graph follow. Additional information on using PerfView can be obtained from the *PerfView User Guide*.

1. Open a terminal window and log on.
2. In the terminal window, to verify that the DISPLAY environment variable is set to your terminal window, enter:

```
echo $DISPLAY
```

If the DISPLAY environment variable is not set correctly, set it to your terminal window.

3. To start PerfView, type:

```
pv
```

The main PerfView window is displayed.

---

### NOTE

Since values are logged hourly to MeasureWare, use the PerfView Graph : **Settings->Points Every** to set the time setting to **1h** or **3h**.

4. Select **Data Sources>Manage**.

5. In the PerfView Systems window highlight the desired system from the list and click **Open**.

The Data Sources window is displayed listing all known source files. If the desired data source is not listed, press **Select** and enter the data source name.

6. Select the desired source file from the list and click **Open**.

Perfview connects to the data source and displays it in the main window.

7. Select **Graphs>Create New Graph**.

8. In the Select Metrics window highlight the data source file.

A list of metrics is displayed to use for graphing.

9. Highlight the desired metrics from the list to use for graphing.

The selected metrics are displayed in the Metrics to Be Graphed portion of the Select Metrics window.

10. Click **OK** when finished selecting metrics.

11. Click **Draw** to generate the graph.

12. You can use the **Settings** menu on the PerfView Graph window to change settings for the graph, the **Show** menu to drill down to examine points on the graph, and the **File** menu to save, print, or export the graph. You can also correlate operating system metrics with Exchange SPI metrics.

---

## Troubleshooting

---

## Introduction

This chapter offers troubleshooting suggestions for Exchange SPI. It includes the following sections:

- ❑ Self-Healing Information for enhanced troubleshooting
- ❑ Verifying Software Installation on the Management Server
- ❑ The Exchange SPI Error Log
- ❑ Turning on/ Disabling Tracing
- ❑ Common Errors
- ❑ Verifying the MSXSPI account has the right privileges
- ❑ Verifying MeasureWare Integration
- ❑ Installing Old DSI Log Files
- ❑ Advanced Configuration Template Failures

---

## Self-Healing Information for enhanced troubleshooting

The Exchange SPI now includes a **Self-Healing Info** application that gathers data useful for troubleshooting issues. The application can be launched on the managed node to gather specific error messages, and other relevant data that can help you diagnose problems.

Even though the **Self-Healing Info** application can work independently, it can also be integrated with HP OpenView Self-Healing Services, available at no cost with your support contract. Self-Healing Services speeds up the problem resolution process by allowing you to easily open an incident and send data straight to a secure HP support site. For more information, see HP Openview's Software Support Oline Web site at:

[http://support.openview.hp.com/self\\_healing.jsp](http://support.openview.hp.com/self_healing.jsp)

---

### NOTE

If Self-Healing Services is already installed, you will have to re-start it after installing your SPI. Whenever possible, install the SPI before installing Self-Healing Services. An upgrade to SPIs on a managed node already running Self-Healing Services requires a re-start of Self-Healing Services.

After you install the Self-Healing Services client on the managed node, you no longer need to launch the **Self-Healing Info** application. Self-Healing Services automatically gathers error-related and system data when you submit an incident.

### USING THE SELF-HEALING INFO APPLICATION

1. Turn on tracing, see *Turning on Tracing* chapter 8 page 160.
2. Reproduce your problem.
3. Open the Node Bank window and locate the node on which you want to run the Self-Healing Info application.
4. Open the Application Bank window and double-click EXSPI.Admin.

**Self-Healing Information for enhanced troubleshooting**

5. Drag and drop the node onto the Self-Healing Info application.
6. In the message that appears, note where the compressed file will be stored.
7. Send the file to the above-mentioned HP support site for diagnosis.

---

## Verifying Exchange SPI Installation on the Management Server

---

**NOTE:**

This utility is not available for Sun Solaris.

1. To check the integrity of Exchange SPI files on the OVO management server, run the following command:

**`/usr/sbin/swverify SPI-EXCHANGE-OVO`**

This command produces output similar to the following:

```
(non-interactive) (jobid=ovruxr13-0161)
* Session started for user "root@ovruxr13".
* Beginning Selection
* Target connection succeeded for "ovruxr13:/".
* Software selections:
+ DSI2DDF.DSI2DDF,l=/,r=A.02.00.00,a=HP/SunOS,v=HP
SPI-EXCHANGE-OVO.EXSPI,l=/,r=A.08.20.6,a=HP-UX_B.11.00_32
/HP-UX_B.11.00_64,v=HP
+SPI-SHS-OVO.SPI-SHS-AIX,l=/,r=A.01.00.00,a=HP_UX_10/11,v
=HP
+SPI-SHS-OVO.SPI-SHS-CORE,l=/,r=A.01.00.00,a=HP_UX_10/11,
v=HP
+SPI-SHS-OVO.SPI-SHS-HPUX,l=/,r=A.01.00.00,a=HP_UX_10/11,
v=HP
+SPI-SHS-OVO.SPI-SHS-LXx86,l=/,r=A.01.00.00,a=HP_UX_10/11
,v=HP
+SPI-SHS-OVO.SPI-SHS-OSF,l=/,r=A.01.00.00,a=HP_UX_10/11,v
=HP
+SPI-SHS-OVO.SPI-SHS-SOL,l=/,r=A.01.00.00,a=HP_UX_10/11,v
=HP
+SPI-SHS-OVO.SPI-SHS-UX64,l=/,r=A.01.00.00,a=HP_UX_10/11,
v=HP
+SPI-SHS-OVO.SPI-SHS-WIN,l=/,r=A.01.00.00,a=HP_UX_10/11,v
=HP
+SPI-SVCDISC-OVO.SPI-SVCDISC-AGT-AIX,l=/,r=A.02.00,a=HP_U
X_11,v=HP,fr=A.02.00,fa=HP_UX_11
```

## Verifying Exchange SPI Installation on the Management Server

```
+SPI-SVCDISC-OVO.SPI-SVCDISC-AGT-HP,l=/,r=A.02.00,a=HP_UX
_UX_11,v=HP,fr=A.02.00,fa=HP_UX_11
+SPI-SVCDISC-OVO.SPI-SVCDISC-AGT-LNX,l=/,r=A.02.00,a=HP_U
X_11,v=HP,fr=A.02.00,fa=HP_UX_11
+SPI-SVCDISC-OVO.SPI-SVCDISC-AGT-SOL,l=/,r=A.02.00,a=HP_U
X_11,v=HP,fr=A.02.00,fa=HP_UX_11
+SPI-SVCDISC-OVO.SPI-SVCDISC-AGT-TRU64,l=/,r=A.02.00,a=HP
_UX_11,v=HP,fr=A.02.00,fa=HP_UX_11
+SPI-SVCDISC-OVO.SPI-SVCDISC-AGT-WIN,l=/,r=A.02.00,a=HP_U
X_11,v=HP,fr=A.02.00,fa=HP_UX_11
+SPI-SVCDISC-OVO.SPI-SVCDISC-SRV-HP,l=/,r=A.02.00,a=HP_UX
_UX_11,v=HP,fr=A.02.00,fa=HP_UX_11
```

\* A "+" indicates an automatic selection due to dependency or the automatic selection of a patch or reference bundle.

\* Selection succeeded.

\* Beginning Analysis

\* Session selections have been saved in the file:  
/root/users/afshinsu/.sw/sessions/swverify.last

NOTE: More information may be found in the agent logfile using the command

```
swjob -a log ovruxr13-0161 @ ovruxr13:/
```

---

## The Exchange SPI Error Log

OVO7 and OVO8/DCE errors are forwarded to the browser and logged to:

```
\usr\OV\exspi\log\exspierror
```

OVO8/HTTPS errors are logged to:

```
<Installation_Directory>\Data\exspi\log\exspierror
```

For example:

```
04/01/02 08:43:57 ERROR exspi(488) [colamain.cpp:333]:  
EXSPI-60-40:  
Exchange Server Software not installed on this system  
(Check: SOFTWARE\Microsoft\Exchange\Setup). Unable to  
perform collection!
```


---

## Turning on Tracing

If a problem occurs and you are asked to turn on tracing by the EX-SPI support team, use the **Enable EXSPI Tracing** application for the relevant Exchange version.

1. Select all the Exchange managed nodes you wish to configure in the OVO Node Bank.
2. Drag and drop these nodes on the **Enable EXSPI Tracing** application located in the EXSPI Admin application group under the appropriate version.
3. Verify whether there are any errors in the **Output of Application** window.

### *Output of Application window*

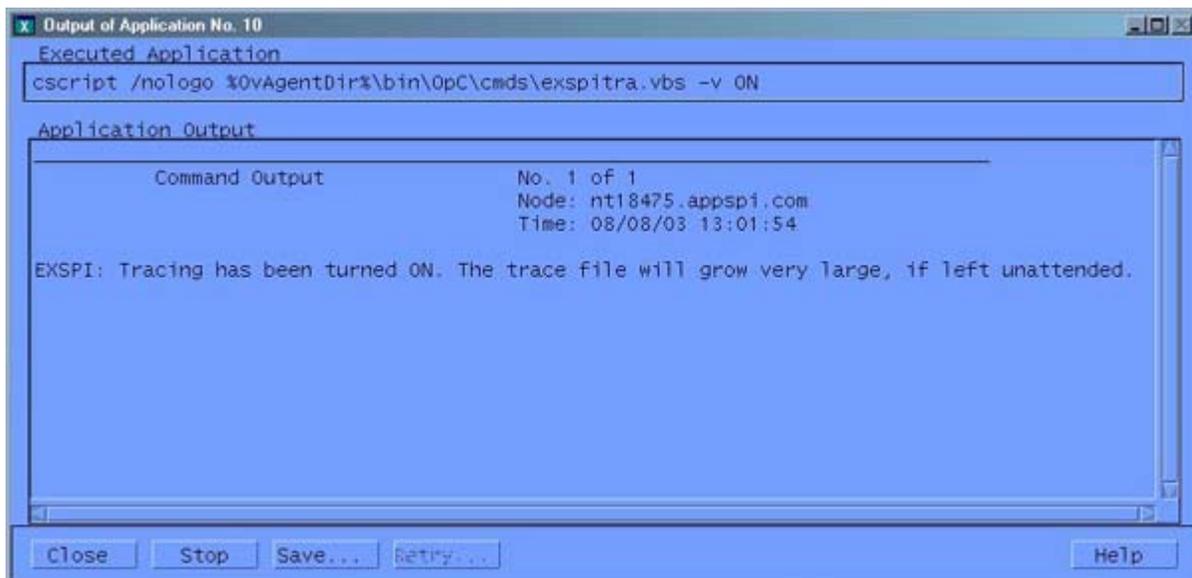

## DISABLING TRACING

For disabling the tracing, use **Disable EXSPI Tracing**.

---

**NOTE**

The trace file will grow very large. It is advisable to leave tracing enabled only long enough to recreate the problem, or in order to comply with HP support instructions.

---

## Common Errors

1. When re-installing or upgrading Exchange Server, Exchange Setup program shows errors.

**Symptom:** Exchange Server re-install or upgrade (e.g., new Service Pack), the Exchange Setup generates error messages about DLLs that can't be overwritten.

**Solution:** Stop OVO (`opcagt -stop`) and MeasureWare (`mwacmd stop`), then retry the operation.

2. Schedule template fails with message:  
`EXSPI xxxxx Metric Collection failed.`

**Symptom:** The scheduled command failed with an exit code other than 0.

**Solution:** This error sometimes occur if the system is rebooted just before the collector/analyzer program was executed.

However, if this is not the case do the following: To find out more information about the failure, modify the failing schedule template, check the **Send Output of Action** check box and re-distribute templates again.

The browser message should now contain an annotation with more information about the failure. Also, check the `exspierror` for more information.

3. Error when distributing Exchange 5.5 ConfigFile templates to Windows NT4 managed nodes.

**Symptom:** During ConfigFile template distribution to Windows NT nodes, the following system error message box appears and the action fails:

```
OvCfgFile.exe - Entry Point Not Found. The procedure
entry point __lc_collate_cp could not be located in the
dynamic link library MSVCRT.dll.
```

**Solution:** The Windows managed node does not have the correct version of the Microsoft C Runtime library MSVCRT.dll installed on the managed node (MSVCRT.dll is located in the system32 directory). Upgrade your system by downloading and installing a newer version of MSVCRT.dll as described in Microsoft Knowledge Base article Q259403 at:  
**[www.support.microsoft.com/default.aspx?scid=kb;EN-US;q259403](http://www.support.microsoft.com/default.aspx?scid=kb;EN-US;q259403)**  
Updating MSVCRT.dll may require a reboot. Afterwards, restart the failed ConfigFile-template distribution.

---

## Verifying MSXSPI account has right privileges

In order to verify that you have created the MSXSPI account with the right amount of privileges to run advanced metrics such as 5, 841, or 630, do the following:

1. Log into your Exchange 2000 or 2003 server as MSXSPI user (in the correct NT domain).
2. Open a DOS command prompt window.
3. `cd` to the directory where `exspi` collector is located (for OVO7 and OVO8/DCE typically in `c:\usr\OV\bin\OpC\monitor`, for OVO8/HTTPS `<InstallDir>\data\bin\instrumentation`).

4. Run the following series of commands:

```
exspi_e2k.exe -m 5 -p
exspi_e2k.exe -m 841 -p
exspi_e2k.exe -m 630 -p
```

5. These will print the results to the screen.
6. If these executed properly and the correct results printed on the screen, your MSXSPI account has the right permissions.

---

## Verifying MeasureWare Integration

To verify MeasureWare integration check the following:

1. Is the MeasureWare Agent installed on the Exchange server managed node?
2. Is the MeasureWare agent up and running (`mwacmd status` or MeasureWare Agent application in RPM Tools Windows group)? There should be TWO `rep_server` programs running. If not, re-start MeasureWare Agent.
3. Verify MeasureWare Agent configuration.
  - Verify that `perflbd.mwc` (e.g., in `\rpmtools\data`) contains `EXSPI_DATA` data source.
  - If not, re-run MW setup: First run, Disable Data Logging, wait for MW to re-start, then run Enable Data Logging.
  - Verify that DSI logfiles were created in `\usr\exspi\dsi\log\exspi_log.EXSPI_*`
  - Check the timestamps of those files; they are updated when the data collectors run.
4. Verify `exspi_e2k.exe` or `exspi_e55.exe` data forwarding:
  - **For OVO7 and OVO8/DCE** the collector/analyzer `exspi_e2k.exe` or `exspi_e55.exe` specified in the schedule templates writes MeasureWare data to `\usr\OV\exspi\dsi\*.dat` only if the keyword `MW ON` is present in the `\usr\OV\exspi\defaults` file (Note: the defaults file has no file extension.). Check the defaults file for the above keyword. If not present, run **EXSPI Add DataSource**.
  - **For OVO8/HTTPS** the collector/analyzer `exspi_e2k.exe` or `exspi_e55.exe` specified in the schedule templates writes MeasureWare data to `<InstallDir>data\exspi\dsi\*.dat` only

if the keyword `MW ON` is present in the `<InstallDir>data\exspi\defaults` file. (Note: the defaults file has no file extension.). Check the defaults file for the above keyword. If not present, run **EXSPI Add DataSource**.

- Check whether `*.dat` files are present in `\usr\OV\exspi\dsi`. (for OVO7 and OVO8/DCE), or `<InstallDir>data\exspi\dsi` (for OVO8/HTTPS).
- Check timestamps of `*.dat` files.

---

## Advanced Configuration Template Failures

**Symptom:** The following data collectors fail and a critical message is shown in the OVO browser:

- EXSPI-60/55 Dc-Private IS Sum. Data
- EXSPI-60/55 Dc-Public IS Sum. Data
- EXSPI-60/55 Dc-Mailbox Data
- EXSPI-60/55 Dc-Public Folder Data

**Solution:** These collectors access Exchange directly and require MSXSPI user and **MSXSPI<hostname> mailbox**.

Verify MSXSPI user, MSXSPI<hostname> mailbox, MSXSPI rights in Exchange and MeasureWare:

1. Verify MSXSPI user setup.
  - Use Windows User Manager to verify MSXSPI account. The user must exist in the same domain as the Exchange Server is part of. **Note:** there must be no local MSXSPI user.
  - For Exchange 5.5, the MSXSPI user must be part of Domain Admin

group.

2. Verify MSXSPI rights in Exchange.

The MSXSPI user must have "Receive As" and "Send As" Exchange Admin permissions. See *Creating a Service Account with Proper Access Permissions* chapter 2 page 22.

3. Verify MSXSPI<hostname> mailbox.

Use **Exchange Admin** to verify that a MSXSPI<host\_name> mailbox exists and click on **Recipients**. In the right pane, a MSXSPI<host\_name> user must show up for each server which belongs to the site.

4. Verify MeasureWare Agent integration as described in *Verifying MeasureWare Integration* chapter 8 page 165.



---

**File Names**

## Introduction

This chapter lists the Exchange SPI file names, along with their descriptions, owners, groups, and permissions. Exchange SPI files are grouped as follows:

- ❑ Management server files
- ❑ Management server/managed node files
- ❑ Managed node files
- ❑ Logging and trace files

# Management Server Files

## TEMPLATES FOR OPCCFGUPLD (OVO UPLOAD FACILITY)

All files listed in this table can be found on the management server in the following directories (the location of these files varies by platform):

`/var/opt/OV/share/tmp/OpC_appl/EXSPI/exspiset/C/`

**Table 1: Management Server Files**

| File  | Description   |
|---|---|
| <code>exspiset.idx</code>                           | OVO upload control file. This file defines what is being uploaded into OVO: message groups, monitor templates, logfile templates, applications and template groups.       |
| <code>TEMPLATES/LOGFILE<br/>/logfile.dat</code>     | Definition file for logfile encapsulation.  |
| <code>TEMPLATES/MONITOR<br/>/monitor.dat</code>     | Definition file for OVO templates: collector/analyzer program, external monitor for each metric and file system monitor. Contains all details for monitoring all metrics. |
| <code>TEMPLATES/SCHEDULE<br/>/schedule.dat</code>   | Definition file for Exchange SPI schedule templates.  |
| <code>TEMPLATES/TEMPLGROUP<br/>/templgrp.dat</code> | Definition file for OVO template group structure.   |
| <code>TEMPLATES/MSGGROUPS<br/>/msggrps.dat</code>   | Definition file for OVO message group structure.  |
| <code>TEMPLATES/INTERFACE<br/>/msgi.dat</code>      | Definition file for Exchange SPI specific error message.  |

## MISCELLANEOUS MANAGEMENT SERVER FILES

**Table 2: Miscellaneous Other Management Server Files**

| File  | Description  |
|---|--|
| /etc/opt/OV/share/conf<br>/OpC/mgmt_sv/<br>reports/exspi_lc.sql | Report that lists all nodes that have Exchange SPI templates assigned (for license check). |
| /opt/OV/EXSPI/bin/exspiv  | Script to run PerfView as metric operator actions and bring up graphs.                     |
| /opt/OV/EXSPI/bin/exspircfg                                     | Script for EXSPI Node Config.  |
| /opt/OV/EXSPI/bin/EXSPI_DiscConfig.sh                           | Script for setting Exchange SPI related variables.   |
| /opt/OV/EXSPI/bin/exspipngcfg_e55.sh                            | Script for End-to-End Ping config for Exchange 5.5   |
| /opt/OV/EXSPI/bin/exspipngcfg_e2k.sh                            | Script for End-to-End Ping config for Exchange 2000 and 2003                               |

---

## Management Server/Managed Node Files

When you run **swinstall**, the following monitor and command files are installed on the Management Server. They are also installed on managed nodes when you distribute monitors, commands and actions from the Management Server to the managed nodes.

### MONITOR FILES

#### On Management Server:

```
/var/opt/OV/share/databases/OpC/mgd_node/customer/ms/
intel/nt/monitor/ (for DCE)
```

and

```
/var/opt/OV/share/databases/OpC/mgd_node/customer/ms/x86/
winnt/monitor/ (for HTTPS)
```

#### On Managed Node:

```
\usr\OV\bin\OpC\monitor (for DCE)
```

and

```
<OVO-DATADIR>\bin\instrumentation (for HTTPS)
```

**Table 3: Monitor Files**

| File               | Description  |
|--------------------|--|
| exspi_e2k.exe      | Exchange 2000/2003 SPI Collector/Analyzer program. |
| exspi_e55.exe      | Exchange 5.5 SPI Collector/Analyzer program.       |
| msexchange.apm.xml | Template list for cluster fail-over                |
| OVAMTLog2k.dll     | Tracking.Log access library for Exchange 2000/2003 |

| File           | Description                                  |
|----------------|--|
| OVAMTLog55.dll | Tracking.Log access library for Exchange 5.5 |
| OVAMDa.dll     | LDAP access library                          |
| hpudm.txt      | Internal data file                           |

---

**NOTE:**

---

All files in Table 3: Monitor Files, are in compressed ".Z" format to improve distribution performance.

## COMMAND FILES

Command files are located in the following directories:

### Management Server:

`/var/opt/OV/share/databases/OpC/mgd_node/customer/ms/  
intel/nt/cmds` (for DCE)

and

`/var/opt/OV/share/databases/OpC/mgd_node/customer/ms/  
x86/winnt/cmds` (for HTTPS)

### Managed Node:

`\usr\OV\bin\OpC\intel\cmds` (for DCE)

and

`<OVO-DATADIR>\bin\instrumentation` (for HTTPS)

All files in this table are in compressed ".Z" format to improve distribution performance.

**Table 4: Command Files**

| File  | Description  |
|---|--|
| exspitra.vbs  | Turns EXSPI Tracing on/off<br>-v ON<br>-v OFF  |
| exspimwd.vbs  | Turns data forwarding to MeasureWare on/off (collector/analyzer will only forward data to MeasureWare if set to on:<br>-v ON<br>-v OFF |
| exspcienc.exe   | For configuring managed node; part of the advanced configuration.  |
| exspi_e2k_cfg.vbs   | For configuring an Exchange 2000 or 2003 server mailbox.   |
| exspi_e55_cfg.exe   | For configuring an Exchange 5.5 server mailbox.  |
| exspiDDF.bat  | For turning on data collection.  |
| EXSPI_CODA_m0660.spec/<br>EXSPI_MW_m0660.spec<br>EXSPI_CODA_m0661.spec/<br>EXSPI_MW_m0661.spec<br>EXSPI_CODA_m0662.spec/<br>EXSPI_MW_m0662.spec<br>EXSPI_CODA_m0663.spec/<br>EXSPI_MW_m0663.spec<br>EXSPI_CODA_m1002.spec/<br>EXSPI_MW_m1002.spec<br>EXSPI_CODA_multi.spec/<br>EXSPI_MW_multi.spec<br>EXSPI_CODA_single.spec/<br>EXSPI_MW_single.spec<br>EXSPI_CODA_details.spec/<br>EXSPI_MW_details.spec<br>EXSPI_CODA_pfdetail.spec/<br>EXSPI_MW_pfdetail.spec | Data log specification   |

Appendix A:  
Management Server/Managed Node Files

| File   | Description  |
|--|--|
| exspi_e2k_clust_config.js  | Generates xml output, which can be used for editing the apminfo.xml file |
| exspi_dbmount.vbs<br>(NOTE: This file is also present under monitor and actions directories) - | Checks and mounts dismounted information store(s)                        |

---

# Windows Managed Node Files

## MONITOR TEMPLATES

When templates are distributed from the management server to the Windows managed nodes, the monitor templates are encrypted and stored in the following directory:

```
%OAgentDir%\conf\OpC\<>hostname>\
```

## Logging and Trace Files

Logging and trace files are located in the following directory on the managed node:

`%OAgentDir%\exspi\log`

**Table 5: Logging and Trace Files**

| File       | Description   |
|------------|---|
| trace      | When TRACE ON is set in %OAgentDir%\exspi\defaults, tracing and debug information is written to %OAgentDir%\exspi\log. This file can get very large.              |
| exspierror | Error information when the Exchange SPI collector/analyzer encounters an error condition. Messages written to this file are also sent to the OVO message browser. |

---

**Components**

This appendix covers the Exchange SPI program components and contains the following topics:

- ❑ Component Interaction
- ❑ Table of Exchange 2000 and 2003 Templates
- ❑ Table of Exchange 5.5 Templates


---

## Component Interaction

The Exchange SPI consists of the following logical components:

- **Template Groups with schedule and monitor templates:** **Monitor** templates define conditions for each metric, **Schedule** templates execute metrics according to the defined schedule.
- **Collector/analyzer program:** Collects the metrics specified in the templates at predefined intervals, performs calculations, and forwards data to the OVO data collecting agent. OVO checks the threshold values and triggers alarms.
- **Windows event log:** Compares Windows event log entries against predefined logfile templates, and forwards error messages to the OVO management server.
- **EXSPI MBox Config:** SPI application that configures an Exchange mailbox for SPI to access mailbox and folder information (advanced configuration).
- **EXSPI Add DataSource:** configures and starts the logging of data, **Enable Data Logging/Disable Data Logging:** starts/stops data logging.
- **Graphs and reports:** Can be generated using HP PerfView and HP Service Reporter.
- **Persistent store:** Saves metric specific values and reports between invocations of the Collector/Analyzer.

*Exchange SPI Component Interaction*

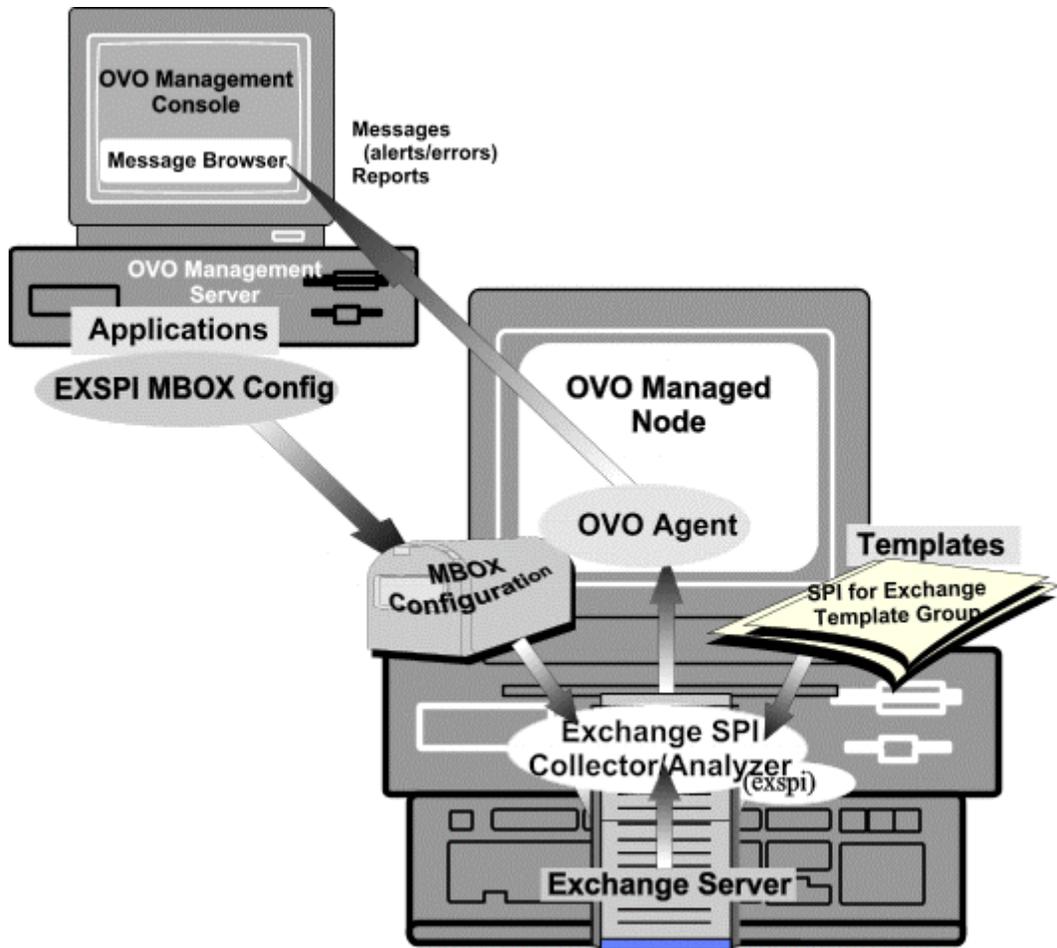

---

## Exchange SPI Templates


Installing the Exchange SPI adds the **SPI for Exchange** template folder to the OVO console tree. Double click **SPI for Exchange** to display the **Exchange 2000 and 2003**, and **Exchange 5.5** folders beneath. Double click to open either folder, and see the EXSPI Quick Start, Add-Ons and Advanced template groups for that version of Exchange. Selecting a template group in the console tree will display the templates, or template sub-groups within that group, in the details pane on the right.

### MS EXCHANGE VERSION AND EXSPI PREFIX

This version of the Exchange SPI monitors MS Exchange 2003, 2000 and 5.5. Template and Template group names contain the version number in the prefix, where **60** refers to Exchange 2000 and 2003, **65** to Exchange 2003 only, and **55** to Exchange 5.5. For example, where an Exchange 5.5 template group has the name **EXSPI-55 Event Log Errors**, the equivalent Exchange 2000 and 2003 template group is **EXSPI-60 Event Log Errors**.

When templates or template groups are referred to that work for both versions, they are referred to in this guide as **EXSPI-60/55** *<template name>*.

*Message Source Templates dialog*

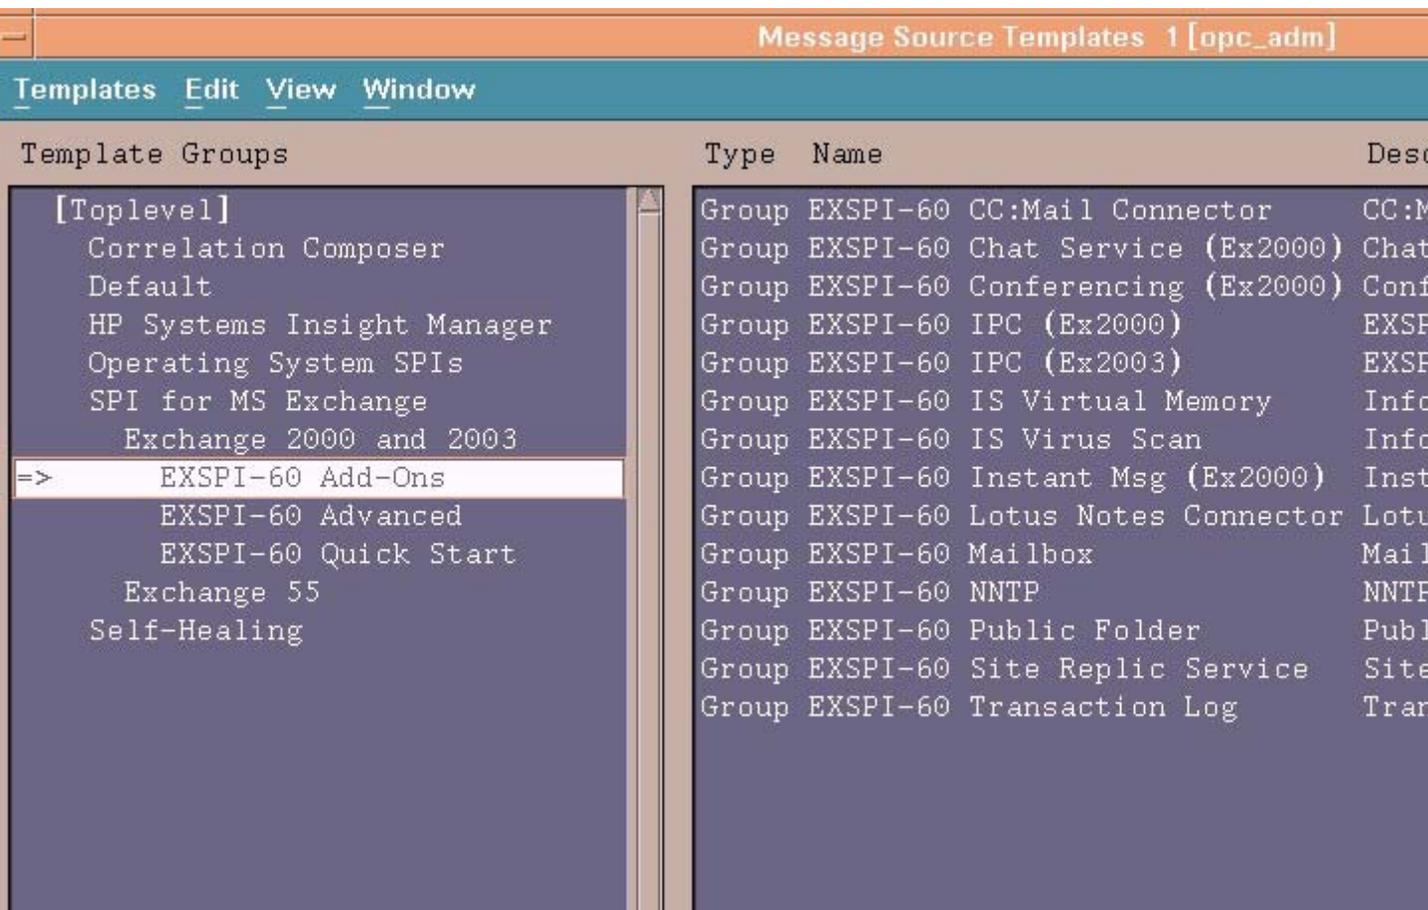

For a complete listing of templates with detailed template by template specifications, see the *HP OpenView Smart Plug-in for Microsoft Exchange Server Reference Guide*.

# Table of Exchange 2000/2003 templates

## EXSPI-60 QUICK START

| Exchange 2000 and 2003: Quick Start Subgroups: | Templates  | Descriptions  |
|--|--|---|
| EXSPI-60 Cluster                               | EXSPI-60 Exchange Cluster Discover SysLog<br>EXSPI-60 Exchange Cluster Discovery AppLog            | System Event Log for Cluster Events<br>Application Event Log for Cluster Events   |
| EXSPI-60 Directory Svc Access                  | EXSPI-60 DSAccess Appl Errors<br>EXSPI-60-0023<br>EXSPI-60-15m-DSAccess                            | MSEXchangeDSAccess application event log errors<br>Exchange DSAccess Cache Hit-Miss Ratio<br>DSAccess Hit-Miss Ratio  |
| EXSPI-60 Event Log Errors                      | EXSPI-60-Exchange Application Errors   | Templates in this group monitor Exchange error messages written to the Windows Event log file and when detected, forward them to the OVO console<br>Exchange System Errors  |
| EXSPI-60 General Data Collection               | EXSPI-60-Log Data (log single instance data to OV Performance Agent)                               | Templates in this group create data stores and write data to data stores  |
| EXSPI-60 Information Store                     | EXSPI-60-0030<br>EXSPI-60-0031<br>EXSPI-60-0032<br>EXSPI-60-0033<br>EXSPI-60-0034<br>EXSPI-60-0040 | Templates in this group collect data on the volume of messages processed by both the Private and Public Information Store during the last logging interval<br>IS Public Average Delivery Time<br>IS Public Average Local Delivery Time<br>IS Public Replication Queue Size<br>IS Public Receive Queue Size<br>IS Public Send Queue Size<br>IS Mailbox Average Delivery Time |

Appendix B:  
Table of Exchange 2000/2003 templates

| Exchange 2000 and 2003: Quick Start Subgroups: | Templates                           | Descriptions   |
|--|-------------------------------------|--|
| EXSPI-60 Information Store (cont)              | EXSPI-60-0041                       | IS Mailbox Average Local Delivery Time                                   |
|  | EXSPI-60-0042                       | IS Mailbox Receive Queue Size  |
|  | EXSPI-60-0043                       | IS Mailbox Send Queue Size   |
|  | EXSPI-60-0100                       | IS User Connection Count Low   |
|  | EXSPI-60-05m-IS                     | 5m Scheduler for metrics in Information Store group                      |
|  | EXSPI-60-15m-IS                     | 15m Scheduler for metrics in Information Store group                     |
|  | EXSPI-60-DC-IS Msg Delivery Time    | Collect data on the average msg delivery times in core procs             |
|  | EXSPI-60-DC-IS Mailbox Msg Vol      | Collect data on the vol. of messages processed by Private IS             |
|  | EXSPI-60-DC-IS Public Msg Vol       | Collect data on the vol. of messages processed by Public IS              |
|  | EXSPI-60-IS_DbLogRecordStallsPerSec | Alarm on Information Store Transaction Log Record Buffer Addition Stalls |
|  | EXSPI-60-IS_DbLogThreadsWaiting     | Alarm on Information Store Threads Waiting to Write to Transaction Log   |
|  | EXSPI-60-IS_DbLogWritesPerSec       | Alarm on the number of times the transaction log buffers are written     |
|  | EXSPI-60-IS_RPCOperations           | Alarm on number of MAPI client RPC operations/sec                        |
|  | EXSPI-60-IS_RPCRequest              | Alarm on number of MAPI client RPC requests                              |
| EXSPI-60 Dc-Information Store                  | Log RPC requests and operations/sec |  |

Table of Exchange 2000/2003 templates

| Exchange 2000 and 2003: Quick Start Subgroups: | Templates  | Descriptions  |
|--|--|---|
| EXSPI-60 Services and Processes                | <p>EXSPI-60-Connector State</p> <p>EXSPI-60-Link State</p> <p>EXSPI-60-Queue State</p> <p>EXSPI-60-Server State</p> <p>EXSPI-60-0001</p> <p>EXSPI-60-0002</p> <p>EXSPI-60-05m-Serv. &amp; Processes</p> <p>EXSPI-60-1001</p> <p>EXSPI-60-10m-Serv. &amp; Processes</p> <p>EXSPI-60-DC-User Connections</p> | <p>Templates in this group monitor Windows Services for Exchange by checking to see that Exchange services configured with Automatic startup are running.</p> <p>Examines the class ExchangeConnectorState for condition ISUP equal to false</p> <p>Examines the class ExchangeLink for thresholds on NumberOfMessages</p> <p>Examines the class ExchangeQueue for thresholds on NumberOfMessages</p> <p>Examines the class ExchangeServerState for condition ServerState not equal to good.</p> <p>Process Monitor</p> <p>Inactive Process Monitor</p> <p>5m Scheduler for metrics in Services and Processes group</p> <p>Services Monitor</p> <p>10m Scheduler for metrics in Services and Processes group</p> <p>Collect data on the number of users</p> |
| EXSPI-60 Internal Errors                       | EXSPI-60-Messages  | <p>Templates in this group collect information on errors occurring within the Exchange SPI and contains instruction text for fixing common problems</p>   |

Appendix B:  
Table of Exchange 2000/2003 templates

| Exchange 2000 and 2003: Quick Start Subgroups: | Templates   | Descriptions   |
|--|---|--|
| EXSPI-60 Message Transfer Agent                | <p>EXSPI-60-0010</p> <p>EXSPI-60-0011</p> <p>EXSPI-60-0012</p> <p>EXSPI-60-0013</p> <p>EXSPI-60-0014</p> <p>EXSPI-60-0015</p> <p>EXSPI-60-0016</p> <p>EXSPI-60-0017</p> <p>EXSPI-60-05m-MTA</p> <p>EXSPI-60-1h-MTA</p> <p>EXSPI-60-DC-MTA &amp; IS Queue Len.</p> <p>EXSPI-60-DC-MTA Message Volume</p> | <p>Templates in this group collect data on the length of message queues and volume of messages (number and kilobytes) processed by the Message Transfer Agent. Also collect data on failed, delayed, and rejected inbound/outbound associations and messages during the last logging interval</p> <p>MTA Message Delay</p> <p>MTA Work Queue Length</p> <p>MTA Failed Conversions</p> <p>MTA Connection Message Delay</p> <p>MTA Connection Queue Lengths</p> <p>MTA Failed Outbound Associations</p> <p>MTA Rejected Inbound Associations</p> <p>MTA Rejected Inbound Messages</p> <p>5m Scheduler for metrics in MTA group</p> <p>1h Scheduler for metrics in MTA group</p> <p>Collect data on the length of message queues in core procs</p> <p>Collect data on the vol. of messages processed by MTA</p> |

Table of Exchange 2000/2003 templates

| Exchange 2000 and 2003: Quick Start Subgroups: | Templates   | Descriptions  |
|--|---|---|
| EXSPI-60 SMTP                                  | EXSPI-60-0050<br>EXSPI-60-0051<br>EXSPI-60-0052<br>EXSPI-60-0053<br>EXSPI-60-0054<br>EXSPI-60-0055<br>EXSPI-60-0056<br>EXSPI-60-0057<br>EXSPI-60-1h-SMTP<br>EXSPI-60-5m-SMTP<br>EXSPI-60-DcSMTP Message Queues<br>EXSPI-60-DC-SMTP Message Volume | Templates in this group monitor the SMTP queue length, Non-Delivery Reports (NDRs), and refused connections<br>SMTP Categorizer Queue Length<br>SMTP Local Queue Length<br>SMTP Local Retry Queue Length<br>SMTP Messages Pending Routing<br>SMTP Remote Queue Length<br>SMTP Remote Retry Queue Length<br>SMTP NDR Percentage<br>SMTP Outbound Connections Refused<br>1h Scheduler for metrics in SMTP group<br>5m Scheduler for metrics in SMTP group<br>Populate Node database with queue metrics for graph.<br>Collect data on the volume of SMTP messages processed. |

## EXSPI-60 ADD-ONS

| Exchange 2000 and 2003: Add-Ons Subgroup | Templates   | Descriptions   |
|--|---|--|
| EXSPI-60 CC:Mail Connector               | <p>EXSPI-60-0090</p> <p>EXSPI-60-0091</p> <p>EXSPI-60-0092</p> <p>EXSPI-60-0093</p> <p>EXSPI-60-1h-ccMail Connector</p> <p>EXSPI-60-5m-ccMail Connector</p> | <p>Templates in this group monitor the number of messages awaiting delivery to Exchange from Lotus cc:Mail, the rate at which Non-Delivery Reports (NDRs) are being sent from Lotus cc:Mail to Exchange and vice versa</p> <p>cc:Mail MTS-IN Queue Length</p> <p>cc:Mail MTS-OUT Queue Length</p> <p>Exchange NDRs to cc:Mail</p> <p>cc:Mail NDRs to Exchange</p> <p>1h Scheduler for metrics in cc:Mail Connector group</p> <p>5m Scheduler for metrics in cc:Mail Connector group</p>  |
| EXSPI-60 Chat Service (Ex 2000)          | <p>EXSPI-60-0830</p> <p>EXSPI-60-0831</p> <p>EXSPI-60-0833</p> <p>EXSPI-60-0834</p> <p>EXSPI-60-0835</p> <p>EXSPI-60-0836</p>                               | <p>Templates in this group monitor numbers of clients logged onto chat community, and note authentications, failures and disconnections related to client timeouts, DNS lookup requests and DNS lookup failures</p> <p>Microsoft Exchange Chat Service.Active DNS logon threads</p> <p>Microsoft Exchange Chat Service.Client Timeout Related Disconnects</p> <p>Microsoft Exchange Chat Service.Anonymous Clients</p> <p>Microsoft Exchange Chat Service.Authenticated Clients</p> <p>Microsoft Exchange Chat Service.Authentication Failures</p> <p>Microsoft Exchange Chat Service.Server operations queued</p> |

Table of Exchange 2000/2003 templates

| Exchange 2000 and 2003: Add-Ons Subgroup   | Templates  | Descriptions   |
|--|--|--|
| EXSPI-60 Chat Service<br>(Ex 2000) (cont.) | EXSPI-60-15m-Chat<br><br>EXSPI-60-Dc-Chat Data Collection  | 15m Scheduler for Chat Metrics<br><br>Collects data about Exchange Chat Service clients and channels.  |
| EXSPI-60 Conference Svr (Ex 2000)          | EXSPI-60-0800<br><br>EXSPI-60-0801<br><br>EXSPI-60-0802<br><br>EXSPI-60-10m-Conf<br><br>EXSPI-60-DC-ConfTrends | Exchange SPI monitors and reports on the Conferencing Management Service, Data Conferencing Service, Multipoint Control Units (MCU) Server, Video Conferencing Service, and Conferencing Bridge Service. These services are offered with Exchange 2000.<br><br>MSEExchangeCONF.Active Conferences<br><br>MSEExchangeDcsMgr.DCOM Calls To MCUs<br><br>MSEExchangeDcsMgr.Average Load Per MCU<br><br>10m Scheduler for active conferencing<br><br>Collect data on trends in conferencing |
| EXSPI-60 Conferencing Bdg (Ex 2000)        | EXSPI-60-0805<br><br>EXSPI-60-0806<br><br>EXSPI-60-0807<br><br>EXSPI-60-10m-ConfBridge                         | Exchange SPI monitors and reports on the Conferencing Management Service, Data Conferencing Service, Multipoint Control Units (MCU) Server, Video Conferencing Service, and Conferencing Bridge Service<br><br>MSEExchangeIpconf.Failed User Join Attempts<br><br>MSEExchangeIpconf.Video Conferences in Progress<br><br>MSEExchangeH323.Incomplete Calls<br><br>10m Scheduler for failed user join attempts and video conferences in progress   |
| EXSPI-60 MCU Server (Ex 2000)              | EXSPI-60-0803  | Templates in this group monitor and collect data on the MCU service<br><br>MSEExchangeT120.Active Connections  |

Appendix B:  
Table of Exchange 2000/2003 templates

| Exchange 2000 and 2003: Add-Ons Subgroup | Templates   | Descriptions   |
|--|---|--|
|  | EXSPI-60-0804<br>EXSPI-60-10m-MCU<br>EXSPI-60-DC-MCU  | MExchangeT120.T120 MCU Load<br>10m Scheduler for MCU conferencing trends<br>Collect data on MCU conferencing trends  |
| EXSPI-60 Instant Msg (Ex 2000)           | EXSPI-60-0841<br>EXSPI-60-0842<br>EXSPI-60-0845<br>EXSPI-60-0846<br>EXSPI-60-1d-Instant Messaging DC<br>EXSPI-60-Instant Messaging DC | Templates monitor numbers of current users online, current subscriptions for each virtual service instance, and message processing time<br>MExchangeIM Virtual Servers.Current Users Online<br>MExchangeIM Virtual Servers.Current Subscriptions<br>MExchangeIM.Failed Requests/sec<br>MExchangeIM.Rejected Requests/sec<br>Reporting Collection for Instant Messaging<br>Alarming metrics for Instant Messaging |
| EXSPI-60 IPC (Exchange 2000 only)        | EXSPI-60-EpoxyClientOutQueueLength<br>EXSPI-60-EpoxyStoreOutQueueLength   | Alarm on epoxy client out queue length<br>Alarm on epoxy store out queue length  |
| EXSPI-65 IPC (Exchange 2003 only)        | EXSPI-65-EpoxyClientOutQueueLength<br>EXSPI-65-EpoxyStoreOutQueueLength   | Alarm on epoxy client out queue length<br>Alarm on epoxy store out queue length  |

## Table of Exchange 2000/2003 templates

| Exchange 2000 and 2003: Add-Ons Subgroup | Templates  | Descriptions   |
|--|--|--|
| EXSPI-60 IS Virtual Memory               | EXSPI-60-0025<br><br>EXSPI-60-IS_VMLargestBlock<br><br>EXSPI-60-IS_VMTotal16MBFreeBlocks<br><br>EXSPI-60-IS_VMTotalLargeFreeBlock<br><br>EXSPI-60-2h-IS VM Total Free Blocks | Monitors total number of free virtual memory blocks regardless of size<br><br>Monitors the size (in bytes) of the largest free block of virtual memory<br><br>Monitors total number of free virtual memory blocks that are greater than or equal to 16 MB<br><br>Monitors sum in bytes of all the free virtual memory blocks that are greater than or equal<br><br>Total number of free virtual memory blocks regardless of size   |
| EXSPI-60 Lotus Notes Connector           | EXSPI-60-0094<br><br>EXSPI-60-0095<br><br>EXSPI-60-0096<br>EXSPI-60-0097<br><br>EXSPI-60-1h-Lotus Notes Connect<br><br>EXSPI-60-5m-Lotus Notes Connect                       | Templates monitor number of messages awaiting delivery to Exchange from Lotus Notes, the rate at which Non-Delivery Reports (NDRs) are sent from Lotus Notes to Exchange and vice versa<br><br>Lotus Notes Inbound Queued Messages Length<br><br>Lotus Notes Outbound Queued Messages Length<br><br>Exchange NDRs sent to Lotus Notes<br><br>Lotus Notes NDRs sent to Microsoft Exchange<br><br>1h Scheduler for metrics in Lotus Notes Connector group<br><br>5m Scheduler for metrics in Lotus Notes Connector group |
| EXSPI-60 Mailbox                         | EXSPI-60 Db Mounted Check<br><br>EXSPI-60-0070<br><br>EXSPI-60 Db Mounted Search<br><br>EXSPI-60-1h-Mailbox Space Usage  | Events of application event log indicate information store mounting/dismounting<br><br>Mailbox Database File Disk Space<br><br>Search an Exchange server for dismounted information store(s)<br><br>Monitors mailbox store space usage   |

Appendix B:  
Table of Exchange 2000/2003 templates

| <b>Exchange 2000 and 2003: Add-Ons Subgroup</b> | <b>Templates</b>  | <b>Descriptions</b>   |
|---|---|---|
| EXSPI-60 NNTP                                   | EXSPI-60-0058<br>EXSPI-60-1h-NNTP   | Templates in this group monitor the failed newsfeed connections<br>Newsfeed Outbound Connections Failed<br>1h Scheduler for metrics in NNTP group   |
| EXSPI-60 Public Folder                          | EXSPI-60 Db Mounted Check<br>EXSPI-60-0072<br>EXSPI-60 Db Mounted Search<br>EXSPI-60-1h-Public Folder Space Usage | Events of application event log indicate information store mounting/dismounting<br>Public Folder Database File Disk Space<br>Search an Exchange server for dismounted information store(s)<br>Monitors public folder store space usage  |
| EXSPI-60 Site Replication Service               | EXSPI-60-0110<br>EXSPI-60-0111<br>EXSPI-60-05m-DS   | Templates monitor site replication to verify that synchronization updates are being processed efficiently.<br>DS Pending Synchronizations<br>DS Remaining Updates<br>5m Scheduler for metrics in Directory Service group  |
| EXSPI-60 Transaction Log                        | EXSPI-60-0004<br>EXSPI-60-0005<br>EXSPI-60-0006<br>EXSPI-60 Dc-Transaction Log Space Usage                        | Templates monitor the size in MB of the Exchange transaction logfiles as well as the disk space used by the files.<br>Percent Low Log File Disk Space<br>Low Log File Disk Space<br>Transaction Log File Disc Space<br>Collects and logs transaction log space usage activity |
| EXSPI-60 Virus Scan (Exchange 2000 only)        | EXSPI-60- Virus Scan Queue Length   | Templates in this group monitor virus scans for optimum performance<br>Checks Information Store Anti Virus API Queue Length.  |

**EXSPI-60 ADVANCED**

| <b>Exchange 2000 and 2003: Advanced Subgroups</b> | <b>Templates</b>  | <b>Descriptions</b>   |
|---|---|---|
| EXSPI-60 End To End Message Ping                  | EXSPI-60-1002<br><br>EXSPI-60-End to End Message Ping   | Templates in this group monitor Email service responsiveness by sending an Email message from one Exchange server to another<br><br>MExchange End To End Message Ping Monitor<br><br>30 m Scheduler for metric in End To End Message Ping group   |
| EXSPI-60 Event Log Warnings and Information       | EXSPI-60-Exchange Application Information<br><br>EXSPI-60-Exchange Application Warnings<br><br>EXSPI-60-Exchange System Information<br><br>EXSPI-60-Exchange System Warnings                                | Templates in this group collect all Exchange-related warning and information messages from the Windows Event Log<br><br>Application Event Log - Notify All Information<br><br>Application Event Log - Notify All Warnings<br><br>Application Event Log - Notify All Information<br><br>Application Event Log - Notify All Warnings  |
| EXSPI-60 Reporter Collection                      | EXSPI-60-DC-Exchange Info<br>EXSPI-60-DC-Mailbox Data<br><br>EXSPI-60-DC-Mailbox IS Sum. Data<br><br>EXSPI-60-DC-Public Folder Data<br><br>EXSPI-60-DC-Public IS Sum. Data<br><br>EXSPI-60-DC-TrackLog Data | Templates in this group enable data collections for OVO reports<br><br>Collect data on Exchange Parameters<br><br>Collect data about all mailboxes on the system<br><br>Collect summary data about Mailbox Information Store<br><br>Collect data about all public folders on the system<br><br>Collect summary data about Public Info. Store (Folders)<br><br>Collect Tracking.Log data |

## Table of Exchange 5.5 templates

### EXSPI-55 QUICK START

| Exchange 5.5: Quick Start Subgroups | Templates   | Descriptions   |
|-------------------------------------|---|--|
| EXSPI-55 Directory Service          | <p>EXSPI-55-0110</p> <p>EXSPI-55-0111</p> <p>EXSPI-55-05m-DS</p>  | <p>Templates in this group monitor directory replication to verify that synchronization updates are being processed efficiently.</p> <p>MSExchangeDS.Remaining Replication Synchronizations</p> <p>MSExchangeDS.Remaining Replication Updates</p> <p>5m Scheduler for metrics in Directory Service group</p>   |
| EXSPI-55-Event Log Errors           | EXSPI-55-Exchange Errors  | <p>Templates in this group monitor Exchange error messages written to the Windows Event log file and when detected, forwards them to the OVO console</p>   |
| EXSPI-55 General Data Collection    | <p>EXSPI-55-Dc-SMTP Message Volume</p> <p>EXSPI-55-Measurement Data Collector</p>   | <p>Templates in this group create data stores and writes data to data stores</p> <p>Collect data on the volume of SMTP messages processed.</p> <p>Forward single instance data to Measurement Data Collector</p>   |
| EXSPI-55 Information Store          | <p>EXSPI-55-0030</p> <p>EXSPI-55-0031</p> <p>EXSPI-55-0032</p> <p>EXSPI-55-0033</p> <p>EXSPI-55-0034</p> <p>EXSPI-55-0040</p> | <p>Templates in this group collect data on the volume of messages processed by both the Private and Public Information Store during the last logging interval</p> <p>IS Public Average Delivery Time</p> <p>IS Public Average Local Delivery Time</p> <p>IS Public Replication Queue Size</p> <p>IS Public Receive Queue Size</p> <p>IS Public Send Queue Size</p> <p>IS Mailbox Average Delivery Time</p> |

| Exchange 5.5: Quick Start Subgroups | Templates   | Descriptions   |
|-------------------------------------|---|--|
| EXSPI-55 Information Store (cont.)  | EXSPI-55-0041<br>EXSPI-55-0042<br>EXSPI-55-0043<br>EXSPI-55-0100<br>EXSPI-55-05m-IS<br>EXSPI-55-15m-IS<br>EXSPI-55-DC-IS Msg Delivery Time<br>EXSPI-55-DC-IS Private Msg Vol<br>EXSPI-55-DC-IS Public Msg Vol | IS Mailbox Average Local Delivery Time<br>IS Mailbox Receive Queue Size<br>IS Mailbox Send Queue Size<br>IS User Connection Count Low<br>5m Scheduler for metrics in Information Store group<br>15m Scheduler for metrics in Information Store group<br>Collect data on the average msg delivery times in core processes<br>Collect data on the vol. of messages processed by Private IS<br>Collect data on the vol. of messages processed by Public IS  |
| EXSPI-55 Internal Errors            | EXSPI-55-Messages   | Templates in this group collect information on errors occurring within the Exchange SPI and contains instruction text for fixing common problems   |
| EXSPI-55 Message Transfer Agent     | EXSPI-55-0010<br>EXSPI-55-0011<br>EXSPI-55-0012<br>EXSPI-55-0013<br>EXSPI-55-0014<br>EXSPI-55-0015<br>EXSPI-55-0016   | Templates in this group collect data on the length of message queues and volume of messages (number and kilobytes) processed by the Message Transfer Agent. Also collects data on failed, delayed, and rejected inbound/outbound associations and messages during the last logging interval<br>MTA Message Delay<br>MTA Work Queue Length<br>MTA Failed Conversions<br>MTA Connection Message Delay<br>MTA Connection Queue Lengths<br>MTA Failed Outbound Associations<br>MTA Rejected Inbound Associations |

Appendix B:  
Table of Exchange 5.5 templates

| Exchange 5.5: Quick Start Subgroups     | Templates   | Descriptions   |
|---|---|--|
| EXSPI-55 Message Transfer Agent (cont.) | EXSPI-55-0017<br>EXSPI-55-05m-MTA<br>EXSPI-55-1h-MTA<br>EXSPI-55-DC-MTA & IS Queue Len.<br>EXSPI-55-DC-MTA Message Volume                           | MTA Rejected Inbound Messages<br>5m Scheduler for metrics in MTA group<br>1h Scheduler for metrics in MTA group<br>Collect data on the length of message queues in core processes<br>Collect data on the vol. of messages processed by MTA   |
| EXSPI-55 Services and Processes         | EXSPI-55-0001<br>EXSPI-55-0002<br>EXSPI-55-05m-Serv. & Processes<br>EXSPI-55-1001<br>EXSPI-55-10m-Serv. & Processes<br>EXSPI-55-DC-User Connections | Templates in this group monitor Windows Services for Exchange by checking to see that Exchange services configured with Automatic startup are running.<br>Process Monitor<br>Inactive Process Monitor<br>5m Scheduler for metrics in Services and Processes group<br>Process Monitor<br>10m Scheduler for metrics in Services and Processes group<br>Collect data on the number of users |
| EXSPI-55 Transaction Log                | EXSPI-55-0005<br>EXSPI-55-0006<br>EXSPI-55-15m-Transaction Log<br>EXSPI-55-1d-Transaction Log   | Templates in this group monitor the size in MB of the Exchange transaction logfiles as well as the disk space used by the files.<br>15m Scheduler for metrics in Transaction Log group<br>1day Scheduler for metrics in Transaction Log group  |

## EXSPI-55 ADD-ONS

| Exchange 5.5: Add-Ons Subgroups | Templates   | Descriptions  |
|---------------------------------|---|---|
| EXSPI-55 CC:Mail Connector      | <p>EXSPI-55-0090</p> <p>EXSPI-55-0091</p> <p>EXSPI-55-0092</p> <p>EXSPI-55-0093</p> <p>EXSPI-55-1h-ccMail Connector</p> <p>EXSPI-55-5m-ccMail Connector</p> | <p>Templates in this group monitor the number of messages awaiting delivery to Exchange from Lotus cc:Mail, the rate at which Non-Delivery Reports (NDRs) are being sent from Lotus cc:Mail to Exchange and vice versa</p> <p>cc:Mail MTS-IN Queue Length</p> <p>cc:Mail MTS-OUT Queue Length</p> <p>Exchange NDRs to cc:Mail</p> <p>cc:Mail NDRs to Exchange</p> <p>1h Scheduler for metrics in cc:Mail Connector group</p> <p>5m Scheduler for metrics in cc:Mail Connector group</p>   |
| EXSPI-55 Internet Mail Service  | <p>EXSPI-55-0060</p> <p>EXSPI-55-0061</p> <p>EXSPI-55-0062</p> <p>EXSPI-55-0063</p> <p>EXSPI-55-0064</p> <p>EXSPI-55-0065</p> <p>EXSPI-55-0066</p>          | <p>Templates in this group monitor the rate SMTP connections to other hosts are failing or being rejected for the Internet Mail Service, the number of messages queued to be converted to Internet Mail format as well as the number awaiting final delivery, the rate at which non-delivery reports are being generated for inbound mail and outbound mail</p> <p>MSEExchangeIMC.Connections Total Failed MSEExchangeIMC.Connections Total Outbound</p> <p>MSEExchangeIMC.Connections Total Rejected MSEExchangeIMC.Connections Total Inbound</p> <p>MSEExchangeIMC.Queued MTS-IN</p> <p>MSEExchangeIMC.Queued MTS-OUT</p> <p>MSEExchangeIMC.Queued Inbound</p> <p>MSEExchangeIMC.Queued Outbound</p> <p>MSEExchangeIMC.NDRs Total Inbound MSEExchangeIMC.Inbound Messages Total</p> |

Appendix B:  
Table of Exchange 5.5 templates

| Exchange 5.5: Add-Ons Subgroups        | Templates   | Descriptions   |
|--|---|--|
| EXSPI-55 Internet Mail Service (cont.) | EXSPI-55-0067<br><br>EXSPI-55-1h-Internet Mail Services<br><br>EXSPI-55-5m-Internet Mail Services<br><br>EXSPI-55-DC-IMS Message Volume<br><br>EXSPI-55-DC-IMS Queue Length | MExchangeIMC.NDRs Total Outbound<br>MExchangeIMC.Outbound Messages<br>TotalMExchangeIMC.Outbound<br>Messages Total<br><br>1h Scheduler for metrics in Internet Mail<br>Services group<br><br>5 min. Scheduler for metrics in Internet<br>Mail Services group<br><br>Collect data on the vol. of messages<br>processed by the IMS<br><br>Collect data on the vol. of messages<br>processed by the IMS   |
| EXSPI-55 Lotus Notes Connector         | EXSPI-55-0094<br><br>EXSPI-55-0095<br><br>EXSPI-55-0096<br><br>EXSPI-55-0097<br><br>EXSPI-55-1h-Lotus Notes Connect<br><br>EXSPI-55-5m-Lotus Notes Connect                  | Templates in this group monitor the<br>number of messages awaiting delivery,<br>and Non-Delivery Reports (NDRs) being<br>sent to Exchange from Lotus Notes and<br>vice versa<br><br>Lotus Notes Inbound Queued Messages<br>Length<br><br>Lotus Notes Outbound Queued Messages<br>Length<br><br>Exchange NDRs sent to Lotus Notes<br><br>Lotus Notes NDRs sent to Microsoft<br>Exchange<br><br>1h Scheduler for metrics in Lotus Notes<br>Connector group<br><br>5m Scheduler for metrics in Lotus Notes<br>Connector group |
| EXSPI-55 News Service                  | EXSPI-55-0080<br><br>EXSPI-55-0081<br><br>EXSPI-55-1h-News Service<br><br>EXSPI-55-DC-News Message Volume   | Templates in this group monitor the rate<br>inbound and outbound newfeed<br>messages are being rejected because of<br>duplicates or errors<br><br><br><br><br><br><br><br><br><br>1h Scheduler for News Service metrics<br><br>Collect data on the vol. of news messages<br>processed by IS  |

## EXSPI-55 ADVANCED

| Exchange 5.5: Advanced Subgroups            | Templates  | Descriptions   |
|---|--|--|
| EXSPI-55 End To End Message Ping            | <p>EXSPI-55-1002</p> <p>EXSPI-55-End to End Message Ping</p> <p>EXSPI-55 Ping Config</p>   | <p>Templates in this group monitor Email service responsiveness by sending an Email message from one Exchange server to another</p> <p>MSExchange End To End Message Ping Monitor</p> <p>30 m Scheduler for metric in End To End Message Ping group</p>  |
| EXSPI-55 Event Log Warnings and Information | <p>EXSPI-55-Exchange Warnings</p> <p>EXSPI-55-Exchange Information</p>   | <p>Templates in this group collect all Exchange-related warning and information messages from the Windows Event Log</p> <p>Application Event Log - Notify All Warnings</p> <p>Application Event Log - Notify All Information</p>   |
| EXSPI-55 Reporter Collection                | <p>EXSPI-55-DC-Exchange Info</p> <p>EXSPI-55-DC-Mailbox Data</p> <p>EXSPI-55-DC-Private IS Sum. Data</p> <p>EXSPI-55-DC-Public Folder Data</p> <p>EXSPI-55-DC-Public IS Sum. Data</p> <p>EXSPI-55-DC-TrackLog Data</p> | <p>Templates in this group enable data collections for OVO reports</p> <p>Collect data on Exchange Parameters</p> <p>Collect data about all mailboxes on the system</p> <p>Collect summary data about Mailbox Information Store</p> <p>Collect data about all public folders on the system</p> <p>Collect summary data about Public Info. Store (Folders)</p> <p>Collect Tracking.Log data</p> |

Appendix B:  
Table of Exchange 5.5 templates

---

# Index

This chapter provides an Index for the Exchange SPI Users Guide.

## Symbols

\$Agent User 2-21

## A

actions

- automatic in templates 6-115
- operator initiated 6-115

alarms, changing the threshold type for 6-111

applications

- Disable Data Logging 1-12
- Disable EXSPI Tracing 1-12
- Enable Data Logging 1-12
- Enable EXSPI Tracing 1-12
- Enable Message Tracking 1-11
- EXSPI Add DataSource 1-10
- EXSPI Admin 1-10
- EXSPI Graphs 1-11
- EXSPI MBOX Config 1-11
- EXSPI Node Config 1-11
- EXSPI Ping Config 1-11
- Mount Exchange DB 1-12
- Self-Healing Info 1-11

## C

cluster environments, configuring Exchange SPI for 3-65, 5-98

clustered application configuration file 5-99

command files A-174

- UNIX A-175

command line parameters 4-94

- changing calculations for metrics 4-95
- metric range 4-94
- print 4-94
- tag feature 4-94, 6-119

component interaction B-181

components

- Message Group Bank
  - EX\_Fault 4-87
  - EX\_Perf 4-87
  - EXSPI 4-87

configuration

- advanced 3-65
- basic 3-55

- mailboxes 3-71

- Message Browser 3-58

Create User Account

- (Ex2000&2003)/Windows 2000&2003) 2-41

- (Ex5.5/NT4) 2-23

- (Ex5.5/W2k) 2-31, 2-43

Crystal, report writer used with Service Reporter 7-131

customization

- changing the Mailbox Name 6-120

- changing the Windows User Account Name 6-120

- choosing metrics to monitor 6-121

- creating custom groupings 6-110

- modifying metric conditions 6-111

- modifying metric templates for all databases 6-111

- of thresholds 6-116

- schedules 6-117

- using the tag feature 6-119

## D

daily tasks 4-87

data collection

- Add-Ons templates 7-135

- Advanced templates 7-136

- for graphing and reporting 7-131

- Quick Start templates 7-131

de-assigning Exchange SPI templates from managed nodes 3-82

deinstalling 7-152

deinstalling Exchange SPI 3-81

deleting Exchange SPI templates 3-83

disabling tracing 8-161

## E

Enable Data Logging

- description of B-181

Enabling Message Tracking

- Exchange 2000/2003 3-69

- Exchange 5.5 3-67

enabling tracing 8-160

End-To-End Message Ping 3-65, 3-73

error log 8-159

errors

- common 8-162

Exchange Cluster Config 1-12

Exchange organization 1-6  
EXSPI Admin 1-10  
EXSPI Node Config 3-66  
exspi\_e2k.exe/exspi\_e55.exe A-173  
exspi\_lc.sql A-172  
exspierror A-178  
exspimwd.bat A-175  
exspipv A-172  
exspiset.idx A-171  
exspispec A-175  
exspitra.vbs A-175

## F

files

command files A-174  
on the management server A-171

## G

Grant Exchange access permissions to User Account  
for (Ex5.5/NT4) 2-28  
for (Ex5.5/W2k) 2-39  
graphing, using PerfView 7-151  
graphs 1-16, 7-147  
Information Store 7-148  
Messaging 7-149  
System Information 7-150  
graphs, in PerfView Graph from a MW DSI logfile 7-151

## H

high availability environments 5-98

## I

installation 3-55  
installing Exchange SPI report templates 7-125  
on the management server 3-55  
OVO agents on MS Exchange servers 3-56  
prior to 3-53  
verifying on management server 8-155  
instruction text 1-5

## L

logfile.dat A-171

## M

managed node files A-173  
exspierror A-178  
logging and trace files A-178  
monitor templates A-177  
trace A-178  
Windows A-177  
management server files A-171, A-172  
logfile.dat A-171  
monitor.dat A-171  
msggrps.dat A-171  
msgi.dat A-171  
schedule.dat A-171  
set0.idx A-171  
tmplgrp.dat A-171  
management server/managed node files  
monitor files A-173  
management server/managed node monitor files  
UNIX A-173  
message text, modifying 6-115  
message tracking  
enable 3-65, 3-67  
enabling on Exchange 2000 and 2003 servers 3-69  
metric conditions, as contained in monitor templates 1-9  
metrics  
changing calculations for using command line parameter 4-95  
showing values for, using -p parameter 4-94  
monitor templates A-177  
msexchange.apm.xml 5-98, 5-99  
msexchange.apm.xml, modifying 5-98  
msgi.dat A-171

## O

operator initiated actions, in templates 6-115  
OVAMTLog.dll A-173, A-174  
OVO UNIX 8.0 DCE and HTTPS Agent 1-4

## P

- PerfView
  - graphing data with 7-151
- PerfView graph 6-115
- PerfView, using 7-151
- Persistent store B-181
- procedures
  - service accounts
    - creating in Windows2000/2003/Ex2000 or 2003 2-47

## R

- removing Exchange SPI software 3-81
- report templates 7-152
- reports 1-16
  - Exchange 2000/2003 list 7-140
  - Exchange 5.5 list 7-138, 7-143
  - requirements 7-126
- reports/graphs
  - time interval required 7-144

## S

- schedule.dat A-171
- Self-Healing Info 8-155
- Self-Healing Services 8-155
- server connections
  - setting up 3-73
- Service account user with special Exchange privileges 2-21
- service accounts
  - creating
    - Windows 2000 & 2003/Ex 2000 & 2003 2-47
- severity setting in templates 6-115
- swinstall, using to re-install templates 6-121

## T

- template failures
  - advanced configuration 8-166
- templates
  - actions as defined in 6-115
  - advanced configuration template failures 8-166
  - assigning/distributing 3-67

- customizing 4-93, 6-110
  - customizing message text 6-115
  - customizing thresholds in 6-114
  - distributing reporter collection templates 7-145
  - distributing Quick Start templates 7-144
  - duration interval, setting/resetting thresholds 6-115
  - duration settings 6-115
  - Exchange 2000/2003 list B-185
  - Exchange 5.5 list B-196
  - for opccfgupld (OVO upload facility) A-171
  - installation considerations 3-54
  - logfile encapsulator templates 1-9
  - message templates 1-9
  - monitor templates 1-9
  - re-installing 6-121
  - Reporter Collection 7-145
  - schedule templates 1-9
  - severity alert setting 6-115
  - template group prerequisites for Exchange 2000 and 2003 4-91
  - template group prerequisites for Exchange 5.5 4-90
  - template groups 1-9
  - template groups requirements 4-89
  - template types 1-9
- thresholds
- changing 6-116
  - continuously (with no reset) 6-113
  - with reset 6-112
  - without reset 6-112
- tmplgrp A-171
- tmplgrp.dat A-171
- trace files A-178
- tracing
  - turning on 8-160
- Troubleshooting 8-153

## U

- user accounts with special Exchange access permissions,
  - how to create 2-22
- user privileges 2-21

