

Executive Summaries Report Pack

Software Version: 1.0

HP OpenView Performance Insight

User Guide

May 2006



Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notices

© Copyright 2004 - 2006 Hewlett-Packard Development Company, L.P.

Trademark Notices

OpenView is a U.S. registered trademark of Hewlett-Packard Development Company, L.P.

Java™ is a U.S. trademark of Sun Microsystems, Inc.

Oracle® is a registered U.S. trademark of Oracle Corporation, Redwood City, California.

UNIX® is a registered trademark of The Open Group.

Windows® and Windows NT® are U.S. registered trademarks of Microsoft® Corp.

All other product names are the property of their respective trademark or service mark holders and are hereby acknowledged.

Documentation Updates

To verify that the manual you are using is in fact the most recent edition, go to:

http://ovweb.external.hp.com/lpe/doc_serv/

Locate the product, then look to see if a more recent edition of this document is available for downloading. If you subscribe to the appropriate product support service, you can arrange to have document updates sent to you. Contact your HP sales representative for details.

The following table provides a list of changes made to this document since the last update in December 2005.

Chapter	Changes
Chapter 1	Minor editorial changes.
Chapter 2	Minor editorial changes.
Chapter 3	Minor editorial changes.

Support

Please visit the HP OpenView support web site at:

<http://www.hp.com/managementsoftware/support>

This web site provides contact information and details about the products, services, and support that HP OpenView offers.

HP OpenView online software support provides customer self-solve capabilities. It provides a fast and efficient way to access interactive technical support tools needed to manage your business. As a valued support customer, you can benefit by using the support site to:

- Search for knowledge documents of interest
- Submit enhancement requests online
- Download software patches
- Submit and track progress on support cases
- Manage a support contract
- Look up HP support contacts
- Review information about available services
- Enter discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and log in. Many also require a support contract.

To find more information about access levels, go to:

http://www.hp.com/managementsoftware/access_level

To register for an HP Passport ID, go to:

<http://www.managementsoftware.hp.com/passport-registration.html>

Contents

- 1 Overview 7
 - Device Performance in a “Single View” 7
 - Folders and Reports 8
 - Sources for Additional Information 10
- 2 Package Installation 11
 - Guidelines for a Smooth Install 11
 - Installing Executive Summaries 1.0 12
 - Uninstalling Executive Summaries 1.0 14
- 3 Sample Reports 17
- Glossary 29
- Index 31

1 Overview

This chapter covers the following topics:

- Device performance (resources and traffic volume) in a “single view”
- Folders and reports
- Statistics; applying constraints to a report; adding locations
- Sources for additional information

Device Performance in a “Single View”

HP OpenView Performance Insight (OVPI) is a performance management and reporting application. Long-term data collection, in-depth analysis, and automated web-based reporting are this application’s primary strengths. OVPI can be integrated with network and system management applications, including NNM and OVO. Integration enhances your control over fault isolation and problem diagnosis.

The Executive Summaries Report Pack installs on OVPI. The reports in this package display the following statistics for devices:

- CPU utilization
- Buffer utilization
- Memory utilization
- Traffic volume on device interfaces

Previously, before these reports were created, you had to consult reports in two places to get this information, the Interface Reporting Report Pack and the Device Resource Report Pack. Executive Summaries 1.0 puts this information in one place, hence the term *single view*.

The following table outlines recent enhancements to the Executive Summaries Report Pack.

Version	Date of Release	Features/Enhancements
1.0	April 2004	5 reports; no datapipe [not applicable] Supports Oracle only; does not support Sybase
1.0	August 2004	No changes
1.0	November 2004	No changes
1.0	June 2005	No changes
1.0	March 2006	No changes
1.0	May 2006	No changes

Folders and Reports

Executive Summaries 1.0 contains device-oriented reports and location-oriented reports. The device-oriented reports roll-up (aggregate) traffic volume from the interface level to the device level. The location-oriented summary reports roll-up resource utilization and traffic volume for all the devices owned by one customer at one location. If you are logging into the OVPI Application Server, you will see two folders:

- Device
- Location

The Device folder contains two reports:

- Device Single View Summary
- Device Single View Top Ten

The Location folder contains three reports:

- Executive Summary
- Executive Summary Aggregate Availability & Traffic
- Executive Summary Top Ten

See [Chapter 3, Sample Reports](#) for a description of each report.

Types of Statistics

Executive Summaries 1.0 tracks the following statistics:

CPU Statistics

- Average utilization
- Maximum utilization
- Busy hour
- Baseline busy hour
- F30/F60/F90 busy hour
- CPU percentage of exceptions



“percentage of exceptions” is calculated by dividing the number of exceptions by 96 (4 x 24 samples = 96 total samples) and multiplying the result by 100.

Memory Statistics

- Average utilization
- Maximum utilization
- Busy hour
- Baseline busy hour
- F30/F60/F90 busy hour
- Memory percentage of exceptions

Buffer Statistics

- Average utilization
- Maximum utilization
- Busy hour utilization
- Baseline busy hour
- F30/F60/F90 busy hour
- Buffer percentage of exceptions

Traffic Statistics

- Traffic volume per device
- Interface availability
- Frames (total for the day, across all devices)
- Errors (total for the day, across all devices)
- Discards (total for the day, across all devices)

Applying Constraints to a Report


Editing a parameter, or applying a constraint, eliminates data you are not interested in seeing. For example, if you edit the Customer Name parameter, only data for the customer you typed in the Customer Name field will appear in the report. Executive Summaries 1.0 supports the following constraints:

- Customer Name
- Customer ID
- Location Name
- Location ID
- Device Name
- Make
- Model

If you are using Report Viewer, follow these steps to apply a constraint:

- 1 Select **Edit > Parameter Values** from the menu bar.
- 2 When the Modify Parameter Values window appears, click the **Current Value** field.
- 3 Enter a new value.
- 4 Click **OK**.

If you are using the Web Access Server, follow these steps:

- 1 Click  (the Edit icon) at the bottom right-hand corner of the report.
- 2 When the Edit Parameters window opens, type the constraint in the appropriate field.
- 3 Click **Submit**.

Adding Locations to Reports

If you are already using Interface Reporting and Device Resource, and if you used Common Property Tables to import locations into those reports, you will not have to add your locations in order to see your locations in Executive Summaries. The reports in Executive Summaries 1.0 will inherit locations from Common Property Tables.

Sources for Additional Information

For information regarding the latest enhancements to this package and any known issues, refer to the *Executive Summaries Report Pack 1.0 Release Statement*. You may also be interested in these documents:

- *Device Resource Report Pack 3.1 User Guide*
- *Common Property Tables 3.5 User Guide*
- *Interface Reporting Report Pack 5.1 User Guide*
- *RMON Ethernet Statistics Report Pack 3.0 User Guide*
- *OVPI Report Packs, Release Notes, May 2006*

Manuals for the core product, OVPI, and manuals for the reporting solutions and shared packages that run on OVPI can be downloaded from this site:

<http://www.managementsoftware.hp.com>

Select **Support > Product Manuals** to reach the **Product Manuals Search** page. The user guides for OVPI are listed under **Performance Insight**. The user guides for report packs and datapipes are listed under **Performance Insight Reporting Solutions**.

The manuals listed under **Performance Insight Reporting Solutions** indicate the month and year of publication. If a manual is revised and reposted, the date of publication will change. Since we post revised manuals on a regular basis, we recommend searching this site for updates before using the PDF that was copied to the Docs directory on the report pack CD-ROM.

2 Package Installation

This chapter covers the following topics:

- Guidelines for a smooth install
- Installing Executive Summaries 1.0
- Package removal

Guidelines for a Smooth Install

An OVPI reporting solution has at least two ingredients, a report pack and a datapipe. Some reporting solutions offer multiple datapipes. When you install a datapipe, you configure OVPI to collect a specific type of performance data at a specific interval. When you install a report pack, you configure OVPI to summarize and aggregate the data collected by the datapipe.



There are no datapipes for Executive Summaries. Executive Summaries uses data collected by Interface Reporting and Device Resource.

When you insert the report pack CD in the CD-ROM drive and launch the package extraction program, the install script extracts packages from the CD and copies the results to the Packages directory on your system. After the extraction process finishes, the install script prompts you to launch Performance Insight and start Package Manager.

If the OVPI packages on the report pack CD are already in the Packages directory awaiting installation, Executive Summaries 1.0 is ready to install. If packages have not been extracted from the CD yet and you need assistance with that step, use the extract procedure later in this chapter. Before installing packages, review the following guidelines.

Prerequisites for Executive Summaries 1.0

Following is a list of prerequisites for Executive Summaries 1.0:

- OVPI 5.1
- All available service packs for OVPI 5.1
- Common Property Tables 3.5 or higher
- Device Resource Report Pack 3.1 or higher
 - Dev Res Cisco Switch Datapipe
 - Dev Res Cisco Router Datapipe
- Interface Reporting Report Pack 5.1
 - Interface Discovery Datapipe 2.3
 - Interface Reporting ifEntry Datapipe 2.3

Common Property Tables

If you are currently running Common Property Tables 2.2, upgrade to Common Property Tables 3.0. If you are currently running Common Property Tables 3.0, upgrading to version 3.5 is optional. For details about installing and using Common Property Tables, refer to the *Common Property Tables 3.5 User Guide*.

Interface Reporting and Device Resource

If you are running earlier versions of Interface Reporting or Device Resource, upgrade those packages before installing Executive Summaries 1.0. If you need help upgrading those packages, refer to the following manuals:

- *Device Resource Report Pack 3.1 User Guide*
- *Interface Reporting Report Pack 5.1 User Guide*



Device Resource 3.1 and Interface Reporting 5.1 are both “enhanced” packages, which means they were modified to take advantage of features in OVPI 5.1 Device Resource 3.1 and Interface Reporting 5.0 *require* OVPI 5.1.

Distributed Systems

If you are installing Executive Summaries in a distributed environment, package installation is more complicated. Here is an outline of the procedure:

- 1 Verify that every server is running the same version of OVPI and all available service packs for that version.
- 2 Disable trendcopy on the central server.
- 3 If necessary, upgrade the following packages:
 - Common Property Tables
 - Interface Reporting
 - Device Resource
- 4 Install Executive Summaries 1.0 on the central server and on every satellite server; accept the option to deploy reports each time you install the report pack.
- 5 Re-enable trendcopy on the central server.

Installing Executive Summaries 1.0

Perform these tasks:

- Stop OVPI Timer and extract packages from the report pack CD
- If necessary, upgrade Common Property Tables
- If necessary, upgrade Device Resource and Interface Reporting
- Install Executive Summaries 1.0 and restart OVPI Timer

Task 1: Stop OVPI Timer and extract packages from the report pack CD

- 1 Log in to the system. On UNIX[®] systems, log in as root.
- 2 Stop OVPI Timer and wait for processes to terminate.

Windows: Do the following:

- a From the Control Panel, select **Administrative Tools** → **Services**
- b Select OVPI Timer from the list of services.
- c From the Action menu, select **Stop**.

UNIX: As root, do one of the following:

- HP-UX: **sh /sbin/ovpi_timer stop**
- Sun: **sh /etc/init.d/ovpi_timer stop**

- 3 Insert the report pack CD in the CD-ROM drive.

Windows: The Main Menu opens automatically.

UNIX:

- a Mount the CD (if the CD does not mount automatically)
- b Navigate to the top level directory on the CD
- c Run **./setup**

- 4 Type **1** in the choice field and press **Enter**. The install script displays a percentage complete bar. When the copy is complete, the install script starts Package Manager. The Package Manager welcome window opens.

Task 2: Upgrade to Common Property Tables 3.5

The Executive Summaries Report Pack requires Common Property Tables. If you are running an earlier version of Common Property Tables, upgrade to version 3.5 by installing the “to_35” package. When you install the upgrade package for Common Property Tables, do not install other packages at the same time. Install the upgrade package for Common Property Tables and only the upgrade package for Common Property Tables. If you need help, refer to the *Common Property Tables 3.5 User Guide*.

Task 3: Upgrade Device Resource and Interface Reporting

If you are upgrading the Device Resource Report Pack and/or the Interface Reporting Report Pack, upgrade these packages before installing the Executive Summaries Report Pack. Refer to the following manuals for more information about upgrading these packages:

- *Device Resource Report Pack 3.1 User Guide*
- *Interface Reporting Report Pack 5.1 User Guide*

Task 4: Install Executive Summaries 1.0 and restart OVPI Timer

- 1 Start Package Manager. The Package Manager welcome window opens.
- 2 Click **Next**. The Package Location window opens.
- 3 Click **Install**.
- 4 Approve the default installation directory or select a different directory if necessary. Use the browse feature to select a different directory.

- 5 Click **Next**. The Report Deployment window opens. Accept the default for Deploy Reports; enter your user name and password for the OVPI Application Server.
 - 6 Click **Next**. The Package Selection window opens.
 - 7 Click the check box next to the following packages:
 - *Executive_Summary*
 - *Executive_Summary_Demo* (optional)
- ▶ Installing the Demo Package is optional. The Demo Package can be installed alone, or you can install it along with everything else.
- ▶ If you are installing Common Property Tables, Device Resource, and Interface Reporting for the first time, click the check boxes next to these packages.
- 8 Click **Next**. The Type Discover window opens.
 - 9 To run Discover immediately after package installation, accept the default and click **Next**. The Selection Summary window opens.
 - 10 Click **Install**. The Installation Progress window opens. When installation is complete, a package installation complete message appears.
 - 11 Click **Done** to return to the Management Console.
 - 12 Restart OVPI Timer.

Windows: Do the following:

- a From the Control Panel, select **Administrative Tools** → **Services**
- b Select OVPI Timer from the list of services.
- c From the Action menu, select **Start**.

UNIX: As root, do one of the following:

- HP-UX: `sh /sbin/ovpi_timer start`
- Sun: `sh /etc/init.d/ovpi_timer start`

Uninstalling Executive Summaries 1.0

Follow these steps to uninstall the Executive Summaries Report Pack:

- 1 Log in to the system. On UNIX systems, log in as root.
- 2 Stop OVPI Timer and wait for processes to stop running.

Windows: Do the following:

- a From the Control Panel, select **Administrative Tools** → **Services**
- b Select OVPI Timer from the list of services.
- c From the Action menu, select **Start**.

UNIX: As root, do one of the following:

- HP-UX: `sh /sbin/ovpi_timer stop`

- Sun: `sh /etc/init.d/ovpi_timer stop`
- 3 Start Package Manager.
 - a Launch Performance Insight and select **Management Console**.
 - b Select **Tools → Package Manager**
 - The Welcome window opens.
- 4 Click **Next**. The Packages Location window opens.
- 5 Click **Uninstall**.
- 6 Click **Next**. The Report Undeployment window opens. Accept the default for Undeploy Reports; accept the defaults for application server name and port; enter your user name and password for the OVPI Application Server.
- 7 Click **Next**. The Package Selection window opens.
- 8 Click the check box next to the following packages:
 - *Executive Summaries*
 - *Executive Summaries Demo* (if installed)
- 9 Click **Next**. The Selection Summary window opens.
- 10 Click **Uninstall**. The Progress window opens. When the uninstall process is complete, a removal complete message appears.
- 11 Click **Done** to return to the Management Console.
- 12 Restart OVPI Timer.
 - Windows: Do the following:
 - a From the Control Panel, select **Administrative Tools → Services**
 - b Select OVPI Timer from the list of services.
 - c From the Action menu, select **Start**.
 - UNIX: As root, do one of the following:
 - HP-UX: `sh /sbin/ovpi_timer start`
 - Sun: `sh /etc/init.d/ovpi_timer start`

3 Sample Reports

Executive Summaries 1.0 contains five reports:

- 1 Device Single View Summary
- 2 Device Single View Top Ten Summary
- 3 Executive Summary
- 4 Executive Summary Aggregate Availability and Traffic
- 5 Executive Summary Top Ten

Report 1: Device Single View Summary [see sample below]

This report creates a single view of device performance by combining traffic volume statistics with resource utilization statistics. The traffic data comes from Interface Reporting, while the resource data comes from Device Resource. The term *summary* in the title refers to the fact that traffic volume for each interface on the device is being rolled up to the device level.

Use the table at the top of the report to spot high busy hours. The graphs below provide hourly and daily views of resource utilization and traffic volume. Use the graphs to:

- View hourly data for yesterday (showing the busy hour in context)
- Compare yesterday's performance to performance throughout the preceding week
- Track average utilization, maximum utilization, and the percentage of exceptions

Is there a correlation between traffic volume and resource utilization? Usually not. If traffic volume is up, resource utilization could be up or it could be down. If traffic volume is down, resource utilization should be down also. If traffic volume is low, but resource utilization is high, this could indicate that a resource is not functioning properly.

Report 2: Device Single View Top Ten Summary [see sample below]

Like the preceding report, this report combines traffic volume statistics with resource utilization statistics. This report looks at yesterday's performance and estimates for future performance. Use it to see which devices ranked worst yesterday and which devices are likely to see poor performance in the near future.

The tables on the left provide statistics for average utilization and yesterday's busy hour. Table entries sort by average utilization, highest to lowest. The tables on the right provide statistics for baseline busy hour, F30, F60, and F90. Table entries sort by F90 value, highest to lowest. Most of the time you will not see the same device listed in both tables, left and right. If the same device appears in both tables, yesterday's performance is probably not an isolated incident; it is instead part of a longer-term trend that may require your attention.

Report 3: Executive Summary [see sample below]

This is a location-oriented, single view report. After you select a location, the table at the top profiles each customer in terms of yesterday's percentage of exceptions. Use this report to get a sense of how customers compare to each other at each location. The graphs below the table allow you to look at hourly details on a customer-by-customer basis, and you can also compare yesterday's performance to performance during the preceding week.

Report 4: Executive Summary Aggregate Availability and Traffic [see sample below]

This report provides aggregated information for the day, as opposed to aggregated information for a particular location or customer. The top table gives you daily figures for availability and traffic, and covers the preceding week. The bottom chart provides the same information for each of the previous 30 days. Use the top table to find out if availability and traffic volume are stable, improving, or worsening. Use the bottom table to see whether this week's figures deviate from or align with historic performance.

Report 5: Executive Summary Top Ten Report [see sample below]

This report highlights exceptions on a customer-by-customer basis and ranks the locations that belong to the selected customer. Use this report to find out:

- Which customers are seeing the most exceptions
- Which locations had the worst performance yesterday
- Which locations are expected to have poor performance in the future

The selection table at the top sorts customers by total exceptions, highest to lowest. The tables along the left sort locations by yesterday's average resource utilization, worst to best, while the tables along the right sort locations by F90 value, worst to best.

Most of the time you will not see the same location listed in both tables, left and right. If the same location appears in both tables, yesterday's performance is probably not an isolated incident; it is instead part of a longer-term trend that may require your attention.

Device Single View Summary



The Single View Summary Report provides the network management staff with detailed information on key metrics for individual devices with the highest CPU, Buffer, Memory Utilization, and Traffic Volume.



Location Unassigned



Device Summary

Thu Mar 04 2004

Device	Busy Hour CPU Util	Busy Hour Memory Util	Busy Hour Buffer Util	
15.16.122.32	41	75	13	
15.24.115.2	1	62	0	
15.128.164.163		41	0	
15.128.9.129		30	0	
15.128.9.130		16	5	
15.6.96.1		9	0	

Device: 15.16.122.32 Vendor: Model: Customer: Customer Unassigned

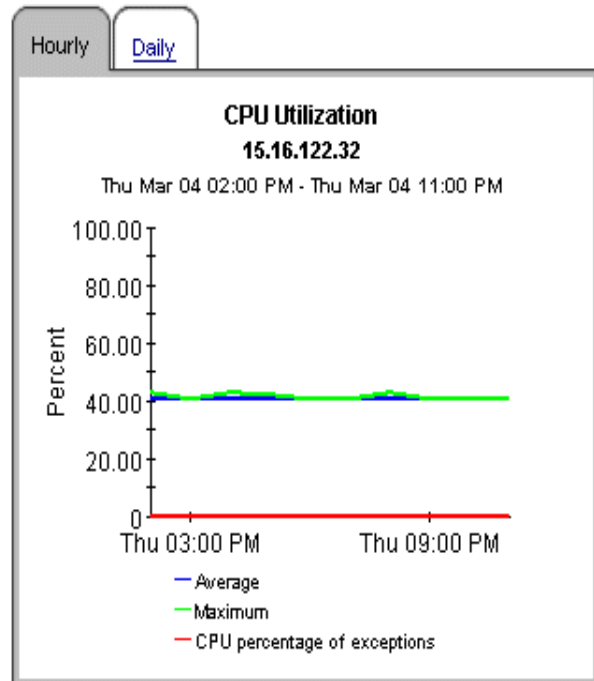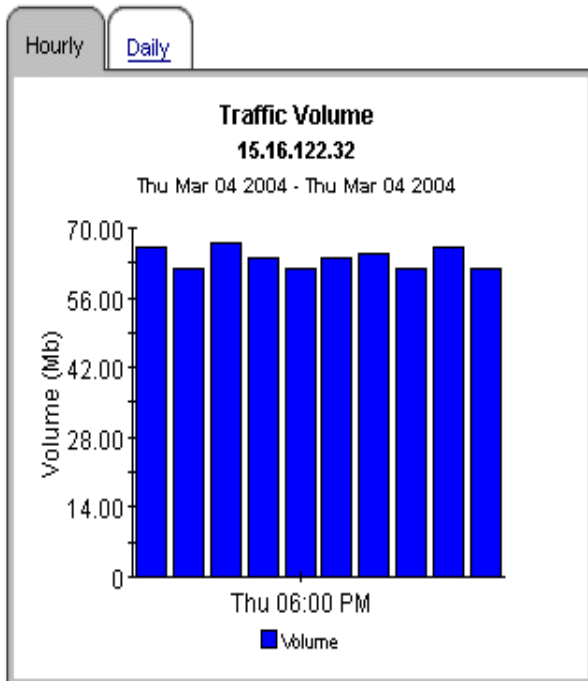

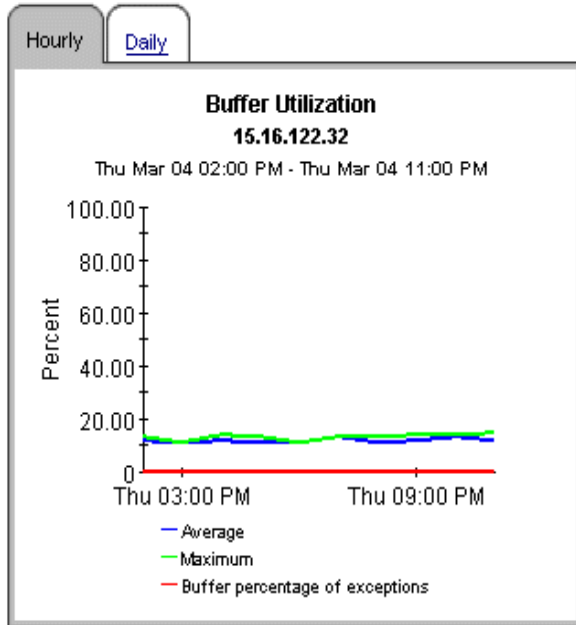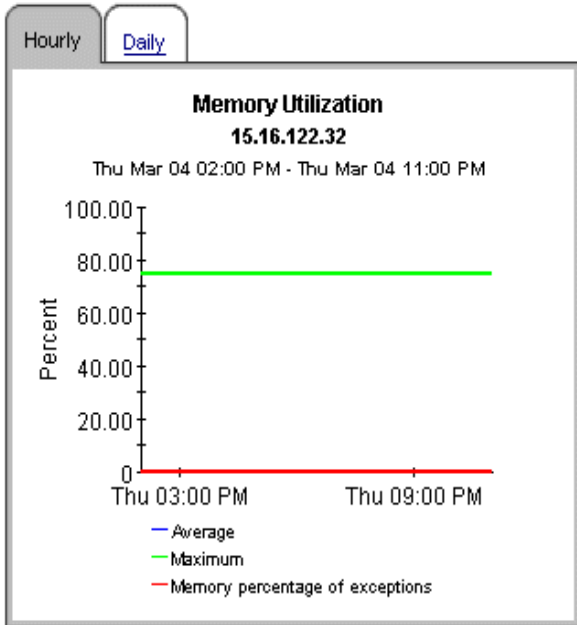

[Back to Top](#)



Device Single View

Top Ten



The Device Single View Top Ten Report provides the network manager and other members of the network management staff a list of the top ten devices based on various criteria.

Customer Summary

Thu Mar 04 2004

Customer	Average CPU Util	Average Memory Util	Average Buffer Util
Customer Unassigned	21	39	3

Highest Average CPU Utilization

Thu Mar 04 2004

Device	Average CPU Util	Busy Hour CPU Util
15.6.96.1		
15.128.164.163		
15.128.9.130		
15.128.9.129		
15.16.122.32	41	41
15.24.115.2	1	1

CPU Utilization Forecast

Sorted by Highest 90 Day Forecasted Value

Device	Baseline	30th Day	60th Day	90th Day
15.6.96.1				
15.128.164.163				
15.128.9.129				
15.128.9.130				
15.16.122.32	45	38	37	36
15.24.115.2	1	0	0	0

Highest Average Memory Utilization

Thu Mar 04 2004

Device	Average Memory Util	Busy Hour Memory Util
15.16.122.32	75	75
15.24.115.2	62	62
15.128.164.163	41	41
15.128.9.129	30	30
15.128.9.130	16	16
15.6.96.1	9	9

Memory Utilization Forecast

Sorted by Highest 90 Day Forecasted Value

Device	Baseline	30th Day	60th Day	90th Day
15.16.122.32	99	70	68	65
15.24.115.2	62	62	62	62
15.128.164.163	41	41	41	41
15.128.9.129	30	30	30	30
15.128.9.130	16	16	16	16
15.6.96.1	9	9	10	10





Highest Average Buffer Utilization

Thu Mar 04 2004

Device	Average Buffer Util	Busy Hour Buffer Util
15.16.122.32	12	13
15.128.9.130	5	5
15.24.115.2	0	0
15.128.9.129	0	0
15.6.96.1	0	0
15.128.164.163	0	0

Buffer Utilization Forecast

Sorted by Highest 90 Day Forecasted Value

Device	Baseline	30th Day	60th Day	90th Day
15.16.122.32	33	11	7	3
15.128.9.129	9	2	2	2
15.128.9.130	14	4	3	2
15.128.164.163	5	1	1	1
15.24.115.2	2	1	1	1
15.6.96.1	0	0	0	0

Highest Traffic Volume


Thu Mar 04 2004

Device	Volume	Availability
15.6.96.1	4.72 Gb	95
15.16.122.32	645.28 Mb	39
15.128.9.130	163.97 Mb	66
15.128.164.163	52.59 Mb	100
15.24.115.2	36.29 Mb	27

Traffic Volume Forecast

Sorted by Highest 90 Day Forecasted Value

Device	Baseline	30th Day	60th Day	90th Day
15.16.122.32	3	5	6	8
15.6.96.1	13	10	8	6
15.6.96.1	13	10	8	5
15.16.122.32	3	4	5	5
15.6.96.1	14	10	7	5
15.16.122.32	3	3	3	3
15.6.96.1	12	8	5	2
15.16.122.32	3	2	2	2
15.16.122.32	3	2	2	1
15.6.96.1	14	8	5	1

 Back to Top



Executive Summary





The Executive Summary Report provides CFOs, CIOs, and managers an overview of the performance of corporate devices in the critical areas of CPU/Memory/Buffer utilization, Network Traffic volume and percentage of exceptions by location/region.




Location Unassigned

Location Exceptions Report

Thu Mar 04 2004

Customer	CPU Util Exceptions	Total Exceptions	Memory Util Exceptions	Buffer Util Exceptions
All Customers	0	0	0	0
Customer Unassigned	0	0	0	0

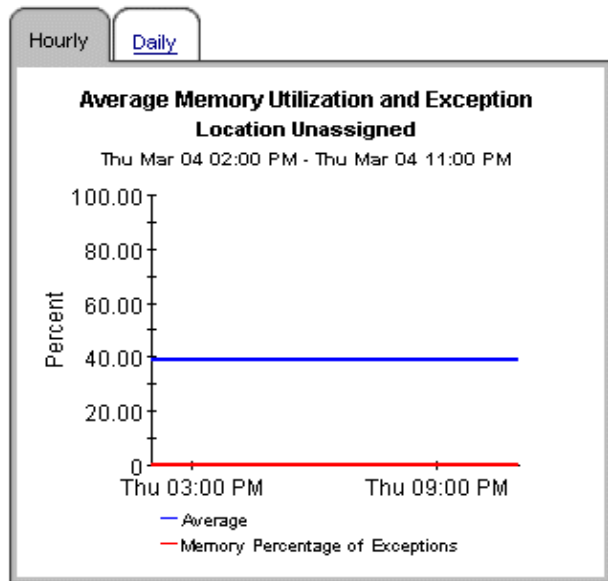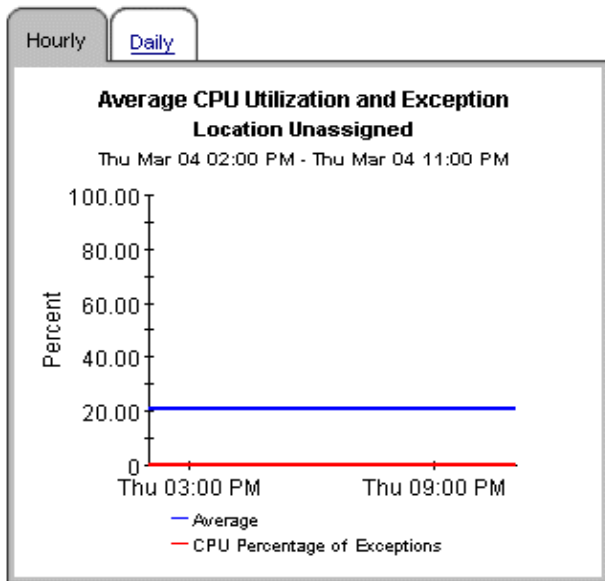

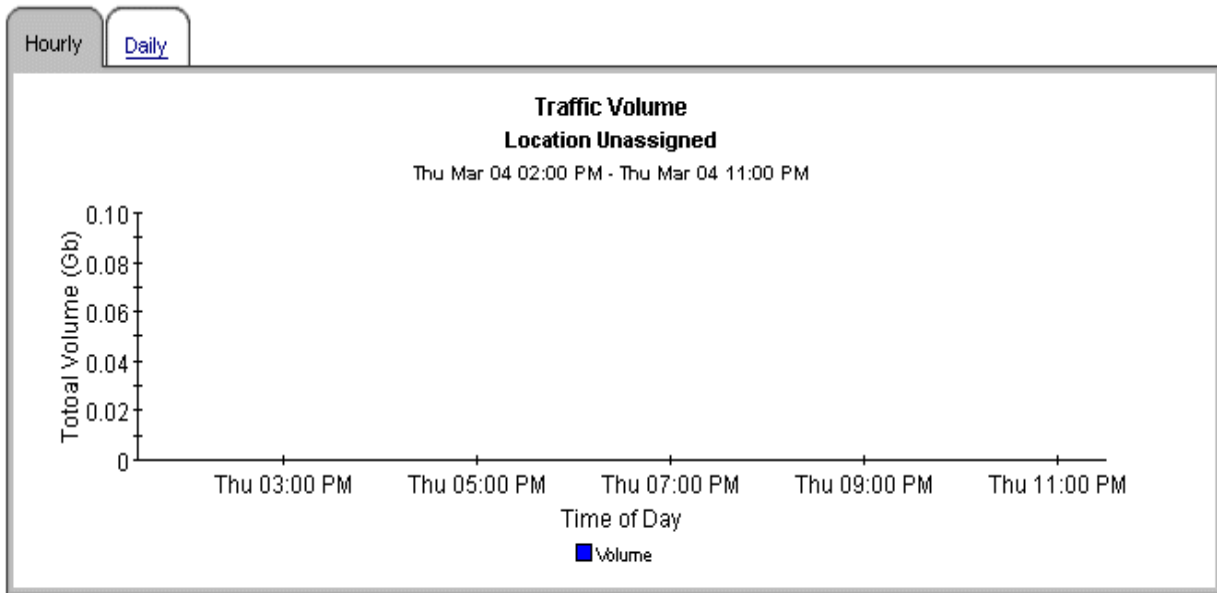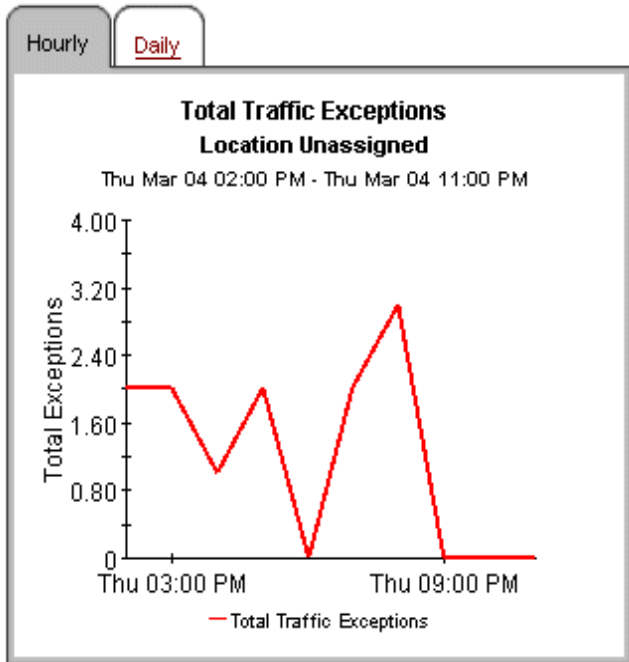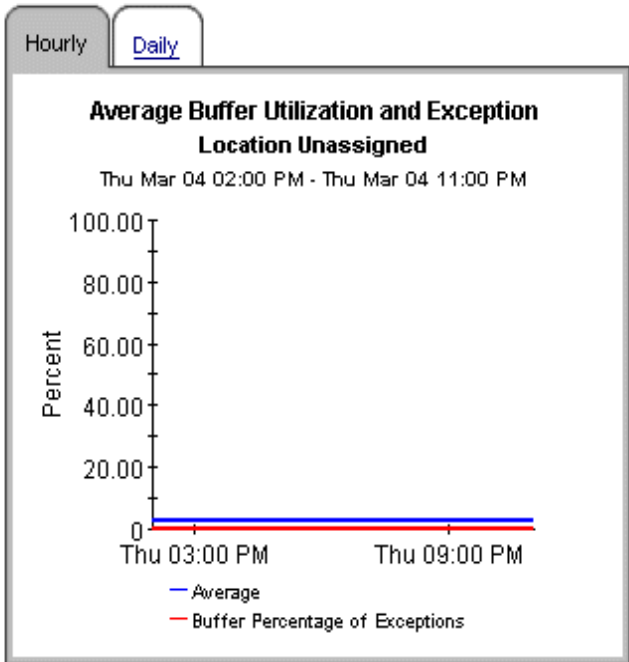

[Back to Top](#)



Executive Summary

Aggregate Availability & Traffic



This report is designed to display the overall availability for all managed interfaces on all managed devices across the entire enterprise. All devices for all customers are aggregated on a daily basis, and the availability of interfaces is calculated on an interface basis and brought forward in tabular and graphic form. Note: the graph on this report has its minimum y-axis artificially set to 50%, assuming this to be a worst-case basement value. Tune managed interfaces to ensure maximum accuracy of the report.

7-Day Availability History: All Interfaces on All Devices


Previous 7 Days

(Availability Alert Rule: Yellow < 90, Red < 75)

Date	Five-Nines Availability (%)	Total Traffic	Total Interfaces	Total Frames	Total Errors	Total Discards
Tue, Mar 23, 2004	54.863	18757116685	70	73836975	243	0
Mon, Mar 22, 2004	55.142	6994959597	70	35499201	331	0
Sun, Mar 21, 2004	56.040	15830307084	70	80518118	712	1
Sat, Mar 20, 2004	54.914	35412656134	70	101276461	858	15
Fri, Mar 19, 2004	55.753	47696669902	70	16774901	124	35

30-Day Daily Availability History: All Interfaces on All Devices

Fri Mar 19 12:00 AM - Tue Mar 23 12:00 AM

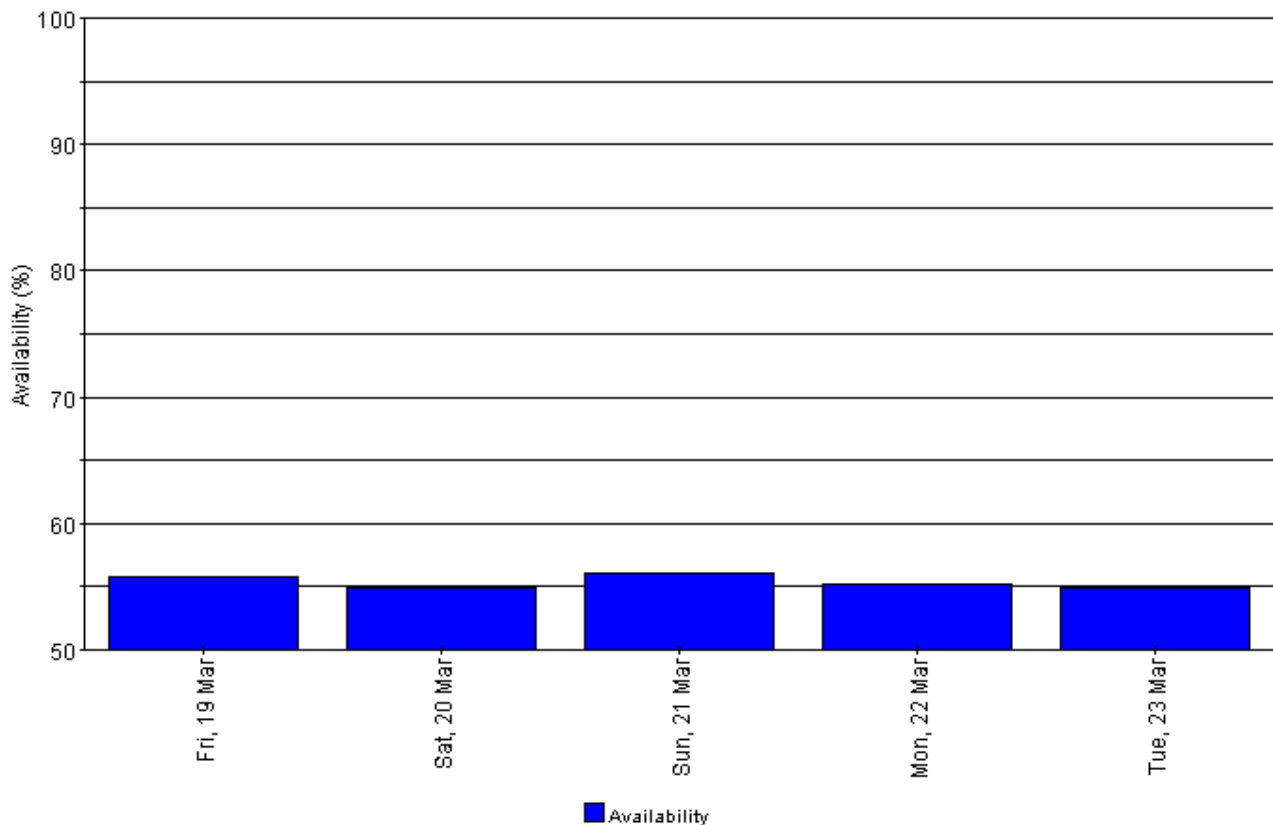

Executive Summary

Top Ten



The Executive Summary Top Ten Report provides the network manager and other members of the network management staff a list of the top ten locations/regions based on various criteria.

Customer Exception Counts

Select a Customer for the Top Ten Locations

Thu Mar 04 2004

Customer	Total Exceptions	CPU Util Exceptions	Memory Util Exceptions	Buffer Util Exceptions
Customer Unassigned	0	0	0	0

Highest Average CPU Utilization

Thu Mar 04 2004

Location	Average CPU Util	Busy Hour CPU Util
Location Unassigned	21	21

CPU Utilization Forecast

Sorted by Highest 90 Day Forecasted Value

Location	Baseline	30th Day	60th Day	90th Day
Location Unassigned	39	21	20	20

Highest Average Memory Utilization

Thu Mar 04 2004

Location	Average Memory Util	Busy Hour Memory Util
Location Unassigned	39	39

Memory Utilization Forecast

Sorted by Highest 90 Day Forecasted Value

Location	Baseline	30th Day	60th Day	90th Day
Location Unassigned	62	68	83	99





Highest Average Buffer Utilization

Thu Mar 04 2004

Location	Average Buffer Util	Busy Hour Buffer Util
Location Unassigned	3	3

Buffer Utilization Forecast

Sorted by Highest 90 Day Forecasted Value

Location	Baseline	30th Day	60th Day	90th Day
Location Unassigned	6	7	9	11

Highest Traffic Volume


Thu Mar 04 2004

Location	Volume	Availability
Location Unassigned	5.6 Gb	56

Traffic Volume Forecast

Sorted by Highest 90 Day Forecasted Value

Location	Baseline	30th Day	60th Day	90thDay
No Data				

 [Back to Top](#)



Glossary

availability

The percentage of time the device is operational. Identifies device outages indicated by the sysuptime variable but does not account for periods of time the device could not be reached by OVPI.

average utilization

In an hourly graph, this is the average of four samples taken over a one-hour period. In a daily graph, this is the average of 96 samples taken over a 24-hour period.

baseline

The average of 91 busy hour readings over the baseline period.

baseline period

The previous 91 days. Forecasts for F30, F60, and F90 values are based on performance during the baseline period.

busy hour

Highest hourly average for the day, not a peak nor momentary event (actual utilization could be higher or lower during the course of that hour). The highest average hour among 24 hourly averages.

Common Property Tables

Locations and customer names appear in reports if you have imported this information using the Common Property Tables package. Refer to the Common Property Tables user guide for more information about importing this information. If you do not import customer names, data for all customers rolls up under the “All Customers” name. If you do not import locations, data for all locations rolls up under the “All Locations” name.

daily

A view of performance that compares average utilization to busy hour utilization. The number of days that you can see in this view depends on the number of days that data has been collected. The maximum number of days is the baseline period (91 days). Daily views also include performance data from yesterday, the same data visible in the hourly view, rolled up as one average and one busy hour.

device

A router or switch, not a server. In selection tables, devices are listed by IP addresses or hostname.

exception

An event that occurs when utilization exceeds the allowable threshold.

F30 / F60 / F90

The level where utilization or volume is expected to be 30, 60, or 90 days from now. Values are calculated by applying linear regression to busy hour levels over the baseline period.

hourly

An average derived from four collections taken once every 15 minutes. Or, a graph showing yesterday's hourly increases and decreases.

summary

An aggregation of multiple samples. In an hourly graph, an average based on multiple samples collected during one hour. In a daily graph, an average based on multiple samples collected over the course of each day. In customer and location reports, an aggregation of multiple averages for multiple devices across the same hour, day, or month.

threshold

The point at which the acceptable percentage of traffic errors/failures becomes abnormal and may impact response time. The default threshold values for buffer, CPU, and memory utilization is 85%.

utilization

The value of the metric in used divided by the total available resources for that metric, multiplied by 100 (measured as a percentage).

Index

A

availability, 29
average utilization, 29

B

baseline, 29
buffer utilization threshold, 30
busy hour utilization, 29

C

central server
 install report pack, 12
 upgrade report pack, 12
Common Property Tables, 29
 requirements, 11
 upgrade, 13
CPU utilization threshold, 30

D

daily, 29
device, 29
device reports, 8
device single view summary report, 18
device single view top ten report, 20
distributed systems guidelines, 12

E

exception, 29
executive summary availability & traffic report, 24
executive summary report, 22
executive summary top ten report, 25
extract
 package, 13

F

F30, 30
F60, 30

F90, 30

H

hourly, 30

I

install
 central server, 12
 package, 13
 prerequisites, 11
 satellite server, 12
interface, 30
Interface Reporting Report Pack
 requirements, 11

L

list of reports, 8
location reports, 8

M

memory utilization threshold, 30
metrics, 8

P

package
 extract, 13
 folders, 13
 install, 13
 remove, 14
 uninstall, 14
prerequisites, 11
Product Manuals Search (web page), 10

R

remove
 package, 14

reports

- device, 8
- device single view summary, 18
- device single view top ten, 20
- executive summary, 22
- executive summary availability & traffic, 24
- executive summary top ten, 25
- list of, 8
- location, 8

requirements

- Common Property Tables, 11
- Interface Reporting Report Pack, 11
- OVPI, 11
- software, 11

S

satellite server

- install report pack, 12
- upgrade report pack, 12

software requirements, 11

statistics, 8

T

threshold, 30

U

uninstall package, 14

upgrade

- central server, 12
- Common Property Tables, 13
- satellite server, 12

utilization, 30

V

version history, 7