

**ProTune<sup>®</sup>**  
*Analysis User's Guide*  
Version 1.0



MERCURY INTERACTIVE

Protune Analysis User's Guide, Version 1.0

This manual, and the accompanying software and other documentation, is protected by U.S. and international copyright laws, and may be used only in accordance with the accompanying license agreement. Features of the software, and of other products and services of Mercury Interactive Corporation, may be covered by one or more of the following patents: U.S. Patent Nos. 5,701,139; 5,657,438; 5,511,185; 5,870,559; 5,958,008; 5,974,572; 6,138,157; 6,144,962; 6,205,122; 6,237,006; 6,341,310; and 6,360,332. Other patents are pending in the U.S. and other countries.

WinRunner, XRunner, and LoadRunner are registered trademarks of Mercury Interactive Corporation. WinRunner, XRunner, and LoadRunner are registered trademarks of Mercury Interactive Corporation in the United States and/or other countries.

Astra QuickTest, Astra LoadTest, Astra FastTrack, RapidTest, QuickTest, Visual Testing, Action Tracker, Link Doctor, Change Viewer, Dynamic Scan, Fast Scan, Visual Web Display, ActiveTest, ActiveTest SecureCheck, ActiveWatch, POPs on Demand, Topaz, Topaz ActiveAgent, Topaz Observer, Topaz Prism, Topaz Delta, Topaz Rent-a-POP, Topaz Open DataSource, Topaz AIMS, Topaz Console, Topaz Diagnostics, Topaz WeatherMap, Twinlook, TurboLoad, LoadRunner TestCenter, SiteReliance and Global SiteReliance are trademarks of Mercury Interactive Corporation in the United States and/or other countries.

All other company, brand and product names are registered trademarks or trademarks of their respective holders. Mercury Interactive Corporation disclaims any responsibility for specifying which marks are owned by which companies or which organizations.

Mercury Interactive Corporation  
1325 Borregas Avenue  
Sunnyvale, CA 94089  
Tel. (408)822-5200 (800) TEST-911  
Fax. (408)822-5300

© Copyright 2002 by Mercury Interactive Corporation, All rights reserved

If you have any comments or suggestions regarding this document, please send them via e-mail to [documentation@mercury.co.il](mailto:documentation@mercury.co.il).

---

# Table of Contents

<b>Welcome to ProTune</b> .....	ix
Online Resources .....	ix
ProTune Documentation Set .....	x
Using the ProTune Documentation Set .....	xi
Typographical Conventions.....	xiii
<b>Chapter 1: Introducing the Analysis</b> .....	1
About the Analysis .....	2
Creating Analysis Sessions .....	3
Starting the Analysis.....	3
Collating Execution Results .....	4
Viewing Summary Data .....	4
Aggregating Analysis Data.....	5
Setting the Analysis Time Filter .....	7
Setting General Options .....	9
Setting Database Options .....	10
Working with Templates.....	14
Viewing Session Information .....	16
Viewing the Session Run-Time Settings.....	17
Analysis Graphs .....	18
Opening Analysis Graphs.....	21

<b>Chapter 2: Working with Analysis Graphs</b> .....	23
About Working with Analysis Graphs .....	24
Determining a Point's Coordinates.....	24
Performing a Drill Down on a Graph .....	25
Enlarging a Section of a Graph .....	28
Changing the Granularity of the X-Axis.....	28
Applying a Filter to a Graph .....	31
Grouping and Sorting Results .....	35
Configuring Display Options .....	36
Viewing the Legend .....	40
Viewing the Data as a Spreadsheet and as Raw Data .....	42
Viewing Measurement Trends.....	44
Auto Correlating Measurements .....	45
<b>Chapter 3: Vuser Graphs</b> .....	49
About Vuser Graphs .....	49
Running Vusers Graph .....	50
Vuser Summary Graph .....	51
Rendezvous Graph .....	52
<b>Chapter 4: Error Graphs</b> .....	53
About Error Graphs .....	53
Error Statistics Graph .....	54
Errors per Second Graph .....	55
<b>Chapter 5: Transaction Graphs</b> .....	57
About Transaction Graphs .....	57
Average Transaction Response Time Graph .....	58
Transactions per Second Graph .....	60
Total Transactions per Second .....	61
Transaction Summary Graph .....	62
Transaction Performance Summary Graph .....	63
Transaction Response Time (Under Load) Graph .....	64
Transaction Response Time (Percentile) Graph .....	65
Transaction Response Time (Distribution) Graph .....	66

<b>Chapter 6: Web Resource Graphs</b> .....	69
About Web Resource Graphs.....	69
Hits per Second Graph .....	70
Throughput Graph .....	71
HTTP Status Code Summary Graph .....	72
HTTP Responses per Second Graph .....	73
Pages Downloaded per Second Graph .....	76
Retries per Second Graph .....	78
Retries Summary Graph .....	79
<b>Chapter 7: Web Page Breakdown Graphs</b> .....	81
About Web Page Breakdown Graphs .....	82
Activating the Web Page Breakdown Graphs .....	83
Page Component Breakdown Graph .....	85
Page Component Breakdown (Over Time) Graph .....	87
Page Download Time Breakdown Graph .....	89
Page Download Time Breakdown (Over Time) Graph .....	93
Time to First Buffer Breakdown Graph .....	95
Time to First Buffer Breakdown (Over Time) Graph .....	97
Downloaded Component Size Graph .....	99
<b>Chapter 8: User-Defined Data Point Graphs</b> .....	101
About User-Defined Data Point Graphs.....	101
Data Points (Sum) Graph .....	102
Data Points (Average) Graph .....	103
<b>Chapter 9: System Resource Graphs</b> .....	105
About System Resource Graphs.....	105
Windows Resources Graph .....	106
UNIX Resources Graph.....	110
SNMP Resources Graph .....	112
TUXEDO Resources Graph .....	113
Antara FlameThrower Resources Graph .....	116
<b>Chapter 10: Network Monitor Graphs</b> .....	127
About Network Monitoring .....	127
Understanding Network Monitoring.....	128
Network DelayTime Graph .....	129
Network Sub-Path Time Graph .....	130
Network Segment Delay Graph .....	131
Verifying the Network as a Bottleneck.....	132
<b>Chapter 11: Firewall Server Monitor Graphs</b> .....	133
About Firewall Server Monitor Graphs .....	133
Check Point FireWall-1 Server Graph .....	134

<b>Chapter 12: Web Server Resource Graphs</b> .....	135
About Web Server Resource Graphs.....	135
Apache Server Graph .....	136
Microsoft Information Internet Server (IIS) Graph .....	138
iPlanet/Netscape Server Graph .....	140
<b>Chapter 13: Web Application Server Resource Graphs</b> .....	143
About Web Application Server Resource Graphs.....	144
Ariba Graph .....	145
ATG Dynamo Graph .....	147
BroadVision Graph .....	150
ColdFusion Graph .....	157
Fujitsu INTERSTAGE Graph .....	158
Microsoft Active Server Pages (ASP) Graph .....	159
Oracle9iAS HTTP Server Graph .....	160
SilverStream Graph .....	164
WebLogic (SNMP) Graph .....	165
WebLogic (JMX) Graph .....	167
WebSphere Graph .....	170
WebSphere (EPM) Graph .....	177
<b>Chapter 14: Database Server Resource Graphs</b> .....	191
About Database Server Resource Graphs.....	191
DB2 Graph .....	192
Oracle Graph .....	206
SQL Server Graph .....	209
Sybase Graph .....	211
<b>Chapter 15: Streaming Media Graphs</b> .....	217
About Streaming Media Graphs.....	217
RealPlayer Client Graph .....	218
RealPlayer Server Graph .....	220
Windows Media Server Graph .....	221
Media Player Client Graph.....	223
<b>Chapter 16: ERP Server Resource Graphs</b> .....	225
About ERP Server Resource Graphs .....	225
SAP Graph .....	226
<b>Chapter 17: Java Performance Graphs</b> .....	229
About Java Performance Graphs .....	229
EJB Graph .....	230
JProbe Graph .....	231
Sitraka JMonitor Graph .....	231
TowerJ Graph .....	234

<b>Chapter 18: Cross Result and Merged Graphs</b> .....	237
About Cross Result and Merged Graphs .....	237
Cross Result Graphs.....	238
Generating Cross Result Graphs .....	240
Merging Graphs .....	241
Creating a Merged Graph .....	243
<b>Chapter 19: Understanding Analysis Reports</b> .....	245
About Analysis Reports.....	245
Viewing Summary Reports .....	247
Creating HTML Reports .....	248
Working with Transaction Reports .....	249
Session Step Execution Report .....	251
Failed Transaction Report .....	252
Failed Vuser Report .....	253
Data Point Report .....	254
Detailed Transaction Report .....	255
Transaction Performance by Vuser Report .....	256
<b>Chapter 20: Interpreting Analysis Graphs</b> .....	257
Analyzing Transaction Performance .....	257
Using the Web Page Breakdown Graphs.....	260
Using Auto Correlation .....	262
Identifying Server Problems .....	267
Identifying Network Problems .....	268
Comparing Session Step Results .....	269
<b>Index</b> .....	271



---

# Welcome to ProTune

Welcome to ProTune, the proactive solution for optimizing production systems. ProTune's system-wide approach to optimization is a product of Mercury Interactive's expert knowledge and tuning methodologies.

The main intention of ProTune is to enable the user to explore his network, detect bottlenecks and assist during the tuning phase. ProTune combines the network topology, predefined tuning sessions and goals to a set of tests that pinpoint problematic components in the client network. In addition, ProTune helps the more advanced user to explore and tune the business processes by providing a simple and organized methodology.

## Online Resources



ProTune includes the following online tools:

**Read Me First** provides last-minute news and information about ProTune.

**Books Online** displays the complete documentation set in PDF format. Online books can be read and printed using Adobe Acrobat Reader, which is included in the installation package. Check Mercury Interactive's Customer Support Web site for updates to ProTune online books.

**ProTune Function Reference** gives you online access to all of ProTune's functions that you can use when creating Vuser scripts, including examples of how to use the functions. Check Mercury Interactive's Customer Support Web site for updates to the online *Online Function Reference*.

**ProTune Context Sensitive Help** provides immediate answers to questions that arise as you work with ProTune. It describes dialog boxes, and shows you how to perform ProTune tasks. To activate this help, click in a window

and press F1. Check Mercury Interactive's Customer Support Web site for updates to ProTune help files.

**Technical Support Online** uses your default web browser to open Mercury Interactive's Customer Support Web site. This site enables you to browse the knowledge base and add your own articles, post to and search user discussion forums, submit support requests, download patches and updated documentation, and more. The URL for this Web site is <http://support.mercuryinteractive.com>.

**Support Information** presents the locations of Mercury Interactive's Customer Support Web site and home page, and a list of Mercury Interactive's offices around the world.

**Mercury Interactive on the Web** uses your default Web browser to open Mercury Interactive's home page (<http://www.mercuryinteractive.com>). This site enables you to browse the knowledge base and add your own articles, post to and search user discussion forums, submit support requests, download patches and updated documentation, and more.

## **ProTune Documentation Set**

ProTune is supplied with a set of documentation that describes how to:

- install ProTune
- create scripts
- use the ProTune Console
- use the ProTune Analysis

## Using the ProTune Documentation Set

The ProTune documentation set consists of one installation guide, a Console user's guide, an Analysis user's guide, and two guides for creating Virtual User scripts.

### Installation Guide

For instructions on installing ProTune, refer to the *ProTune Installation Guide*. The installation guide explains how to install:

- ▶ the ProTune Console—on a Windows-based machine
- ▶ Virtual User components—for both Windows and UNIX platforms

### Console User's Guide

The ProTune documentation pack includes one Console user's guide:

The *ProTune Console User's Guide* describes how to create and run ProTune sessions using the ProTune Console in a Windows environment. The Vusers can run on UNIX and Windows-based platforms. The Console user's guide presents an overview of the ProTune testing process.

### Analysis User's Guide

The ProTune documentation pack includes one Analysis user's guide:

The *ProTune Analysis User's Guide* describes how to use the ProTune Analysis graphs and reports after running a session in order to analyze system performance.

## Guide for Creating Scripts

The ProTune documentation pack includes one VuGen user's guide.

The *ProTune Virtual User Generator User's Guide* describes how to create scripts using VuGen. When necessary, supplement this document with the online *ProTune Function Reference* and the *WinRunner User's Guide* for creating GUI scripts.

<b>For information on</b>	<b>Look here...</b>
Installing ProTune	<i>ProTune Installation Guide</i>
The ProTune testing process	<i>ProTune Console User's Guide</i>
Creating scripts	<i>ProTune Virtual User Generator User's Guide</i>
Creating and running sessions	<i>ProTune Console User's Guide</i>
Analyzing test results	<i>ProTune Analysis User's Guide</i>

## Typographical Conventions

This book uses the following typographical conventions:

<b>1, 2, 3</b>	Bold numbers indicate steps in a procedure.
►	Bullets indicate options and features.
>	The greater than sign separates menu levels (for example, <b>File &gt; Open</b> ).
<b>Stone Sans</b>	The <b>Stone Sans</b> font indicates names of interface elements on which you perform actions (for example, “Click the <b>Run</b> button.”).
<b>Bold</b>	<b>Bold</b> text indicates method or function names
<i>Italics</i>	<i>Italic</i> text indicates method or function arguments, file names or paths, and book titles.
Helvetica	The Helvetica font is used for examples and text that is to be typed literally.
<>	Angle brackets enclose a part of a file path or URL address that may vary from user to user (for example, < <i>Product installation folder</i> >\bin).
[ ]	Square brackets enclose optional arguments.
{ }	Curly brackets indicate that one of the enclosed values must be assigned to the current argument.
...	In a line of syntax, an ellipsis indicates that more items of the same format may be included.



# 1

---

## Introducing the Analysis

ProTune Analysis provides graphs and reports to help you analyze the performance of your system. These graphs and reports summarize the session step execution.

This chapter describes:

- Creating Analysis Sessions
- Starting the Analysis
- Collating Execution Results
- Viewing Summary Data
- Aggregating Analysis Data
- Setting the Analysis Time Filter
- Setting General Options
- Setting Database Options
- Working with Templates
- Viewing Session Information
- Viewing the Session Run-Time Settings
- Analysis Graphs
- Opening Analysis Graphs

## About the Analysis

During session step execution, Vusers generate result data as they perform their transactions. To monitor the session step performance *during* test execution, use the online monitoring tools described in the *ProTune Console User's Guide*. To view a summary of the results *after* test execution, you can use one or more of the following tools:

- ▶ The **Vuser log files** contain a full trace of the session step run for each Vuser. These files are located in the session step results directory. (When you run a Vuser script in standalone mode, these files are placed in the Vuser script directory.) For more information on Vuser log files, refer to the *ProTune Virtual User Generator User's Guide*.
- ▶ The **Console Output window** displays information about the session step run. If your session step run fails, look for debug information in this window. For more information, see the *ProTune Console User's Guide*.
- ▶ The **Analysis graphs** help you determine system performance and provide information about transactions and Vusers. You can compare multiple graphs by combining results from several session steps or merging several graphs into one.
- ▶ The **Graph Data** and **Raw Data** views display the actual data used to generate the graph in a spreadsheet format. You can copy this data into external spreadsheet applications for further processing.
- ▶ The **Report** utilities enable you to view a Summary HTML report for each graph or a variety of Performance and Activity reports.

This chapter provides an overview of the graphs and reports that can be generated through the Analysis.

## Creating Analysis Sessions

When you run a session step, data is stored in a result file with an *.lrr* extension. The Analysis is the utility that processes the gathered result information and generates graphs and reports.

When you work with the Analysis utility, you work within a *session*. An Analysis session contains at least one set of session step results (*lrr* file). The Analysis stores the display information and layout settings for the active graphs in a file with an *.lra* extension.

## Starting the Analysis

You can open the Analysis through the ProTune program group as an independent application, or directly from the Console. To open the new Analysis utility as an independent application, choose **Analysis** from the ProTune Program Group.

To open the Analysis directly from the Console, select **Results > Analyze Results**. This option is only available after running a session step. The Analysis takes the latest result file from the current session step, and opens a new session using these results. You can also instruct the Console to automatically open the Analysis after it completes session step execution by selecting **Results > Auto Load Analysis**.

When creating a new session, the Analysis prompts you for the result file (*.lrr* extension) that you wish to include in the session. To open an existing session, you specify an Analysis Session file (*.lra* extension).

## Collating Execution Results

When you run a session step, by default all Vuser information is stored locally on each Vuser host. After session step execution the results are automatically *collated* or consolidated—results from all of the hosts are transferred to the results directory. You disable automatic collation by choosing **Results > Auto Collate Results** from the Console window, to clear the check mark adjacent to the option. To manually collate results, choose **Results > Collate Results**. If your results have not been collated, the Analysis will automatically collate the results before generating the analysis data. For more information about collating results, see the *ProTune Console User's Guide*.

## Viewing Summary Data

In large session steps, with results exceeding 100 MBs, it can take a while for the Analysis to process the data. While ProTune is processing the complete data, you can view a summary of the data collected. To view the summary data, choose **Tools > Options**, and select the **Result Collection** tab. Select **Display summary data while generating complete data** if you want the Analysis to process the complete data graphs while you view the summary data, or select **Generate summary data only** if you do not want ProTune to process the complete Analysis data.

The following graphs are not available when viewing summary data only: Rendezvous, Data Point (Sum), Web Page Breakdown, Network Monitor, and Error graphs.

---

**Note:** Some fields are not available for filtering when you are working with summary graphs.


---

## Aggregating Analysis Data

If you choose to generate the complete Analysis data, the Analysis aggregates the data being generated using either built-in data aggregation formulas, or aggregation settings that you define. Data aggregation is necessary in order to reduce the size of the database and decrease processing time in large session steps.


**To aggregate Analysis data:**

- 1 Select **Tools > Options**, and click the **Result Collection** tab in the Options dialog box.

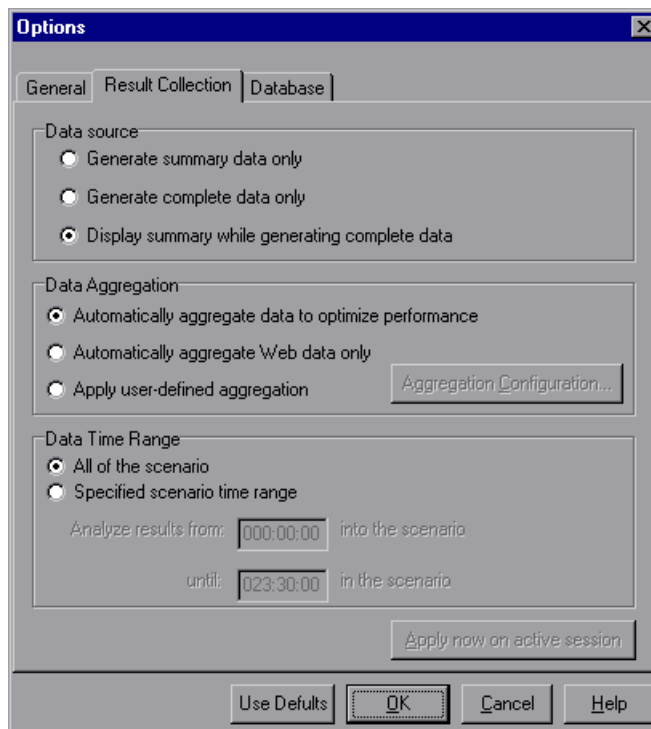

**2** Select one of the following three options:

- **Automatically aggregate data to optimize performance:** Instructs the Analysis to aggregate data using its own, built-in data aggregation formulas.
- **Automatically aggregate Web data only:** Instructs the Analysis to aggregate Web data using its own, built-in data aggregation formulas.
- **Apply user-defined aggregation:** Applies the aggregation settings you define. To define aggregation settings, click the **Aggregation Configuration** button. The Data Aggregation Configuration dialog box opens.

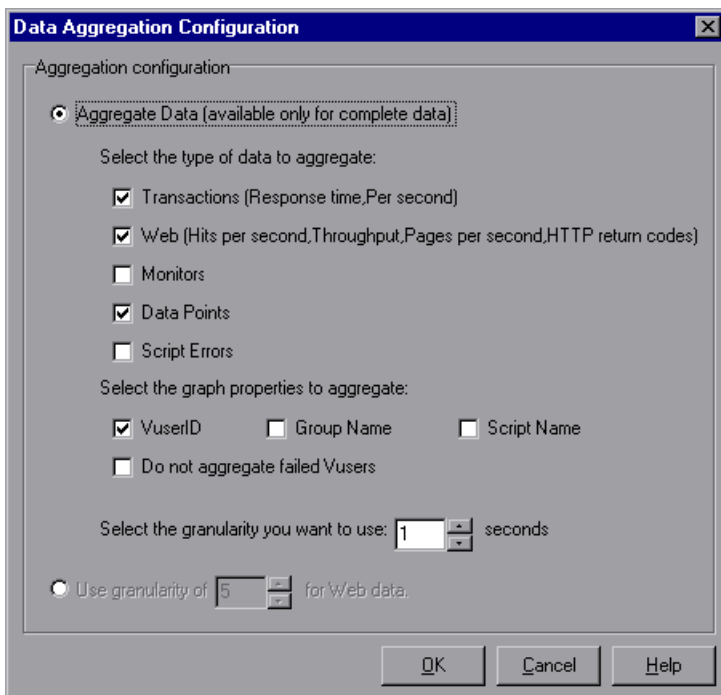

Select **Aggregate Data** if you want to specify the data to aggregate. Specify the type(s) of graphs for which you want to aggregate data, and the graph properties—Vuser ID, Group Name, and Script Name—you want to aggregate. If you do not want to aggregate the failed Vuser data, select **Do not aggregate failed Vusers**.

---

**Note:** You will not be able to drill down on the graph properties you select to aggregate.

---

Specify a custom granularity for the data. To reduce the size of the database, increase the granularity. To focus on more detailed results, decrease the granularity. Note that the minimum granularity is 1 second.

Select **Use granularity of xxx seconds for Web data** to specify a custom granularity for Web data. By default, the Analysis summarizes Web measurements every 5 seconds. To reduce the size of the database, increase the granularity. To focus on more detailed results, decrease the granularity.

Click **OK** to close the Data Aggregation Configuration dialog box.


- 3 Click **OK** in the Result Collection tab to save your settings and close the Options dialog box.

## Setting the Analysis Time Filter

You can filter the time range of session step data stored in the database and displayed in the Analysis graphs. This decreases the size of the database and thereby decreases processing time.

**To filter the time range of session step data:**

- 1 Select **Tools > Options**, and click the **Result Collection** tab in the Options dialog box.

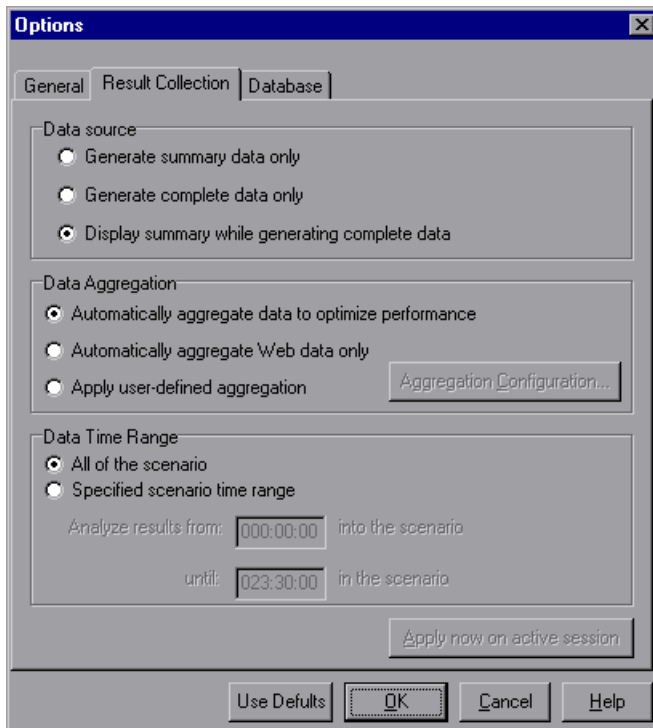

- 2 In the Data Time Range box, select **Specified session step time range**.
- 3 Enter the beginning and end of the session step time range you want the Analysis to display.
- 4 Click **OK** to save your settings and close the Options dialog box.

---

**Note:** All graphs except the Running Vusers graph will be affected by the time range settings, in both the Summary and Complete Data Analysis modes.


---

## Setting General Options

In the General tab of the Options dialog box, you can choose whether you want dates stored and displayed in a European or U.S. format. In addition, you can select the directory location at which you want the file browser to open, and in which you want to store temporary files.

**To configure General options:**

- 1 Select **Tools > Options**. The Options dialog box opens, displaying the General tab.

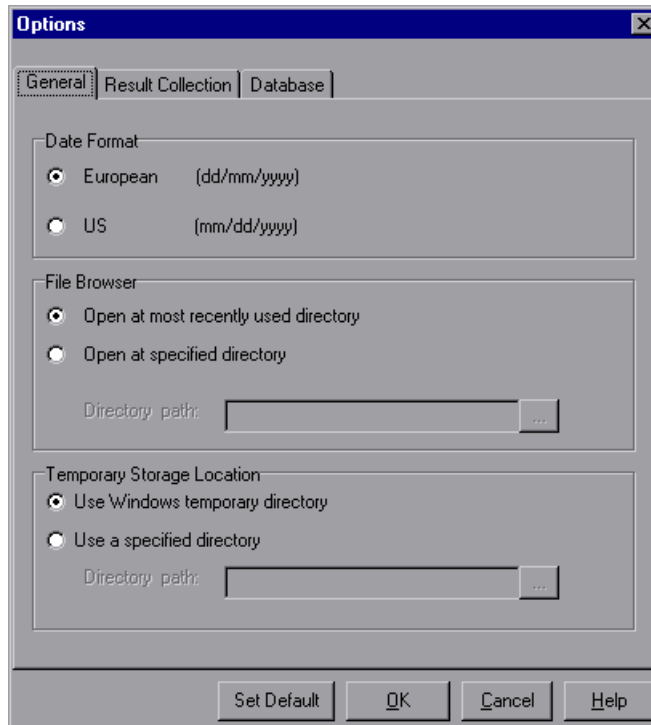


- 2** In the Date Format box, select **European** to store and display dates in the European format, or **US** to store and display dates in the American format.
- 3** In the File Browser box, select **Open at most recently used directory** if you want the Analysis to open the file browser at the previously used directory location. Select **Open at specified directory** and enter the directory location at which you want the file browser to open, if you want the Analysis to open the file browser at a specified directory.
- 4** In the Temporary Storage Location box, select Use Windows temporary directory if you want the Analysis to store temporary files in your Windows temp directory. Select **Use a specified directory** and enter the directory location in which you want to save temporary files, if you want the Analysis to save temporary files in a specified directory.

## Setting Database Options

The Database Options tab lets you specify the database in which to store Analysis session result data. By default, ProTune stores Analysis result data in an Access 97 database. If your Analysis result data exceeds two gigabytes, it is recommended that you store it on an SQL server or MSDE machine.

**To save result data in Access database format:**

- 1 Select **Tools > Options** to open the Options dialog box. Select the **Database** tab.

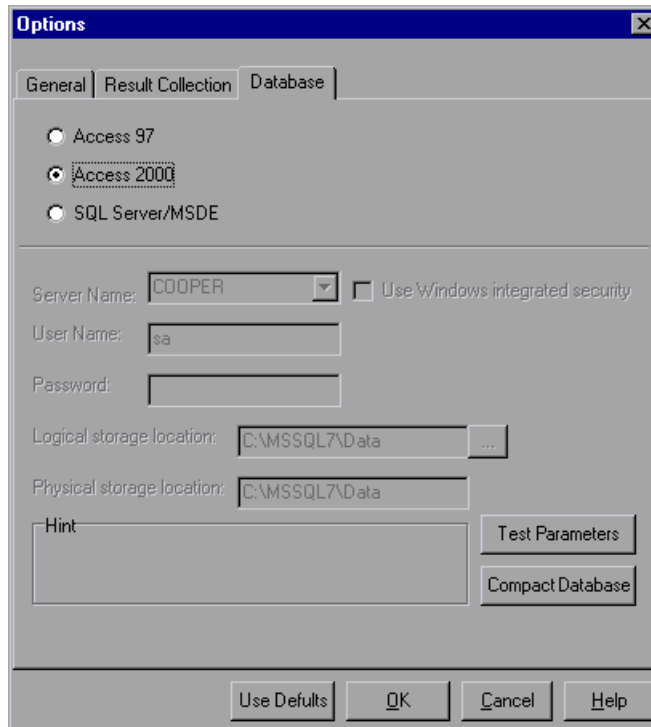

- 2 Choose one of the following two options:
  - To instruct ProTune to save Analysis result data in an Access 97 database format, select **Access 97**.
  - To instruct ProTune to save Analysis result data in an Access 2000 database format, select **Access 2000**.
- 3 Click the **Test Parameters** button to connect to the Access database and verify that the “list separator” registry options on your machine are the same as those on the database machine.

- 4 Click the **Compact Database** button to repair and compress results that may have become fragmented, and prevent the use of excessive disk space.


---

**Note:** Long session steps (duration of two hours or more) will require more time for compacting.

---

**To save result data on an SQL Server or MSDE machine:**

- 1 Select **Tools > Options** to open the Options dialog box. Click the **Database** tab, and select the **SQL Server/MSDE** option.

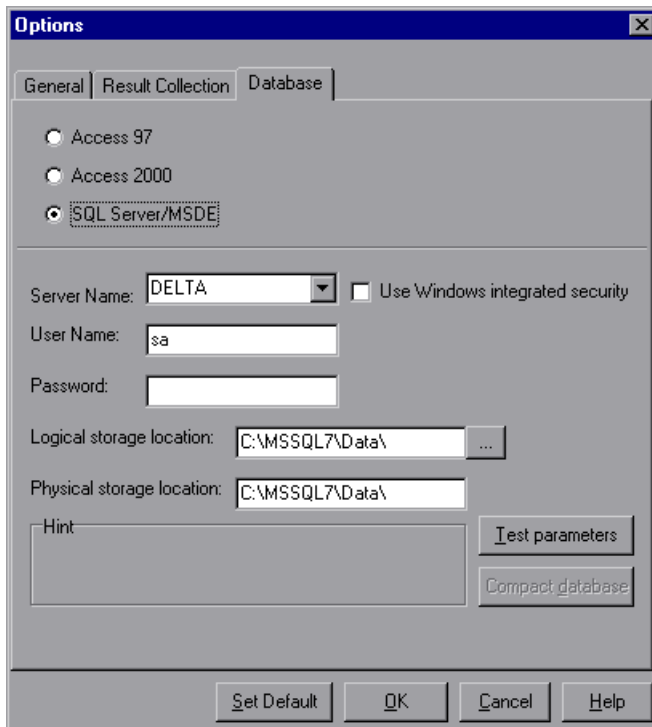

- 2 Select or enter the name of the machine on which the SQL server or MSDE is running, and enter the master database user name and password. Select **Use Windows-integrated security** in order to use your Windows login, instead of specifying a user name and password.

---

**Note:** By default, the user name “sa” and no password are used for the SQL server.

---

- 3** In the Logical storage location box, enter a shared directory on the SQL server/MSDE machine in which you want permanent and temporary database files to be stored. For example, if your SQL server’s name is *fly*, enter \\fly\*<Analysis Database>*\\. Note that Analysis results stored on an SQL server/MSDE machine can only be viewed on the machine’s local LAN.
- 4** In the Physical storage location box, enter the real drive and directory path on the SQL server/MSDE machine that correspond to the logical storage location. For example, if the Analysis database is mapped to an SQL server named *fly*, and *fly* is mapped to drive D, enter D:\<Analysis Database>.

---

**Note:** If the SQL server/MSDE and Analysis are on the same machine, the logical storage location and physical storage location are identical.

---

- 5** Click **Test Parameters** to connect to the SQL server/MSDE machine and verify that the shared directory you specified exists on the server, and that you have write permissions on the shared server directory. If so, the Analysis synchronizes the shared and physical server directories.

---

**Note:** If you store Analysis result data on an SQL server/MSDE machine, you must select **File > Save As** in order to save your Analysis session. To delete your Analysis session, you must select **File > Delete Current Session**.

To open a session stored on an SQL Server/MSDE machine, the machine must be running and the directory you defined must exist as a shared directory.


---

## Working with Templates

You can save the filter and display options that you specified for an Analysis session in order to use them later in another session.

**To save the Analysis template that you created:**

- 1 Select **Tools > Templates > Save As Template**. The Save As Template dialog box opens.

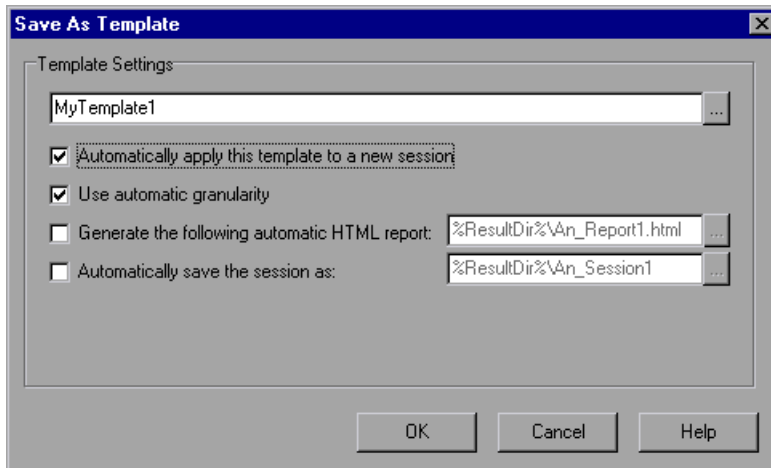


- 2 Enter the name of the template you want to create, or select the template name using the browse button to the right of text box.
- 3 To apply the template to any new session you open, select **Automatically apply this template to a new session**.
- 4 To apply the default Analysis granularity (one second) to the template, select **Use automatic granularity**. For information about setting Analysis granularity, see “Changing the Granularity of the X-Axis” on page 28.
- 5 To generate an HTML report using the template, select **Generate the following automatic HTML report**, and specify or select a report name. For information about generating HTML reports, see “Creating HTML Reports” on page 248.
- 6 To instruct the Analysis to automatically save the session using the template you specify, select **Automatically save the session as**, and specify or select a file name.

- 7 Click **OK** to close the dialog box and save the template.

Once you have saved a template, you can apply it to other Analysis sessions.

**To use a saved template in another Analysis session:**

- 1 Select **Tools > Templates > Apply/Edit Template**. The Apply/Edit Template dialog box opens.

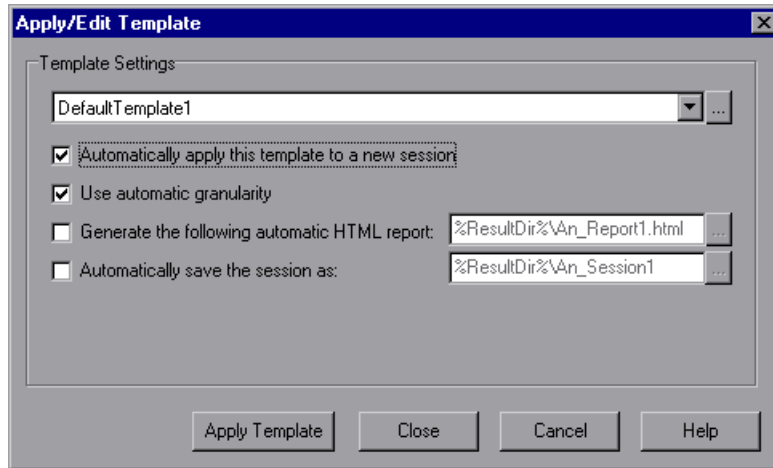

- 2 Select the template you want to use from the template selector, or click the browse button to choose a template from a different location.

- 3** To apply the template to any new session you open, select **Automatically apply this template to a new session**.
- 4** To apply the default Analysis granularity (one second) to the template, select **Use automatic granularity**. For information about setting Analysis granularity, see “Changing the Granularity of the X-Axis” on page 28.
- 5** To generate an HTML report using the template, select **Generate the following automatic HTML report**, and specify or select a report name. For information about generating HTML reports, see “Creating HTML Reports” on page 248.
- 6** To instruct the Analysis to automatically save the session using the template you specify, select **Automatically save the session as**, and specify or select a file name.

Click **OK** to close the dialog box and load the template you selected into the current Analysis session.


## Viewing Session Information

You can view the properties of the current Analysis session in the Session Information dialog box.

### To view the properties of the current Analysis session:

Select **File > Session Information**. The Session Information dialog box opens, enabling you to view the session name, result file name, and database name, directory path, and type. In addition, you can view whether the session contains complete or summary data, whether a time filter has been applied

to the session, and whether the data was aggregated. The Web granularity used in the session is also displayed.

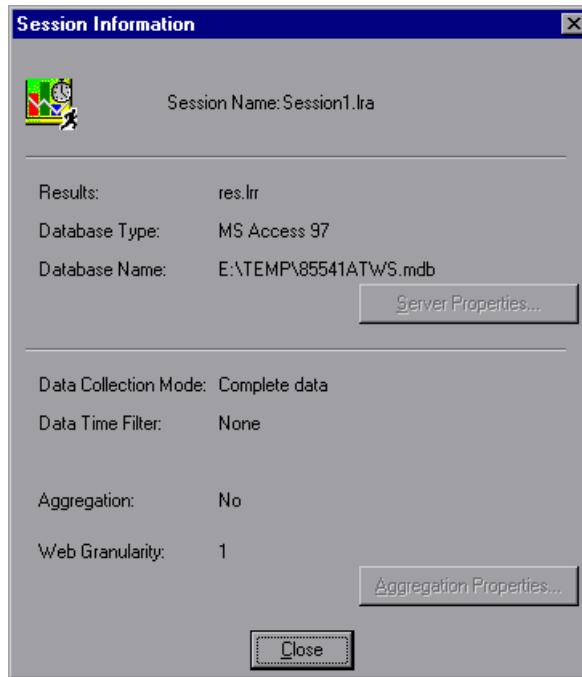

## Viewing the Session Run-Time Settings

You can view information about the Vuser groups and scripts that were run in each session step, as well as the run-time settings for each script in a session step, in the Session Run-Time Settings dialog box.

---

**Note:** The run-time settings allow you to customize the way a Vuser script is executed. You configure the run-time settings from the Console or VuGen before running a session step. For information on configuring the run-time settings, refer to the *ProTune Virtual User Generator User's Guide*.

---

### To view the session step run-time settings:



Select **File > Session Run-Time Settings**, or click the **Run-Time Settings** button on the toolbar. The Session Run-Time Settings dialog box opens, displaying the Vuser groups, scripts, and scheduling information for each session step. For each script in a session step, you can view the run-time settings that were configured in the Console or VuGen before session execution.

## Analysis Graphs

The Analysis graphs are divided into the following categories:

- Users
- Transactions
- Web Resources
- Web Page Breakdown
- User-Defined Data Points
- System Resources
- Network Monitor
- Firewalls
- Web Server Resources
- Web Application Server Resources
- Database Server Resources
- Streaming Media
- ERP Server Resources
- Java Performance

**Vuser** graphs display information about Vuser states and other Vuser statistics. For more information, see Chapter 3, “Vuser Graphs.”

**Error** graphs provide information about the errors that occurred during the session step. For more information, see Chapter 4, “Error Graphs.”

**Transaction** graphs and reports provide information about transaction performance and response time. For more information, see Chapter 5, “Transaction Graphs.”

**Web Resource** graphs provide information about the throughput, hits per second, HTTP responses per second, number of retries per second, and downloaded pages per second for Web Users. For more information, see Chapter 6, “Web Resource Graphs.”

**Web Page Breakdown** graphs provide information about the size and download time of each Web page component. For more information, see Chapter 7, “Web Page Breakdown Graphs.”

**User-Defined Data Point** graphs display information about the custom data points that were gathered by the online monitor. For more information, see Chapter 8, “User-Defined Data Point Graphs.”

**System Resource** graphs show statistics relating to the system resources that were monitored during the session step using the online monitor. This category also includes graphs for SNMP and TUXEDO monitoring. For more information, see Chapter 9, “System Resource Graphs.”

**Network Monitor** graphs provide information about the network delays. For more information, see Chapter 10, “Network Monitor Graphs.”

**Firewall** graphs provide information about firewall server resource usage. For more information, see Chapter 11, “Firewall Server Monitor Graphs.”

**Web Server Resource** graphs provide information about the resource usage for the Apache, iPlanet/Netscape, and MS IIS Web servers. For more information see Chapter 12, “Web Server Resource Graphs.”

**Web Application Server Resource** graphs provide information about the resource usage for various Web application servers such as Ariba, ATG Dynamo, BroadVision, ColdFusion, Fujitsu INTERSTAGE, Microsoft ASP, Oracle9iAS HTTP, SilverStream, WebLogic (SNMP), WebLogic (JMX), and WebSphere, and WebSphere (EPM). For more information see Chapter 13, “Web Application Server Resource Graphs.”

**Database Server Resource** graphs provide information about DB2, Oracle, SQL Server, and Sybase database resources. For more information, see Chapter 14, “Database Server Resource Graphs.”

**Streaming Media** graphs provide information about RealPlayer Client, RealPlayer Server, and Windows Media Server resource usage. For more information, see Chapter 15, "Streaming Media Graphs."

**ERP Server Resource** graphs provide information about SAP R/3 system server resource usage. For more information, see Chapter 16, "ERP Server Resource Graphs."


**Java Performance** graphs provide information about resource usage of Enterprise Java Bean (EJB) objects, Java-based applications, and the TowerJ Java virtual machine. For more information, see Chapter 17, "Java Performance Graphs."

## Opening Analysis Graphs

By default, ProTune displays only the Summary Report in the graph tree view. You can open the Analysis graphs using the Open a New Graph dialog box.

**To open a new graph:**

- 1 Select **Graph > Add Graph**, or click **<New Graph>** in the graph tree view. The Open a New Graph dialog box opens.

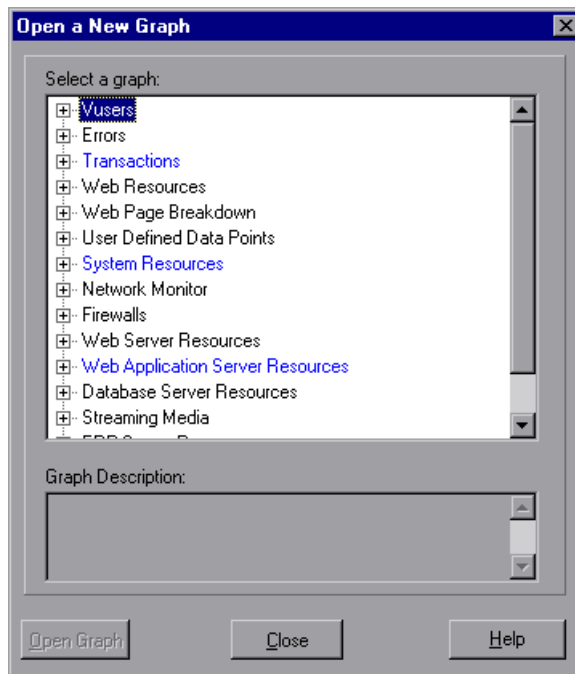

- 2 Click the "+" to expand the graph tree, and select a graph. You can view a description of the graph in the Graph Description box.
- 3 Click **Open Graph**. The Analysis generates the graph you selected and adds it to the graph tree view. The graph is displayed in the right pane of the Analysis.

To display an existing graph in the right pane of the Analysis, select the graph in the graph tree view.



# 2

---

## Working with Analysis Graphs

The Analysis contains several utilities that allow you to customize result data and view this data in various different ways.

This chapter describes:

- About Working with Analysis Graphs
- Determining a Point's Coordinates
- Performing a Drill Down on a Graph
- Enlarging a Section of a Graph
- Changing the Granularity of the X-Axis
- Applying a Filter to a Graph
- Grouping and Sorting Results
- Configuring Display Options
- Viewing the Legend
- Viewing the Data as a Spreadsheet and as Raw Data
- Viewing Measurement Trends
- Auto Correlating Measurements


## About Working with Analysis Graphs

The Analysis provides a number of utilities that enable you to customize the the graphs in your session so that you can view the data displayed in the most effective way possible.

Using the Analysis utilities, you can determine a point's coordinates, drill down on a graph, enlarge a section of a graph, change the granularity of a graph's x-axis, apply a filter to a graph, group and sort result data, configure a graph's display options, view a graph's data as a spreadsheet or as raw data, view measurement trends, or auto correlate between measurements in a graph.

## Determining a Point's Coordinates

You can determine the coordinates and values at specific points in a graph. Place the cursor over the point you want to evaluate. The Analysis displays the axis values and other grouping information.

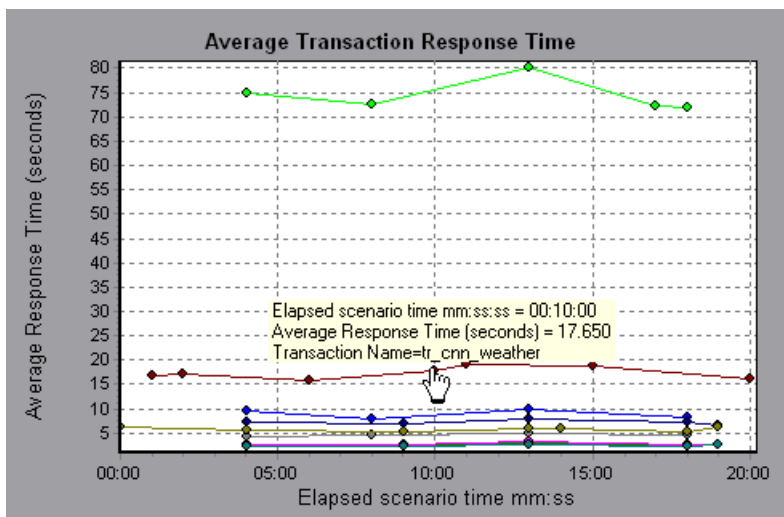

## Performing a Drill Down on a Graph


The Analysis provides another filtering mechanism called *drill down*. Drill down lets you focus on a specific measurement within your graph. You select one measurement within the graph and display it according to desired grouping. The available groupings are Vuser ID, Group Name, Vuser End Status, etc. depending on the graph. For example, the **Average Transaction Response Time** graph shows one line per transaction. To determine the response time for each Vuser, you drill down on one transaction and sort it according to Vuser ID. The graph displays a separate line for each Vuser's transaction response time.

---


**Note:** The drill down feature is not available for the Web Page Breakdown graph.

---

In the following example, the graph shows a line for each of the five transactions.

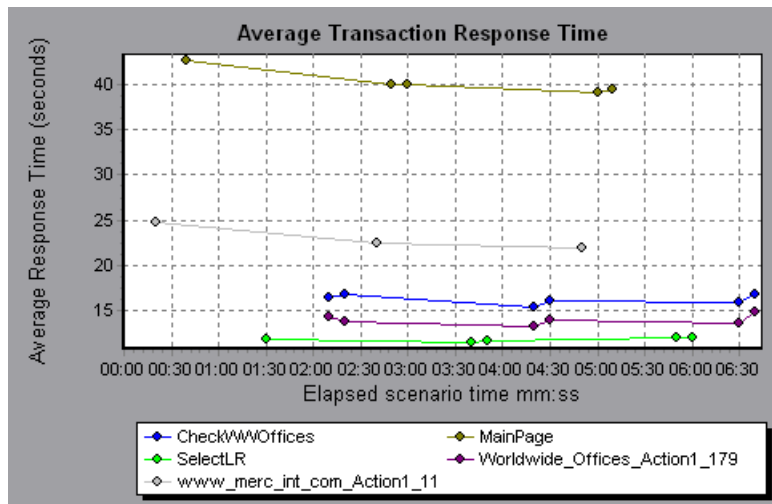


In a drill down for the MainPage transaction per Vuser ID, the graph displays the response time only for the MainPage transaction, one line per Vuser.

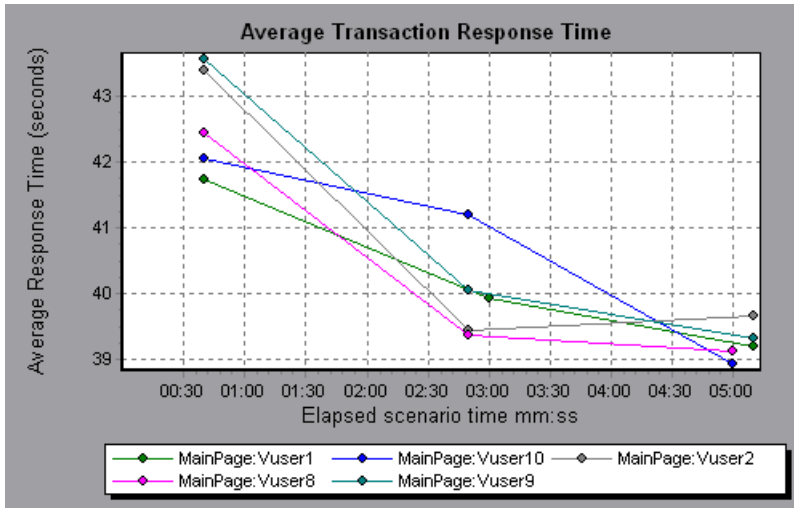

You can see from the graph that the response time was longer for some Users than for others.

**To drill down in a graph:**

- 1 Right-click on a line, bar, or segment within the graph, and select **Drill Down**. The Drill Down Options dialog box opens listing all of the measurements in the graph.

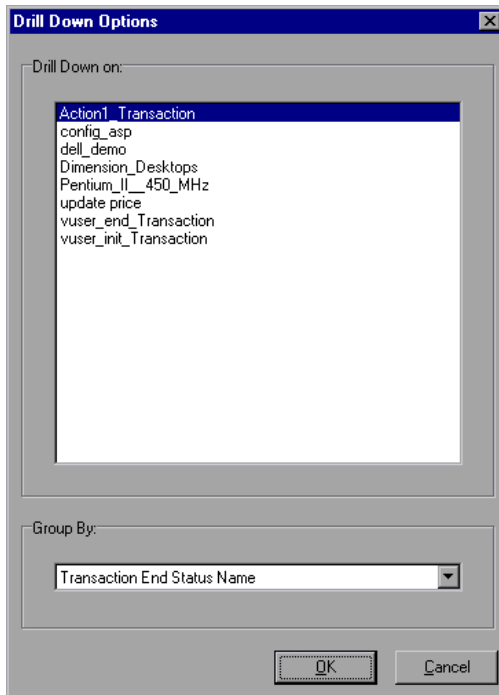

- 2 Select a measurement for drill down.
- 3 From the Group By box, select a group by which to sort.
- 4 Click **OK**. The Analysis drills down and displays the new graph.
- 5 To undo the last drill down settings, choose **Undo Set Filter/Group By** from the right-click menu.
- 6 To perform additional drill downs, repeat steps 1 to 4.
- 7 To clear all filter and drill down settings, choose **Clear Filter/Group By** from the right-click menu.

## Enlarging a Section of a Graph

Graphs initially display data representing the entire duration of the session step. You can enlarge any section of a graph to zoom in on a specific period of the session step run. For example, if a session step ran for ten minutes, you can enlarge and focus on the session step events that occurred between the second and fifth minutes.

**To zoom in on a section of the graph:**


- 1** Click inside a graph.
- 2** Move the mouse pointer to the beginning of the section you want to enlarge, but not over a line of the graph.
- 3** Hold down the left mouse button and draw a box around the section you want to enlarge.
- 4** Release the left mouse button. The section is enlarged.
- 5** To restore the original view, choose **Clear Display Option** from the right-click menu.

## Changing the Granularity of the X-Axis

You can make the graphs easier to read and analyze by changing the granularity (scale) of the x-axis. The maximum granularity is half of the graph's time range. To ensure readability and clarity, the Analysis automatically adjusts the minimum granularity of graphs with ranges of 500 seconds or more.

**To change the granularity of a graph:**


- 1 Click inside a graph.
- 2 Select **View > Set Granularity**, or click the **Set Granularity** button. The Granularity dialog box opens.

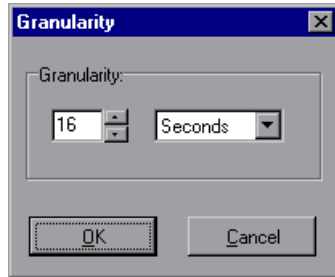


- 3 Enter a new granularity value in milliseconds, minutes, seconds, or hours.
- 4 Click **OK**.

In the following example, the Hits per Second graph is displayed using different granularities. The y-axis represents the number of hits per second within the granularity interval. For a granularity of 1, the y-axis shows the number of hits per second for each one second period of the session step.


For a granularity of 5, the y-axis shows the number of hits per second for every five-second period of the session step.

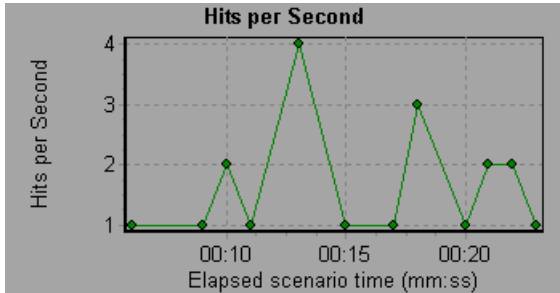

Granularity=1

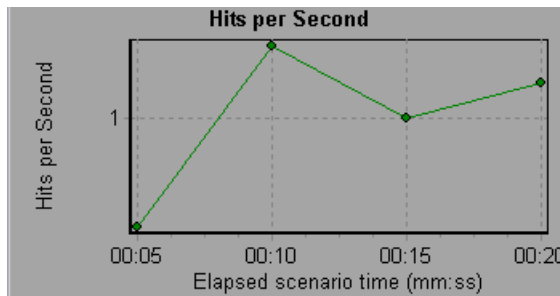

Granularity=5

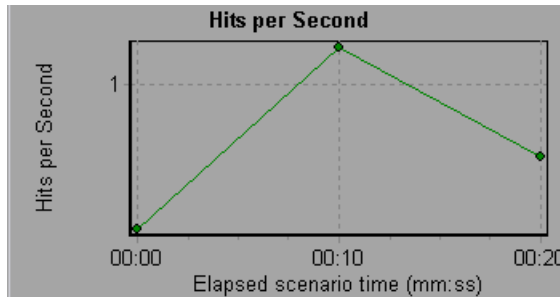

Granularity=10

In the above graphs, the same session step results are displayed in a granularity of 1, 5, and 10. The lower the granularity, the more detailed the results. For example, using a low granularity as in the upper graph, you see the intervals in which no hits occurred. It is useful to use a higher granularity to study the overall Vuser behavior throughout the session step.

By viewing the same graph with a higher granularity, you can easily see that overall, there was an average of approximately 1 hit per second.

## Applying a Filter to a Graph

When viewing graphs in an Analysis session, you can specify to display only the desired information. If, by default, all transactions are displayed for the entire length of the session step, you can filter a graph to show fewer transactions for a specific segment of the session step. For example, you can display four transactions beginning from five minutes into the session step and ending three minutes before the end of the session step.

The filter conditions differ for each type of graph. The filter conditions also depend on your session step. For example, if you only had one group or one load generator machine in your session step, the Group Name and Load Generator Name filter conditions do not apply.


You can also activate global filter conditions that will apply to all graphs in the session. The available global filter conditions are a combination of the filter conditions that apply to the individual graphs.

Note that you can also filter merged graphs. The filter conditions for each graph are displayed on separate tabs.

### To set a filter condition for an individual graph:


- 1 Select the graph you want to filter by clicking the graph tab or clicking the graph name in the tree view.

**2** Choose **View > Set Filter/Group By**. The Graph Settings dialog box opens.

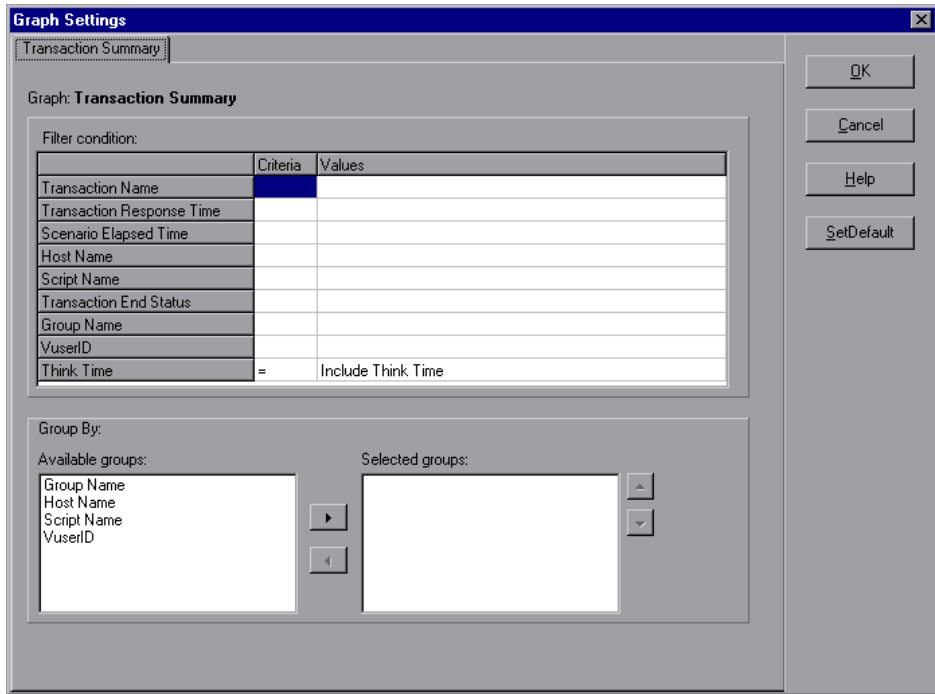


- 3** Click the Criteria box of the condition(s) you want to set, and select either "=" or "<>" (does not equal) from the drop down list.
- 4** Click the Values box of the filter condition you want to set, and select a value from the drop down box. For several filter conditions, a new dialog box opens.


- 5 For the Transaction Response Time filter condition, the Set Dimension Information dialog box opens. Specify a minimum and maximum transaction response time for each transaction.

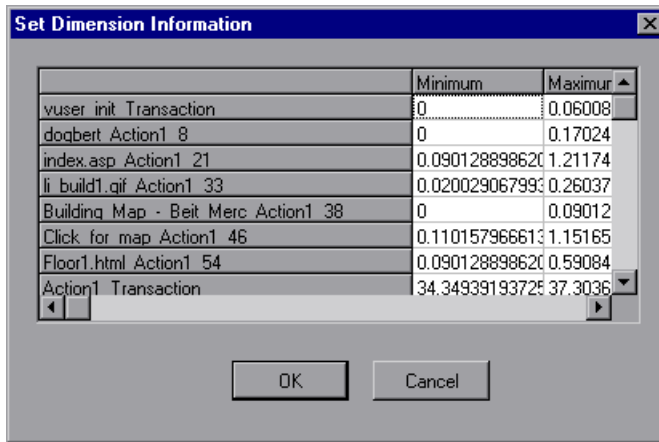

- 6 For the Vuser ID filter condition, the Vuser ID dialog box opens. Specify the Vuser IDs, or the range of Vusers, you want the graph to display.

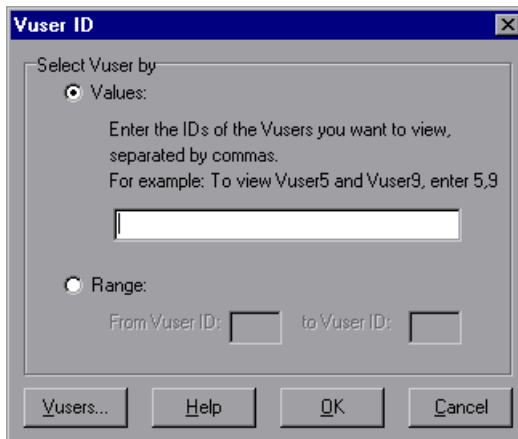

- 7 For the Session Elapsed Time filter condition, the Session Elapsed Time dialog box opens. Specify the start and end time for the graph in hours:minutes:seconds format. The time is relative to the start of the session step.



- 8 For Rendezvous graphs, while setting the *Number of Released Vusers* condition, the Set Dimension Information dialog box opens. Specify a minimum and maximum number of released Vusers.
- 9 For all graphs that measure resources (Web Server, Database Server, etc.), when you set the *Resource Value* condition, the Set Dimension Information dialog box opens displaying a full range of values for each resource. Specify a minimum and maximum value for the resource.
- 10 Click **OK** to accept the settings and close the Graph Settings dialog box.

To apply a global filter condition for all graphs in the session (both those displayed and those that have not yet been opened), choose **File > Set Global Filter** or click the **Set Global Filter** button, and set the desired filters.



---


**Note:** You can set the same filter conditions described above for the Summary Report. To set filter conditions for the Summary Report, select **Summary Report** in the graph tree view, and choose **View > Summary Filter**. Select the filter conditions you want to apply to the Summary Report in the Analysis Summary Filter dialog box.

---

## Grouping and Sorting Results

When viewing a graph, you can group the data in several ways. For example, Transaction graphs can be grouped by the Transaction End Status. The Vuser graphs can be grouped by the Session Elapsed Time, Vuser End Status, Vuser Status, and VuserID.


You can also sort by more than one group—for example by Vuser ID and then Vuser status. The results are displayed in the order in which the groups are listed. You can change the order in which things are grouped by rearranging the list. The following graph shows the Transaction Summary grouped according to Vusers.

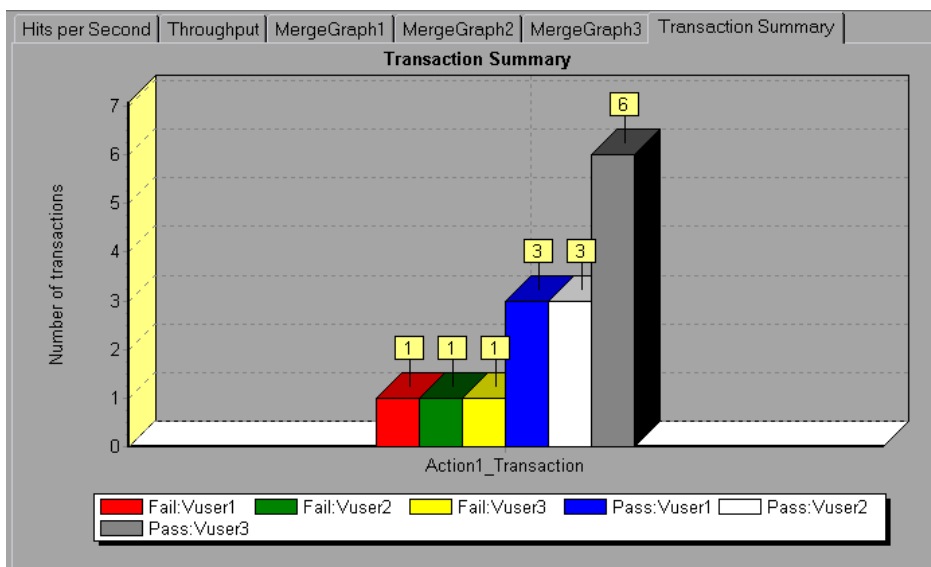

**To sort the graph data according to groups:**

- 1 Select the graph you want to sort by clicking the graph tab or clicking the graph name in the tree view.
- 2 Choose **View > Set Filter/Group By**. The Graph Settings dialog box opens.

- 3 In the Available Groups box, select the group by which you want to sort the results.

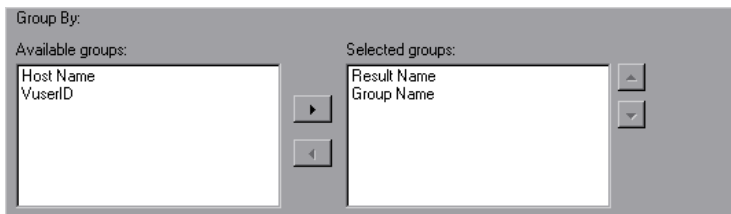

- 4 Click the right-facing arrow to move your selection to the Selected Groups box.
- 5 To change the order in which the results are grouped, select the group you want to move and click the up or down arrow until the groups are in the desired order.
- 6 To remove an existing grouping, select an item in the Selected Groups box and click the left-facing arrow to move it to the Available Groups box.
- 7 Click **OK** to close the dialog box.


## Configuring Display Options

You can configure both standard and advanced display options for each graph. The standard options let you select the type of graph and the time setting. The advanced options allow you to modify the scale and format of each graph.

### Standard Display Options


The standard display options let you choose the type of graph to display: line, point, bar, or pie graph. Not all options are available for all graphs.

In addition, you can indicate whether the graph should be displayed with a three-dimensional look, and specify the percent for the three-dimensional graphs. This percentage indicates the thickness of the bar, grid, or pie chart.

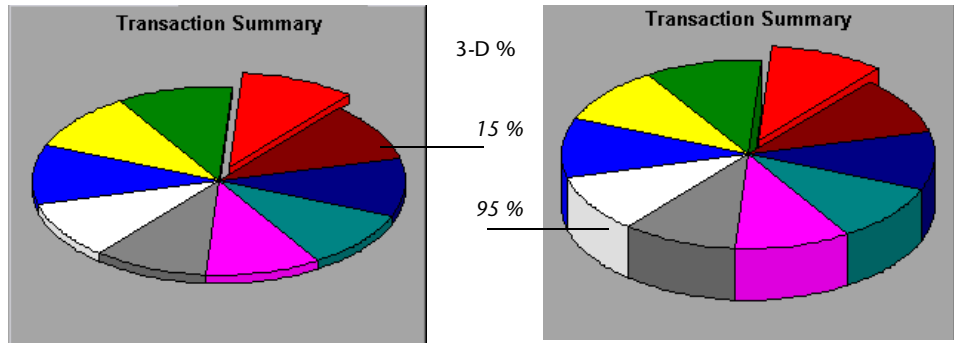

The standard display options also let you indicate how to plot the results that are time-based: relative to the beginning of the session step (default), or absolute time, based on the system clock of the machine.


To open the Display Options dialog box, choose **View > Display Options** or click the **Display Options** button.

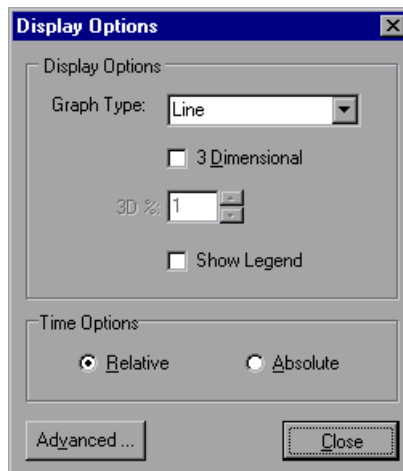

Choose a graph type, specify a three-dimensional percent, select whether you want a legend to be displayed, and/or choose a time option. Click **Close** to accept the settings and close the dialog box.

## Advanced Display Options

The Advanced options let you configure the look and feel of your graph as well as its title and the format of the data. To set the Advanced options, you must first open the Display Options dialog box. Choose **View > Display Options** or click the **Display Options** button. To access the Advanced options, click **Advanced**. The Editing MainChart dialog box opens.

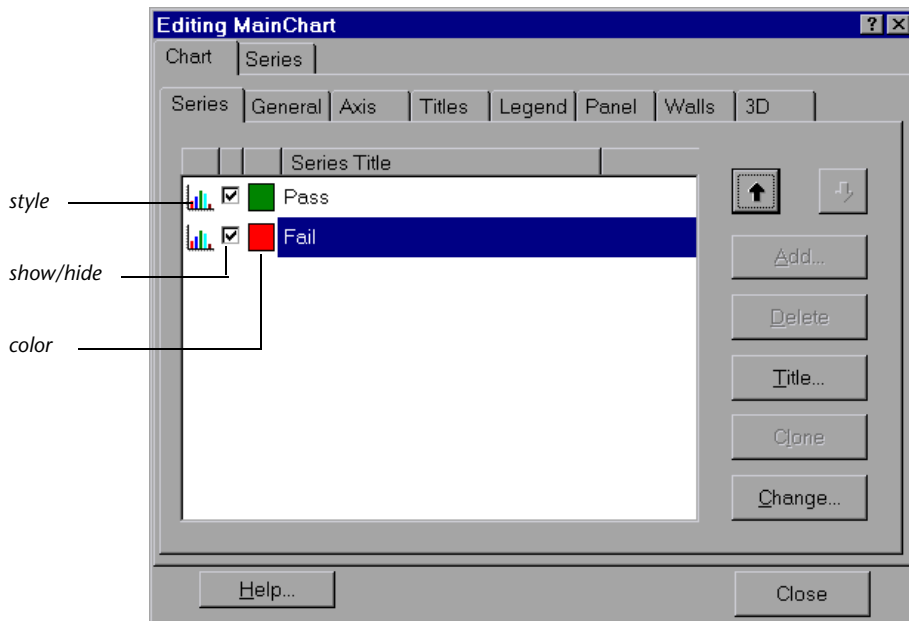

You can customize the graph layout by setting the *Chart* and *Series* preferences. Click the appropriate tab and sub-tab to configure your graph.

### Chart Settings

The Chart settings control the look and feel of the entire graph—not the individual points. You set Chart preferences using the following tabs: Series, General, Axis, Titles, Legend, Panel, Walls, and 3D.

**Series:** displays the graph style, (bar, line, etc.) the hide/show settings, line and fill color, and the title of the series.

**General:** contains options for print preview, export, margins, scrolling, and magnification.

**Axis:** indicates which axes to show as well as their scales, titles, ticks, and position.

**Titles:** allows you to set the title of the graph, its font, background color, border, and alignment.

**Legend:** includes all legend-related settings, such as position, fonts, and divider lines.

**Panel:** shows the background panel layout of the graph. You can modify its color, set a gradient option, or specify a background image.

**Walls:** lets you set colors for the walls of three-dimensional graphs.

**3D:** contains the three-dimensional settings, offset, magnification, and rotation angle for the active graph.

## **Series Settings**

The Series settings control the appearance of the individual points plotted in the graph. You set Series preferences using the following tabs: Format, Point, General, and Marks.

**Format:** allows you to set the border color, line color, pattern and invert property for the lines or bars in your graph.

**Point:** displays the point properties. Points appear at various points within your line graph. You can set the size, color and shape of these points.

**General:** contains the type of cursor, the format of the axis values, and show/hide settings for the horizontal and vertical axis.

**Marks:** allows you to display the value for each point in the graph and configure the format of those marks.


## Viewing the Legend

The Legend tab displays the color, scale, minimum, maximum, average, median, and standard deviation of each measurement appearing in the graph.


Legend	Graph Details	User Notes	Graph Data	Raw Data				
Color	Scale	Measurement	Minimum	Maximum	Average	Median	Std. Deviation	
<input checked="" type="checkbox"/>	1	air_head2_gif_Action1_159	0.176	0.657	0.247	0.19	0.155	
<input checked="" type="checkbox"/>	1	beige_gif_Action1_183	0.167	0.434	0.24	0.194	0.092	
<input checked="" type="checkbox"/>	1	book_gif_Action1_167	0.198	0.812	0.291	0.2	0.2	
<input checked="" type="checkbox"/>	1	bullet1_gif_Action1_234	0.11	0.245	0.164	0.17	0.04	
<input checked="" type="checkbox"/>	1	butt_ast_gif_Action1_207	0.13	0.238	0.177	0.176	0.027	
<input checked="" type="checkbox"/>	1	Click_here_Action1_107	0.187	0.827	0.288	0.201	0.22	

The Legend tab shortcut menu (right-click) has the following additional features:

- ▶ **Show/Hide:** Displays or hides a measurement in the graph.
- ▶ **Show only selected:** Displays the highlighted measurement only.
- ▶ **Show all:** Displays all the available measurements in the graph.
- ▶ **Configure measurements:** Opens the Measurement Options dialog box in which you can set the color and scale of the measurement you selected. You can manually set measurement scales, or set scale to automatic, scale to one, or view measurement trends for all measurements in the graph.

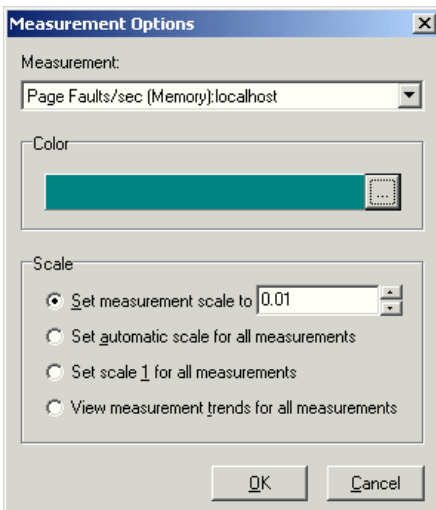

- **Show measurement description:** Displays a dialog box with the name, monitor type, and description of the selected measurement.
- **Animate selected line:** Displays the selected measurement as a flashing line.
- **Auto Correlate:** Opens a dialog box enabling you to correlate the selected measurement with other monitor measurements in order to view similar measurement trends in the session step. For more information on the auto correlation feature, see page 45.
- **Sort by this column:** Sorts the measurements according to the selected column, in ascending or descending order.
- **Configure columns:** Opens the Legend Columns Options dialog box in which you can choose the columns you want to view, the width of each column, and the way you want to sort the columns.

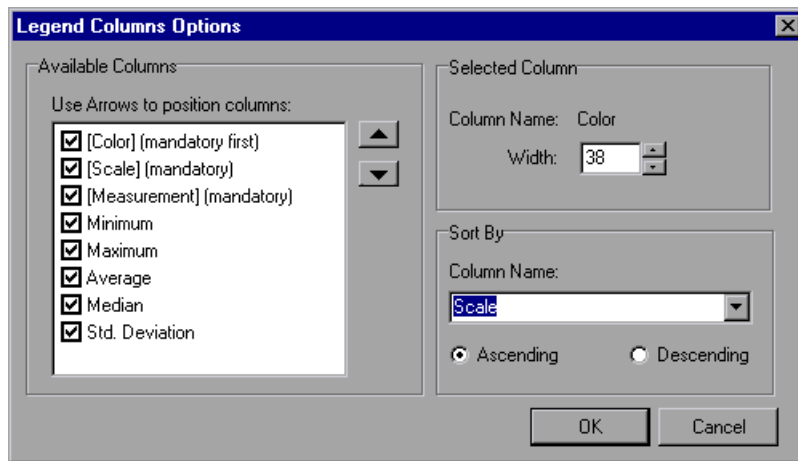

- **Web page breakdown for <selected measurement>** (appears for measurements in the Average Transaction Response Time and Transaction Performance Summary graphs): Displays a Web Page Breakdown graph for the selected transaction measurement.
- **Break down** (appears for measurements in the Web Page Breakdown graphs): Displays a graph with a breakdown of the selected page.

## Viewing the Data as a Spreadsheet and as Raw Data

The Analysis allows you to view graph data in two ways:

- ▶ **Spreadsheet:** The graph values displayed in the Graph Data tab.
- ▶ **Raw Data:** The actual raw data collected during the session step, displayed in the Raw Data tab.

### Spreadsheet View

You can view the graph displayed by the Analysis in spreadsheet format using the **Graph Data** tab below the graph.

Transaction Name	Minimum	Average	Maximum
air_head2_gif_Action1_159	0.12	0.304	3.105
beige_gif_Action1_183	0.111	0.27	1.462
book_gif_Action1_167	0.19	0.373	3.314
bullet1_gif_Action1_234	0.11	0.184	0.701
butt_ast_gif_Action1_207	0.13	0.184	0.311
Click_here_Action1_107	0.16	0.33	2.124

The first column displays the values of the x-axis. The following columns show the y-axis values for each transaction.

If there are multiple values for the y-axis, as in the Transaction Performance Summary graph (minimum, average, and maximum), all of the plotted values are displayed. If you filter out a transaction, it will not appear in the view.

The Spreadsheet shortcut menu (right-click) has the following additional features:

- ▶ **Copy All:** You can copy the spreadsheet to the clipboard in order to paste it into an external spreadsheet program.
- ▶ **Save As:** You can save the spreadsheet data to an Excel file. Once you have the data in Excel, you can generate your own customized graphs.

## Raw Data View

You can view the actual raw data collected during test execution for the active graph. The Raw Data view is not available for all graphs.


Viewing the raw data can be especially useful for:

- ▶ determining specific details about a peak—for example, which Vuser was running the transaction that caused the peak value(s).
- ▶ performing a complete export of unprocessed data for your own spreadsheet application.

**To display a graph's Raw Data view:**



- 1** Choose **View > View Raw Data** or click the **Raw Data** button. The Raw Data dialog box opens.



- 2** Specify a time range—the entire graph (default) or a specific range of time—and click **OK**.

- Click the **Raw Data** tab below the graph. The Analysis displays the raw data in a grid directly below the active graph.

Legend	Graph Details	User Notes	Graph Data	Raw Data	
	Transaction Name	Transaction Response Time	Scenario Elapsed Time	Transaction End Status Name	UserID
	Dimension Desktops	0.25	18	Pass	User1
	Pentium_II_450_MHz	2.274	15	Pass	User1
	Action1_Transaction	6.5	13	Pass	User1
	dell_demo	1.502	18	Pass	User1
	Action1_Transaction	4.106	17	Pass	User1
	dell_demo	0.17	13	Pass	User1

- To show a different range, repeat the above procedure.

## Viewing Measurement Trends

You can view the pattern of a line graph more effectively by standardizing the graph's y-axis values. Standardizing a graph causes the graph's y-axis values to converge around zero. This cancels the measurements' actual values and allows you to focus on the behavior pattern of the graph during the course of the session step.

The Analysis standardizes the y-axis values in a graph according to the following formula:

New Y value = (Previous Y Value - Average of previous values) / STD of previous values

**To view a line graph as a standardized graph:**

- Select **View > View Measurement Trends**, or right-click the graph and choose **View Measurement Trends**. Alternatively, you can select **View > Configure Measurements** and check the **View measurement trends for all measurements** box.

**Note:** The standardization feature can be applied to all line graphs except the Web Page Breakdown graph.

---

- 2** View the standardized values for the line graph you selected. Note that the values in the Minimum, Average, Maximum, and Std. Deviation legend columns are real values.

To undo the standardization of a graph, repeat step 1.

---

**Note:** If you standardize two line graphs, the two y-axes merge into one y-axis.


---

## Auto Correlating Measurements

You can detect similar trends among measurements by correlating a measurement in one graph with measurements in other graphs. Correlation cancels the measurements' actual values and allows you to focus on the behavior pattern of the measurements during a specified time range of the session step.

### To correlate a measurement in a graph with other measurements:

- 1 Right-click the measurement you want to correlate in the graph or legend, and select **Auto Correlate**. The Auto Correlate dialog box opens.

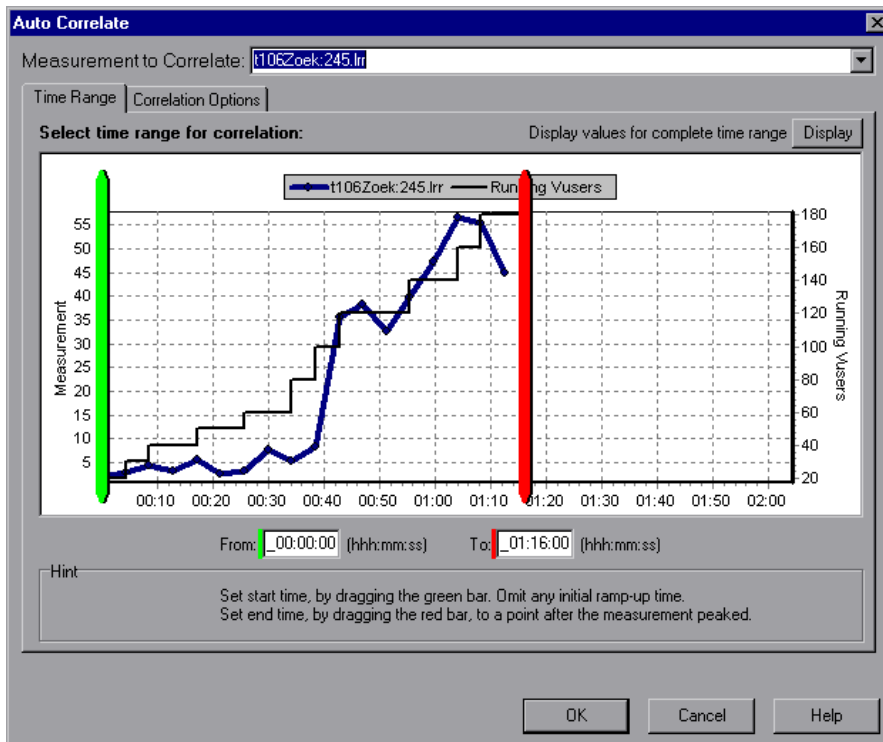

- 2 In the Time Range tab, specify a start and an end value (in hhh:mm:ss format) for the desired session step time range. Alternatively, you can use the green and red vertical drag bars to specify the start and end values for the session step time range.

If you applied a time filter to your graph, you can correlate values for the complete session step time range by clicking the **Display** button in the upper right-hand corner of the dialog box.


---

**Note:** The granularity of the correlated measurements graph may differ from that of the original graph, depending on the session step time range defined.

---

- 3** To specify the graphs you want to correlate with a selected measurement and the type of graph output to be displayed, click the **Correlation Options** tab.
- 4** In the select Graphs for Correlation section, choose the graphs whose measurements you want to correlate with your selected measurement.
- 5** In the Data Interval section, select one of the following two options:
  - **Automatic:** Instructs the Analysis to use an automatic value, determined by the time range, in order to calculate the interval between correlation measurement polls.
  - **Correlate data based on X second intervals:** Enter the number of seconds you want the Analysis to wait between correlation measurement polls.
- 6** In the Output section, select one of the following two options:
  - **Show the X most closely correlated measurements:** Specify the number of most closely correlated measurements you want the Analysis to display.
  - **Show measurements with an influence factor of at least X%:** Specify the minimum influence factor for the measurements displayed in the correlated graph.
- 7** Click **OK**. The Analysis generates the correlated graph you specified. Note the two new columns—*Correlation Match* and *Correlation*—that appear in the Legend tab below the graph.

In the following example, the t106Zoek:245.Irr measurement in the Average Transaction Response Time graph is correlated with the measurements in the Windows Resources, Microsoft IIS, and SQL Server graphs. The five measurements most closely correlated with t106Zoek:245.Irr are displayed in the graph below.

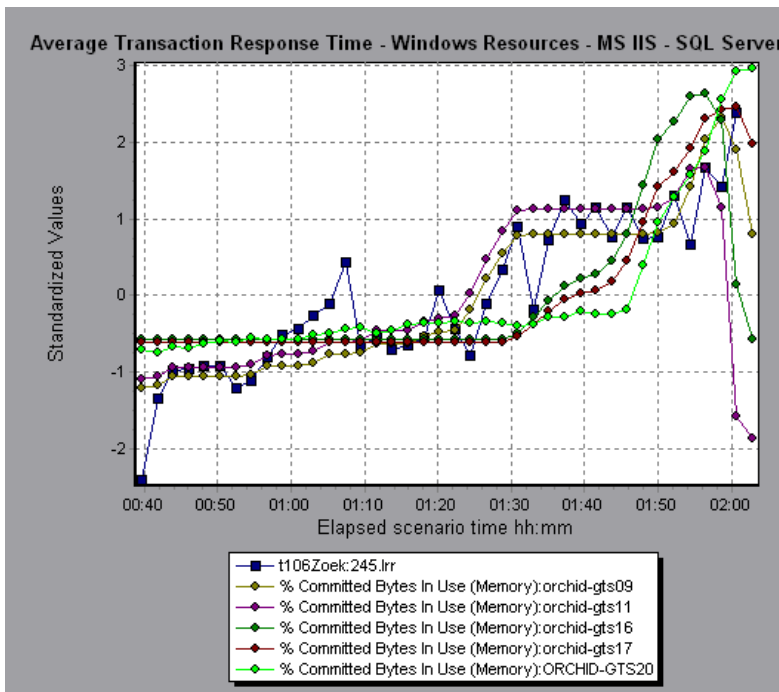

To specify another measurement to correlate, select the measurement from the Measurement to Correlate box at the top of the Auto Correlate dialog box.

---

**Note:** This feature can be applied to all line graphs except the Web Page Breakdown graph.

---

For more information on auto correlation, see Chapter 20, "Interpreting Analysis Graphs."

# 3

---

## Vuser Graphs

After running a session step, you can check the behavior of the Vusers that participated in the session step using the following Vuser graphs:

- Running Vusers Graph
- Vuser Summary Graph
- Rendezvous Graph


### About Vuser Graphs

During session step execution, Vusers generate data as they perform transactions. The Vuser graphs let you determine the overall behavior of Vusers during the session step. They display the Vuser states, the number of Vusers that completed the script, and rendezvous statistics. Use these graphs in conjunction with Transaction graphs to determine the effect of the number of Vusers on transaction response time.

## Running Vusers Graph

The Running Vusers graph displays the number of Vusers that executed Vuser scripts and their status during each second of the test. This graph is useful for determining the Vuser load on your server at any given moment. By default, this graph only shows the Vusers with a *Run* status. To view another Vuser status, set the filter conditions to the desired status. For more information, see Chapter 2, "Working with Analysis Graphs."


The x-axis represents the elapsed time from the beginning of the session step run. The y-axis represents the number of Vusers in the session step.

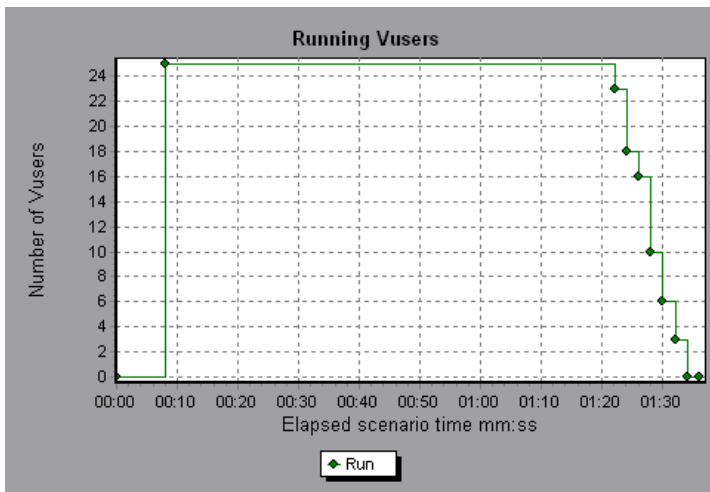

## Vuser Summary Graph

The Vuser Summary graph displays a summary of Vuser performance. It lets you view the number of Vusers that successfully completed the session step run relative to those that did not.

This graph may only be viewed as a pie.

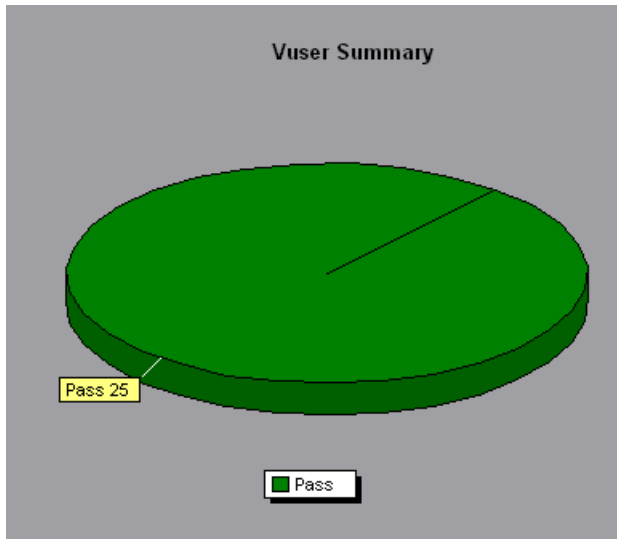


## Rendezvous Graph

The Rendezvous graph indicates when Vusers were released from rendezvous points, and how many Vusers were released at each point.

This graph helps you understand transaction performance times. If you compare the Rendezvous graph to the Average Transaction Response Time graph, you can see how the load peak created by a rendezvous influences transaction times.

On the Rendezvous graph, the x-axis indicates the time that elapsed since the beginning of the session step. The y-axis indicates the number of Vusers that were released from the rendezvous. If you set a rendezvous for 60 Vusers, and the graph indicates that only 25 were released, you can see that the rendezvous ended when the timeout expired because all of the Vusers did not arrive.

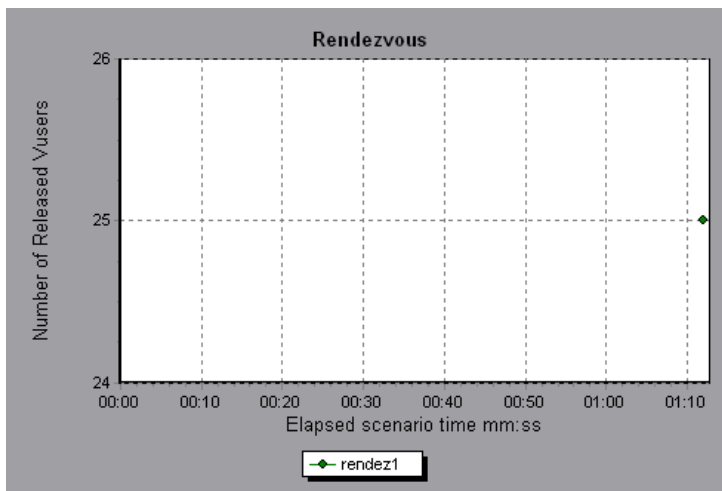

# 4

---

## Error Graphs

After a session step run, you can use the error graphs to analyze the errors that occurred during the load test.

This chapter describes:

- Error Statistics Graph
- Errors per Second Graph

### About Error Graphs


During session step execution, Users may not complete all transactions successfully. The Error graphs let you view information about the transactions that failed, stopped, or ended in errors. Using the Error graphs, you can view a summary of errors that occurred during the session step and the average number of errors that occurred per second.

## Error Statistics Graph

The Error Statistics graph displays the number of errors that accrued during session step execution, grouped by error code.

In the graph below, out of a total of 178 errors that occurred during the session step run, the second error code displayed in the legend occurred twelve times, comprising 6.74% the errors.


This graph may only be viewed as a pie.

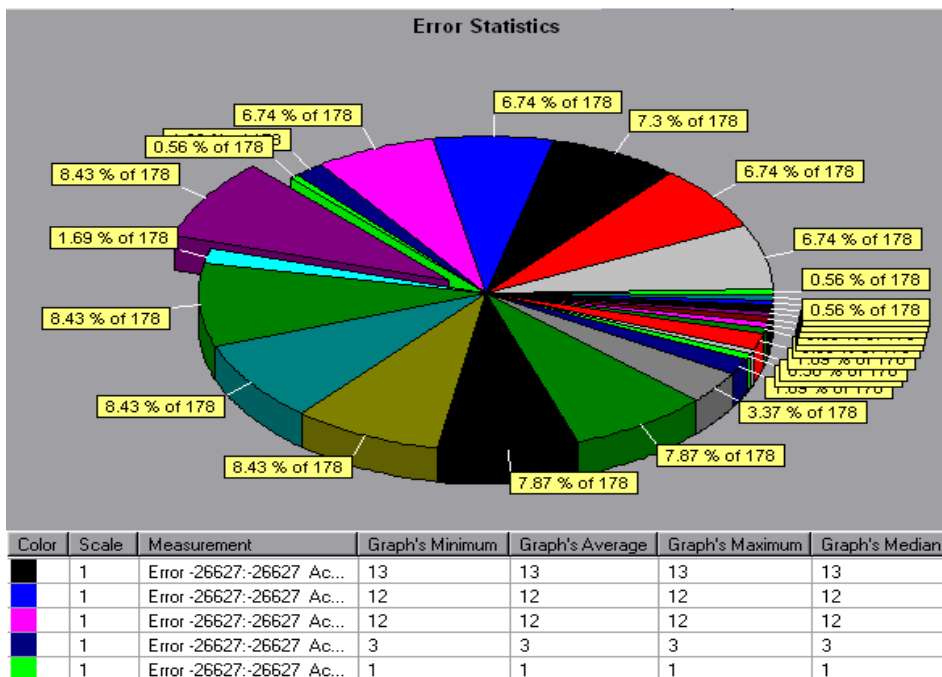

## Errors per Second Graph

The Errors per Second graph displays the average number of errors that occurred during each second of the session step run, grouped by error code.

The x-axis represents the elapsed time from the beginning of the session step run. The y-axis represents the number of errors.

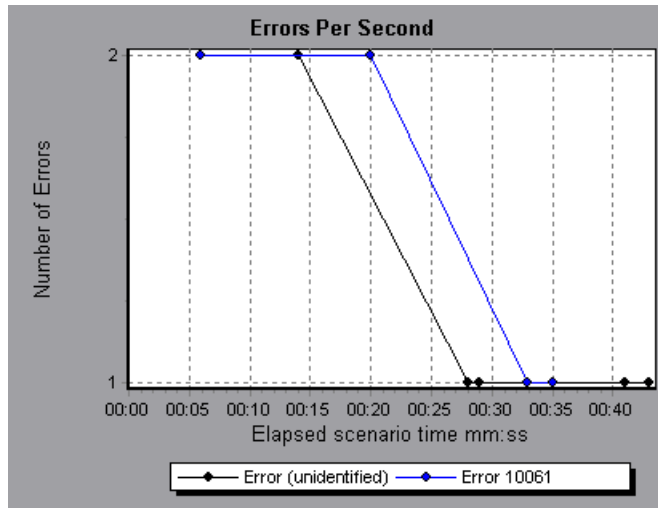



# 5

---

## Transaction Graphs

After running a session step, you can analyze the transactions that were executed during the test using one or more of the following graphs:

- ▶ Average Transaction Response Time Graph
- ▶ Transactions per Second Graph
- ▶ Total Transactions per Second
- ▶ Transaction Summary Graph
- ▶ Transaction Performance Summary Graph
- ▶ Transaction Response Time (Under Load) Graph
- ▶ Transaction Response Time (Percentile) Graph
- ▶ Transaction Response Time (Distribution) Graph

### About Transaction Graphs


During session step execution, Users generate data as they perform transactions. The Analysis enables you to generate graphs that show the transaction performance and status throughout script execution.

You can use additional Analysis tools such as merging and crossing results to understand your transaction performance graphs. You can also sort the graph information by transactions. For more information about working with the Analysis, see Chapter 2, “Working with Analysis Graphs.”

## Average Transaction Response Time Graph

The Average Transaction Response Time graph displays the average time taken to perform transactions during each second of the session step run.

The x-axis represents the elapsed time from the beginning of the session step run. The y-axis represents the average time (in seconds) taken to perform each transaction.

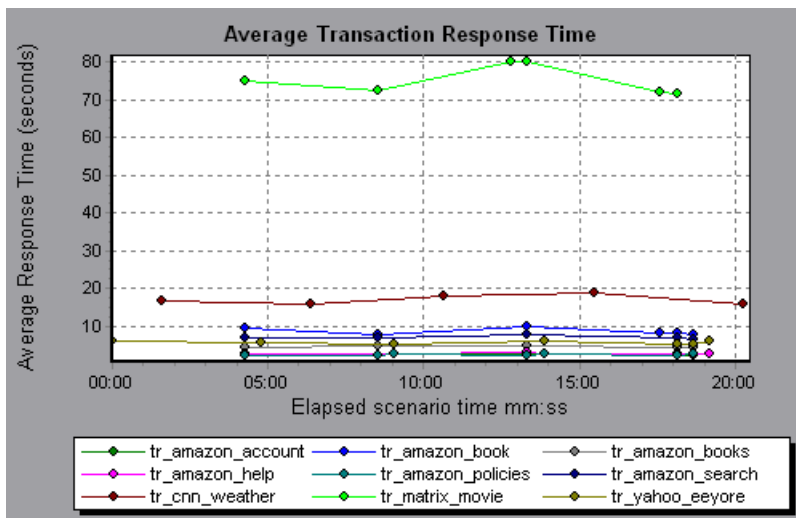

This graph is displayed differently for each granularity. The lower the granularity, the more detailed the results. However, it may be useful to view the results with a higher granularity to study the overall Vuser behavior throughout the session step. For example, using a low granularity, you may see intervals when no transactions were performed. However, by viewing the same graph with a higher granularity, you will see the graph for the overall transaction response time. For more information on setting the granularity, see Chapter 2, "Working with Analysis Graphs."

---

**Note:** By default, only transactions that passed are displayed.

---

You can view a breakdown of a transaction in the Average Transaction Response Time graph by selecting **View > Show Transaction Breakdown Tree**, or right-clicking the transaction and selecting **Show Transaction Breakdown Tree**. In the Transaction Breakdown Tree, right-click the transaction you want to break down, and select **Show Only <transaction name>**. The Average Transaction Response Time graph displays data for the sub-transactions.

To view a breakdown of the Web page(s) included in a transaction or sub-transaction, right-click it and select **Web page breakdown for <transaction name>**. For more information on the Web Page Breakdown graphs, see Chapter 7, “Web Page Breakdown Graphs.”

You can compare the Average Transaction Response Time graph to the Running Vusers graph to see how the number of running Vusers affects the transaction performance time.


For example, if the Average Transaction Response Time graph shows that performance time gradually improved, you can compare it to the Running Vusers graph to see whether the performance time improved due to a decrease in the Vuser load.

If you have defined acceptable minimum and maximum transaction performance times, you can use this graph to determine whether the performance of the server is within the acceptable range.

## Transactions per Second Graph

The Transactions per Second graph displays, for each transaction, the number of times it passed, failed, and stopped during each second of a session step run. This graph helps you determine the actual transaction load on your system at any given moment. You can compare this graph to the Average Transaction Response Time graph in order to analyze the effect of the number of transactions on the performance time.


The x-axis represents the elapsed time from the beginning of the session step run. The y-axis represents the number of transactions performed during the session step run.

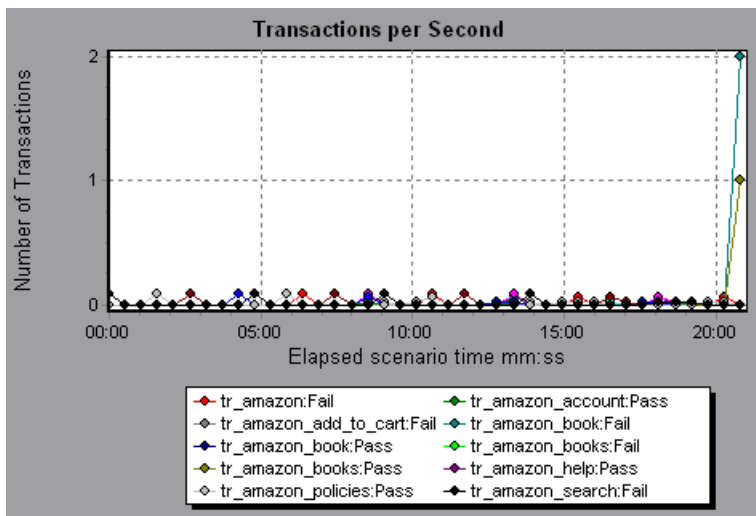

## Total Transactions per Second

The Total Transactions per Second graph displays the total number of transactions that passed, the total number of transactions that failed, and the total number of transactions that were stopped, during each second of a session step run.


The x-axis represents the elapsed time (in seconds) since the start of the session step run. The y-axis represents the total number of transactions performed during the session step run.

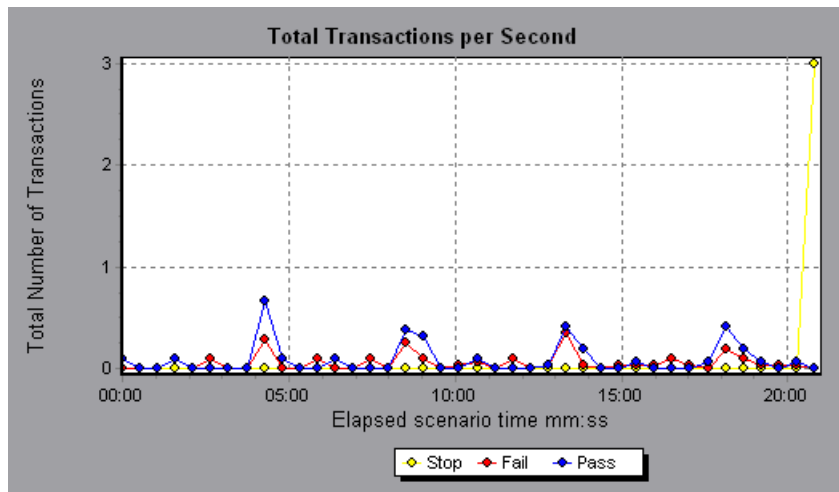

## Transaction Summary Graph

The Transaction Summary graph summarizes the number of transactions in the session step that failed, passed, stopped, and ended in error.


The x-axis specifies the name of the transaction. The y-axis shows the number of transactions performed during the session step run.

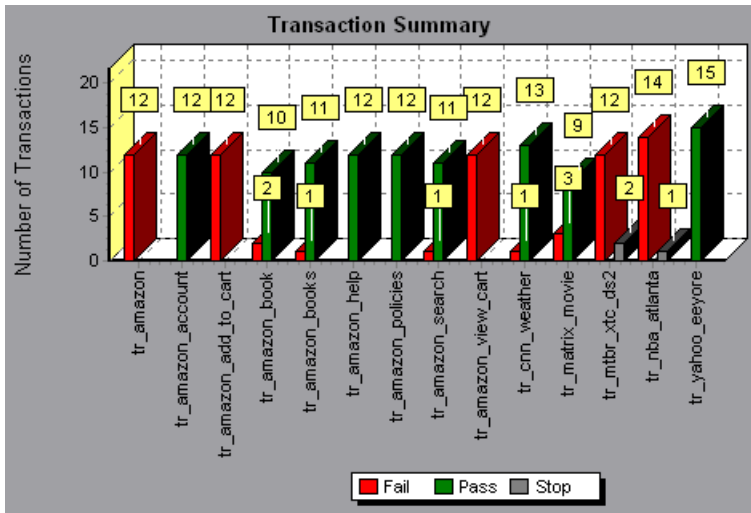

## Transaction Performance Summary Graph

The Transaction Performance Summary graph displays the minimum, maximum and average performance time for all the transactions in the session step.

The x-axis specifies the name of the transaction. The y-axis shows the time—rounded off to the nearest second—taken to perform each transaction.

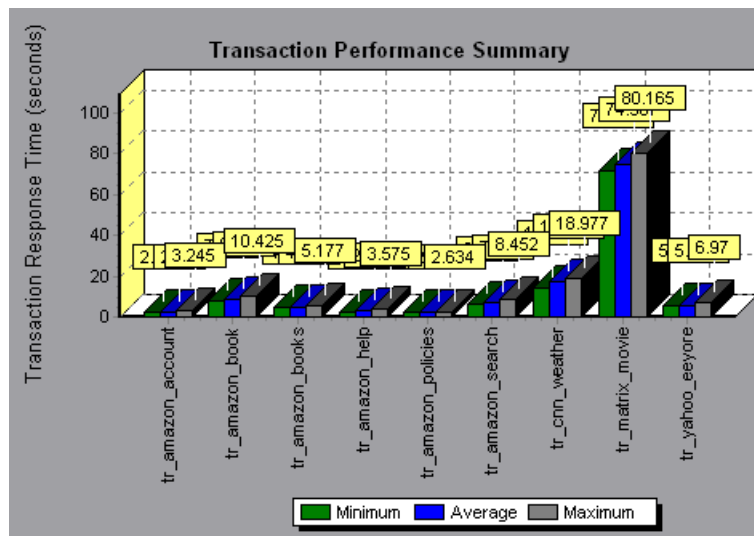


You can view a breakdown of a transaction in the Transaction Performance Summary graph by selecting **View > Show Transaction Breakdown Tree**, or right-clicking the transaction and selecting **Show Transaction Breakdown Tree**. In the Transaction Breakdown Tree, right-click the transaction you want to break down, and select **Show Only <transaction name>**. The Transaction Performance Summary graph displays data for the sub-transactions.

To view a breakdown of the Web page(s) included in a transaction or sub-transaction, right-click it and select **Web page breakdown for <transaction name>**. For more information on the Web Page Breakdown graphs, see Chapter 7, "Web Page Breakdown Graphs."

## Transaction Response Time (Under Load) Graph

The Transaction Response Time (Under Load) graph is a combination of the Running Vusers and Average Transaction Response Time graphs and indicates transaction times relative to the number of Vusers running at any given point during the session step. This graph helps you view the general impact of Vuser load on performance time and is most useful when analyzing a session step with a gradual load. For information about creating a gradual load for a session step, see the *ProTune Console User's Guide*.

The x-axis indicates the number of running Vusers, and the y-axis indicates the average transaction time in seconds.

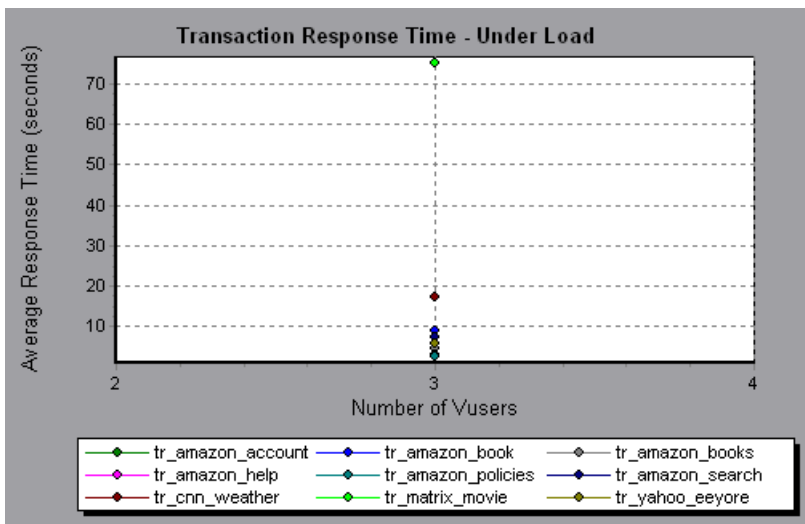

## Transaction Response Time (Percentile) Graph

The Transaction Response Time (Percentile) graph analyzes the percentage of transactions that were performed within a given time range. This graph helps you determine the percentage of transactions that met the performance criteria defined for your system. In many instances, you need to determine the percent of transactions with an acceptable response time. The maximum response time may be exceptionally long, but if most transactions have acceptable response times, the overall system is suitable for your needs.


The x-axis represents the percentage of the total number of transactions measured during the session step run. The y-axis represents the time taken to perform the transactions.

---

**Note:** The Analysis approximates the transaction response time for each available percentage of transactions. The y-axis values, therefore, may not be exact.

---

In the following graph, fewer than 20 percent of the *tr\_matrix\_movie* transactions had a response time less than 70 seconds.

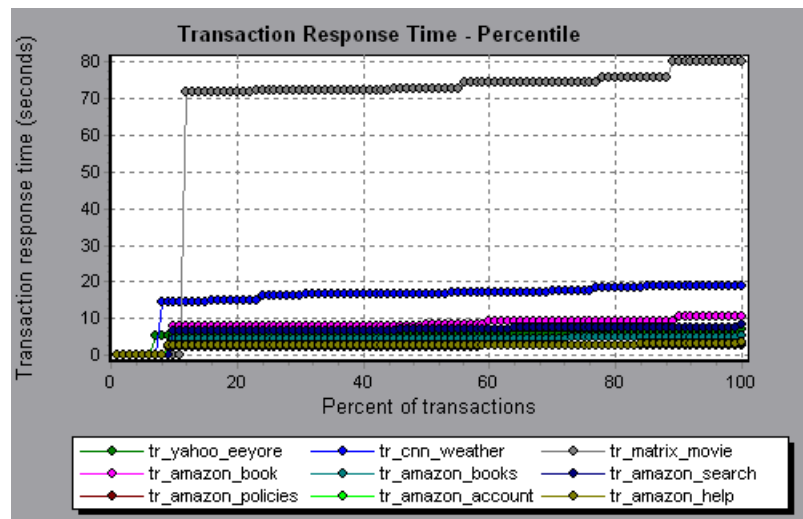



---

**Note:** This graph can only be displayed as a bar graph.

---

If you have defined acceptable minimum and maximum transaction performance times, you can use this graph to determine whether the performance of the server is within the acceptable range.



# 6

---

## Web Resource Graphs

After a session step run, you use the Web Resource graphs to analyze Web server performance.

This chapter describes:


- Hits per Second Graph
- Throughput Graph
- HTTP Status Code Summary Graph
- HTTP Responses per Second Graph
- Pages Downloaded per Second Graph
- Retries per Second Graph
- Retries Summary Graph

### About Web Resource Graphs

Web Resource graphs provide you with information about the performance of your Web server. You use the Web Resource graphs to analyze the throughput on the Web server, the number of hits per second that occurred during the session step, the number of HTTP responses per second, the HTTP status codes (which indicate the status of HTTP requests, for example, “the request was successful,” “the page was not found”) returned from the Web server, the number of downloaded pages per second, the number of server retries per second, and a summary of the server retries during the session step.

## Hits per Second Graph

The Hits per Second graph shows the number of HTTP requests made by Users to the Web server during each second of the session step run. This graph helps you evaluate the amount of load Users generate, in terms of the number of hits. You can compare this graph to the Average Transaction Response Time graph to see how the number of hits affects transaction performance.

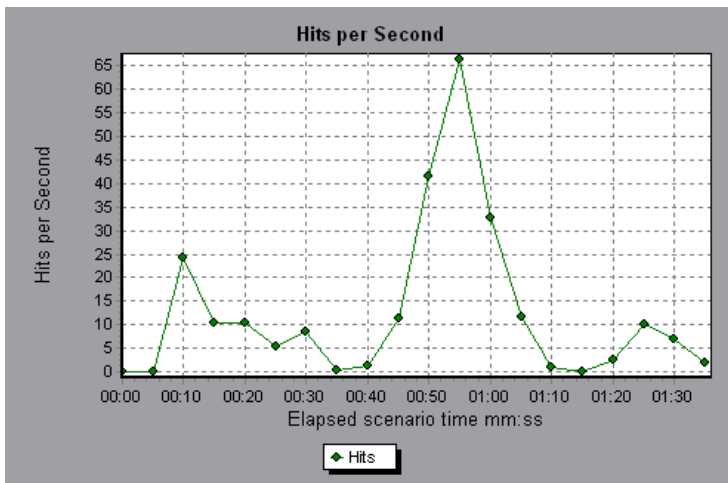

The x-axis represents the elapsed time since the start of the session step run. The y-axis represents the number of hits on the server. For example, the graph above shows that the most hits per second took place during the fifty-fifth second of the session step.

---

**Note:** You cannot change the granularity of the x-axis to a value that is less than the Web granularity you defined in the General tab of the Options dialog box.


---

## Throughput Graph

The Throughput graph shows the amount of throughput on the server during each second of the session step run. Throughput is measured in bytes and represents the amount of data that the Vusers received from the server at any given second. This graph helps you evaluate the amount of load Vusers generate, in terms of server throughput. You can compare this graph to the Average Transaction Response Time graph to see how the throughput affects transaction performance.

The x-axis represents the elapsed time since the start of the session step run. The y-axis represents the throughput of the server, in bytes.

The following graph shows the highest throughput to be 193,242 bytes during the fifty-fifth second of the session step.

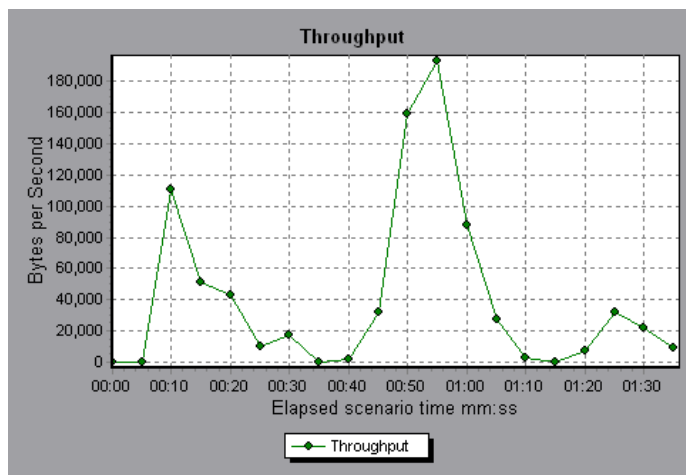


---

**Note:** You cannot change the granularity of the x-axis to a value that is less than the Web granularity you defined in the General tab of the Options dialog box.


---

## HTTP Status Code Summary Graph

The HTTP Status Code Summary Graph shows the number of HTTP status codes (which indicate the status of HTTP requests, for example, “the request was successful,” “the page was not found”) returned from the Web server during the session step run, grouped by status code. Use this graph together with the HTTP Responses per Second Graph to locate those scripts which generated error codes.

This graph may only be viewed as a pie.

The following graph shows that only the HTTP status codes **200** and **302** were generated. Status code **200** was generated 1,100 times, and status code **302** was generated 125 times.

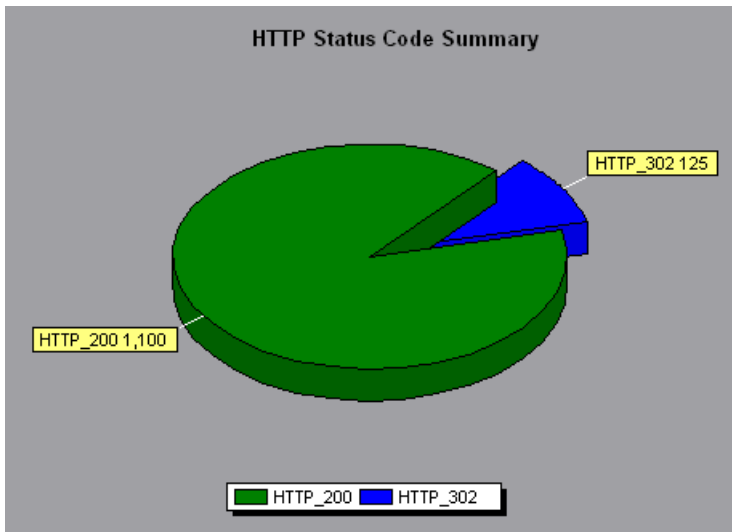


## HTTP Responses per Second Graph

The HTTP Responses per Second graph shows the number of HTTP status codes (which indicate the status of HTTP requests, for example, “the request was successful,” “the page was not found”) returned from the Web server during each second of the session step run, grouped by status code. You can group the results shown in this graph by script (using the "Group By" function) to locate scripts which generated error codes. For more information on the "Group By" function, see Chapter 2, “Working with Analysis Graphs.”

The x-axis represents the time that has elapsed since the start of the session step run. The y-axis represents the number of HTTP responses per second.

The following graph shows that the greatest number of **200** status codes, 60, was generated in the fifty-fifth second of the session step run. The greatest number of **302** codes, 8.5, was generated in the fiftieth second of the session step run.

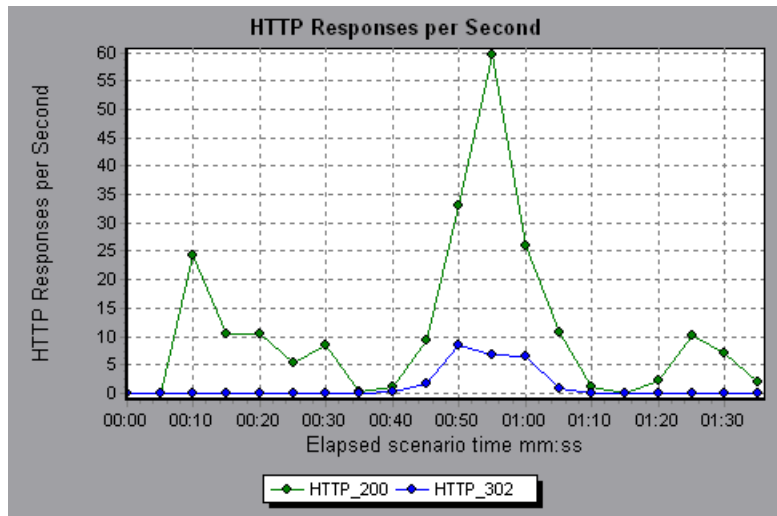

The following table displays a list of HTTP status codes:

<b>Code</b>	<b>Description</b>
200	OK
201	Created
202	Accepted
203	Non-Authoritative Information
204	No Content
205	Reset Content
206	Partial Content
300	Multiple Choices
301	Moved Permanently
302	Found
303	See Other
304	Not Modified
305	Use Proxy
307	Temporary Redirect
400	Bad Request
401	Unauthorized
402	Payment Required
403	Forbidden
404	Not Found
405	Method Not Allowed
406	Not Acceptable
407	Proxy Authentication Required
408	Request Timeout
409	Conflict


<b>Code</b>	<b>Description</b>
410	Gone
411	Length Required
412	Precondition Failed
413	Request Entity Too Large
414	Request - URI Too Large
415	Unsupported Media Type
416	Requested range not satisfiable
417	Expectation Failed
500	Internal Server Error
501	Not Implemented
502	Bad Gateway
503	Service Unavailable
504	Gateway Timeout
505	HTTP Version not supported

For more information on the above status codes and their descriptions, see <http://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html#sec10>.

## Pages Downloaded per Second Graph


The Pages Downloaded per Second graph shows the number of Web pages (y-axis) downloaded from the server during each second of the session step run (x-axis). This graph helps you evaluate the amount of load Vusers generate, in terms of the number of pages downloaded.

The following graph shows that the greatest number of pages downloaded per second, about 7, occurred in the fiftieth second of the session step run.

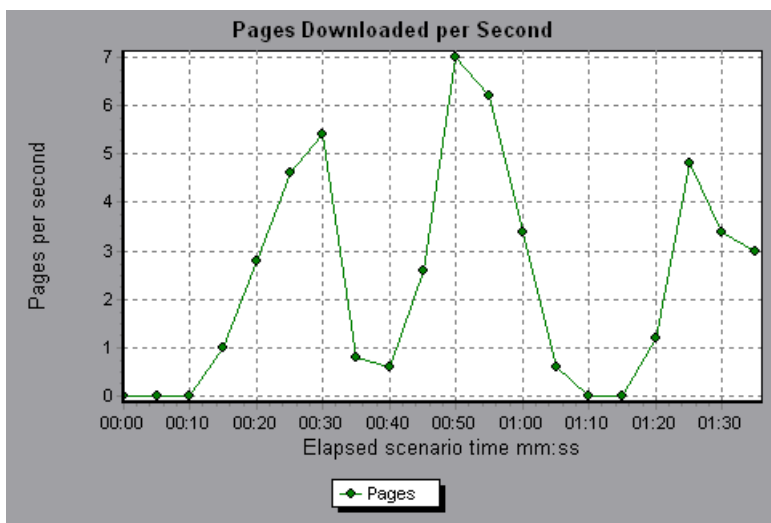

Like throughput, downloaded pages per second is a representation of the amount of data that the Vusers received from the server at any given second. However, the Throughput graph takes into account each resource and its size (for example, the size of each .gif file, the size of each Web page). The Pages Downloaded per Second graph takes into account only the number of pages.

In the following example, the Throughput graph is merged with the Pages Downloaded per Second graph. It is apparent from the graph that throughput is not completely proportional to the number of pages downloaded per second. For example, between 10 and 25 seconds into the session step run, the number of pages downloaded per second increased while the throughput decreased.

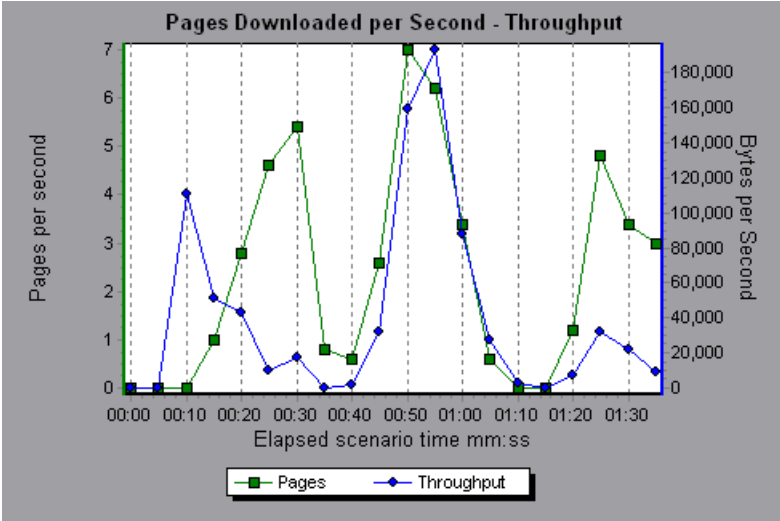


## Retries per Second Graph

The Retries per Second graph displays the number of attempted server connections during each second of the session step run. A server connection is retried when the initial connection was unauthorized, when proxy authentication is required, when the initial connection was closed by the server, when the initial connection to the server could not be made, or when the server was initially unable to resolve the load generator's IP address.

The x-axis displays the time that has elapsed since the start of the session step run. The y-axis displays the number of server retries per second.

The following graph shows that during the first second of the session step, the number of retries was 0.4, whereas in the fifth second of the session step, the number of retries per second rose to 0.8.

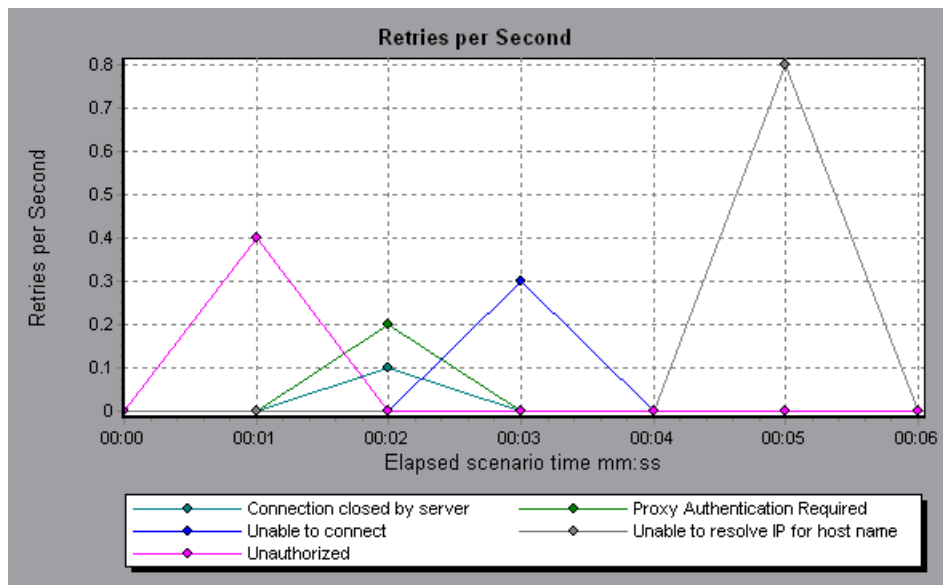


## Retries Summary Graph

The Retries Summary Graph shows the number of attempted server connections during the session step run, grouped by the cause of the retry. Use this graph together with the Retries per Second Graph to determine at what point during the session step the server retries were attempted.

This graph may only be viewed as a pie.

The following graph shows that the server's inability to resolve the load generator's IP address was the leading cause of server retries during the session step run.

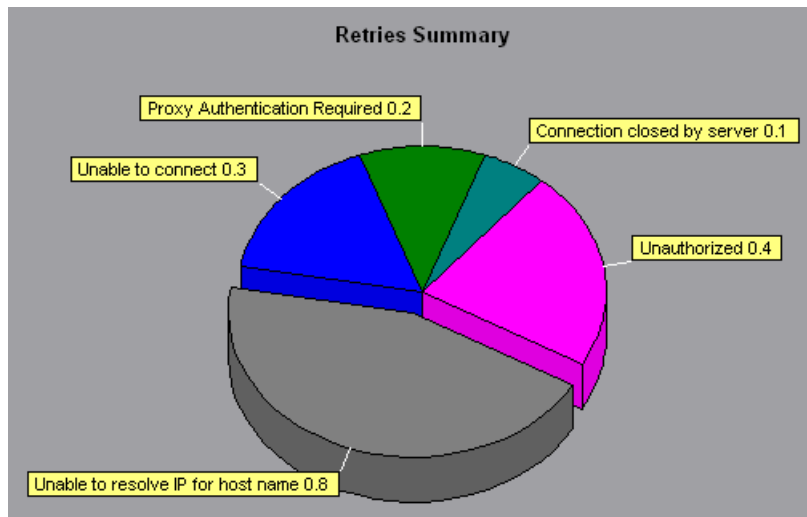



# 7

---

## Web Page Breakdown Graphs

The Web Page Breakdown graphs enable you to assess whether transaction response times were affected by page content. Using the Web Page Breakdown graphs, you can analyze problematic elements—for example, images that download slowly, or broken links—of a Web site.

This chapter describes:

- ▶ Activating the Web Page Breakdown Graphs
- ▶ Page Component Breakdown Graph
- ▶ Page Component Breakdown (Over Time) Graph
- ▶ Page Download Time Breakdown Graph
- ▶ Page Download Time Breakdown (Over Time) Graph
- ▶ Time to First Buffer Breakdown Graph
- ▶ Time to First Buffer Breakdown (Over Time) Graph
- ▶ Downloaded Component Size Graph

## About Web Page Breakdown Graphs

Web Page Breakdown graphs provide you with performance information for each monitored Web page in your script. You can view the download time of each page in the script and its components, and identify at what point during download time problems occurred. In addition, you can view the relative download time and size of each page and its components. The Analysis displays both average download time and download time over time data.

You correlate the data in the Web Page Breakdown graphs with data in the Transaction Performance Summary and Average Transaction Response Time graphs in order to analyze why and where problems are occurring, and whether the problems are network- or server-related.

In order for the Analysis to generate Web Page Breakdown graphs, you must enable the component breakdown feature before recording your script.

**To enable the component breakdown feature:**

- 1** From the Console menu, choose **Tools > Options**.
- 2** Select the **Web Page Breakdown** tab. Select the **Enable Web Page Breakdown** check box.

---


**Note:** It is recommended that, in VuGen, you select **HTML-based script** in the Recording tab of the Recording Options dialog box.

---

For more information on recording Web Vuser scripts, see the *ProTune Virtual User Generator User's Guide*.

## Activating the Web Page Breakdown Graphs

The Web Page Breakdown graphs are most commonly used to analyze a problem detected in the Transaction Performance Summary or Average Transaction Response Time graphs. For example, the Average Transaction Response Time graph below demonstrates that the average transaction response time for the trans1 transaction was high.

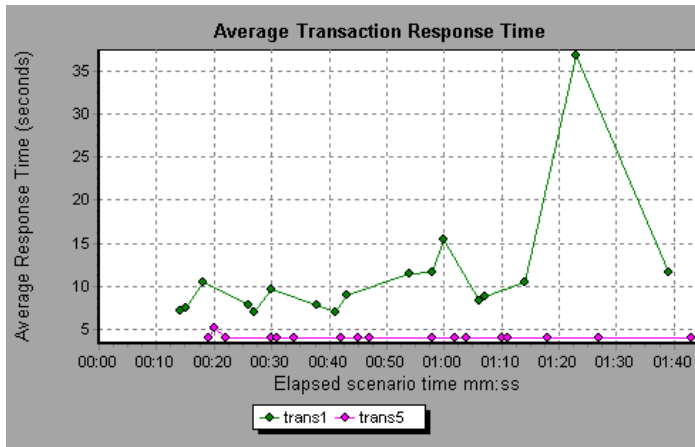

Using the Web Page Breakdown graphs, you can pinpoint the cause of the delay in response time for the trans1 transaction.

**To view a breakdown of a transaction:**

- 1** Right-click trans1 and select **Web Page Breakdown for trans1**. The Web Page Breakdown graph and the Web Page Breakdown tree appear.
- 2** In the Web Page Breakdown tree, right-click the problematic page you want to break down, and select **Break Down <component name>**. Alternatively, select a page in the Select Page to Break Down box. The Web Page Breakdown graph for that page appears.

---

**Note:** You can open a browser displaying the problematic page by right-clicking the page in the Web Page Breakdown tree and selecting **View page in browser**.

---

- 3** Select one of the four available options:
  - ▶ **Download Time Breakdown:** Displays a table with a breakdown of the selected page's download time. The size of each page component (including the component's header) is displayed. See the Page Download Time Breakdown Graph for more information about this display.
  - ▶ **Component Breakdown (Over Time):** Displays the Page Component Breakdown (Over Time) Graph for the selected Web page.
  - ▶ **Download Time Breakdown (Over Time):** Displays the Page Download Time Breakdown (Over Time) Graph for the selected Web page.
  - ▶ **Time to First Buffer Breakdown (Over Time):** Displays the Time to First Buffer Breakdown (Over Time) Graph for the selected Web page.


See the following sections for an explanation of each of these four graphs.



To display the graphs in full view, click the **Open graph in full view** button. Note that you can also access these graphs, as well as additional Web Page Breakdown graphs, from the Open a New Graph dialog box.

## Page Component Breakdown Graph

The Page Component Breakdown graph displays the average download time (in seconds) for each Web page and its components. For example, the following graph demonstrates that the main cnn.com URL took 28.64% of the total download time, compared to 35.67% for the www.cnn.com/WEATHER component.

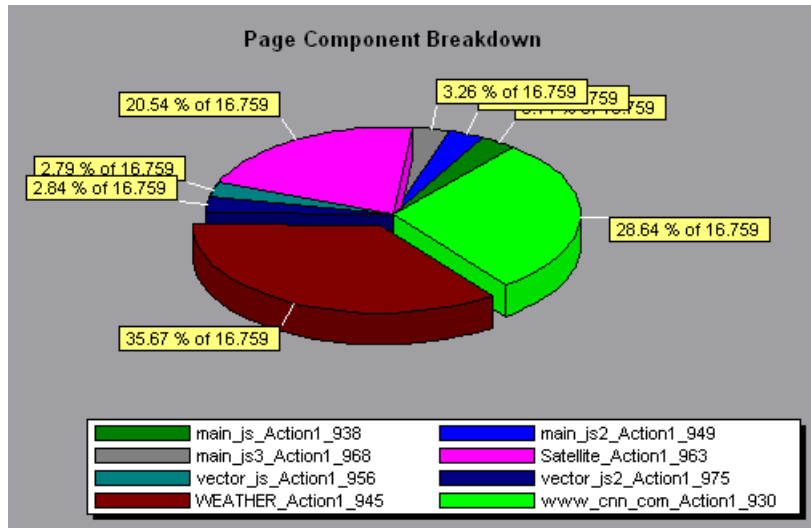


To ascertain which components caused the delay in download time, you can break down the problematic URL by double-clicking it in the Web Page




## Page Component Breakdown (Over Time) Graph

The Page Component Breakdown (Over Time) graph displays the average response time (in seconds) for each Web page and its components during each second of the session step run. For example, the following graph demonstrates that the response time for Satellite\_Action1\_963 was significantly greater, throughout the session step, than the response time for main\_js\_Action1\_938.

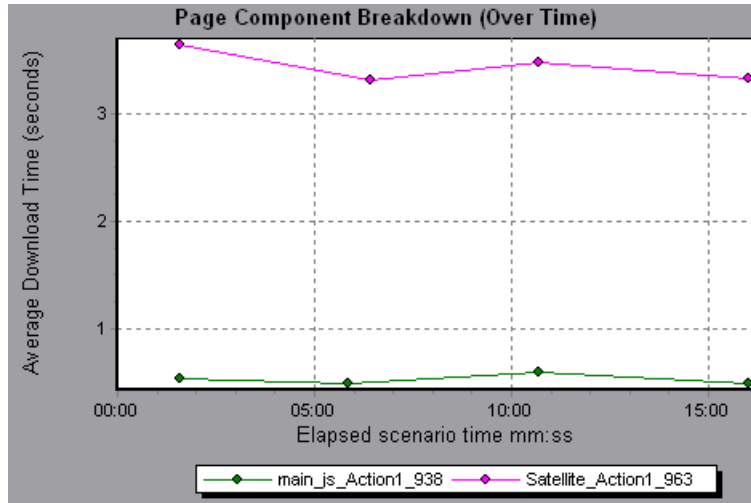

To ascertain which components were responsible for the delay in response time, you can break down the problematic component by double-clicking it in the Web Page Breakdown tree.

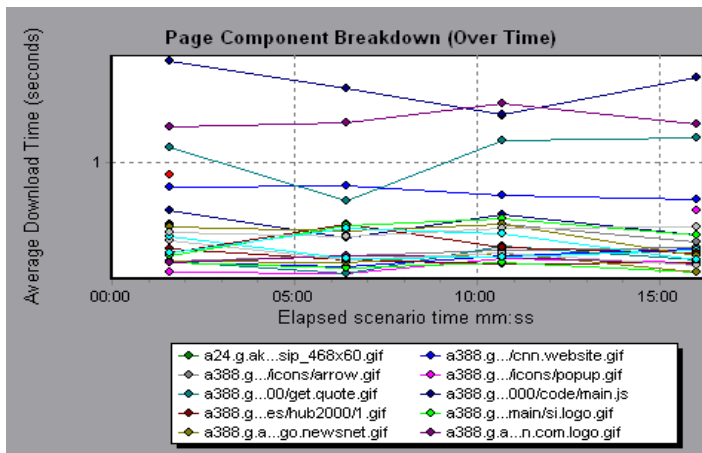


Using the above graph, you can track which components of the main component were most problematic, and at which point(s) during the session step the problem(s) occurred. To isolate the most problematic components, it may be helpful to sort the legend tab according to the average number of seconds taken to download a component. To sort the legend by average, double-click the **Average** column heading.

To identify a component in the graph, you can click it. The corresponding line in the legend tab is selected.

## Page Download Time Breakdown Graph

The Page Download Time Breakdown graph displays a breakdown of each page component's download time, enabling you to determine whether slow response times are being caused by network or server errors during Web page download.

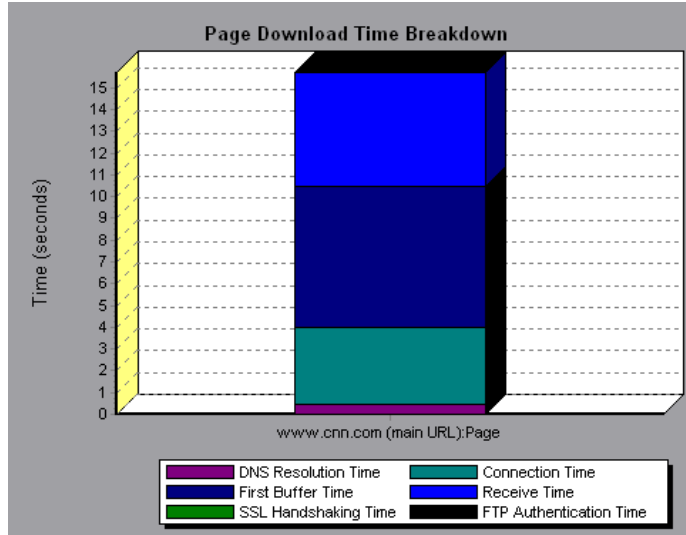

The Page Download Time Breakdown graph breaks down each component by DNS resolution time, connection time, time to first buffer, SSL

handshaking time, receive time, FTP authentication time, client time, and error time. These breakdowns are described below:

Name	Description
DNS Resolution	Displays the amount of time needed to resolve the DNS name to an IP address, using the closest DNS server. The DNS Lookup measurement is a good indicator of problems in DNS resolution, or problems with the DNS server.
Connection	Displays the amount of time needed to establish an initial connection with the Web server hosting the specified URL. The connection measurement is a good indicator of problems along the network. It also indicates whether the server is responsive to requests.
First Buffer	<p>Displays the amount of time that passes from the initial HTTP request (usually GET) until the first buffer is successfully received back from the Web server. The first buffer measurement is a good indicator of Web server delay as well as network latency.</p> <p><b>Note:</b> Since the buffer size may be up to 8K, the first buffer might also be the time it takes to completely download the element.</p>
SSL Handshaking	<p>Displays the amount of time taken to establish an SSL connection (includes the client hello, server hello, client public key transfer, server certificate transfer, and other—partially optional—stages). After this point, all the communication between the client and server is encrypted.</p> <p>The SSL Handshaking measurement is only applicable for HTTPS communications.</p>

Name	Description
Receive	Displays the amount of time that passes until the last byte arrives from the server and the downloading is complete. The Receive measurement is a good indicator of network quality (look at the time/size ratio to calculate receive rate).
FTP Authentication	Displays the time taken to authenticate the client. With FTP, a server must authenticate a client before it starts processing the client's commands. The FTP Authentication measurement is only applicable for FTP protocol communications.
Client Time	Displays the average amount of time that passes while a request is delayed on the client machine due to browser think time or other client-related delays.
Error Time	Displays the average amount of time that passes from the moment an HTTP request is sent until the moment an error message (HTTP errors only) is returned.


---

**Note:** Each measurement displayed on the page level is the sum of that measurement recorded for each page component. For example, the Connection Time for [www.cnn.com](http://www.cnn.com) is the sum of the Connection Time for each of the page's components.

---

The above graph demonstrates that receive time, connection time, and first buffer time accounted for a large portion of the time taken to download the main [cnn.com](http://www.cnn.com) URL. If you break the [cnn.com](http://www.cnn.com) URL down further, you can


isolate the components with the longest download time, and analyze the network or server problems that contributed to the delay in response time.

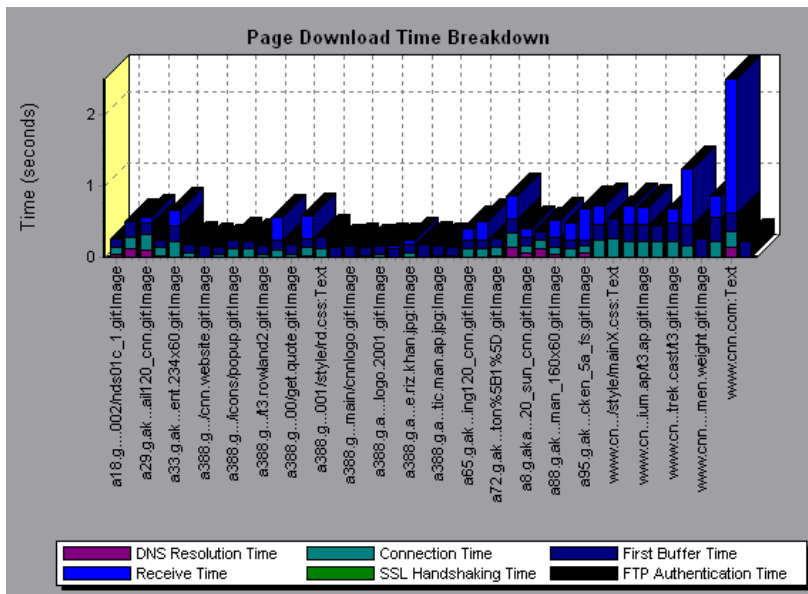

Breaking down the cnn.com URL demonstrates that for the component with the longest download time (the www.cnn.com component), the receive time accounted for a large portion of the download time.

## Page Download Time Breakdown (Over Time) Graph

The Page Download Time Breakdown (Over Time) graph displays a breakdown of each page component's download time during each second of the session step run. This graph enables you to determine at what point during session step execution network or server problems occurred.

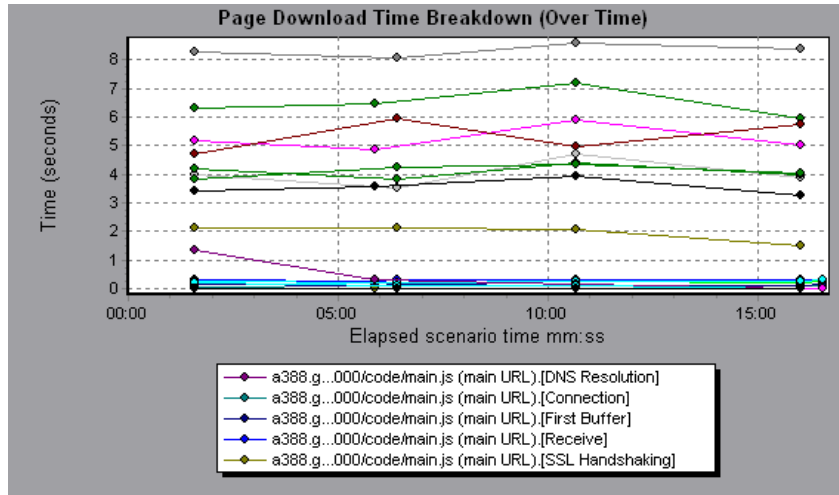


**Note:** Each measurement displayed on the page level is the sum of that measurement recorded for each page component. For example, the Connection Time for [www.cnn.com](http://www.cnn.com) is the sum of the Connection Time for each of the page's components.

To isolate the most problematic components, you can sort the legend tab according to the average number of seconds taken to download a component. To sort the legend by average, double-click the **Average** column heading.

To identify a component in the graph, click it. The corresponding line in the legend tab is selected.

In the example in the previous section, it is apparent that [cnn.com](http://cnn.com) was the most problematic component. If you examine the [cnn.com](http://cnn.com) component, the

Page Download Time Breakdown (Over Time) graph demonstrates that first buffer and receive time remained high throughout the session step, and that DNS Resolution time decreased during the session step.

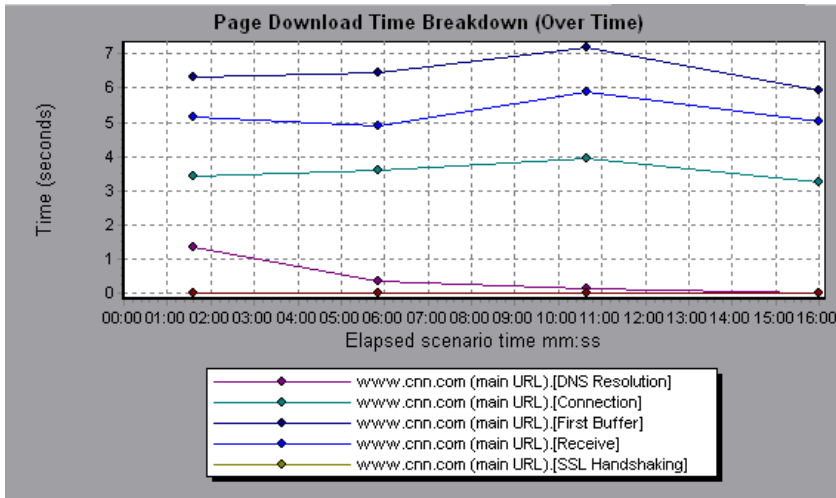


---

**Note:** When the Page Download Time Breakdown (Over Time) graph is selected from the Web Page Breakdown graph, it appears as an area graph.

---

## Time to First Buffer Breakdown Graph

The Time to First Buffer Breakdown graph displays each Web page component's relative server/network time (in seconds) for the period of time until the first buffer is successfully received back from the Web server. If the download time for a component is high, you can use this graph to determine whether the problem is server- or network-related.

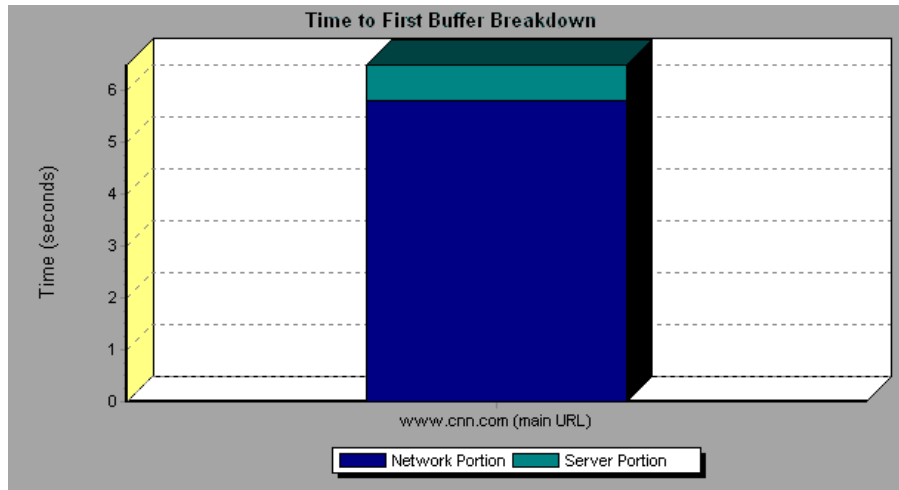


---

**Note:** Each measurement displayed on the page level is the sum of that measurement recorded for each page component. For example, the network time for [www.cnn.com](http://www.cnn.com) is the sum of the network time for each of the page's components.

---

Network time is defined as the average amount of time that passes from the moment the first HTTP request is sent until receipt of ACK.


Server time is defined as the average amount of time that passes from the receipt of ACK of the initial HTTP request (usually GET) until the first buffer is successfully received back from the Web server.

In the above graph, it is apparent that network time is greater than server time.

**Note:** Because server time is being measured from the client, network time may influence this measurement if there is a change in network performance from the time the initial HTTP request is sent until the time the first buffer is sent. The server time displayed, therefore, is estimated server time and may be slightly inaccurate.

The graph can only be viewed as a bar graph.


You can break the main cnn.com URL down further to view the time to first buffer breakdown for each of its components.

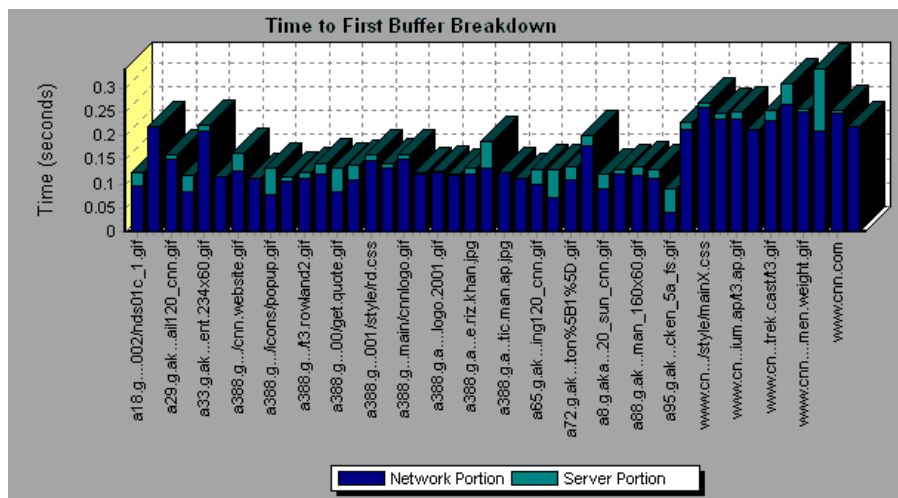

It is apparent that for the main cnn.com component (the first component on the right), the time to first buffer breakdown is almost all network time.

## Time to First Buffer Breakdown (Over Time) Graph

The Time to First Buffer Breakdown (Over Time) graph displays each Web page component's server and network time (in seconds) during each second of the session step run, for the period of time until the first buffer is successfully received back from the Web server. You can use this graph to determine when during the session step run a server- or network-related problem occurred.

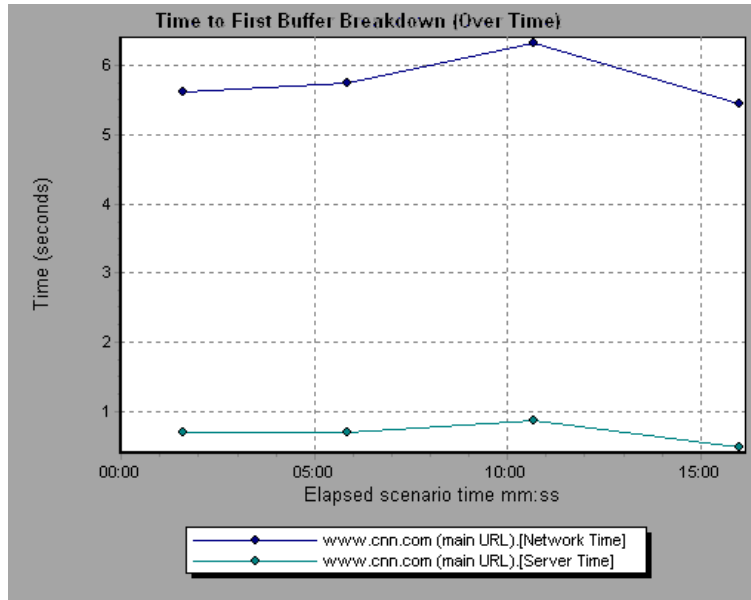


Network time is defined as the average amount of time that passes from the moment the first HTTP request is sent until receipt of ACK.

Server time is defined as the average amount of time that passes from the receipt of ACK of the initial HTTP request (usually GET) until the first buffer is successfully received back from the Web server.

Because server time is being measured from the client, network time may influence this measurement if there is a change in network performance from the time the initial HTTP request is sent until the time the first buffer is sent. The server time displayed, therefore, is estimated server time and may be slightly inaccurate.

**Note:** Each measurement displayed on the page level is the sum of that measurement recorded for each page component. For example, the network time for www.cnn.com is the sum of the network time for each of the page's components.


You can break the main cnn.com URL down further to view the time to first buffer breakdown for each of its components.

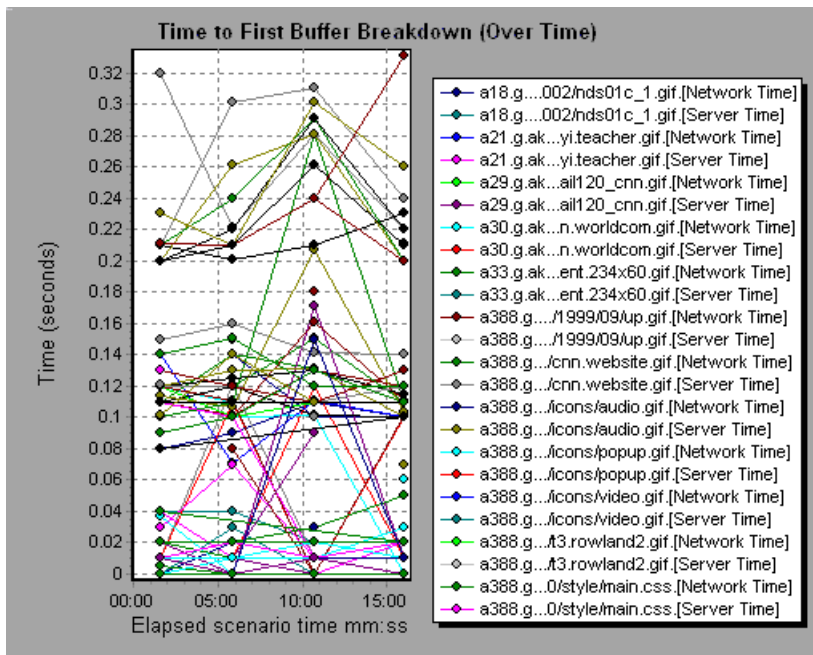

**Note:** When the Time to First Buffer Breakdown (Over Time) graph is selected from the Web Page Breakdown graph, it appears as an area graph.

## Downloaded Component Size Graph

The Downloaded Component Size graph displays the size of each Web page component. For example, the following graph shows that the `www.cnn.com/WEATHER` component is 39.05% of the total size, whereas the main `cnn.com` component is 34.56% of the total size.

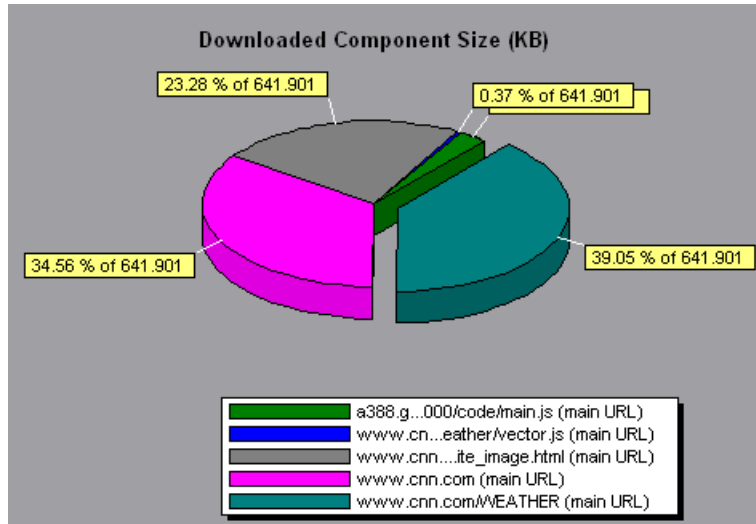


---

**Note:** The Web page size is a sum of the sizes of each of its components.

---

You can break the main cnn.com URL down further to view the size of each of its components.

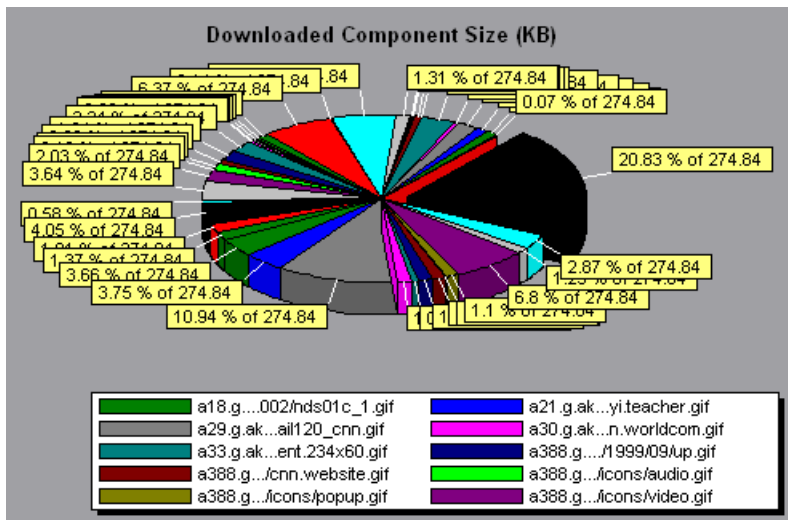

In the above example, the cnn.com component's size (20.83% of the total size) may have contributed to the delay in its downloading. To reduce download time, it may help to reduce the size of this component.

---

**Note:** The Downloaded Component Size graph can only be viewed as a pie graph.

---

# 8

---

## User-Defined Data Point Graphs

After a session step run, you can use the User-Defined Data Point graphs to display the values of user-defined data points in the Vuser script.

This chapter describes the:

- ▶ Data Points (Sum) Graph
- ▶ Data Points (Average) Graph

### About User-Defined Data Point Graphs

The User-Defined Data Point graphs display the values of user-defined data points. You define a data point in your Vuser script by inserting an **lr\_user\_data\_point** function at the appropriate place (**user\_data\_point** for GUI Vusers and **lr.user\_data\_point** for Java Vusers).

```
Action1()
{
    lr_think_time(1);
    lr_user_data_point ("data_point_1",1);
    lr_user_data_point ("data_point_2",2);
    return 0;
}
```


For Vuser protocols that support the graphical script representations such as Web and Oracle NCA, you insert a data point as a User Defined step. Data point information is gathered each time the script executes the function or step. For more information about data points, see the online *ProTune Function Reference*.

## Data Points (Sum) Graph

The Data Points (Sum) graph shows the sum values for user-defined data points during the session step run.

The x-axis represents the number of seconds that elapsed since the start time of the run. The y-axis displays the sum values of the recorded data point statements.

In the following example, the *user\_data\_point\_val\_1* data point is shown as a function of the elapsed session step time.

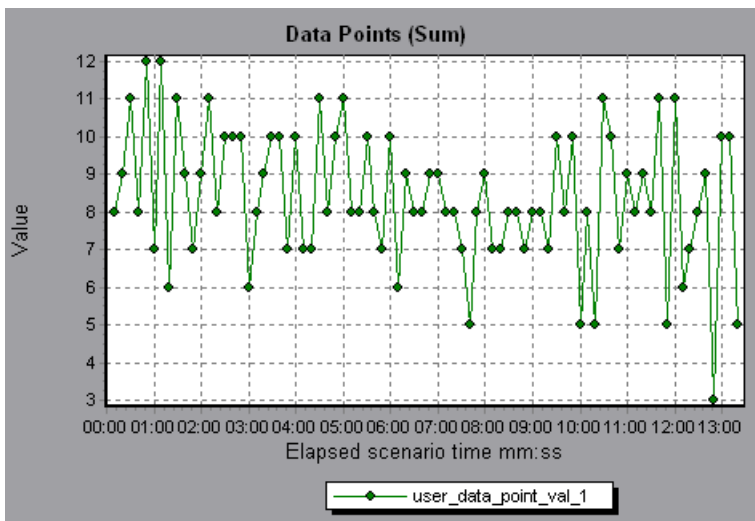


## Data Points (Average) Graph

The Data Points (Average) graph shows the average values that were recorded for user-defined data points during the session step run.

The x-axis represents the number of seconds that elapsed since the start time of the run. The y-axis displays the average values of the recorded data point statements.

In the following example, the *user\_data\_point\_val\_1* data point is shown as a function of the elapsed session step time.

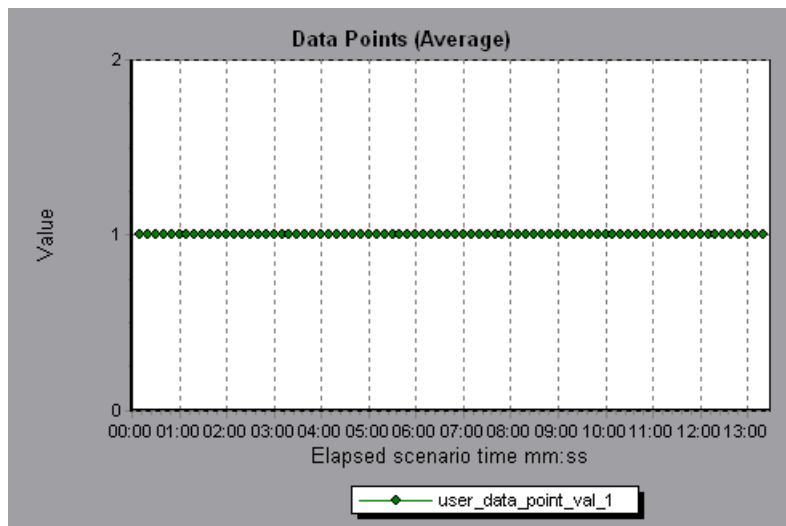



# 9

---

## System Resource Graphs

After running a session step, you can check the various system resources that were monitored during the session step using one or more of the following System Resource graphs:

- Windows Resources Graph
- UNIX Resources Graph
- SNMP Resources Graph
- TUXEDO Resources Graph
- Antara FlameThrower Resources Graph

### About System Resource Graphs


System Resource graphs display the system resource usage measured by the online monitors during the session step run. These graphs require that you specify the resources you want to measure *before* running the session step. For more information, see the section on online monitors in the *ProTune Console User's Guide*.

System Resource graphs are available for:

- Windows Resources
- UNIX Resources
- SNMP Resources
- TUXEDO Resources
- Antara FlameThrower Resources Graph

## Windows Resources Graph

The Windows Resources graph shows the NT and Windows 2000 resources measured during the session step. The NT and Windows 2000 measurements correspond to the built-in counters available from the Windows Performance Monitor.

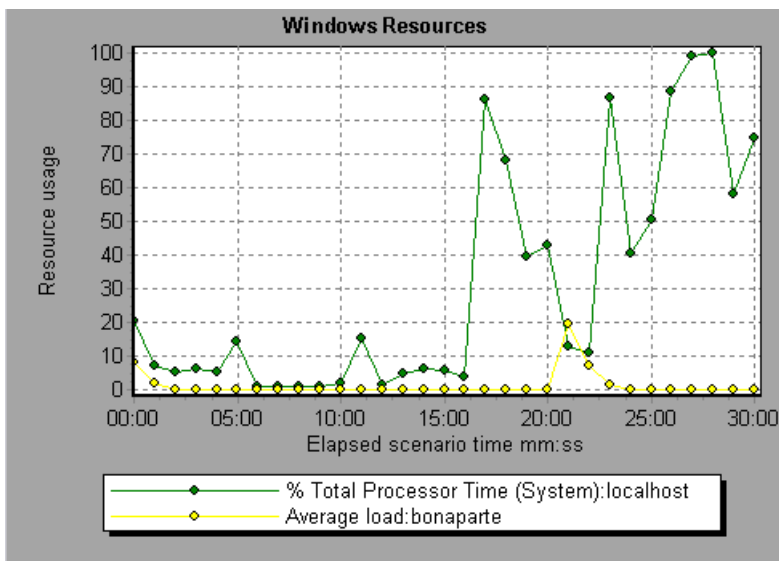

The following default measurements are available for Windows Resources:


Object	Measurement	Description
<b>System</b>	<b>% Total Processor Time</b>	The average percentage of time that all the processors on the system are busy executing non-idle threads. On a multi-processor system, if all processors are always busy, this is 100%, if all processors are 50% busy this is 50% and if 1/4th of the processors are 100% busy this is 25%. It can be viewed as the fraction of the time spent doing useful work. Each processor is assigned an Idle thread in the Idle process which consumes those unproductive processor cycles not used by any other threads.
<b>Processor</b>	<b>% Processor Time (Windows 2000)</b>	The percentage of time that the processor is executing a non-idle thread. This counter was designed as a primary indicator of processor activity. It is calculated by measuring the time that the processor spends executing the thread of the idle process in each sample interval, and subtracting that value from 100%. (Each processor has an idle thread which consumes cycles when no other threads are ready to run.) It can be viewed as the percentage of the sample interval spent doing useful work. This counter displays the average percentage of busy time observed during the sample interval. It is calculated by monitoring the time the service was inactive, and then subtracting that value from 100%.
<b>System</b>	<b>File Data Operations/sec</b>	The rate at which the computer issues read and write operations to file system devices. This does not include File Control Operations.

<b>Object</b>	<b>Measurement</b>	<b>Description</b>
<b>System</b>	<b>Processor Queue Length</b>	The instantaneous length of the processor queue in units of threads. This counter is always 0 unless you are also monitoring a thread counter. All processors use a single queue in which threads wait for processor cycles. This length does not include the threads that are currently executing. A sustained processor queue length greater than two generally indicates processor congestion. This is an instantaneous count, not an average over the time interval.
<b>Memory</b>	<b>Page Faults/sec</b>	This is a count of the page faults in the processor. A page fault occurs when a process refers to a virtual memory page that is not in its Working Set in the main memory. A page fault will not cause the page to be fetched from disk if that page is on the standby list (and hence already in main memory), or if it is in use by another process with which the page is shared.
<b>PhysicalDisk</b>	<b>% Disk Time</b>	The percentage of elapsed time that the selected disk drive is busy servicing read or write requests.
<b>Memory</b>	<b>Pool Nonpaged Bytes</b>	The number of bytes in the nonpaged pool, a system memory area where space is acquired by operating system components as they accomplish their appointed tasks. Nonpaged pool pages cannot be paged out to the paging file. They remain in main memory as long as they are allocated.

Object	Measurement	Description
Memory	Pages/sec	The number of pages read from the disk or written to the disk to resolve memory references to pages that were not in memory at the time of the reference. This is the sum of Pages Input/sec and Pages Output/sec. This counter includes paging traffic on behalf of the system cache to access file data for applications. This value also includes the pages to/from non-cached mapped memory files. This is the primary counter to observe if you are concerned about excessive memory pressure (that is, thrashing), and the excessive paging that may result.
System	Total Interrupts/sec	The rate at which the computer is receiving and servicing hardware interrupts. The devices that can generate interrupts are the system timer, the mouse, data communication lines, network interface cards, and other peripheral devices. This counter provides an indication of how busy these devices are on a computer-wide basis. See also Processor:Interrupts/sec.
Objects	Threads	The number of threads in the computer at the time of data collection. Notice that this is an instantaneous count, not an average over the time interval. A thread is the basic executable entity that can execute instructions in a processor.
Process	Private Bytes	The current number of bytes that the process has allocated that cannot be shared with other processes.

## UNIX Resources Graph

The UNIX Resources graph shows the UNIX resources measured during the session step. The UNIX measurements include those available by the *rstatd* daemon: average load, collision rate, context switch rate, CPU utilization, incoming packets error rate, incoming packets rate, interrupt rate, outgoing packets error rate, outgoing packets rate, page-in rate, page-out rate, paging rate, swap-in rate, swap-out rate, system mode CPU utilization, and user mode CPU utilization.

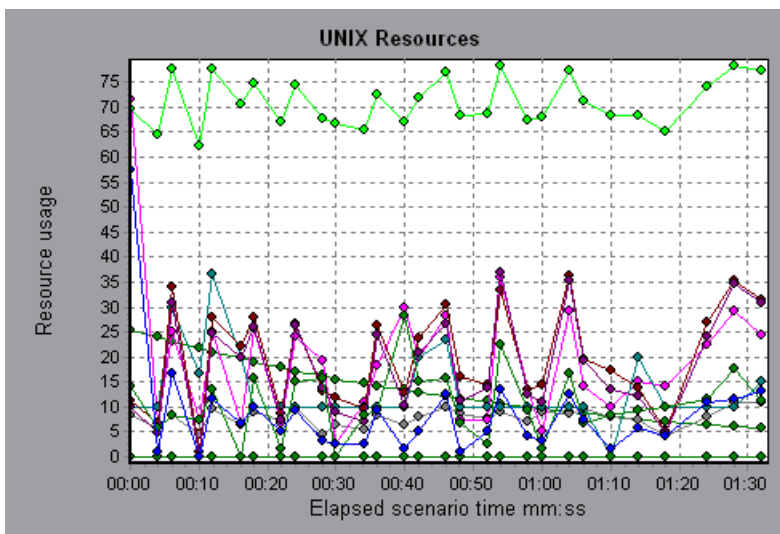

The following default measurements are available for UNIX machines:


Measurement	Description
Average load	Average number of processes simultaneously in 'Ready' state during the last minute
Collision rate	Collisions per second detected on the Ethernet
Context switches rate	Number of switches between processes or threads, per second
CPU utilization	Percent of time that the CPU is utilized
Disk rate	Rate of disk transfers

<b>Measurement</b>	<b>Description</b>
<b>Incoming packets error rate</b>	Errors per second while receiving Ethernet packets
<b>Incoming packets rate</b>	Incoming Ethernet packets per second
<b>Interrupt rate</b>	Number of device interrupts per second
<b>Outgoing packets errors rate</b>	Errors per second while sending Ethernet packets
<b>Outgoing packets rate</b>	Outgoing Ethernet packets per second
<b>Page-in rate</b>	Number of pages read to physical memory, per second
<b>Page-out rate</b>	Number of pages written to pagefile(s) and removed from physical memory, per second
<b>Paging rate</b>	Number of pages read to physical memory or written to pagefile(s), per second
<b>Swap-in rate</b>	Number of processes being swapped
<b>Swap-out rate</b>	Number of processes being swapped
<b>System mode CPU utilization</b>	Percent of time that the CPU is utilized in system mode
<b>User mode CPU utilization</b>	Percent of time that the CPU is utilized in user mode

## SNMP Resources Graph


The SNMP Resources graph shows statistics for machines running an SNMP agent, using the Simple Network Management Protocol (SNMP).

The following graph displays SNMP measurements for a machine called *bonaparte*:

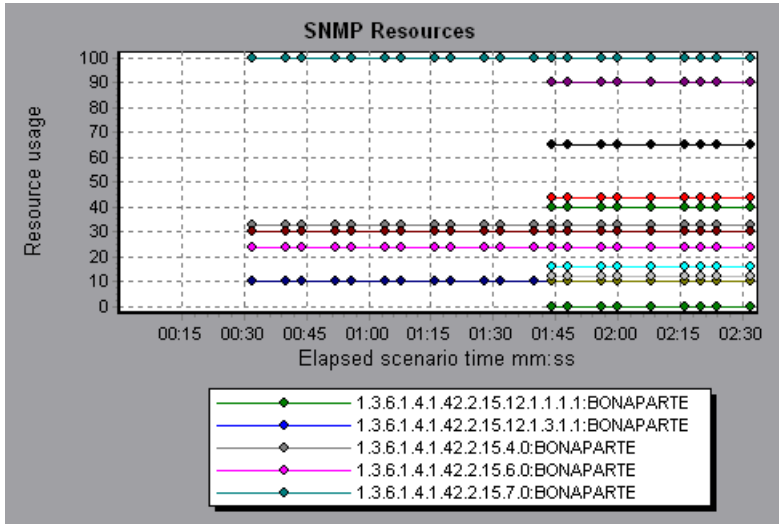

# TUXEDO Resources Graph

The TUXEDO Resources graph provides information about the server, load generator machine, workstation handler, and queue in a TUXEDO system.

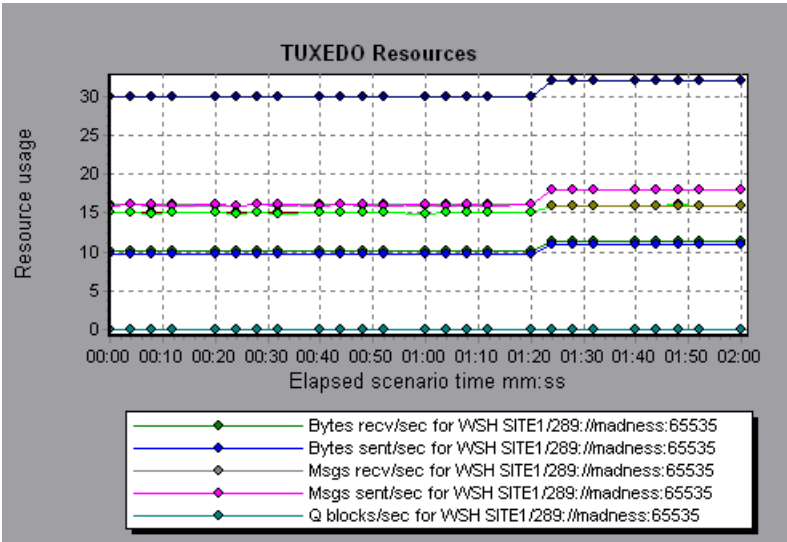

The following table lists the available TUXEDO monitor measurements:

Monitor	Measurements
Server	<b>Requests per second</b> - How many server requests were handled per second
	<b>Workload per second</b> -The workload is a weighted measure of the server requests. Some requests could have a different weight than others. By default, the workload is always 50 times the number of requests.

Monitor	Measurements
Machine	<p><b>Workload completed per second</b> - The total workload on all the servers for the machine that was completed, per unit time</p>
	<p><b>Workload initiated per second</b> - The total workload on all the servers for the machine that was initiated, per unit time</p>
	<p><b>Current Accessers</b> - Number of clients and servers currently accessing the application either directly on this machine or through a workstation handler on this machine.</p>
	<p><b>Current Clients</b> - Number of clients, both native and workstation, currently logged in to this machine.</p>
	<p><b>Current Transactions</b> - Number of in use transaction table entries on this machine.</p>
Queue	<p><b>Bytes on queue</b> - The total number of bytes for all the messages waiting in the queue</p>
	<p><b>Messages on queue</b> - The total number of requests that are waiting on queue. By default this is 0.</p>

Monitor	Measurements
<b>Workstation Handler (WSH)</b>	<b>Bytes received per second</b> - The total number of bytes received by the workstation handler, per unit time
	<b>Bytes sent per second</b> - The total number of bytes sent back to the clients by the workstation handler, per unit time
	<b>Messages received per second</b> - The number of messages received by the workstation handler, per unit time
	<b>Messages sent per second</b> - The number of messages sent back to the clients by the workstation handler, per unit time
	<b>Number of queue blocks per second</b> - The number of times the queue for the workstation handler blocked, per unit time. This gives an idea of how often the workstation handler was overloaded.

## Antara FlameThrower Resources Graph

The Antara FlameThrower graph displays statistics about the resource usage on the Antara FlameThrower server during the session step run.

The following default measurements are available for the Antara FlameThrower server:

### Layer Performance Counters

Measurement	Description
TxBytes	The total number of Layer 2 data bytes transmitted.
TxByteRate(/sec)	The number of Layer 2 data bytes transmitted per second.
TxFrames	The total number of packets transmitted.
TxFrameRate(/sec)	The number of packets transmitted per second.
RxBytes	The total number of Layer 2 data bytes received.
RxByteRate(/sec)	The number of Layer 2 data bytes received per second.
RxFrames	The total number of packets received.
RxFrameRate(/sec)	The number of packets received per second.

### TCP Performance Counters

Measurement	Description
ActiveTCPConns	Total number of currently active TCP connections.
SuccTCPConns	Total number of SYN ACK packets received.
SuccTCPConn Rate(/sec)	Number of SYN ACK packets received per second.
TCPConnLatency(milise)	Interval between transmitting a SYN packet and receiving a SYN ACK reply packet in msec.
MinTCPConn Latency(milise)	Minimum TCPConnectionLatency in msec.

Measurement	Description
<b>MaxTCPConn Latency(milisecc)</b>	Maximum TCPConnectionLatency in msec.
<b>TCPStdConnClose</b>	Total number of FIN or FIN ACK packets transmitted (Client).
<b>TCPStdConnClose</b>	Total number of FIN or FIN ACK packets received (Client).
<b>TCPStdResets</b>	Total number of RST packets transmitted.
<b>TCPStdResets</b>	Total number of RST packets received.
<b>SYNSent</b>	Total number of SYN packets transmitted.
<b>SYNSentRate(/sec)</b>	Number of SYN packets transmitted per second.
<b>SYNAckSent</b>	Total number of SYN ACK packets transmitted.
<b>SYNAckRate(/sec)</b>	Number of SYN ACK packets transmitted per second.

### HTTP Performance Counters

Measurement	Description
<b>HTTPRequests</b>	Total number of HTTP Request command packets transmitted.
<b>HTTPRequestRate (/sec)</b>	Number of HTTP Request packets transmitted per second.
<b>AvgHTTPData Latency(miliseccs)</b>	The average HTTP Data Latency over the past second in msec.
<b>HTTPData Latency(miliseccs)</b>	Interval between transmitting a Request packet and receiving a response in msec.
<b>DataThroughput (bytes/sec)</b>	The number of data bytes received from the HTTP server per second.
<b>MinHTTPData Latency(miliseccs)</b>	Minimum HTTPDataLatency in msec.
<b>MaxHTTPData Latency(miliseccs)</b>	Maximum HTTPDataLatency in msec.

Measurement	Description
<b>MinData Throughput (bytes/sec)</b>	Minimum HTTPDataThroughput in seconds.
<b>MaxData Throughput (bytes/sec)</b>	Maximum HTTPDataThroughput in seconds.
<b>SuccHTTPRequests</b>	Total number of successful HTTP Request Replies (200 OK) received.
<b>SuccHTTPRequest Rate(/sec)</b>	Number of successful HTTP Request Replies (200 OK) received per second.
<b>UnSuccHTTP Requests</b>	Number of unsuccessful HTTP Requests.

### SSL/HTTPS Performance Counters

Measurement	Description
<b>SSLConnections</b>	Number of ClientHello messages sent by the Client.
<b>SSLConnection Rate(/sec)</b>	Number of ClientHello messages sent per second.
<b>SuccSSL Connections</b>	Number of successful SSL Connections. A successful connection is one in which the Client receives the Server's finished handshake message without any errors.
<b>SuccSSLConnection Rate(/sec)</b>	Number of successful SSL connections established per second.
<b>SSLAlertErrors</b>	Number of SSL alert messages received by the client (e.g. bad_record_mac, decryption_failed, handshake_failure, etc..)
<b>SuccSSLResumed Sessions</b>	Number of SSL Sessions that were successfully resumed.
<b>FailedSSLResumed Sessions</b>	Number of SSL Sessions that were unable to be resumed.

## Sticky SLB Performance Counters

Measurement	Description
Cookie AuthenticationFail	The number of Cookie's that were not authenticated by the Server.
SuccCookie Authentication	The number of Cookie's authenticated by the server.
SSLClientHellos	The number of Client Hello packets sent to the server.
SSLServerHellos	The number of Server Hello packets sent to back to the client.
SSLSessionsFailed	The number of Session ID's that were not authenticated by the server.
SSLSessions Resumed	The number of Session ID's authenticated by the server.
succSSLClientHellos	The number of Client Hello replies received by the client or packets received by the server.
succSSLServerHellos	The number of Server Hello's received by the client.

## FTP Performance Counters

Measurement	Description
TPUsers	Total number of Ftp User command packets transmitted.
FTPUserRate(/sec)	Number of Ftp User command packets transmitted per second.
FTPUserLatency (milisecs)	Interval between transmitting a Ftp User command packet and receiving a response in msec.
MinFTPUserLatency (milisecs)	Minimum FTPUsersLatency in msec.
MaxFTPUserLatency (milisecs)	Maximum FTPUsersLatency in msec.
SuccFTPUsers	Total number of successful Ftp User command replies received.

<b>Measurement</b>	<b>Description</b>
<b>SuccFTPUserRate (/sec)</b>	Number of successful Ftp User command replies received per second.
<b>FTPPasses</b>	Total number of FTP PASS packets transmitted.
<b>FTPPassRate(/sec)</b>	Number of FTP PASS packets transmitted per second.
<b>FTPPassLatency (milisecs)</b>	Interval between transmitting a Ftp PASS packet and receiving a response in msec.
<b>MinFTPPassLatency (milisecs)</b>	Minimum FTPPassLatency in msec.
<b>MaxFTPPassLatency (milisecs)</b>	Maximum FTPPassLatency in msec.
<b>SuccFTPPasses</b>	Total number of successful FTP PASS replies received.
<b>SuccFTPPassRate (/sec)</b>	Number of successful FTP PASS replies received per second.
<b>FTPControl Connections</b>	Total number of SYN packets transmitted by the FTP client.
<b>FTPControl ConnectionRate (/sec)</b>	Number of SYN packets transmitted by the FTP client per second.
<b>SuccFTPControl Connections</b>	Total number of SYN ACK packets received by the FTP client.
<b>SuccFTPControl ConnectionRate (/sec)</b>	Number of SYN ACK packets received by the FTP Client per second.
<b>FTPData Connections</b>	Number of SYN ACK packets received by the FTP client per second.
<b>FTPDataConnection Rate(/sec)</b>	Number of SYN ACK packets transmitted by the FTP Client or received by the FTP Server per second.
<b>SuccFTPData Connections</b>	Total number of SYN ACK packets transmitted by the FTP Client or received by the FTP Server.

Measurement	Description
<b>SuccFTPData ConnectionRate (/sec)</b>	Number of SYN ACK packets received by the FTP server per second.
<b>FtpAuthFailed</b>	Total number of error replies received by the FTP client.
<b>FTPGets</b>	Total number of client Get requests.
<b>FTPPuts</b>	Total number of client Put requests.
<b>SuccFTPGets</b>	Total number of successful Get requests (data has been successfully transferred from server to client).
<b>SuccFTPPuts</b>	Total number of successful Put requests (data has been successfully transferred from client to server) .

### SMTP Performance Counters

Measurement	Description
<b>SMTPHelos</b>	Total number of HELO packets transmitted.
<b>SMTPHeloRate(/sec)</b>	Number of HELO packets transmitted per second.
<b>SMTPHeloLatency (milisecs)</b>	Interval between transmitting a HELO packet and receiving a response in msec.
<b>MinSMTPHelo Latency(milisecs)</b>	Minimum SMTPHeloLatency in msec.
<b>MaxSMTPHelo Latency(milisecs)</b>	Maximum SMTPHeloLatency in msec.
<b>SuccSMTPHelos</b>	Total number of successful HELO replies received.
<b>SuccSMTPHelo Rate(/sec)</b>	Number of successful HELO replies received per second.
<b>SMTPMailFroms</b>	Total number of Mail From packets transmitted.
<b>SMTPMailFromRate (/sec)</b>	Number of Mail From packets transmitted per second.
<b>SMTPMailFrom Latency(milisecs)</b>	Interval between transmitting a Mail From packet and receiving a response in msec.

<b>Measurement</b>	<b>Description</b>
<b>MinSMTPMailFrom Latency(miliseCs)</b>	Minimum SMTPMailFromLatency in msec.
<b>MaxSMTPMailFrom Latency(miliseCs)</b>	Maximum SMTPMailFromLatency in msec.
<b>SuccSMTPMail Froms</b>	Total number of successful Mail From replies received.
<b>SuccSMTPMailFrom Rate(/sec)</b>	Number of successful Mail From replies received per second.
<b>SMTPRcptTos</b>	Total number of RcptTo packets transmitted.
<b>SMTPRcptToRate (/sec)</b>	Number of RcptTo packets transmitted per second.
<b>SMTPRcptTo Latency(miliseCs)</b>	Interval between transmitting a RcptTo packet and receiving a response in msec.
<b>MinSMTPRcptTo Latency(miliseCs)</b>	Minimum SMTPRcptToLatency in msec.
<b>MaxSMTPRcptTo Latency(miliseCs)</b>	Maximum SMTPRcptToLatency in msec.
<b>SuccSMTPRcptTos</b>	Total number of successful RcptTo replies received.
<b>SuccSMTPRcptTo Rate(/sec)</b>	Number of successful RcptTo replies received per second.
<b>SMTPDdatas</b>	Total number of Data packets transmitted.
<b>SMTPDataRate(/sec)</b>	Number of Data packets transmitted per second.
<b>SMTPDataLatency (miliseCs)</b>	Interval between transmitting a Data packet and receiving a response in msec.
<b>MinSMTPData Latency(miliseCs)</b>	Minimum SMTPDataLatency in msec.
<b>MaxSMTPData Latency(miliseCs)</b>	Maximum SMTPDataLatency in msec.

Measurement	Description
SuccSMTPData	Total number of successful Data replies received.
SuccSMTPDataRate (/sec)	Number of successful Data replies received per second.

### POP3 Performance Counters

Measurement	Description
POP3Users	Total number of Pop3 User command packets transmitted.
POP3UserRate(/sec)	Number of Pop3 User command packets transmitted per second.
POP3UserLatency (milisecs)	Interval between transmitting a Pop3 User command packet and receiving a response in msec.
MinPOP3User Latency(milisecs)	Minimum POP3UserLatency in msec.
MaxPOP3User Latency(milisecs)	Maximum POP3UserLatency in msec.
SuccPOP3Users	Total number of successful Pop3 User replies received.
SuccPOP3UserRate (/sec)	Number of successful Pop3 User replies received per second.
POP3Passes	Total number of Pop3 Pass command packets transmitted.
POP3PassRate(/sec)	Number of Pop3 Pass command packets transmitted per second.
POP3PassLatency (milisecs)	Interval between transmitting a Pop3 Pass packet and receiving a response in msec.
MinPOP3Pass Latency(milisecs)	Minimum POP3PassLatency in msec.
MaxPOP3Pass Latency(milisecs)	Maximum POP3PassLatency in msec.
SuccPOP3Passes	Total number of successful Pop3 Pass replies received.

<b>Measurement</b>	<b>Description</b>
<b>SuccPOP3PassRate (/sec)</b>	Number of successful Pop3 Pass replies received per second.
<b>POP3Stats</b>	Total number of Pop3 Stat command packets sent.
<b>POP3StatRate(/sec)</b>	Number of Pop3 Stat command packets transmitted per second.
<b>POP3StatLatency (milisechs)</b>	Interval between transmitting a Pop3 Stat packet and receiving a response in msec.
<b>MinPOP3Stat Latency(milisechs)</b>	Minimum POP3StatLatency in msec.
<b>MaxPOP3Stat Latency(milisechs)</b>	Maximum POP3StatLatency in msec.
<b>SuccPOP3Stats</b>	Total number of successful Pop3 Stat replies received.
<b>SuccPOP3StatRate (/sec)</b>	Number of successful Pop3 Stat replies received per second.
<b>POP3Lists</b>	Total number of Pop3 List command packets transmitted.
<b>POP3ListRate(/sec)</b>	Number of Pop3 List command packets transmitted per second.
<b>POP3ListLatency (milisechs)</b>	Interval between transmitting a Pop3 List packet and receiving a response in msec.
<b>MinPOP3List Latency(milisechs)</b>	Minimum POP3ListLatency in msec.
<b>MaxPOP3List Latency(milisechs)</b>	Maximum POP3ListLatency in msec.
<b>SuccPOP3Lists</b>	Total number of successful Pop3Lists received.
<b>SuccPOP3ListRate (/sec)</b>	Number of successful Pop3Lists received per second.
<b>POP3Retrs</b>	Total number of Pop3 Retr packets transmitted.
<b>POP3RetrRate(/sec)</b>	Number of Pop3 Retr packets transmitted per second.

Measurement	Description
<b>POP3RetrLatency (milisecs)</b>	Interval between transmitting a Pop3 Retr packet and receiving a response in msec.
<b>MinPOP3Retr Latency(milisecs)</b>	Minimum POP3RetrLatency in msec.
<b>MaxPOP3Retr Latency(milisecs)</b>	Maximum POP3RetrLatency in msec.
<b>SuccPOP3Retrs</b>	Total number of successful Pop3Retrs received.
<b>SuccPOP3RetrRate (/sec)</b>	Number of successful Pop3Retrs received per second.

### DNS Performance Counters

Measurement	Description
<b>SuccPrimaryDNS Request</b>	Total number of Successful DNS requests made to the Primary DNS server.
<b>SuccSecondaryDNS Request</b>	Total number of Successful DNS requests made to the Secondary DNS server.
<b>SuccDNSData RequestRate(/sec)</b>	Number of Successful DNS Request packets transmitted per second.
<b>PrimaryDNSFailure</b>	Total number of DNS requests failures received from the Primary DNS server.
<b>PrimaryDNSRequest</b>	Total number of DNS requests made to the Primary DNS server.
<b>SecondaryDNS Failure</b>	Total number of DNS requests failures received from the Secondary DNS server.
<b>SecondaryDNS Request</b>	Total number of DNS requests made to the Secondary DNS server.
<b>MinDNSData Latency</b>	Minimum DNS Data Latency in msec.
<b>MaxDNSData Latency</b>	Maximum DNS Data Latency in msec.

Measurement	Description
<b>CurDNSData Latency</b>	Interval between sending a DNS request packet and receiving a response in msec.
<b>DNSDataRequest Rate(/sec)</b>	Number of DNS Request packets transmitted per second.
<b>NoOf ReTransmission</b>	Total number of DNS Request packets re
<b>NoOfAnswers</b>	Total number of Answers to the DNS Request packets.

### Attacks Performance Counters

Measurement	Description
<b>Attacks</b>	Total number of attack packets transmitted (All Attacks)
<b>AttackRate(/sec)</b>	Number of attack packets transmitted per second (ARP, Land, Ping, SYN, and Smurf)
<b>Havoc Flood</b>	Number of Havoc packets generated (Stacheldraht only)
<b>Icmp Flood</b>	Number of ICMP attack packets generated (TFN, TFN2K, & Stacheldraht)
<b>Mix Flood</b>	Number of Mix packets generated (TFN2K only)
<b>Mstream Flood</b>	Number of Mstream packets generated (Stacheldraht only)
<b>Null Flood</b>	Number of Null packets generated (Stacheldraht only)
<b>Smurf Flood</b>	Number of Smurf packets generated (TFN, TFN2K, & Stacheldraht)
<b>Syn Flood</b>	Number of SYN packets generated (TFN, TFN2K, & Stacheldraht)
<b>Targa Flood</b>	Number of Targa packets generated (TFN2K only)
<b>Udp Flood</b>	Number of UDP packets generated (All DDoS Attacks only)

# 10

---

## Network Monitor Graphs

You can use Network graphs to determine whether your network is causing a delay in the session step. You can also determine the problematic network segment.

This chapter describes:

- Understanding Network Monitoring
- Network DelayTime Graph
- Network Sub-Path Time Graph
- Network Segment Delay Graph
- Verifying the Network as a Bottleneck

### About Network Monitoring


Network configuration is a primary factor in the performance of applications and Web systems. A poorly designed network can slow client activity to unacceptable levels.

In an application, there are many network segments. A single network segment with poor performance can affect the entire application.

Network graphs let you locate the network-related problem so that it can be fixed.

## Understanding Network Monitoring

The following diagram shows a typical network. In order to go from the server machine to the Vuser machine, data must travel over several segments.

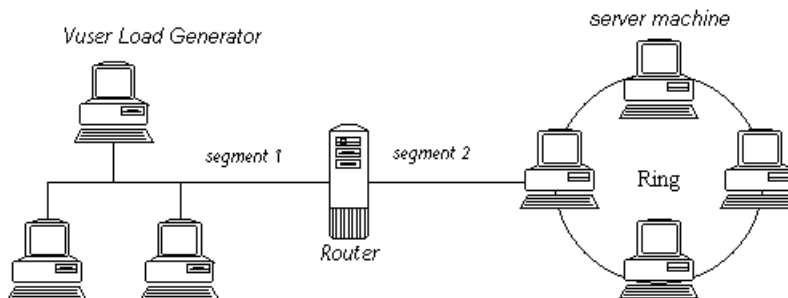

To measure network performance, the Network monitor sends packets of data across the network. When a packet returns, the monitor calculates the time it takes for the packet to go to the requested node and return. The Network Sub-Path Time graph displays the delay from the source machine to each node along the path. The Network Segment Delay graph displays the delay for each segment of the path. The Network Delay Time graph displays the delay for the complete path between the source and destination machines.

Using the Network Monitor graphs, you can determine whether the network is causing a bottleneck. If the problem is network-related, you can locate the problematic segment so that it can be fixed.


In order for the Analysis to generate Network monitor graphs, you must activate the Network monitor before executing the session step. In the Network monitor settings, you specify the path you want to monitor. For information about setting up the Network monitor, see the *ProTune Console User's Guide*.

## Network DelayTime Graph

The Network Delay Time graph shows the delays for the complete path between the source and destination machines (for example, the database server and Vuser load generator). The graph maps the delay as a function of the elapsed session step time.

Each path defined in the Console is represented by a separate line with a different color in the graph.


The following graph shows the network delay as a function of the elapsed session step time. It shows a delay of 16 milliseconds in the 8th minute of the session step.

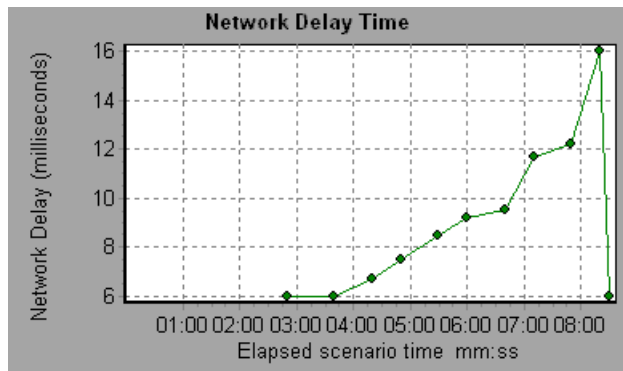

## Network Sub-Path Time Graph

The Network Sub-Path Time graph shows the delay for each segment of the path according to the elapsed session step time. Each segment is displayed as a separate line with a different color.

In the following example, four segments are shown. The graph indicates that one segment caused a delay of 70 milliseconds in the sixth minute.

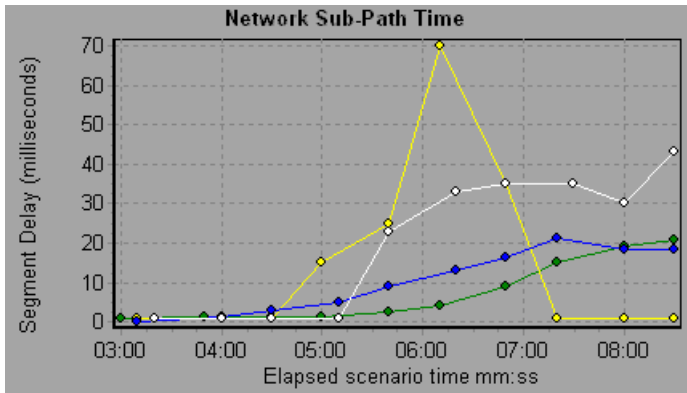

---


**Note:** The delays from the source machine to each of the nodes are measured concurrently, yet independently. It is therefore possible that the delay from the source machine to one of the nodes could be greater than the delay for the complete path between the source and destination machines.

---

## Network Segment Delay Graph

The Network Segment Delay graph shows the delay for each segment of the path according to the elapsed session step time. Each segment is displayed as a separate line with a different color.

In the following example, four segments are shown. The graph indicates that one segment caused a delay of 70 seconds in the sixth minute.

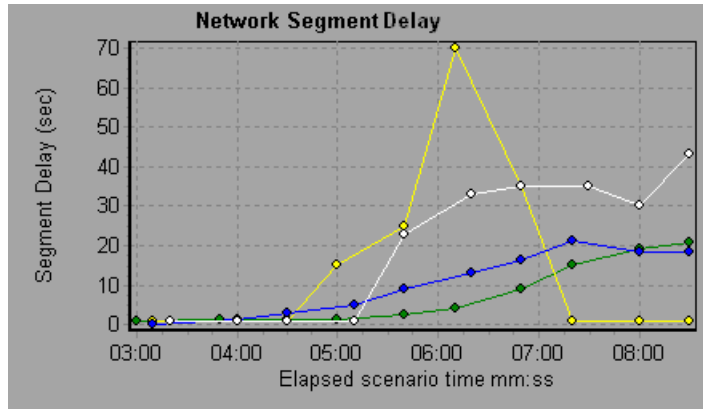


---


**Note:** The segment delays are measured approximately, and do not add up to the network path delay which is measured exactly. The delay for each segment of the path is estimated by calculating the delay from the source machine to one node and subtracting the delay from the source machine to another node. For example, the delay for segment B to C is calculated by measuring the delay from the source machine to point C, and subtracting the delay from the source machine to point B.

---

## Verifying the Network as a Bottleneck

You can merge various graphs to determine if the network is a bottleneck. For example, using the Network Delay Time and Running Vusers graphs, you can determine how the number of Vusers affects the network delay. The Network Delay Time graph indicates the network delay during the session step run. The Running Vusers graph shows the number of running Vusers.

In the following merged graph, the network delays are compared to the running Vusers. The graph shows that when all 10 Vusers were running, a network delay of 22 milliseconds occurred, implying that the network may be overloaded.

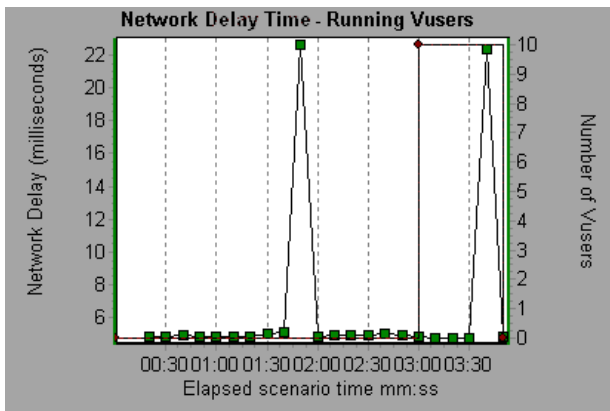

# 11

---

## Firewall Server Monitor Graphs

After a session step run, you can use the Firewall server monitor graphs to analyze Firewall server performance.

This chapter describes the:


- ▶ Check Point FireWall-1 Server Graph

### About Firewall Server Monitor Graphs

Firewall server monitor graphs provide you with performance information for firewall servers. Note that in order to obtain data for these graphs, you need to activate the Firewall server online monitor before running the session step. When you set up the online monitor for the Firewall server, you indicate which statistics and measurements to monitor. For more information on activating and configuring Firewall server monitors, see the *ProTune Console User's Guide*.

## Check Point FireWall-1 Server Graph

The Check Point FireWall-1 graph shows statistics on Check Point's Firewall server as a function of the elapsed session step time.

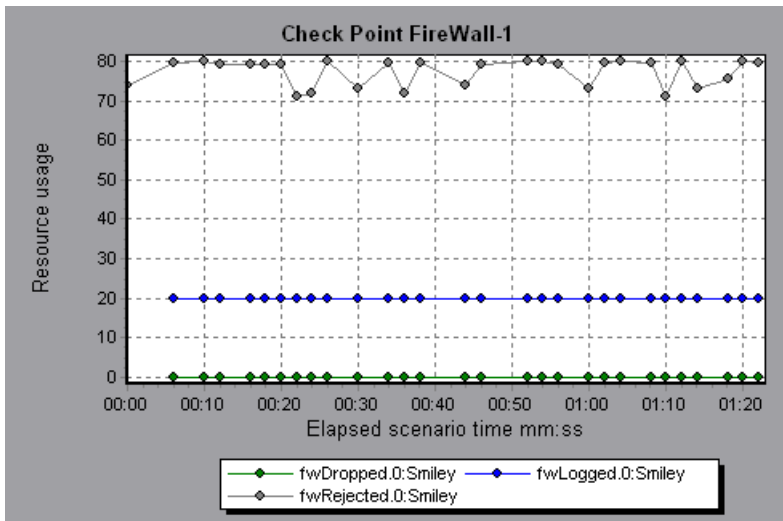

This graph displays the *fwDropped*, *fwLogged*, and *fwRejected* measurements during the first minute and twenty seconds of the session step. Note that there are differences in the scale factor for the measurements: the scale factor for *fwDropped* is 1, the scale factor for *fwLogged* is 10, and the scale factor for *fwRejected* is 0.0001.

The following measurements are available for the Check Point FireWall-1 server:

Measurement	Description
<b>fwRejected</b>	The number of rejected packets.
<b>fwDropped</b>	The number of dropped packets.
<b>fwLogged</b>	The number of logged packets.

# 12

---

## Web Server Resource Graphs

After a session step run, you can use Web Server Resource graphs to analyze the performance of your Apache, Microsoft IIS, and iPlanet/Netscape server performance.

This chapter describes:


- ▶ Apache Server Graph
- ▶ Microsoft Information Internet Server (IIS) Graph
- ▶ iPlanet/Netscape Server Graph

### About Web Server Resource Graphs

Web Server Resource graphs provide you with information about the resource usage of the Apache, Microsoft IIS, and iPlanet/Netscape Web servers. In order to obtain data for these graphs, you need to activate the online monitor for the server and specify which resources you want to measure before running the session step. For information on activating and configuring the Web Server Resource monitors, see the *ProTune Console User's Guide*.


In order to display all the measurements on a single graph, the Analysis may scale them. The Legend tab indicates the scale factor for each resource. To obtain the true value, multiply the scale factor by the displayed value. For example, in the following graph the actual value of *KBytes Sent per second* in

the second minute is 1; 10 multiplied by the scale factor of 1/10 (indicated in the Legend tab below).

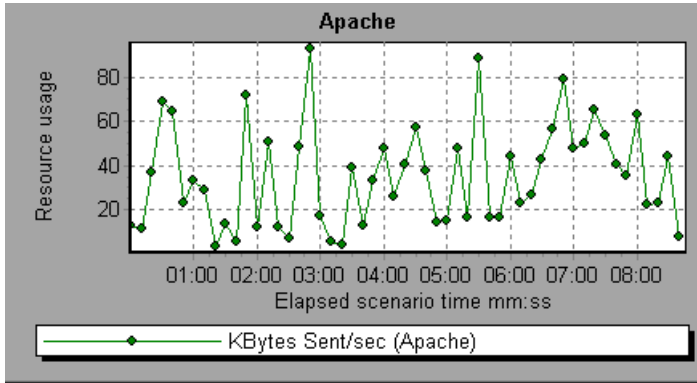

## Apache Server Graph

The Apache Server graph shows server statistics as a function of the elapsed session step time.

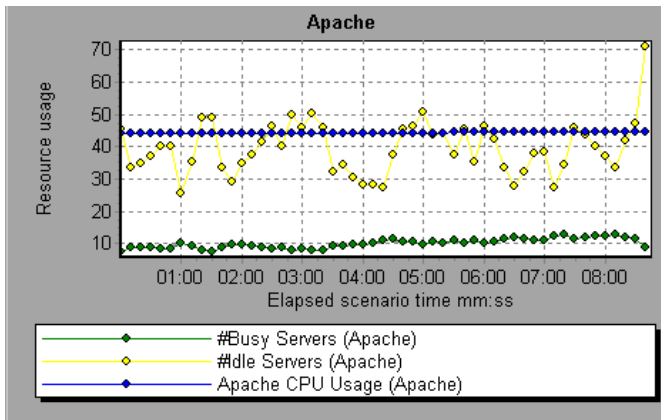

In the above graph, the CPU usage remained steady throughout the session step. At the end of the session step, the number of idle servers increased. The number of busy servers remained steady at 1 throughout the session step, implying that the Vuser only accessed one Apache server.

Note that the scale factor for the *Busy Servers* measurement is 1/10 and the scale factor for *CPU usage* is 10.

The following default measurements are available for the Apache server:

Measurement	Description
# Busy Servers	The number of servers in the Busy state
# Idle Servers	The number of servers in the Idle state
Apache CPU Usage	The percentage of time the CPU is utilized by the Apache server
Hits/sec	The HTTP request rate
KBytes Sent/sec	The rate at which data bytes are sent from the Web server


---

**Note:** The Apache monitor connects to the Web server in order to gather statistics, and registers one hit for each sampling. The Apache graph, therefore, always displays one hit per second, even if no clients are connected to the Apache server.

---

## Microsoft Information Internet Server (IIS) Graph

The Microsoft IIS Server graph shows server statistics as a function of the elapsed session step time.

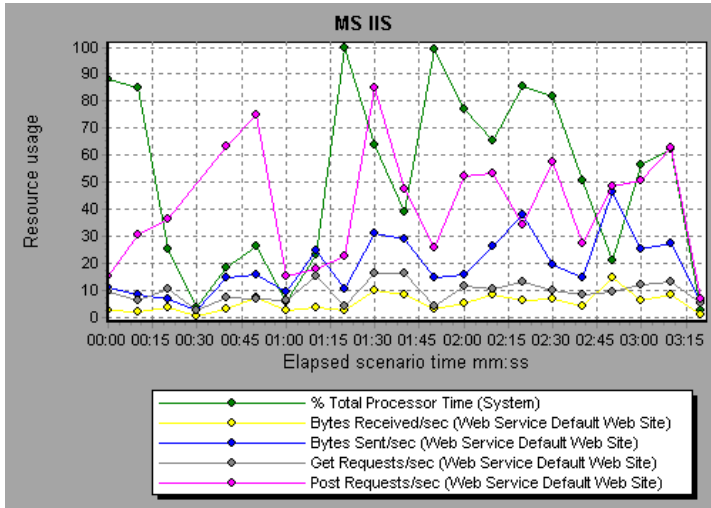

In the above graph, the *Bytes Received/sec* and *Get Requests/sec* measurements remained fairly steady throughout the session step, while the *% Total Processor Time*, *Bytes Sent/sec*, and *Post Requests/sec* measurements fluctuated considerably.


Note that the scale factor for the *Bytes Sent/sec* and *Bytes Received/sec* measurements is 1/100, and the scale factor for the *Post Requests/sec* measurement is 10.

The following default measurements are available for the IIS server:

<b>Object</b>	<b>Measurement</b>	<b>Description</b>
<b>Web Service</b>	<b>Bytes Sent/sec</b>	The rate at which the data bytes are sent by the Web service
<b>Web Service</b>	<b>Bytes Received/sec</b>	The rate at which the data bytes are received by the Web service
<b>Web Service</b>	<b>Get Requests/sec</b>	The rate at which HTTP requests using the GET method are made. Get requests are generally used for basic file retrievals or image maps, though they can be used with forms.
<b>Web Service</b>	<b>Post Requests/sec</b>	The rate at which HTTP requests using the POST method are made. Post requests are generally used for forms or gateway requests.
<b>Web Service</b>	<b>Maximum Connections</b>	The maximum number of simultaneous connections established with the Web service
<b>Web Service</b>	<b>Current Connections</b>	The current number of connections established with the Web service
<b>Web Service</b>	<b>Current NonAnonymous Users</b>	The number of users that currently have a non-anonymous connection using the Web service
<b>Web Service</b>	<b>Not Found Errors/sec</b>	The rate of errors due to requests that could not be satisfied by the server because the requested document could not be found. These are generally reported to the client as an HTTP 404 error code.
<b>Process</b>	<b>Private Bytes</b>	The current number of bytes that the process has allocated that cannot be shared with other processes.

## iPlanet/Netscape Server Graph

The iPlanet/Netscape Server graph shows server statistics as a function of the elapsed session step time.

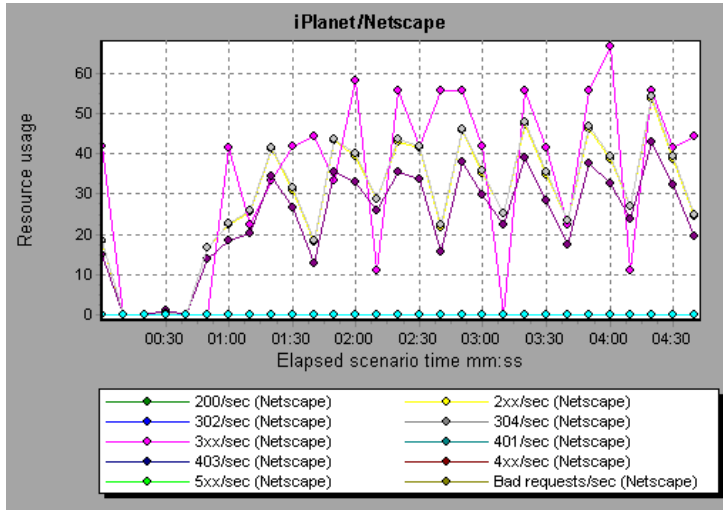

Note that the scale factor for the *302/sec* and *3xx/sec* measurements is 100, and the scale factor for the *Bytes Sent/sec* is 1/100.

The following default measurements are available for the iPlanet/Netscape server:

Measurement	Description
200/sec	The rate of successful transactions being processed by the server
2xx/sec	The rate at which the server handles status codes in the 200 to 299 range
302/sec	The rate of relocated URLs being processed by the server
304/sec	The rate of requests for which the server tells the user to use a local copy of a URL instead of retrieving a newer version from the server

Measurement	Description
3xx/sec	The rate at which the server handles status codes in the 300 to 399 range
401/sec	The rate of unauthorized requests handled by the server
403/sec	The rate of forbidden URL status codes handled by the server
4xx/sec	The rate at which the server handles status codes in the 400 to 499 range
5xx/sec	The rate at which the server handles status codes 500 and higher
Bad requests/sec	The rate at which the server handles bad requests
Bytes sent/sec	The rate at which bytes of data are sent from the Web server
Hits/sec	The HTTP request rate
xxx/sec	The rate of all status codes (2xx-5xx) handled by the server, excluding timeouts and other errors that did not return an HTTP status code



# 13

---

## Web Application Server Resource Graphs

After a session step run, you can use Web Application Server Resource graphs to analyze Web application server performance.

This chapter describes:

- Ariba Graph
- ATG Dynamo Graph
- BroadVision Graph
- ColdFusion Graph
- Fujitsu INTERSTAGE Graph
- Microsoft Active Server Pages (ASP) Graph
- Oracle9iAS HTTP Server Graph
- SilverStream Graph
- WebLogic (SNMP) Graph
- WebLogic (JMX) Graph
- WebSphere Graph
- WebSphere (EPM) Graph

## About Web Application Server Resource Graphs

Web Application Server Resource graphs provide you with resource usage information about the Ariba, ATG Dynamo, BroadVision, ColdFusion, Fujitsu INTERSTAGE, Microsoft ASP, Oracle9iAS HTTP, SilverStream, WebLogic (SNMP), WebLogic (JMX), and WebSphere application servers.

In order to obtain data for these graphs, you need to activate the online monitor for the application server and specify which resources you want to measure before running the session step. For information on activating and configuring the Web Application Server Resource monitors, see the *ProTune Console User's Guide*.

When you open a Web Application Server Resource graph, you can filter it to show only the relevant application. When you need to analyze other applications, you can change the filter conditions and display the desired resources.

In order to display all the measurements on a single graph, the Analysis may scale them. The Legend tab indicates the scale factor for each resource. To obtain the true value, multiply the scale factor by the displayed value. For more information on scaled measurements, see the example in "About Web Server Resource Graphs" on page 135.

## Ariba Graph

The following tables describe the default measurements available for the Ariba server:

### Core Server Performance Counters

Measurement	Description
<b>Total Connections</b>	The cumulative number of concurrent user connections since Ariba Buyer was started.
<b>Requisitions Finished</b>	The instantaneous reading of the length of the worker queue at the moment this metric is obtained. The longer the worker queue, the more user requests are delayed for processing.
<b>Worker Queue Length</b>	The instantaneous reading of the length of the worker queue at the moment this metric is obtained. The longer the worker queue, the more user requests are delayed for processing.
<b>Concurrent Connections</b>	The instantaneous reading of the number of concurrent user connections at the moment this metric is obtained
<b>Total Memory</b>	The instantaneous reading of the memory (in KB) being used by Ariba Buyer at the moment this metric is obtained
<b>Free Memory</b>	The instantaneous reading of the reserved memory (in KB) that is not currently in use at the moment this metric is obtained
<b>Up Time</b>	The amount of time (in hours and minutes) that Ariba Buyer has been running since the previous time it was started
<b>Number of Threads</b>	The instantaneous reading of the number of server threads in existence at the moment this metric is obtained
<b>Number of Cached Objects</b>	The instantaneous reading of the number of Ariba Buyer objects being held in memory at the moment this metric is obtained

Measurement	Description
<b>Average Session Length</b>	The average length of the user sessions (in seconds) of all users who logged out since previous sampling time. This value indicates on average how long a user stays connected to server.
<b>Average Idle Time</b>	The average idle time (in seconds) for all the users who are active since previous sampling time. The idle time is the period of time between two consecutive user requests from the same user.
<b>Approves</b>	The cumulative count of the number of approves that happened during the sampling period. An Approve consists of a user approving one Approvable.
<b>Submits</b>	The cumulative count of the number of Approvables submitted since previous sampling time
<b>Denies</b>	The cumulative count of the number of submitted Approvables denied since previous sampling time
<b>Object Cache Accesses</b>	The cumulative count of accesses (both reads and writes) to the object cache since previous sampling time
<b>Object Cache Hits</b>	The cumulative count of accesses to the object cache that are successful (cache hits) since previous sampling time

### System Related Performance Counters

Measurement	Description
<b>Database Response Time</b>	The average response time (in seconds) to the database requests since the previous sampling time
<b>Buyer to DB server Traffic</b>	The cumulative number of bytes that Ariba Buyer sent to DB server since the previous sampling time.
<b>DB to Buyer server Traffic</b>	The cumulative number of bytes that DB server sent to Ariba Buyer since the previous sampling time

Measurement	Description
Database Query Packets	The average number of packets that Ariba Buyer sent to DB server since the previous sampling time
Database Response Packets	The average number of packets that DB server sent to Ariba Buyer since the previous sampling time

## ATG Dynamo Graph

The following tables describe the measurements that are available for the ATG Dynamo server:

d3System Measurement	Description
sysTotalMem	The total amount of memory currently available for allocating objects, measured in bytes
sysFreeMem	An approximation of the total amount of memory currently available for future allocated objects, measured in bytes
sysNumInfoMsgs	The number of system global info messages written
sysNumWarningMsgs	The number of system global warning messages written
sysNumErrorMsgs	The number of system global error messages written

d3LoadManagement Measurement	Description
ImIsManager	True if the Dynamo is running a load manager
ImManagerIndex	Returns the Dynamo's offset into the list of load managing entities
ImIsPrimaryManager	True if the load manager is an acting primary manager

<b>d3LoadManagement Measurement</b>	<b>Description</b>
<b>ImServicingCMs</b>	True if the load manager has serviced any connection module requests in the amount of time set as the connection module polling interval
<b>ImCMLDRPPort</b>	The port of the connection module agent
<b>ImIndex</b>	A unique value for each managed entity
<b>ImSNMPPort</b>	The port for the entry's SNMP agent
<b>ImProbability</b>	The probability that the entry will be given a new session
<b>ImNewSessions</b>	Indicates whether or not the entry is accepting new sessions, or if the load manager is allowing new sessions to be sent to the entry. This value is inclusive of any override indicated by ImNewSessionOverride.
<b>ImNewSessionOverride</b>	The override set for whether or not a server is accepting new sessions

<b>d3SessionTracking Measurement</b>	<b>Description</b>
<b>stCreatedSessionCnt</b>	The number of created sessions
<b>stValidSessionCnt</b>	The number of valid sessions
<b>stRestoredSessionCnt</b>	The number of sessions migrated to the server
<b>StDictionaryServerStatus</b>	d3Session Tracking

<b>d3DRP Server Measurement</b>	<b>Description</b>
<b>drpPort</b>	The port of the DRP server
<b>drpTotalReqsServed</b>	Total number of DRP requests serviced

<b>d3DRPServer Measurement</b>	<b>Description</b>
<b>drpTotalReqTime</b>	Total service time in msec for all DRP requests
<b>drpAvgReqTime</b>	Average service time in msec for each DRP request
<b>drpNewessions</b>	True if the Dynamo is accepting new sessions

<b>d3DBConnPooling Measurement</b>	<b>Description</b>
<b>dbPoolsEntry</b>	A pooling service entry containing information about the pool configuration and current status
<b>dbIndex</b>	A unique value for each pooling service
<b>dbPoolID</b>	The name of the DB connection pool service
<b>dbMinConn</b>	The minimum number of connections pooled
<b>dbMaxConn</b>	The maximum number of connections pooled
<b>dbMaxFreeConn</b>	The maximum number of free pooled connections at a time
<b>dbBlocking</b>	Indicates whether or not the pool is to block out check outs
<b>dbConnOut</b>	Returns the number of connections checked out
<b>dbFreeResources</b>	Returns the number of free connections in the pool. This number refers to connections actually created that are not currently checked out. It does not include how many more connections are allowed to be created as set by the maximum number of connections allowed in the pool.
<b>dbTotalResources</b>	Returns the number of total connections in the pool. This number refers to connections actually created and is not an indication of how many more connections may be created and used in the pool.

## BroadVision Graph

The BroadVision monitor supplies performance statistics for all the servers/services available within the application server.

The following table describes all the servers/services that are available:

Server	Multiple Instances	Description
<b>adm_srv</b>	No	One-To-One user administration server. There must be one.
<b>alert_srv</b>	No	Alert server handles direct IDL function calls to the Alert system.
<b>bvconf_srv</b>	No	One-To-One configuration management server. There must be one.
<b>cmsdb</b>	Yes	Visitor management database server.
<b>cntdb</b>	Yes	Content database server.
<b>deliv_smtp_d</b>	Yes	Notification delivery server for e-mail type messages. Each instance of this server must have its own ID, numbered sequentially starting with "1".
<b>deliv_comp_d</b>	No	Notification delivery completion processor.
<b>extdbacc</b>	Yes	External database accessor. You need at least one for each external data source.
<b>genericdb</b>	No	Generic database accessor handles content query requests from applications, when specifically called from the application. This is also used by the One-To-One Command Center.
<b>hostmgr</b>	Yes	Defines a host manager process for each machine that participates in One-To-One, but doesn't run any One-To-One servers. For example, you need a hostmgr on a machine that runs only servers. You don't need a separate hostmgr on a machine that already has one of the servers in this list.
<b>g1_ofbe_srv</b>	No	Order fulfillment back-end server.

Server	Multiple Instances	Description
g1_ofdb	Yes	Order fulfillment database server.
g1_om_srv	No	Order management server.
pmtassign_d	No	The payment archiving daemon routes payment records to the archives by periodically checking the invoices table, looking for records with completed payment transactions, and then moving those records into an archive table.
pmthdlr_d	Yes	For each payment processing method, you need one or more authorization daemons to periodically acquire the authorization when a request is made.
pmtsettle_d	Yes	Payment settlement daemon periodically checks the database for orders of the associated payment processing method that need to be settled, and then authorizes the transactions.
sched_poll_d	No	Notification schedule poller scans the database tables to determine when a notification must be run.
sched_srv	Yes	Notification schedule server runs the scripts that generate the visitor notification messages.

### Performance Counters

Performance counters for each server/service are divided into logical groups according to the service type.

The following section describes all the available counters under each group. Please note that for some services the number of counters for the same group can be different.

Counter groups:

- BV\_DB\_STAT
- BV\_SRV\_CTRL
- BV\_SRV\_STAT
- NS\_STAT
- BV\_CACHE\_STAT
- JS\_SCRIPT\_CTRL
- JS\_SCRIPT\_STAT

**BV\_DB\_STAT**

The database accessor processes have additional statistics available from the BV\_DB\_STAT memory block. These statistics provide information about database accesses, including the count of selects, updates, inserts, deletes, and stored procedure executions.

- DELETE - Count of deletes executions
- INSERT - Count of inserts executions
- SELECT - Count of selects executions
- SPROC - Count of stored procedure executions.
- UPDATE - Count of updates executions

**BV\_SRV\_CTRL**

- SHUTDOWN

## NS\_STAT

The NS process displays the namespace for the current One-To-One environment, and optionally can update objects in a name space.

- Bind
- List
- New
- Rebind
- Rsvl
- Unbind

## BV\_SRV\_STAT

The display for Interaction Manager processes includes information about the current count of sessions, connections, idle sessions, threads in use, and count of CGI requests processed.

- **HOST** - Host machine running the process.
- **ID** - Instance of the process (of which multiple can be configured in the `bv1to1.conf` file), or engine ID of the Interaction Manager.
- **CGI** - Current count of CGI requests processed.
- **CONN** - Current count of connections.
- **CPU** - CPU percentage consumed by this process. If a process is using most of the CPU time, consider moving it to another host, or creating an additional process, possibly running on another machine. Both of these specifications are done in the `bv1to1.conf` file. The CPU % reported is against a single processor. If a server is taking up a whole CPU on a 4 processor machine, this statistic will report 100%, while the Windows NT Task Manager will report 25%. The value reported by this statistic is consistent with "% Processor Time" on the Windows NT Performance Monitor.
- **GROUP** - Process group (which is defined in the `bv1to1.conf` file), or Interaction Manager application name.

- ▶ **STIME** - Start time of server. The start times should be relatively close. Later times might be an indication that a server crashed and was automatically restarted.
- ▶ **IDL** - Total count of IDL requests received, not including those to the monitor.
- ▶ **IdIQ**
- ▶ **JOB**
- ▶ **LWP** - Number of light-weight processes (threads).
- ▶ **RSS** - Resident memory size of server process (in Kilobytes).
- ▶ **STIME** - System start time.
- ▶ **SESS** - Current count of sessions.
- ▶ **SYS** - Accumulated system mode CPU time (seconds).
- ▶ **THR** - Current count of threads.
- ▶ **USR** - Accumulated user mode CPU time (seconds).
- ▶ **VSZ** - Virtual memory size of server process (in kilobytes). If a process is growing in size, it probably has a memory leak. If it is an Interaction Manager process, the culprit is most likely a component or dynamic object (though Interaction Manager servers do grow and shrink from garbage collection during normal use).

#### **BV\_CACHE\_STAT**

Monitors the request cache status.

The available counters for each request are:

- ▶ **CNT- Request\_Name-HIT** - Count of requests found in the cache.
- ▶ **CNT- Request\_Name-MAX** - Maximum size of the cache in bytes
- ▶ **CNT- Request\_Name-SWAP** - Count of items that got swapped out of the cache.
- ▶ **CNT- Request\_Name-MISS** - Count of requests that were not in the cache.
- ▶ **CNT- Request\_Name-SIZE** - Count of items currently in the cache.

## Cache Metrics

Cache metrics are available for the following items:

- **AD**
- **ALERTSCHED** - Notification schedules are defined in the BV\_ALERTSCHED and BV\_MSGSCHED tables. They are defined by the One-To-One Command Center user or by an application.
- **CATEGORY\_CONTENT**
- **DISCUSSION** - The One-To-One discussion groups provide moderated system of messages and threads of messages aligned to a particular topic. Use the Discussion group interfaces for creating, retrieving and deleting individual messages in a discussion group. To create, delete, or retrieve discussion groups, use the generic content management API. The BV\_DiscussionDB object provides access to the threads and messages in the discussion group database.
- **EXT\_FIN\_PRODUCT**
- **EDITORIAL** - Using the Editorials content module, you can point cast and community cast personalized editorial content, and sell published text on your One-To-One site. You can solicit editorial content, such as investment reports and weekly columns, from outside authors and publishers, and create your own articles, reviews, reports, and other informative media. In addition to text, you can use images, sounds, music, and video presentations as editorial content.
- **INCENTIVE** - Contains sales incentives
- **MSGSCHED** - Contains the specifications of visitor-message jobs. Notification schedules are defined in the BV\_ALERTSCHED and BV\_MSGSCHED tables. They are defined by the One-To-One Command Center user or by an application.
- **MSGSCRIPT** - Contains the descriptions of the JavaScripts that generate visitor messages and alert messages. Contains the descriptions of the JavaScripts that generate targeted messages and alert messages. Use the Command Center to add message script information to this table by selecting the Visitor Messages module in the Notifications group. For more information, see the Command Center User's Guide.

- **PRODUCT** - BV\_PRODUCT contains information about the products that a visitor can purchase.
- **QUERY** - BV\_QUERY contains queries.
- **SCRIPT** - BV\_SCRIPT contains page scripts.
- **SECURITIES**
- **TEMPLATE** - The Templates content module enables you to store in the content database any BroadVision page templates used on your One-To-One site. Combining BroadVision page templates with BroadVision dynamic objects in the One-To-One Design Center application is one way for site developers to create One-To-One Web sites. If your developers use these page templates, you can use the Command Center to enter and manage them in your content database. If your site doesn't use BroadVision page template, you will not use this content module.

#### **JS\_SCRIPT\_CTRL**

- CACHE
- DUMP
- FLUSH
- METER
- TRACE

#### **JS\_SCRIPT\_STAT**

- ALLOC
- ERROR
- FAIL
- JSPERR
- RELEASE
- STOP
- SUCC
- SYNTAX

## ColdFusion Graph

The following default measurements are available for Allaire's ColdFusion server::

Measurement	Description
<b>Avg. Database Time (msec)</b>	The running average of the amount of time, in milliseconds, that it takes ColdFusion to process database requests.
<b>Avg. Queue Time (msec)</b>	The running average of the amount of time, in milliseconds, that requests spent waiting in the ColdFusion input queue before ColdFusion began to process the request.
<b>Avg Req Time (msec)</b>	The running average of the total amount of time, in milliseconds, that it takes ColdFusion to process a request. In addition to general page processing time, this value includes both queue time and database processing time.
<b>Bytes In/sec</b>	The number of bytes per second sent to the ColdFusion server.
<b>Bytes Out/sec</b>	The number of bytes per second returned by the ColdFusion server.
<b>Cache Pops</b>	Cache pops.
<b>Database Hits/sec</b>	This is the number of database hits generated per second by the ColdFusion server.
<b>Page Hits/sec</b>	This is the number of Web pages processed per second by the ColdFusion server.
<b>Queued Requests</b>	The number of requests currently waiting to be processed by the ColdFusion server.
<b>Running Requests</b>	The number of requests currently being actively processed by the ColdFusion server.
<b>Timed Out Requests</b>	The number of requests that timed out due to inactivity timeouts.

## Fujitsu INTERSTAGE Graph

The following default measurements are available for the Fujitsu INTERSTAGE server:

Measurement	Description
<b>IspSumObjectName</b>	The object name of the application for which performance information is measured
<b>IspSumExecTimeMax</b>	The maximum processing time of the application within a certain period of time
<b>IspSumExecTimeMin</b>	The minimum processing time of the application within a certain period of time
<b>IspSumExecTimeAve</b>	The average processing time of the application within a certain period of time
<b>IspSumWaitTimeMax</b>	The maximum time required for INTERSTAGE to start an application after a start request is issued
<b>IspSumWaitTimeMin</b>	The minimum time required for INTERSTAGE to start an application after a start request is issued
<b>IspSumWaitTimeAve</b>	The average time required for INTERSTAGE to start an application after a start request is issued
<b>IspSumRequestNum</b>	The number of requests to start an application
<b>IspSumWaitReqNum</b>	The number of requests awaiting application activation

## Microsoft Active Server Pages (ASP) Graph

The following default measurements are available for Microsoft Active Server Pages (ASP):

Measurement	Description
Errors per Second	The number of errors per second.
Requests Wait Time	The number of milliseconds the most recent request was waiting in the queue.
Requests Executing	The number of requests currently executing.
Requests Queued	The number of requests waiting in the queue for service.
Requests Rejected	The total number of requests not executed because there were insufficient resources to process them.
Requests Not Found	The number of requests for files that were not found.
Requests/sec	The number of requests executed per second.
Memory Allocated	The total amount of memory, in bytes, currently allocated by Active Server Pages.
Errors During Script Run-Time	The number of failed requests due to run-time errors.
Sessions Current	The current number of sessions being serviced.
Transactions/sec	The number of transactions started per second.

## Oracle9iAS HTTP Server Graph

The following table describes some of the modules that are available for the Oracle9iAS HTTP server:

Measurement	Description
mod_mime.c	Determines document types using file extensions
mod_mime_magic.c	Determines document types using "magic numbers"
mod_auth_anon.c	Provides anonymous user access to authenticated areas
mod_auth_dbm.c	Provides user authentication using DBM files
mod_auth_digest.c	Provides MD5 authentication
mod_cern_meta.c	Supports HTTP header metafiles
mod_digest.c	Provides MD5 authentication (deprecated by mod_auth_digest)
mod_expires.c	Applies Expires: headers to resources
mod_headers.c	Adds arbitrary HTTP headers to resources
mod_proxy.c	Provides caching proxy abilities
mod_rewrite.c	Provides powerful URI-to-filename mapping using regular expressions
mod_speling.c	Automatically corrects minor typos in URLs
mod_info.c	Provides server configuration information
mod_status.c	Displays server status
mod_usertrack.c	Provides user tracking using cookies
mod_dms.c	Provides access to DMS Apache statistics
mod_perl.c	Allows execution of perl scripts
mod_fastcgi.c	Supports CGI access to long-lived programs
mod_ssl.c	Provides SSL support
mod_plsql.c	Handles requests for Oracle stored procedures
mod_isapi.c	Provides Windows ISAPI extension support

Measurement	Description
<b>mod_setenvif.c</b>	Sets environment variables based on client information
<b>mod_actions.c</b>	Executes CGI scripts based on media type or request method
<b>mod_imap.c</b>	Handles imagemap files
<b>mod_asis.c</b>	Sends files that contain their own HTTP headers
<b>mod_log_config.c</b>	Provides user-configurable logging replacement for mod_log_common
<b>mod_env.c</b>	Passes environments to CGI scripts
<b>mod_alias.c</b>	Maps different parts of the host file system in the document tree, and redirects URLs
<b>mod_userdir.c</b>	Handles user home directories
<b>mod_cgi.c</b>	Invokes CGI scripts
<b>mod_dir.c</b>	Handles the basic directory
<b>mod_autoindex.c</b>	Provides automatic directory listings
<b>mod_include.c</b>	Provides server-parsed documents
<b>mod_negotiation.c</b>	Handles content negotiation
<b>mod_auth.c</b>	Provides user authentication using text files
<b>mod_access.c</b>	Provides access control based on the client hostname or IP address
<b>mod_so.c</b>	Supports loading modules (.so on UNIX, .dll on Win32) at run-time
<b>mod_oprocmgr.c</b>	Monitors JServ processes and restarts them if they fail
<b>mod_jserv.c</b>	Routes HTTP requests to JServ server processes. Balances load across multiple JServs by distributing new requests in round-robin order

Measurement	Description
<b>mod_ose.c</b>	Routes requests to the JVM embedded in Oracle's database server
<b>http_core.c</b>	Handles requests for static Web pages

The following table describes the counters that are available for the Oracle9iAS HTTP server:

Measurement	Description
<b>handle.minTime</b>	The minimum time spent in the module handler
<b>handle.avg</b>	The average time spent in the module handler
<b>handle.active</b>	The number of threads currently in the handle processing phase
<b>handle.time</b>	The total amount of time spent in the module handler
<b>handle.completed</b>	The number of times the handle processing phase was completed
<b>request.maxTime</b>	The maximum amount of time required to service an HTTP request
<b>request.minTime</b>	The minimum amount of time required to service an HTTP request
<b>request.avg</b>	The average amount of time required to service an HTTP request
<b>request.active</b>	The number of threads currently in the request processing phase
<b>request.time</b>	The total amount of time required to service an HTTP request
<b>request.completed</b>	The number of times the request processing phase was completed

Measurement	Description
<b>connection.maxTime</b>	The maximum amount of time spent servicing any HTTP connection
<b>connection.minTime</b>	The minimum amount of time spent servicing any HTTP connection
<b>connection.avg</b>	The average amount of time spent servicing HTTP connections
<b>connection.active</b>	The number of connections with currently open threads
<b>connection.time</b>	The total amount of time spent servicing HTTP connections
<b>connection.completed</b>	The number of times the connection processing phase was completed
<b>numMods.value</b>	The number of loaded modules
<b>childFinish.count</b>	The number of times the Apache parent server started a child server, for any reason
<b>childStart.count</b>	The number of times “children” finished “gracefully.” There are some ungraceful error/crash cases that are not counted in childFinish.count
<b>Decline.count</b>	The number of times each module declined HTTP requests
<b>internalRedirect.count</b>	The number of times that any module passed control to another module using an “internal redirect”
<b>cpuTime.value</b>	The total CPU time utilized by all processes on the Apache server (measured in CPU milliseconds)
<b>heapSize.value</b>	The total heap memory utilized by all processes on the Apache server (measured in kilobytes)
<b>pid.value</b>	The process identifier of the parent Apache process
<b>upTime.value</b>	The amount of time the server been running (measured in milliseconds)

## SilverStream Graph

The following default measurements are available for the SilverStream server:

Measurement	Description
#Idle Sessions	The number of sessions in the Idle state.
Avg. Request processing time	The average request processing time.
Bytes Sent/sec	The rate at which data bytes are sent from the Web server.
Current load on Web Server	The percentage of load utilized by the SilverStream server, scaled at a factor of 25.
Hits/sec	The HTTP request rate.
Total sessions	The total number of sessions.
Free memory	The total amount of memory in the Java Virtual Machine currently available for future allocated objects.
Total memory	The total amount of memory in the Java Virtual Machine.
Memory Garbage Collection Count	The total number of times the JAVA Garbage Collector has run since the server was started.
Free threads	The current number of threads not associated with a client connection and available for immediate use.
Idle threads	The number of threads associated with a client connection, but not currently handling a user request.
Total threads	The total number of client threads allocated.

---

**Note:** The SilverStream monitor connects to the Web server in order to gather statistics, and registers one hit for each sampling. The SilverStream graph, therefore, always displays one hit per second, even if no clients are connected to the SilverStream server.

---

## WebLogic (SNMP) Graph

The following default measurements are available for the WebLogic (SNMP) server (for versions earlier than 6.0):

### ► Server Table

The Server Table lists all WebLogic (SNMP) servers that are being monitored by the agent. A server must be contacted or be reported as a member of a cluster at least once before it will appear in this table. Servers are only reported as a member of a cluster when they are actively participating in the cluster, or shortly thereafter.

Measurement	Description
ServerState	The state of the WebLogic server, as inferred by the SNMP agent. <i>Up</i> implies that the agent can contact the server. <i>Down</i> implies that the agent cannot contact the server.
ServerLoginEnable	This value is true if client logins are enabled on the server.
ServerMaxHeapSpace	The maximum heap size for this server, in KB
ServerHeapUsedPct	The percentage of heap space currently in use on the server
ServerQueueLength	The current length of the server execute queue
ServerQueueThroughput	The current throughput of execute queue, expressed as the number of requests processed per second

Measurement	Description
<b>ServerNumEJBDeployment</b>	The total number of EJB deployment units known to the server
<b>ServerNumEJBBeansDeployed</b>	The total number of EJB beans actively deployed on the server

► **Listen Table**

The Listen Table is the set of protocol, IP address, and port combinations on which servers are listening. There will be multiple entries for each server: one for each protocol, (ipAddr, port) combination. If clustering is used, the clustering-related MIB objects will assume a higher priority.

Measurement	Description
<b>ListenPort</b>	Port number.
<b>ListenAdminOK</b>	True if admin requests are allowed on this (protocol, ipAddr, port); otherwise false
<b>ListenState</b>	Listening if the (protocol, ipAddr, port) is enabled on the server; not Listening if it is not. The server may be listening but not accepting new clients if its server Login Enable state is false. In this case, existing clients will continue to function, but new ones will not.

### ► ClassPath Table

The ClassPath Table is the table of classpath elements for Java, WebLogic (SNMP) server, and servlets. There are multiple entries in this table for each server. There may also be multiple entries for each path on a server. If clustering is used, the clustering-related MIB objects will assume a higher priority.

Measurement	Description
CPType	The type of CP element: Java, WebLogic, servlet. A Java CPTYPE means the cpElement is one of the elements in the normal Java classpath. A WebLogic CPTYPE means the cpElement is one of the elements in weblogic.class.path. A servlet CPTYPE means the cpElement is one of the elements in the dynamic servlet classpath.
CPIndex	The position of an element within its path. The index starts at 1.

## WebLogic (JMX) Graph

The following default measurements are available for the WebLogic (JMX) server (for versions higher than 6.0):

### LogBroadcasterRuntime

Measurement	Description
MessagesLogged	The number of total log messages generated by this instance of the WebLogic server.
Registered	Returns “false” if the MBean represented by this object has been unregistered.
CachingDisabled	Private property that disables caching in proxies.

## **ServerRuntime**

For more information on the measurements contained in each of the following measurement categories, see Mercury Interactive's Load Testing Monitors Web site:

[http://www-svca.mercuryinteractive.com/resources/library/technical/loadtesting\\_monitors/supported.html](http://www-svca.mercuryinteractive.com/resources/library/technical/loadtesting_monitors/supported.html)

- ServletRuntime
- WebAppComponentRuntime
- EJBStatefulHomeRuntime
- JTARuntime
- JVMRuntime
- EJBEntityHomeRuntime.
- DomainRuntime
- EJBComponentRuntime
- DomainLogHandlerRuntime
- JDBCConnectionPoolRuntime
- ExecuteQueueRuntime
- ClusterRuntime
- JMSRuntime
- TimeServiceRuntime
- EJBStatelessHomeRuntime
- WLECConnectionServiceRuntime

**ServerSecurityRuntime**

<b>Measurement</b>	<b>Description</b>
<b>UnlockedUsersTotalCount</b>	Returns the number of times a user has been unlocked on the server
<b>InvalidLoginUsersHighCount</b>	Returns the high-water number of users with outstanding invalid login attempts for the server
<b>LoginAttemptsWhileLockedTotalCount</b>	Returns the cumulative number of invalid logins attempted on the server while the user was locked
<b>Registered</b>	Returns “false” if the MBean represented by this object has been unregistered.
<b>LockedUsersCurrentCount</b>	Returns the number of currently locked users on the server
<b>CachingDisabled</b>	Private property that disables caching in proxies.
<b>InvalidLoginAttemptsTotalCount</b>	Returns the cumulative number of invalid logins attempted on the server
<b>UserLockoutTotalCount</b>	Returns the cumulative number of user lockouts done on the server

## WebSphere Graph

The following measurements are available for the WebSphere server:

### ► Run-Time Resources

Contains resources related to the Java Virtual Machine run-time, as well as the ORB.

Measurement	Description
MemoryFree	The amount of free memory remaining in the Java Virtual Machine
MemoryTotal	The total memory allocated for the Java Virtual Machine
MemoryUse	The total memory in use within the Java Virtual Machine

### ► BeanData

Every home on the server provides performance data, depending upon the type of bean deployed in the home. The top level bean data holds an aggregate of all the containers.

Measurement	Description
BeanCreates	The number of beans created. Applies to an individual bean that is either 'stateful' or 'entity'
EntityBeanCreates	The number of entity beans created
BeanRemoves	The number of entity beans pertaining to a specific bean that have been removed. Applies to an individual bean that is either 'stateful' or 'entity'
EntityBeanRemoves	The number of entity beans removed
StatefulBeanCreates	The number of stateful beans created
StatefulBeanRemoves	The number of stateful bean removed

<b>Measurement</b>	<b>Description</b>
<b>BeanPassivates</b>	The number of bean passivates pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'
<b>EntityBeanPassivates</b>	The number of entity bean passivates
<b>StatefulBeanPassivates</b>	The number of stateful bean passivates
<b>BeanActivates</b>	The number of bean activates pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'
<b>EntityBeanActivates</b>	The number of entity bean activates
<b>StatefulBeanActivates</b>	The number of stateful bean activates
<b>BeanLoads</b>	The number of times the bean data was loaded. Applies to entity
<b>BeanStores</b>	The number of times the bean data was stored in the database. Applies to entity
<b>BeanInstantiates</b>	The number of times a bean object was created. This applies to an individual bean, regardless of its type.
<b>StatelessBeanInstantiates</b>	The number of times a stateless session bean object was created
<b>StatefulBeanInstantiates</b>	The number of times a stateful session bean object was created
<b>EntityBeanInstantiates</b>	The number of times an entity bean object was created
<b>BeanDestroys</b>	The number of times an individual bean object was destroyed. This applies to any bean, regardless of its type
<b>StatelessBeanDestroys</b>	The number of times a stateless session bean object was destroyed
<b>StatefulBeanDestroys</b>	The number of times a stateful session bean object was destroyed

<b>Measurement</b>	<b>Description</b>
<b>EntityBeanDestroys</b>	The number of times an entity bean object was destroyed
<b>BeansActive</b>	The average number of instances of active beans pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'
<b>EntityBeansActive</b>	The average number of active entity beans
<b>StatefulBeansActive</b>	The average number of active session beans
<b>BeansLive</b>	The average number of bean objects of this specific type that are instantiated but not yet destroyed. This applies to an individual bean, regardless of its type.
<b>StatelessBeansLive</b>	The average number of stateless session bean objects that are instantiated but not yet destroyed
<b>StatefulBeansLive</b>	The average number of stateful session bean objects that are instantiated but not yet destroyed
<b>EntityBeansLive</b>	The average number of entity bean objects that are instantiated but not yet destroyed
<b>BeanMethodRT</b>	The average method response time for all methods defined in the remote interface to this bean. Applies to all beans
<b>BeanMethodActive</b>	The average number of methods being processed concurrently. Applies to all beans
<b>BeanMethodCalls</b>	The total number of method calls against this bean

### ► BeanObjectPool

The server holds a cache of bean objects. Each home has a cache and there is therefore one BeanObjectPoolContainer per container. The top level BeanObjectPool holds an aggregate of all the containers data.

Measurement	Description
<b>BeanObjectPoolContainer</b>	The pool of a specific bean type
<b>BeanObject</b>	The pool specific to a home
<b>NumGet</b>	The number of calls retrieving an object from the pool
<b>NumGetFound</b>	The number of calls to the pool that resulted in finding an available bean
<b>NumPuts</b>	The number of beans that were released to the pool
<b>NumPutsDiscarded</b>	The number of times releasing a bean to the pool resulted in the bean being discarded because the pool was full
<b>NumDrains</b>	The number of times the daemon found the pool was idle and attempted to clean it
<b>DrainSize</b>	The average number of beans discarded by the daemon during a clean
<b>BeanPoolSize</b>	The average number of beans in the pool

### ► OrbThreadPool

These are resources related to the ORB thread pool that is on the server.

Measurement	Description
<b>ActiveThreads</b>	The average number of active threads in the pool
<b>TotalThreads</b>	The average number of threads in the pool
<b>PercentTimeMaxed</b>	The average percent of the time that the number of threads in the pool reached or exceeded the desired maximum number

Measurement	Description
<b>ThreadCreates</b>	The number of threads created
<b>ThreadDestroys</b>	The number of threads destroyed
<b>ConfiguredMaxSize</b>	The configured maximum number of pooled threads

► **DBConnectionMgr**

These are resources related to the database connection manager. The manager consists of a series of data sources, as well as a top-level aggregate of each of the performance metrics.

Measurement	Description
<b>DataSource</b>	Resources related to a specific data source specified by the "name" attribute
<b>ConnectionCreates</b>	The number of connections created
<b>ConnectionDestroys</b>	The number of connections released
<b>ConnectionPoolSize</b>	The average size of the pool, i.e., number of connections
<b>ConnectionAllocates</b>	The number of times a connection was allocated
<b>ConnectionWaiters</b>	The average number of threads waiting for a connection
<b>ConnectionWaitTime</b>	The average time, in seconds, of a connection grant
<b>ConnectionTime</b>	The average time, in seconds, that a connection is in use
<b>ConnectionPercentUsed</b>	The average percentage of the pool that is in use
<b>ConnectionPercentMaxed</b>	The percentage of the time that all connections are in use

### ► TransactionData

These are resources that pertain to transactions.

Measurement	Description
<b>NumTransactions</b>	The number of transactions processed
<b>ActiveTransactions</b>	The average number of active transactions
<b>TransactionRT</b>	The average duration of each transaction
<b>BeanObjectCount</b>	The average number of bean object pools involved in a transaction
<b>RolledBack</b>	The number of transactions rolled back
<b>Committed</b>	The number of transactions committed
<b>LocalTransactions</b>	The number of transactions that were local
<b>TransactionMethodCount</b>	The average number of methods invoked as part of each transaction
<b>Timeouts</b>	The number of transactions that timed out due to inactivity timeouts
<b>TransactionSuspended</b>	The average number of times that a transaction was suspended

### ► ServletEngine

These are resources that are related to servlets and JSPs.

Measurement	Description
<b>ServletsLoaded</b>	The number of servlets currently loaded
<b>ServletRequests</b>	The number of requests serviced
<b>CurrentRequests</b>	The number of requests currently being serviced
<b>ServletRT</b>	The average response time for each request
<b>ServletsActive</b>	The average number of servlets actively processing requests

Measurement	Description
<b>ServletIdle</b>	The amount of time that the server has been idle (i.e., time since last request)
<b>ServletErrors</b>	The number of requests that resulted in an error or an exception
<b>ServletBeanCalls</b>	The number of bean method invocations that were made by the servlet
<b>ServletBeanCreates</b>	The number of bean references that were made by the servlet
<b>ServletDBCalls</b>	The number of database calls made by the servlet
<b>ServletDBConAlloc</b>	The number of database connections allocated by the servlet
<b>SessionLoads</b>	The number of times the servlet session data was read from the database
<b>SessionStores</b>	The number of times the servlet session data was stored in the database
<b>SessionSize</b>	The average size, in bytes, of a session data
<b>LoadedSince</b>	The time that has passed since the server was loaded (UNC time)

### ► Sessions

These are general metrics regarding the HTTP session pool.

Measurement	Description
<b>SessionsCreated</b>	The number of sessions created on the server
<b>SessionsActive</b>	The number of currently active sessions
<b>SessionsInvalidated</b>	The number of invalidated sessions. May not be valid when using sessions in the database mode
<b>SessionLifetime</b>	Contains statistical data of sessions that have been invalidated. Does not include sessions that are still alive

## WebSphere (EPM) Graph

The following measurements are available for the WebSphere (EPM) server:

### ► Run Time Resources

Contains resources related to the Java Virtual Machine run-time, as well as the ORB.

Measurement	Description
MemoryFree	The amount of free memory remaining in the Java Virtual Machine
MemoryTotal	The total memory allocated for the Java Virtual Machine
MemoryUse	The total memory in use within the Java Virtual Machine

### ► BeanData

Every home on the server provides performance data, depending upon the type of bean deployed in the home. The top level bean data holds an aggregate of all the containers.

Measurement	Description
BeanCreates	The number of beans created. Applies to an individual bean that is either 'stateful' or 'entity'
EntityBeanCreates	The number of entity beans created
BeanRemoves	The number of entity beans pertaining to a specific bean that have been removed. Applies to an individual bean that is either 'stateful' or 'entity'
EntityBeanRemoves	The number of entity beans removed
StatefulBeanCreates	The number of stateful beans created
StatefulBeanRemoves	The number of stateful bean removed

<b>Measurement</b>	<b>Description</b>
<b>BeanPassivates</b>	The number of bean passivates pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'
<b>EntityBeanPassivates</b>	The number of entity bean passivates
<b>StatefulBeanPassivates</b>	The number of stateful bean passivates
<b>BeanActivates</b>	The number of bean activates pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'
<b>EntityBeanActivates</b>	The number of entity bean activates
<b>StatefulBeanActivates</b>	The number of stateful bean activates
<b>BeanLoads</b>	The number of times the bean data was loaded. Applies to entity
<b>BeanStores</b>	The number of times the bean data was stored in the database. Applies to entity
<b>BeanInstantiates</b>	The number of times a bean object was created. This applies to an individual bean, regardless of its type.
<b>StatelessBeanInstantiates</b>	The number of times a stateless session bean object was created
<b>StatefulBeanInstantiates</b>	The number of times a stateful session bean object was created
<b>EntityBeanInstantiates</b>	The number of times an entity bean object was created
<b>BeanDestroys</b>	The number of times an individual bean object was destroyed. This applies to any bean, regardless of its type
<b>StatelessBeanDestroys</b>	The number of times a stateless session bean object was destroyed
<b>StatefulBeanDestroys</b>	The number of times a stateful session bean object was destroyed

Measurement	Description
<b>EntityBeanDestroys</b>	The number of times an entity bean object was destroyed
<b>BeansActive</b>	The average number of instances of active beans pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'
<b>EntityBeansActive</b>	The average number of active entity beans
<b>StatefulBeansActive</b>	The average number of active session beans
<b>BeansLive</b>	The average number of bean objects of this specific type that are instantiated but not yet destroyed. This applies to an individual bean, regardless of its type.
<b>StatelessBeansLive</b>	The average number of stateless session bean objects that are instantiated but not yet destroyed
<b>StatefulBeansLive</b>	The average number of stateful session bean objects that are instantiated but not yet destroyed
<b>EntityBeansLive</b>	The average number of entity bean objects that are instantiated but not yet destroyed
<b>BeanMethodRT</b>	The average method response time for all methods defined in the remote interface to this bean. Applies to all beans
<b>BeanMethodActive</b>	The average number of methods being processed concurrently. Applies to all beans
<b>BeanMethodCalls</b>	The total number of method calls against this bean

➤ **BeanObjectPool**

The server holds a cache of bean objects. Each home has a cache and there is therefore one BeanObjectPoolContainer per container. The top level BeanObjectPool holds an aggregate of all the containers data.

Measurement	Description
<b>BeanObjectPoolContainer</b>	The pool of a specific bean type
<b>BeanObject</b>	The pool specific to a home
<b>NumGet</b>	The number of calls retrieving an object from the pool
<b>NumGetFound</b>	The number of calls to the pool that resulted in finding an available bean
<b>NumPuts</b>	The number of beans that were released to the pool
<b>NumPutsDiscarded</b>	The number of times releasing a bean to the pool resulted in the bean being discarded because the pool was full
<b>NumDrains</b>	The number of times the daemon found the pool was idle and attempted to clean it
<b>DrainSize</b>	The average number of beans discarded by the daemon during a clean
<b>BeanPoolSize</b>	The average number of beans in the pool

### ► OrbThreadPool

These are resources related to the ORB thread pool that is on the server.

Measurement	Description
<b>ActiveThreads</b>	The average number of active threads in the pool
<b>TotalThreads</b>	The average number of threads in the pool
<b>PercentTimeMaxed</b>	The average percent of the time that the number of threads in the pool reached or exceeded the desired maximum number
<b>ThreadCreates</b>	The number of threads created

Measurement	Description
ThreadDestroys	The number of threads destroyed
ConfiguredMaxSize	The configured maximum number of pooled threads

► **DBConnectionMgr**

These are resources related to the database connection manager. The manager consists of a series of data sources, as well as a top-level aggregate of each of the performance metrics.

Measurement	Description
DataSource	Resources related to a specific data source specified by the "name" attribute
ConnectionCreates	The number of connections created
ConnectionDestroys	The number of connections released
ConnectionPoolSize	The average size of the pool, i.e., number of connections
ConnectionAllocates	The number of times a connection was allocated
ConnectionWaiters	The average number of threads waiting for a connection
ConnectionWaitTime	The average time, in seconds, of a connection grant
ConnectionTime	The average time, in seconds, that a connection is in use
ConnectionPercentUsed	The average percentage of the pool that is in use
ConnectionPercentMaxed	The percentage of the time that all connections are in use

► **TransactionData**

These are resources that pertain to transactions.

Measurement	Description
<b>NumTransactions</b>	The number of transactions processed
<b>ActiveTransactions</b>	The average number of active transactions
<b>TransactionRT</b>	The average duration of each transaction
<b>BeanObjectCount</b>	The average number of bean object pools involved in a transaction
<b>RolledBack</b>	The number of transactions rolled back
<b>Committed</b>	The number of transactions committed
<b>LocalTransactions</b>	The number of transactions that were local
<b>TransactionMethodCount</b>	The average number of methods invoked as part of each transaction
<b>Timeouts</b>	The number of transactions that timed out due to inactivity timeouts
<b>TransactionSuspended</b>	The average number of times that a transaction was suspended

### ► ServletEngine

These are resources that are related to servlets and JSPs.

Measurement	Description
<b>ServletsLoaded</b>	The number of servlets currently loaded
<b>ServletRequests</b>	The number of requests serviced
<b>CurrentRequests</b>	The number of requests currently being serviced
<b>ServletRT</b>	The average response time for each request
<b>ServletsActive</b>	The average number of servlets actively processing requests
<b>ServletIdle</b>	The amount of time that the server has been idle (i.e., time since last request)

Measurement	Description
<b>ServletErrors</b>	The number of requests that resulted in an error or an exception
<b>ServletBeanCalls</b>	The number of bean method invocations that were made by the servlet
<b>ServletBeanCreates</b>	The number of bean references that were made by the servlet
<b>ServletDBCalls</b>	The number of database calls made by the servlet
<b>ServletDBConAlloc</b>	The number of database connections allocated by the servlet
<b>SessionLoads</b>	The number of times the servlet session data was read from the database
<b>SessionStores</b>	The number of times the servlet session data was stored in the database
<b>SessionSize</b>	The average size, in bytes, of a session data
<b>LoadedSince</b>	The time that has passed since the server was loaded (UNC time)

► **Sessions**

These are general metrics regarding the HTTP session pool.

Measurement	Description
<b>SessionsCreated</b>	The number of sessions created on the server
<b>SessionsActive</b>	The number of currently active sessions
<b>SessionsInvalidated</b>	The number of invalidated sessions. May not be valid when using sessions in the database mode
<b>SessionLifetime</b>	Contains statistical data of sessions that have been invalidated. Does not include sessions that are still alive

The following measurements are available for the WebSphere (EPM) server:

► **Run Time Resources**

Contains resources related to the Java Virtual Machine run-time, as well as the ORB.

Measurement	Description
MemoryFree	The amount of free memory remaining in the Java Virtual Machine
MemoryTotal	The total memory allocated for the Java Virtual Machine
MemoryUse	The total memory in use within the Java Virtual Machine

► **BeanData**

Every home on the server provides performance data, depending upon the type of bean deployed in the home. The top level bean data holds an aggregate of all the containers.

Measurement	Description
BeanCreates	The number of beans created. Applies to an individual bean that is either 'stateful' or 'entity'
EntityBeanCreates	The number of entity beans created
BeanRemoves	The number of entity beans pertaining to a specific bean that have been removed. Applies to an individual bean that is either 'stateful' or 'entity'
EntityBeanRemoves	The number of entity beans removed
StatefulBeanCreates	The number of stateful beans created
StatefulBeanRemoves	The number of stateful bean removed
BeanPassivates	The number of bean passivates pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'

<b>Measurement</b>	<b>Description</b>
<b>EntityBeanPassivates</b>	The number of entity bean passivates
<b>StatefulBeanPassivates</b>	The number of stateful bean passivates
<b>BeanActivates</b>	The number of bean activates pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'
<b>EntityBeanActivates</b>	The number of entity bean activates
<b>StatefulBeanActivates</b>	The number of stateful bean activates
<b>BeanLoads</b>	The number of times the bean data was loaded. Applies to entity
<b>BeanStores</b>	The number of times the bean data was stored in the database. Applies to entity
<b>BeanInstantiates</b>	The number of times a bean object was created. This applies to an individual bean, regardless of its type.
<b>StatelessBeanInstantiates</b>	The number of times a stateless session bean object was created
<b>StatefulBeanInstantiates</b>	The number of times a stateful session bean object was created
<b>EntityBeanInstantiates</b>	The number of times an entity bean object was created
<b>BeanDestroys</b>	The number of times an individual bean object was destroyed. This applies to any bean, regardless of its type
<b>StatelessBeanDestroys</b>	The number of times a stateless session bean object was destroyed
<b>StatefulBeanDestroys</b>	The number of times a stateful session bean object was destroyed
<b>EntityBeanDestroys</b>	The number of times an entity bean object was destroyed

Measurement	Description
<b>BeansActive</b>	The average number of instances of active beans pertaining to a specific bean. Applies to an individual bean that is either 'stateful' or 'entity'
<b>EntityBeansActive</b>	The average number of active entity beans
<b>StatefulBeansActive</b>	The average number of active session beans
<b>BeansLive</b>	The average number of bean objects of this specific type that are instantiated but not yet destroyed. This applies to an individual bean, regardless of its type.
<b>StatelessBeansLive</b>	The average number of stateless session bean objects that are instantiated but not yet destroyed
<b>StatefulBeansLive</b>	The average number of stateful session bean objects that are instantiated but not yet destroyed
<b>EntityBeansLive</b>	The average number of entity bean objects that are instantiated but not yet destroyed
<b>BeanMethodRT</b>	The average method response time for all methods defined in the remote interface to this bean. Applies to all beans
<b>BeanMethodActive</b>	The average number of methods being processed concurrently. Applies to all beans
<b>BeanMethodCalls</b>	The total number of method calls against this bean

► **BeanObjectPool**

The server holds a cache of bean objects. Each home has a cache and there is therefore one BeanObjectPoolContainer per container. The top level BeanObjectPool holds an aggregate of all the containers data.

Measurement	Description
<b>BeanObjectPoolContainer</b>	The pool of a specific bean type
<b>BeanObject</b>	The pool specific to a home

Measurement	Description
<b>NumGet</b>	The number of calls retrieving an object from the pool
<b>NumGetFound</b>	The number of calls to the pool that resulted in finding an available bean
<b>NumPuts</b>	The number of beans that were released to the pool
<b>NumPutsDiscarded</b>	The number of times releasing a bean to the pool resulted in the bean being discarded because the pool was full
<b>NumDrains</b>	The number of times the daemon found the pool was idle and attempted to clean it
<b>DrainSize</b>	The average number of beans discarded by the daemon during a clean
<b>BeanPoolSize</b>	The average number of beans in the pool

► **OrbThreadPool**

These are resources related to the ORB thread pool that is on the server.

Measurement	Description
<b>ActiveThreads</b>	The average number of active threads in the pool
<b>TotalThreads</b>	The average number of threads in the pool
<b>PercentTimeMaxed</b>	The average percent of the time that the number of threads in the pool reached or exceeded the desired maximum number
<b>ThreadCreates</b>	The number of threads created
<b>ThreadDestroys</b>	The number of threads destroyed
<b>ConfiguredMaxSize</b>	The configured maximum number of pooled threads

► **DBConnectionMgr**

These are resources related to the database connection manager. The manager consists of a series of data sources, as well as a top-level aggregate of each of the performance metrics.

Measurement	Description
<b>DataSource</b>	Resources related to a specific data source specified by the "name" attribute
<b>ConnectionCreates</b>	The number of connections created
<b>ConnectionDestroys</b>	The number of connections released
<b>ConnectionPoolSize</b>	The average size of the pool, i.e., number of connections
<b>ConnectionAllocates</b>	The number of times a connection was allocated
<b>ConnectionWaiters</b>	The average number of threads waiting for a connection
<b>ConnectionWaitTime</b>	The average time, in seconds, of a connection grant
<b>ConnectionTime</b>	The average time, in seconds, that a connection is in use
<b>ConnectionPercentUsed</b>	The average percentage of the pool that is in use
<b>ConnectionPercentMaxed</b>	The percentage of the time that all connections are in use

### ► TransactionData

These are resources that pertain to transactions.

Measurement	Description
<b>NumTransactions</b>	The number of transactions processed
<b>ActiveTransactions</b>	The average number of active transactions
<b>TransactionRT</b>	The average duration of each transaction
<b>BeanObjectCount</b>	The average number of bean object pools involved in a transaction

Measurement	Description
<b>RolledBack</b>	The number of transactions rolled back
<b>Committed</b>	The number of transactions committed
<b>LocalTransactions</b>	The number of transactions that were local
<b>TransactionMethodCount</b>	The average number of methods invoked as part of each transaction
<b>Timeouts</b>	The number of transactions that timed out due to inactivity timeouts
<b>TransactionSuspended</b>	The average number of times that a transaction was suspended

► **ServletEngine**

These are resources that are related to servlets and JSPs.

Measurement	Description
<b>ServletsLoaded</b>	The number of servlets currently loaded
<b>ServletRequests</b>	The number of requests serviced
<b>CurrentRequests</b>	The number of requests currently being serviced
<b>ServletRT</b>	The average response time for each request
<b>ServletsActive</b>	The average number of servlets actively processing requests
<b>ServletIdle</b>	The amount of time that the server has been idle (i.e., time since last request)
<b>ServletErrors</b>	The number of requests that resulted in an error or an exception
<b>ServletBeanCalls</b>	The number of bean method invocations that were made by the servlet
<b>ServletBeanCreates</b>	The number of bean references that were made by the servlet
<b>ServletDBCalls</b>	The number of database calls made by the servlet

Measurement	Description
<b>ServletDBConAlloc</b>	The number of database connections allocated by the servlet
<b>SessionLoads</b>	The number of times the servlet session data was read from the database
<b>SessionStores</b>	The number of times the servlet session data was stored in the database
<b>SessionSize</b>	The average size, in bytes, of a session data
<b>LoadedSince</b>	The time that has passed since the server was loaded (UNC time)

### ► Sessions

These are general metrics regarding the HTTP session pool.

Measurement	Description
<b>SessionsCreated</b>	The number of sessions created on the server
<b>SessionsActive</b>	The number of currently active sessions
<b>SessionsInvalidated</b>	The number of invalidated sessions. May not be valid when using sessions in the database mode
<b>SessionLifetime</b>	Contains statistical data of sessions that have been invalidated. Does not include sessions that are still alive

# 14

---

## Database Server Resource Graphs

After running a session step, you can use Database Server Resource graphs to analyze the resource usage of your DB2, Oracle, SQL Server, and Sybase databases.

This chapter describes:

- DB2 Graph
- Oracle Graph
- SQL Server Graph
- Sybase Graph

### About Database Server Resource Graphs

The Database Server Resource graphs show statistics for several database servers. Currently DB2, Oracle, SQL Server, and Sybase databases are supported. These graphs require that you specify the resources you want to measure *before* running the session step. For more information, see the section on online monitors in the *ProTune Console User's Guide*.

## DB2 Graph

The DB2 graph shows the resource usage on the DB2 database server machine as a function of the elapsed session step time.

The following tables describe the default counters that can be monitored on a DB2 server:

### DatabaseManager

Measurement	Description
<b>rem_cons_in</b>	The current number of connections initiated from remote clients to the instance of the database manager that is being monitored.
<b>rem_cons_in_exec</b>	The number of remote applications that are currently connected to a database and are currently processing a unit of work within the database manager instance being monitored.
<b>local_cons</b>	The number of local applications that are currently connected to a database within the database manager instance being monitored.
<b>local_cons_in_exec</b>	The number of local applications that are currently connected to a database within the database manager instance being monitored and are currently processing a unit of work.
<b>con_local_dbases</b>	The number of local databases that have applications connected.
<b>agents_registered</b>	The number of agents registered in the database manager instance that is being monitored (coordinator agents and subagents).
<b>agents_waiting_on_token</b>	The number of agents waiting for a token so they can execute a transaction in the database manager.
<b>idle_agents</b>	The number of agents in the agent pool that are currently unassigned to an application and are therefore "idle".

Measurement	Description
<b>agents_from_pool</b>	The number of agents assigned from the agent pool
<b>agents_created_empty_pool</b>	The number of agents created because the agent pool was empty.
<b>agents_stolen</b>	The number of times that agents are stolen from an application. Agents are stolen when an idle agent associated with an application is reassigned to work on a different application.
<b>comm_private_mem</b>	The amount of private memory that the instance of the database manager has currently committed at the time of the snapshot.
<b>inactive_gw_agents</b>	The number of DRDA agents in the DRDA connections pool that are primed with a connection to a DRDA database, but are inactive.
<b>num_gw_conn_switches</b>	The number of times that an agent from the agents pool was primed with a connection and was stolen for use with a different DRDA database.
<b>sort_heap_allocated</b>	The total number of allocated pages of sort heap space for all sorts at the level chosen and at the time the snapshot was taken.
<b>post_threshold_sorts</b>	The number of sorts that have requested heaps after the sort heap threshold has been reached.
<b>pipedsorts_requested</b>	The number of piped sorts that have been requested.
<b>pipedsorts_accepted</b>	The number of piped sorts that have been accepted.

## Database

Measurement	Description
<b>appls_cur_cons</b>	Indicates the number of applications that are currently connected to the database.
<b>appls_in_db2</b>	Indicates the number of applications that are currently connected to the database, and for which the database manager is currently processing a request.
<b>total_sec_cons</b>	The number of connections made by a sub-agent to the database at the node.
<b>num_assoc_agents</b>	At the application level, this is the number of sub-agents associated with an application. At the database level, it is the number of sub-agents for all applications.
<b>sort_heap_allocated</b>	The total number of allocated pages of sort heap space for all sorts at the level chosen and at the time the snapshot was taken.
<b>total_sorts</b>	The total number of sorts that have been executed.
<b>total_sort_time</b>	The total elapsed time (in milliseconds) for all sorts that have been executed.
<b>sort_overflows</b>	The total number of sorts that ran out of sort heap and may have required disk space for temporary storage.
<b>active_sorts</b>	The number of sorts in the database that currently have a sort heap allocated.
<b>total_hash_joins</b>	The total number of hash joins executed.
<b>total_hash_loops</b>	The total number of times that a single partition of a hash join was larger than the available sort heap space.
<b>hash_join_overflows</b>	The number of times that hash join data exceeded the available sort heap space

Measurement	Description
<b>hash_join_small_overflows</b>	The number of times that hash join data exceeded the available sort heap space by less than 10%.
<b>pool_data_l_reads</b>	Indicates the number of logical read requests for data pages that have gone through the buffer pool.
<b>pool_data_p_reads</b>	The number of read requests that required I/O to get data pages into the buffer pool.
<b>pool_data_writes</b>	Indicates the number of times a buffer pool data page was physically written to disk.
<b>pool_index_l_reads</b>	Indicates the number of logical read requests for index pages that have gone through the buffer pool.
<b>pool_index_p_reads</b>	Indicates the number of physical read requests to get index pages into the buffer pool.
<b>pool_index_writes</b>	Indicates the number of times a buffer pool index page was physically written to disk.
<b>pool_read_time</b>	Provides the total amount of elapsed time spent processing read requests that caused data or index pages to be physically read from disk to buffer pool.
<b>pool_write_time</b>	Provides the total amount of time spent physically writing data or index pages from the buffer pool to disk.
<b>files_closed</b>	The total number of database files closed.
<b>pool_async_data_reads</b>	The number of pages read asynchronously into the buffer pool.
<b>pool_async_data_writes</b>	The number of times a buffer pool data page was physically written to disk by either an asynchronous page cleaner, or a pre-fetcher. A pre-fetcher may have written dirty pages to disk to make space for the pages being pre-fetched.

Measurement	Description
<b>pool_async_index_writes</b>	The number of times a buffer pool index page was physically written to disk by either an asynchronous page cleaner, or a pre-fetcher. A pre-fetcher may have written dirty pages to disk to make space for the pages being pre-fetched.
<b>pool_async_index_reads</b>	The number of index pages read asynchronously into the buffer pool by a pre-fetcher.
<b>pool_async_read_time</b>	The total elapsed time spent reading by database manager pre-fetchers.
<b>pool_async_write_time</b>	The total elapsed time spent writing data or index pages from the buffer pool to disk by database manager page cleaners.
<b>pool_async_data_read_reqs</b>	The number of asynchronous read requests.
<b>pool_lsn_gap_clns</b>	The number of times a page cleaner was invoked because the logging space used had reached a pre-defined criterion for the database.
<b>pool_drty_pg_steal_clns</b>	The number of times a page cleaner was invoked because a synchronous write was needed during the victim buffer replacement for the database.
<b>pool_drty_pg_thrsh_clns</b>	The number of times a page cleaner was invoked because a buffer pool had reached the dirty page threshold criterion for the database.
<b>prefetch_wait_time</b>	The time an application spent waiting for an I/O server (pre-fetcher) to finish loading pages into the buffer pool.
<b>pool_data_to_estore</b>	The number of buffer pool data pages copied to extended storage.
<b>pool_index_to_estore</b>	The number of buffer pool index pages copied to extended storage.
<b>pool_data_from_estore</b>	The number of buffer pool data pages copied from extended storage.
<b>pool_index_from_estore</b>	The number of buffer pool index pages copied from extended storage.

Measurement	Description
<b>direct_reads</b>	The number of read operations that do not use the buffer pool.
<b>direct_writes</b>	The number of write operations that do not use the buffer pool.
<b>direct_read_reqs</b>	The number of requests to perform a direct read of one or more sectors of data.
<b>direct_write_reqs</b>	The number of requests to perform a direct write of one or more sectors of data.
<b>direct_read_time</b>	The elapsed time (in milliseconds) required to perform the direct reads.
<b>direct_write_time</b>	The elapsed time (in milliseconds) required to perform the direct writes.
<b>cat_cache_lookups</b>	The number of times that the catalog cache was referenced to obtain table descriptor information.
<b>cat_cache_inserts</b>	The number of times that the system tried to insert table descriptor information into the catalog cache.
<b>cat_cache_overflows</b>	The number of times that an insert into the catalog cache failed due the catalog cache being full.
<b>cat_cache_heap_full</b>	The number of times that an insert into the catalog cache failed due to a heap-full condition in the database heap.
<b>pkg_cache_lookups</b>	The number of times that an application looked for a section or package in the package cache. At a database level, it indicates the overall number of references since the database was started, or monitor data was reset.
<b>pkg_cache_inserts</b>	The total number of times that a requested section was not available for use and had to be loaded into the package cache. This count includes any implicit prepares performed by the system.

<b>Measurement</b>	<b>Description</b>
<b>pkg_cache_num_overflows</b>	The number of times that the package cache overflowed the bounds of its allocated memory.
<b>appl_section_lookups</b>	Lookups of SQL sections by an application from its SQL work area.
<b>appl_section_inserts</b>	Inserts of SQL sections by an application from its SQL work area.
<b>sec_logs_allocated</b>	The total number of secondary log files that are currently being used for the database.
<b>log_reads</b>	The number of log pages read from disk by the logger.
<b>log_writes</b>	The number of log pages written to disk by the logger.
<b>total_log_used</b>	The total amount of active log space currently used (in bytes) in the database.
<b>locks_held</b>	The number of locks currently held.
<b>lock_list_in_use</b>	The total amount of lock list memory (in bytes) that is in use.
<b>deadlocks</b>	The total number of deadlocks that have occurred.
<b>lock_escals</b>	The number of times that locks have been escalated from several row locks to a table lock.
<b>x_lock_escals</b>	The number of times that locks have been escalated from several row locks to one exclusive table lock, or the number of times an exclusive lock on a row caused the table lock to become an exclusive lock.
<b>lock_timeouts</b>	The number of times that a request to lock an object timed-out instead of being granted.
<b>lock_waits</b>	The total number of times that applications or connections waited for locks.
<b>lock_wait_time</b>	The total elapsed time waited for a lock.

Measurement	Description
<b>locks_waiting</b>	Indicates the number of agents waiting on a lock.
<b>rows_deleted</b>	The number of row deletions attempted.
<b>rows_inserted</b>	The number of row insertions attempted.
<b>rows_updated</b>	The number of row updates attempted.
<b>rows_selected</b>	The number of rows that have been selected and returned to the application.
<b>int_rows_deleted</b>	The number of rows deleted from the database as a result of internal activity.
<b>int_rows_updated</b>	The number of rows updated from the database as a result of internal activity.
<b>int_rows_inserted</b>	The number of rows inserted into the database as a result of internal activity caused by triggers.
<b>static_sql_stmts</b>	The number of static SQL statements that were attempted.
<b>dynamic_sql_stmts</b>	The number of dynamic SQL statements that were attempted.
<b>failed_sql_stmts</b>	The number of SQL statements that were attempted, but failed.
<b>commit_sql_stmts</b>	The total number of SQL COMMIT statements that have been attempted.
<b>rollback_sql_stmts</b>	The total number of SQL ROLLBACK statements that have been attempted.
<b>select_sql_stmts</b>	The number of SQL SELECT statements that were executed.
<b>uid_sql_stmts</b>	The number of SQL UPDATE, INSERT, and DELETE statements that were executed.
<b>ddl_sql_stmts</b>	This element indicates the number of SQL Data Definition Language (DDL) statements that were executed.

Measurement	Description
<b>int_auto_rebinds</b>	The number of automatic rebinds (or recompiles) that have been attempted.
<b>int_commits</b>	The total number of commits initiated internally by the database manager.
<b>int_rollbacks</b>	The total number of rollbacks initiated internally by the database manager.
<b>int_deadlock_rollbacks</b>	The total number of forced rollbacks initiated by the database manager due to a deadlock. A rollback is performed on the current unit of work in an application selected by the database manager to resolve the deadlock.
<b>binds_precompiles</b>	The number of binds and pre-compiles attempted.

### Application

Measurement	Description
<b>agents_stolen</b>	The number of times that agents are stolen from an application. Agents are stolen when an idle agent associated with an application is reassigned to work on a different application.
<b>num_assoc_agents</b>	At the application level, this is the number of sub-agents associated with an application. At the database level, it is the number of sub-agents for all applications.
<b>total_sorts</b>	The total number of sorts that have been executed.
<b>total_sort_time</b>	The total elapsed time (in milliseconds) for all sorts that have been executed.
<b>sort_overflows</b>	The total number of sorts that ran out of sort heap and may have required disk space for temporary storage.
<b>total_hash_joins</b>	The total number of hash joins executed.

Measurement	Description
<b>total_hash_loops</b>	The total number of times that a single partition of a hash join was larger than the available sort heap space.
<b>hash_join_overflows</b>	The number of times that hash join data exceeded the available sort heap space
<b>hash_join_small_overflows</b>	The number of times that hash join data exceeded the available sort heap space by less than 10%.
<b>pool_data_l_reads</b>	Indicates the number of logical read requests for data pages that have gone through the buffer pool.
<b>pool_data_p_reads</b>	The number of read requests that required I/O to get data pages into the buffer pool.
<b>pool_data_writes</b>	Indicates the number of times a buffer pool data page was physically written to disk.
<b>pool_index_l_reads</b>	Indicates the number of logical read requests for index pages that have gone through the buffer pool.
<b>pool_index_p_reads</b>	Indicates the number of physical read requests to get index pages into the buffer pool.
<b>pool_index_writes</b>	Indicates the number of times a buffer pool index page was physically written to disk.
<b>pool_read_time</b>	Provides the total amount of elapsed time spent processing read requests that caused data or index pages to be physically read from disk to buffer pool.
<b>prefetch_wait_time</b>	The time an application spent waiting for an I/O server (pre-fetcher) to finish loading pages into the buffer pool.
<b>pool_data_to_estore</b>	The number of buffer pool data pages copied to extended storage.
<b>pool_index_to_estore</b>	The number of buffer pool index pages copied to extended storage.

<b>Measurement</b>	<b>Description</b>
<b>pool_data_from_estore</b>	The number of buffer pool data pages copied from extended storage.
<b>pool_index_from_estore</b>	The number of buffer pool index pages copied from extended storage.
<b>direct_reads</b>	The number of read operations that do not use the buffer pool.
<b>direct_writes</b>	The number of write operations that do not use the buffer pool.
<b>direct_read_reqs</b>	The number of requests to perform a direct read of one or more sectors of data.
<b>direct_write_reqs</b>	The number of requests to perform a direct write of one or more sectors of data.
<b>direct_read_time</b>	The elapsed time (in milliseconds) required to perform the direct reads.
<b>direct_write_time</b>	The elapsed time (in milliseconds) required to perform the direct writes.
<b>cat_cache_lookups</b>	The number of times that the catalog cache was referenced to obtain table descriptor information.
<b>cat_cache_inserts</b>	The number of times that the system tried to insert table descriptor information into the catalog cache.
<b>cat_cache_overflows</b>	The number of times that an insert into the catalog cache failed due the catalog cache being full.
<b>cat_cache_heap_full</b>	The number of times that an insert into the catalog cache failed due to a heap-full condition in the database heap.
<b>pkg_cache_lookups</b>	The number of times that an application looked for a section or package in the package cache. At a database level, it indicates the overall number of references since the database was started, or monitor data was reset.

Measurement	Description
<b>pkg_cache_inserts</b>	The total number of times that a requested section was not available for use and had to be loaded into the package cache. This count includes any implicit prepares performed by the system.
<b>appl_section_lookups</b>	Lookups of SQL sections by an application from its SQL work area.
<b>appl_section_inserts</b>	Inserts of SQL sections by an application from its SQL work area.
<b>uow_log_space_used</b>	The amount of log space (in bytes) used in the current unit of work of the monitored application.
<b>locks_held</b>	The number of locks currently held.
<b>deadlocks</b>	The total number of deadlocks that have occurred.
<b>lock_escals</b>	The number of times that locks have been escalated from several row locks to a table lock.
<b>x_lock_escals</b>	The number of times that locks have been escalated from several row locks to one exclusive table lock, or the number of times an exclusive lock on a row caused the table lock to become an exclusive lock.
<b>lock_timeouts</b>	The number of times that a request to lock an object timed-out instead of being granted.
<b>lock_waits</b>	The total number of times that applications or connections waited for locks.
<b>lock_wait_time</b>	The total elapsed time waited for a lock.
<b>locks_waiting</b>	Indicates the number of agents waiting on a lock.
<b>uow_lock_wait_time</b>	The total amount of elapsed time this unit of work has spent waiting for locks.
<b>rows_deleted</b>	The number of row deletions attempted.


<b>Measurement</b>	<b>Description</b>
<b>rows_inserted</b>	The number of row insertions attempted.
<b>rows_updated</b>	The number of row updates attempted.
<b>rows_selected</b>	The number of rows that have been selected and returned to the application.
<b>rows_written</b>	The number of rows changed (inserted, deleted or updated) in the table.
<b>rows_read</b>	The number of rows read from the table.
<b>int_rows_deleted</b>	The number of rows deleted from the database as a result of internal activity.
<b>int_rows_updated</b>	The number of rows updated from the database as a result of internal activity.
<b>int_rows_inserted</b>	The number of rows inserted into the database as a result of internal activity caused by triggers.
<b>open_rem_curs</b>	The number of remote cursors currently open for this application, including those cursors counted by 'open_rem_curs_blk'.
<b>open_rem_curs_blk</b>	The number of remote blocking cursors currently open for this application.
<b>rej_curs_blk</b>	The number of times that a request for an I/O block at server was rejected and the request was converted to non-blocked I/O.
<b>acc_curs_blk</b>	The number of times that a request for an I/O block was accepted.
<b>open_loc_curs</b>	The number of local cursors currently open for this application, including those cursors counted by 'open_loc_curs_blk'.
<b>open_loc_curs_blk</b>	The number of local blocking cursors currently open for this application.
<b>static_sql_stmts</b>	The number of static SQL statements that were attempted.

Measurement	Description
<b>dynamic_sql_stmts</b>	The number of dynamic SQL statements that were attempted.
<b>failed_sql_stmts</b>	The number of SQL statements that were attempted, but failed.
<b>commit_sql_stmts</b>	The total number of SQL COMMIT statements that have been attempted.
<b>rollback_sql_stmts</b>	The total number of SQL ROLLBACK statements that have been attempted.
<b>select_sql_stmts</b>	The number of SQL SELECT statements that were executed.
<b>uid_sql_stmts</b>	The number of SQL UPDATE, INSERT, and DELETE statements that were executed.
<b>ddl_sql_stmts</b>	This element indicates the number of SQL Data Definition Language (DDL) statements that were executed.
<b>int_auto_rebinds</b>	The number of automatic rebinds (or recompiles) that have been attempted.
<b>int_commits</b>	The total number of commits initiated internally by the database manager.
<b>int_rollbacks</b>	The total number of rollbacks initiated internally by the database manager.
<b>int_deadlock_rollbacks</b>	The total number of forced rollbacks initiated by the database manager due to a deadlock. A rollback is performed on the current unit of work in an application selected by the database manager to resolve the deadlock.
<b>binds_precompiles</b>	The number of binds and pre-compiles attempted.

## Oracle Graph

The Oracle graph displays information from Oracle V\$ tables: Session statistics, V\$SESSTAT, system statistics, V\$SYSSTAT, and other table counters defined by the user in the custom query.

In the following Oracle graph, the V\$SYSSTAT resource values are shown as a function of the elapsed session step time.

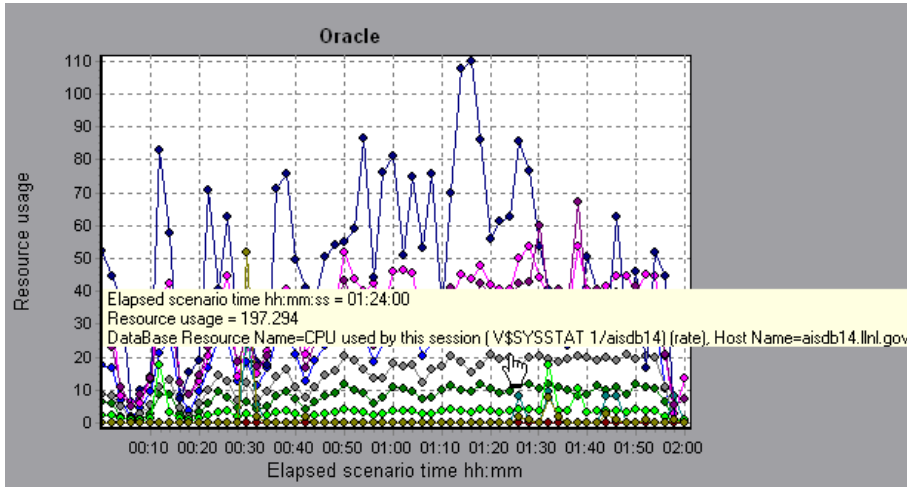


The following measurements are most commonly used when monitoring the Oracle server (from the V\$SYSSTAT table):

Measurement	Description
<b>CPU used by this session</b>	This is the amount of CPU time (in 10s of milliseconds) used by a session between the time a user call started and ended. Some user calls can be completed within 10 milliseconds and, as a result, the start and end user-call time can be the same. In this case, 0 milliseconds are added to the statistic. A similar problem can exist in the operating system reporting, especially on systems that suffer from many context switches.
<b>Bytes received via SQL*Net from client</b>	The total number of bytes received from the client over Net8
<b>Logons current</b>	The total number of current logons
<b>Opens of replaced files</b>	The total number of files that needed to be reopened because they were no longer in the process file cache
<b>User calls</b>	Oracle allocates resources (Call State Objects) to keep track of relevant user call data structures every time you log in, parse, or execute. When determining activity, the ratio of user calls to RPI calls gives you an indication of how much internal work gets generated as a result of the type of requests the user is sending to Oracle.
<b>SQL*Net roundtrips to/from client</b>	The total number of Net8 messages sent to, and received from, the client
<b>Bytes sent via SQL*Net to client</b>	The total number of bytes sent to the client from the foreground process(es)
<b>Opened cursors current</b>	The total number of current open cursors

<b>Measurement</b>	<b>Description</b>
<b>DB block changes</b>	Closely related to consistent changes, this statistic counts the total number of changes that were made to all blocks in the SGA that were part of an update or delete operation. These are changes that are generating redo log entries and hence will be permanent changes to the database if the transaction is committed. This statistic is a rough indication of total database work and indicates (possibly on a per-transaction level) the rate at which buffers are being dirtied.
<b>Total file opens</b>	The total number of file opens being performed by the instance. Each process needs a number of files (control file, log file, database file) in order to work against the database.

## SQL Server Graph

The SQL Server graph shows the standard Windows resources on the SQL server machine.

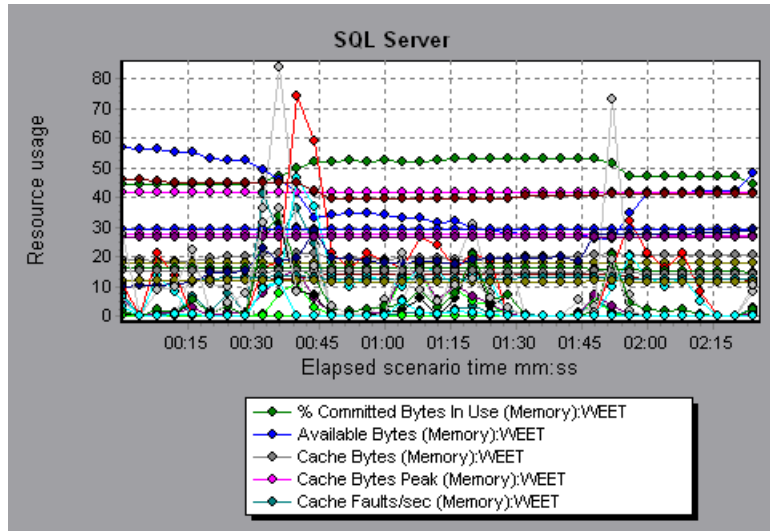

The following table describes the default counters that can be monitored on version 6.5 of the SQL Server:

Measurement	Description
<b>% Total Processor Time (NT)</b>	The average percentage of time that all the processors on the system are busy executing non-idle threads. On a multi-processor system, if all processors are always busy, this is 100%, if all processors are 50% busy this is 50% and if 1/4th of the processors are 100% busy this is 25%. It can be viewed as the fraction of the time spent doing useful work. Each processor is assigned an Idle thread in the Idle process which consumes those unproductive processor cycles not used by any other threads.
<b>Cache Hit Ratio</b>	The percentage of time that a requested data page was found in the data cache (instead of being read from disk)

<b>Measurement</b>	<b>Description</b>
<b>I/O - Batch Writes/sec</b>	The number of 2K pages written to disk per second, using Batch I/O. The checkpoint thread is the primary user of Batch I/O.
<b>I/O - Lazy Writes/sec</b>	The number of 2K pages flushed to disk per second by the Lazy Writer
<b>I/O - Outstanding Reads</b>	The number of physical reads pending
<b>I/O - Outstanding Writes</b>	The number of physical writes pending
<b>I/O - Page Reads/sec</b>	The number of physical page reads per second
<b>I/O - Transactions/sec</b>	The number of Transact-SQL command batches executed per second
<b>User Connections</b>	The number of open user connections
<b>% Processor Time (Win 2000)</b>	The percentage of time that the processor is executing a non-idle thread. This counter was designed as a primary indicator of processor activity. It is calculated by measuring the time that the processor spends executing the thread of the idle process in each sample interval, and subtracting that value from 100%. (Each processor has an idle thread which consumes cycles when no other threads are ready to run). It can be viewed as the percentage of the sample interval spent doing useful work. This counter displays the average percentage of busy time observed during the sample interval. It is calculated by monitoring the time the service was inactive, and then subtracting that value from 100%.

## Sybase Graph

The Sybase graph shows the resource usage on the Sybase database server machine as a function of the elapsed session step time.

The following tables describe the measurements that can be monitored on a Sybase server:

Object	Measurement	Description
Network	Average packet size (Read)	Reports the number of network packets received
	Average packet size (Send)	Reports the number of network packets sent
	Network bytes (Read)	Reports the number of bytes received, over the sampling interval
	Network bytes (Read)/sec	Reports the number of bytes received, per second
	Network bytes (Send)	Reports the number of bytes sent, over the sampling interval
	Network bytes (Send)/sec	Reports the number of bytes sent, per second
	Network packets (Read)	Reports the number of network packets received, over the sampling interval
	Network packets (Read)/sec	Reports the number of network packets received, per second
	Network packets (Send)	Reports the number of network packets sent, over the sampling interval
	Network packets (Send)/sec	Reports the number of network packets sent, per second
Memory	Memory	Reports the amount of memory, in bytes, allocated for the page cache

<b>Object</b>	<b>Measurement</b>	<b>Description</b>
<b>Disk</b>	Reads	Reports the number of reads made from a database device
	Writes	Reports the number of writes made to a database device
	Waits	Reports the number of times that access to a device had to wait
	Grants	Reports the number of times access to a device was granted
<b>Engine</b>	Server is busy (%)	Reports the percentage of time during which the Adaptive Server is in a "busy" state
	CPU time	Reports how much "busy" time was used by the engine
	Logical pages (Read)	Reports the number of data page reads, whether satisfied from cache or from a database device
	Pages from disk (Read)	Reports the number of data page reads that could not be satisfied from the data cache
	Pages stored	Reports the number of data pages written to a database device
<b>Stored Procedures</b>	Executed (sampling period)	Reports the number of times a stored procedure was executed, over the sampling interval
	Executed (session)	Reports the number of times a stored procedure was executed, during the session
	Average duration (sampling period)	Reports the time, in seconds, spent executing a stored procedure, over the sampling interval
	Average duration (session)	Reports the time, in seconds, spent executing a stored procedure, during the session

Object	Measurement	Description
<b>Locks</b>	% Requests	Reports the percentage of successful requests for locks
	Locks count	Reports the number of locks. This is an accumulated value.
	Granted immediately	Reports the number of locks that were granted immediately, without having to wait for another lock to be released
	Granted after wait	Reports the number of locks that were granted after waiting for another lock to be released
	Not granted	Reports the number of locks that were requested but not granted
	Wait time (avg.)	Reports the average wait time for a lock
<b>SqlSrvr</b>	Locks/sec	Reports the number of locks. This is an accumulated value.
	% Processor time (server)	Reports the percentage of time that the Adaptive Server is in a "busy" state
	Transactions	Reports the number of committed Transact-SQL statement blocks (transactions)
	Deadlocks	Reports the number of deadlocks
<b>Cache</b>	% Hits	Reports the percentage of times that a data page read could be satisfied from cache without requiring a physical page read
	Pages (Read)	Reports the number of data page reads, whether satisfied from cache or from a database device

<b>Object</b>	<b>Measurement</b>	<b>Description</b>
<b>Cache</b>	Pages (Read)/sec	Reports the number of data page reads, whether satisfied from cache or from a database device, per second
	Pages from disk (Read)	Reports the number of data page reads that could not be satisfied from the data cache
	Pages from disk (Read)/sec	Reports the number of data page reads, per second, that could not be satisfied from the data cache
	Pages (Write)	Reports the number of data pages written to a database device
	Pages (Write)/sec	Reports the number of data pages written to a database device, per second
<b>Process</b>	% Processor time (process)	Reports the percentage of time that a process running a given application was in the "Running" state (out of the time that all processes were in the "Running" state)
	Locks/sec	Reports the number of locks, by process. This is an accumulated value.
	% Cache hit	Reports the percentage of times that a data page read could be satisfied from cache without requiring a physical page read, by process
	Pages (Write)	Reports the number of data pages written to a database device, by process
<b>Transaction</b>	Transactions	Reports the number of committed Transact-SQL statement blocks (transactions), during the session

Object	Measurement	Description
Transaction	Rows (Deleted)	Reports the number of rows deleted from database tables during the session
	Inserts	Reports the number of insertions into a database table during the session
	Updates	Reports the updates to database tables during the session
	Updates in place	Reports the sum of expensive, in-place and not-in-place updates (everything except updates deferred) during the session
	Transactions/sec	Reports the number of committed Transact-SQL statement blocks (transactions) per second
	Rows (Deleted)/sec	Reports the number of rows deleted from database tables, per second
	Inserts/sec	Reports the number of insertions into a database table, per second
	Updates/sec	Reports the updates to database tables, per second
	Updates in place/sec	Reports the sum of expensive, in-place and not-in-place updates (everything except updates deferred), per second



# 15

---

## Streaming Media Graphs

After a session step run, you can use the Streaming Media graphs to analyze RealPlayer Client, RealPlayer Server, and Windows Media Server performance.

This chapter describes the:


- ▶ RealPlayer Client Graph
- ▶ RealPlayer Server Graph
- ▶ Windows Media Server Graph
- ▶ Media Player Client Graph

### About Streaming Media Graphs

Streaming Media Resource graphs provide you with performance information for the RealPlayer Client, RealPlayer Server, and Windows Media Server machines. Note that in order to obtain data for Streaming Media Resource graphs, you need to install the RealPlayer Client and activate the online monitor for the RealPlayer Server or Windows Media Server before running the session step. When you set up the online monitor for the RealPlayer Server or Windows Media Server, you indicate which statistics and measurements to monitor. For more information on installing and configuring the Streaming Media Resource monitors, see the *ProTune Console User's Guide*.


In order to display all the measurements on a single graph, the Analysis may scale them. The Legend tab indicates the scale factor for each resource. To obtain the true value, multiply the scale factor by the displayed value. For

example, in the following graph the actual value of *RTSP Clients* two minutes into the session step is 200; 20 multiplied by the scale factor of 10.

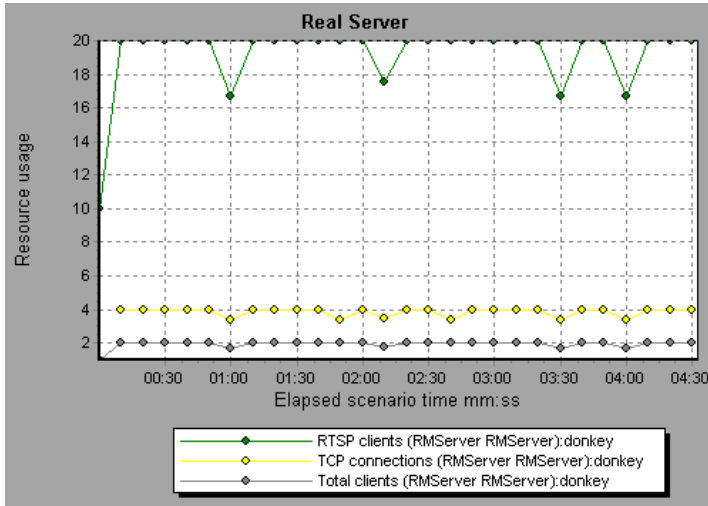

## RealPlayer Client Graph

The Real Client graph shows statistics on the RealPlayer client machine as a function of the elapsed session step time.

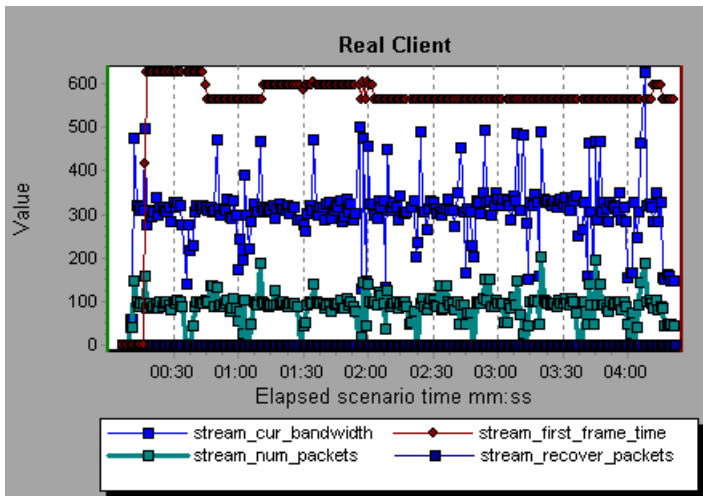

This graph displays the *Total Number of Packets*, *Number of Recovered Packets*, *Current Bandwidth*, and *First Frame Time* measurements during the first four and a half minutes of the session step. Note that the scale factor is the same for all of the measurements.


The following table describes the RealPlayer Client measurements that are monitored:

Measurement	Description
<b>Current Bandwidth (Kbits/sec)</b>	The number of kilobytes in the last second
<b>Buffering Event Time (sec)</b>	The average time spent on buffering
<b>Network Performance</b>	The ratio (percentage) between the current bandwidth and the actual bandwidth of the clip
<b>Percentage of Recovered Packets</b>	The percentage of error packets that were recovered
<b>Percentage of Lost Packets</b>	The percentage of packets that were lost
<b>Percentage of Late Packets</b>	The percentage of late packets
<b>Time to First Frame Appearance (sec)</b>	The time for first frame appearance (measured from the start of the replay)
<b>Number of Buffering Events</b>	The average number of all buffering events
<b>Number of Buffering Seek Events</b>	The average number of buffering events resulting from a seek operation
<b>Buffering Seek Time</b>	The average time spent on buffering events resulting from a seek operation
<b>Number of Buffering Congestion Events</b>	The average number of buffering events resulting from network congestion
<b>Buffering Congestion Time</b>	The average time spent on buffering events resulting from network congestion

Measurement	Description
Number of Buffering Live Pause Events	The average number of buffering events resulting from live pause
Buffering Live Pause Time	The average time spent on buffering events resulting from live pause

## RealPlayer Server Graph

The Real Server graph shows RealPlayer server statistics as a function of the elapsed session step time.

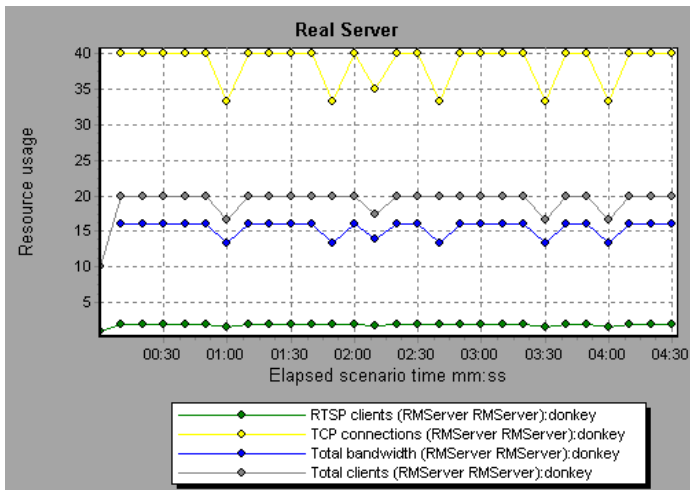

In this graph, the number of *RTSP Clients* remained steady during the first four and a half minutes of the session step. The *Total Bandwidth* and number of *Total Clients* fluctuated slightly. The number of *TCP Connections* fluctuated more significantly.

Note that the scale factor for the *TCP Connections* and *Total Clients* measurements is 10, and the scale factor for *Total Bandwidth* is 1/1000.

The following default measurements are available for the RealPlayer Server:

Measurement	Description
Encoder Connections	The number of active encoder connections
HTTP Clients	The number of active clients using HTTP
Monitor Connections	The number of active server monitor connections
Multicast Connections	The number of active multicast connections
PNA Clients	The number of active clients using PNA
RTSP Clients	The number of active clients using RTSP
Splitter Connections	The number of active splitter connections
TCP Connections	The number of active TCP connections
Total Bandwidth	The number of bits per second being consumed
Total Clients	The total number of active clients
UDP Clients	The number of active UDP connections

## Windows Media Server Graph

The Windows Media Server graph shows the Windows Media server statistics as a function of the elapsed session step time.


The following default measurements are available for the Windows Media Server:

Measurement	Description
Active Live Unicast Streams (Windows)	The number of live unicast streams that are being streamed
Active Streams	The number of streams that are being streamed
Active TCP Streams	The number of TCP streams that are being streamed
Active UDP Streams	The number of UDP streams that are being streamed

<b>Measurement</b>	<b>Description</b>
<b>Aggregate Read Rate</b>	The total, aggregate rate (bytes/sec) of file reads
<b>Aggregate Send Rate</b>	The total, aggregate rate (bytes/sec) of stream transmission
<b>Connected Clients</b>	The number of clients connected to the server
<b>Connection Rate</b>	The rate at which clients are connecting to the server
<b>Controllers</b>	The number of controllers currently connected to the server
<b>HTTP Streams</b>	The number of HTTP streams being streamed
<b>Late Reads</b>	The number of late read completions per second
<b>Pending Connections</b>	The number of clients that are attempting to connect to the server, but are not yet connected. This number may be high if the server is running near maximum capacity and cannot process a large number of connection requests in a timely manner.
<b>Stations</b>	The number of station objects that currently exist on the server
<b>Streams</b>	The number of stream objects that currently exist on the server
<b>Stream Errors</b>	The cumulative number of errors occurring per second

## Media Player Client Graph

The Media Player Client graph shows statistics on the Windows Media Player client machine as a function of the elapsed session step time.

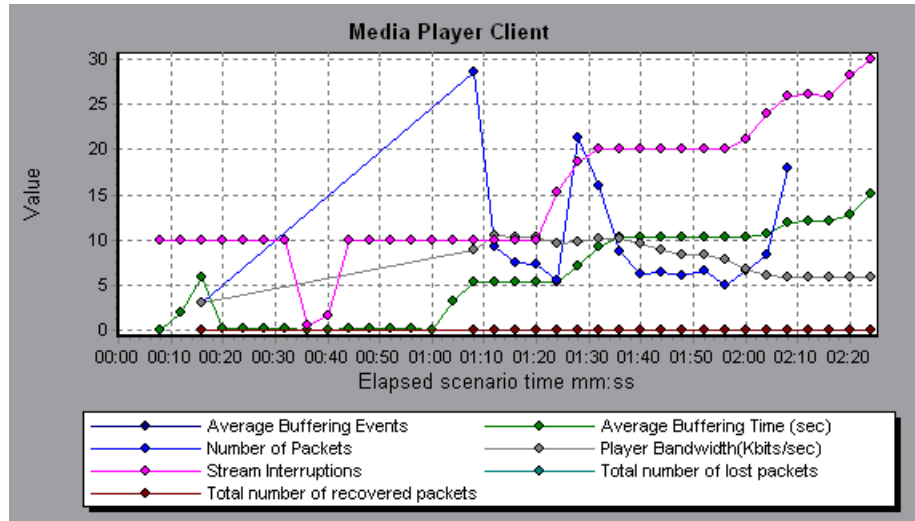

In this graph, the *Total number of recovered packets* remained steady during the first two and a half minutes of the session step. The *Number of Packets* and *Stream Interruptions* fluctuated significantly. The *Average Buffering Time* increased moderately, and the *Player Bandwidth* increased and then decreased moderately.

Note that the scale factor for the *Stream Interruptions* and *Average Buffering Events* measurements is 10, and the scale factor for *Player Bandwidth* is 1/10.

The following table describes the Media Player Client measurements that are monitored:

<b>Measurement</b>	<b>Description</b>
<b>Average Buffering Events</b>	The number of times Media Player Client had to buffer incoming media data due to insufficient media content
<b>Average Buffering Time (sec)</b>	The time spent by Media Player Client waiting for sufficient amount of media data in order to continue playing media clip
<b>Current bandwidth (Kbits/sec)</b>	The number of kbits per second received
<b>Number of Packets</b>	The number of packets sent by server for a particular media clip
<b>Stream Interruptions</b>	The number of interruptions encountered by media player client while playing a media clip. This measurement includes number of time client had to buffer incoming media data, and any errors that occurred during playback.
<b>Stream Quality (Packet-level)</b>	The percentage ratio of packets received to total packets
<b>Stream Quality (Sampling-level)</b>	The percentage of stream samples received on time (no delays in reception)
<b>Total number of recovered packets</b>	The number of lost packets that were recovered. This value is only relevant during network playback.
<b>Total number of lost packets</b>	The number of lost packets that were not recovered. This value is only relevant during network playback.

# 16

---

## ERP Server Resource Graphs

After a session step run, you can use the ERP server resource monitor graphs to analyze ERP server resource performance.

This chapter describes the:


- ▶ SAP Graph

### About ERP Server Resource Graphs

ERP server resource monitor graphs provide you with performance information for ERP servers. Note that in order to obtain data for these graphs, you need to activate the ERP server resource online monitor before running the session step. When you set up the online monitor for ERP server resources, you indicate which statistics and measurements to monitor. For more information on activating and configuring ERP server resource monitors, see the *ProTune Console User's Guide*.

## SAP Graph

The SAP graph shows the resource usage of a SAP R/3 system server as a function of the elapsed session step time.

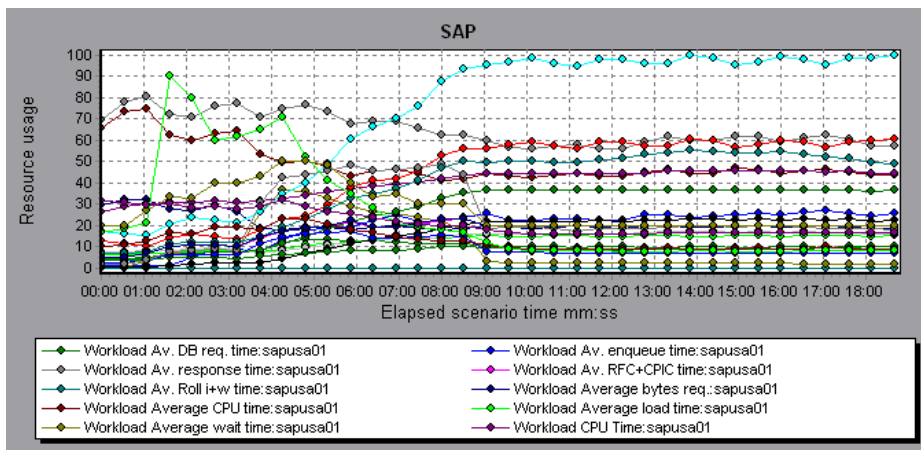


---

**Note:** There are differences in the scale factor for some of the measurements.

---

The following are the most commonly monitored counters for a SAP R/3 system server:

Measurement	Description
Average CPU time	The average CPU time used in the work process.
Average response time	The average response time, measured from the time a dialog sends a request to the dispatcher work process, through the processing of the dialog, until the dialog is completed and the data is passed to the presentation layer. The response time between the SAP GUI and the dispatcher is not included in this value.

Measurement	Description
<b>Average wait time</b>	The average amount of time that an unprocessed dialog step waits in the dispatcher queue for a free work process. Under normal conditions, the dispatcher work process should pass a dialog step to the application process immediately after receiving the request from the dialog step. Under these conditions, the average wait time would be a few milliseconds. A heavy load on the application server or on the entire system causes queues at the dispatcher queue.
<b>Average load time</b>	The time needed to load and generate objects, such as ABAP source code and screen information, from the database.
<b>Database calls</b>	The number of parsed requests sent to the database.
<b>Database requests</b>	The number of logical ABAP requests for data in the database. These requests are passed through the R/3 database interface and parsed into individual database calls. The proportion of database calls to database requests is important. If access to information in a table is buffered in the SAP buffers, database calls to the database server are not required. Therefore, the ratio of calls/requests gives an overall indication of the efficiency of table buffering. A good ratio would be 1:10.
<b>GUI time</b>	The GUI time is measured in the work process and is the response time between the dispatcher and the GUI.
<b>Roll ins</b>	The number of rolled-in user contexts.
<b>Roll outs</b>	The number of rolled-out user contexts.
<b>Roll in time</b>	The processing time for roll ins.
<b>Roll out time</b>	The processing time for roll outs.

<b>Measurement</b>	<b>Description</b>
<b>Roll wait time</b>	The queue time in the roll area. When synchronous RFCs are called, the work process executes a roll out and may have to wait for the end of the RFC in the roll area, even if the dialog step is not yet completed. In the roll area, RFC server programs can also wait for other RFCs sent to them.
<b>Average time per logical DB call</b>	The average response time for all commands sent to the database system (in milliseconds). The time depends on the CPU capacity of the database server, the network, the buffering, and on the input/output capabilities of the database server. Access times for buffered tables are many magnitudes faster and are not considered in the measurement.

# 17

---

## Java Performance Graphs

After a session step run, you can use the Java performance monitor graphs to analyze the performance of Enterprise Java Bean (EJB) objects, Java-based applications, and the TowerJ Java virtual machine.

This chapter describes the:


- EJB Graph
- JProbe Graph
- Sitraka JMonitor Graph
- TowerJ Graph

### About Java Performance Graphs

Java performance graphs provide you with performance information for Enterprise Java Bean (EJB) objects, Java-based applications, and the TowerJ Java virtual machine. Note that in order to obtain data for these graphs, you need to activate the various Java performance monitors before running the session step. When you set up the Java performance online monitors, you indicate which statistics and measurements to monitor. For more information on activating and configuring the Java performance monitors, see the *ProTune Console User's Guide*.

## EJB Graph

The EJB graph shows the resource usage of Enterprise Java Bean (EJB) objects on a WebLogic or WebSphere application server, as a function of the elapsed session step time.

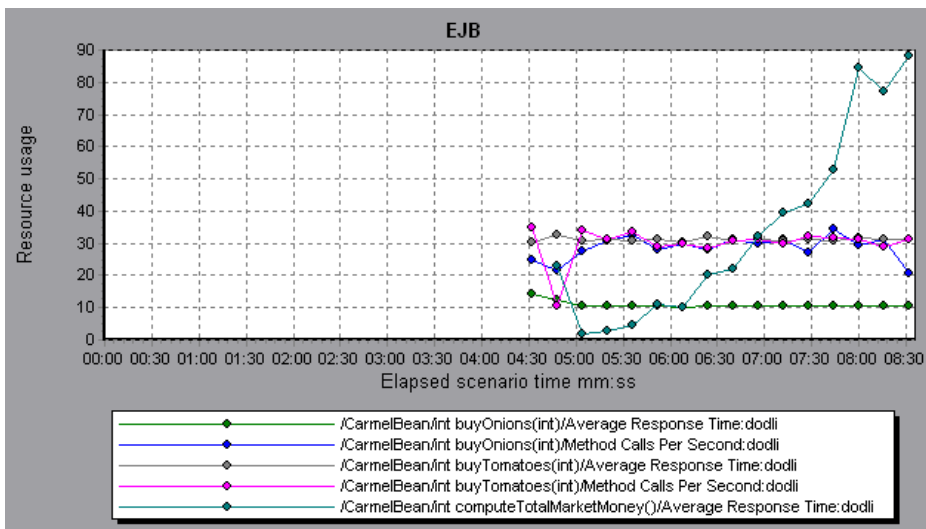

**Note:** There are differences in the scale factor between the two EJB object measurements.

The following counters can be measured for each EJB object method:

Measurement	Description
Average Response Time	The average response time of the EJB object being monitored.
Method Calls per Second	The number of EJB object method calls per second.

## JProbe Graph

The JProbe graph shows the resource usage of Java-based applications as a function of the elapsed session step time.

The following JProbe counters are available:

Measurement	Description
<b>Allocated Memory (heap)</b>	The amount of allocated memory in the heap (in bytes)
<b>Available Memory (heap)</b>	The amount of available memory in the heap (in bytes)

---

**Note:** There are differences in the scale factor between the two available measurements.

---

## Sitraka JMonitor Graph

The Sitraka JMonitor graph shows the resource usage of Java-based applications as a function of the elapsed session step time.

The following Sitraka JMonitor measurements are available:

SummaryMemoryMetrics	Description
<b>% Free Heap Space</b>	The percentage of free heap space since the last report.
<b>% GC-To-Elapsed Time</b>	The percentage of garbage collection to elapsed time.
<b>% GC-To-Poll Time</b>	The percentage of garbage collection to poll time.
<b>% Used Heap</b>	The percentage of used heap space since the last report.

<b>SummaryMemoryMetrics</b>	<b>Description</b>
<b>Average GC Time (ms)</b>	The average time, in milliseconds, spent performing garbage collections since the metric was enabled. (Disabling metric resets value to zero).
<b>GC Time (ms)</b>	The time, in milliseconds, spent performing garbage collections during the last poll period.
<b>Heap Size (KB)</b>	Total heap size, in kilobytes.
<b>KB Freed</b>	The number of kilobytes freed in the last poll period.
<b>KB Freed Per GC</b>	Average number of kilobytes freed per garbage collection since the metric was enabled (Disabling the metric resets value to zero).
<b>Number of GCs</b>	The number of garbage collections during the last poll period.
<b>Total GC Time (ms)</b>	The total time, in milliseconds, spent performing garbage collections since the metric was enabled. (Disabling the metric resets the value to zero).
<b>Total GCs</b>	The total number of garbage collections since the metric was enabled. (Disabling the metric resets value to zero).
<b>Total KB Freed</b>	The total number of kilobytes freed since the metric was enabled. (Disabling the metric resets value to zero).
<b>Used Heap (KB)</b>	Used heap size, in kilobytes.

DetailedMemoryMetrics	Description
<b>Average KB Per Object</b>	The average number of kilobytes per object since the metric was enabled. (Disabling the metric resets value to zero).
<b>Free-to-Alloc Ratio</b>	The objects freed to objects allocated ratio since the metric was enabled (Disabling the metric resets value to zero).
<b>KB Allocated</b>	The number of kilobytes allocated since the metric was enabled. (Disabling the metric resets value to zero).
<b>Live Objects</b>	The change in number of live objects during the last poll period.
<b>Objects Allocated</b>	The number of objects allocated in the last poll period.
<b>Objects Freed</b>	The number of objects freed during the last poll period.
<b>Objects Freed Per GC</b>	The average number of objects freed per garbage collection since the metric was enabled. (Disabling the metric resets value to zero).
<b>Total KB Allocated</b>	The Kilobytes allocated since metric was enabled. (Disabling the metric resets value to zero).
<b>Total Objects Allocated</b>	The number of objects allocated since the metric was enabled. (Disabling the metric resets value to zero).
<b>Total Objects Freed</b>	The number of objects freed since the metric was enabled. (Disabling the metric resets value to zero).

## TowerJ Graph

The TowerJ graph shows the resource usage of the TowerJ Java virtual machine as a function of the elapsed session step time.

The following measurements are available for the TowerJ Java virtual machine:

ThreadResource Measurement	Description
ThreadStartCountTotal	The number of threads that were started.
ThreadStartCountDelta	The number of threads that were started since the last report.
ThreadStopCountTotal	The number of threads that were stopped.
ThreadStopCountDelta	The number of threads that were stopped since the last report

GarbageCollection Resource Measurement	Description
GarbageCollectionCount Total	The number of times the garbage collector has run.
GarbageCollectionCount Delta	The number of times the garbage collector has run since the last report.
PreGCHeapSizeTotal	The total pre-GC heap space.
PreGCHeapSizeDelta	The total pre-GC heap space since the last report
PostGCHeapSizeTotal	The total post-GC heap space.
PostGCHeapSizeDelta	The total post-GC heap space since the last report.
NumPoolsTotal	The number of pools.
NumPoolsDelta	The number of pools since the last report.

<b>GarbageCollection Resource Measurement</b>	<b>Description</b>
<b>NumSoBlocksTotal</b>	The number of small object blocks.
<b>NumSoBlocksDelta</b>	The number of small object blocks since the last report.
<b>NumLoBlocksTotal</b>	The number of large object blocks.
<b>NumLoBlocksDelta</b>	The number of large object blocks.
<b>NumFullSoBlocksTotal</b>	The number of full small object blocks.
<b>NumFullSoBlocksDelta</b>	The number of full small object blocks since the last report.
<b>TotalMemoryTotal</b>	Total memory (heap size).
<b>TotalMemoryDelta</b>	Total memory (heap size) since the last report.
<b>NumMallocsTotal</b>	The number of current mallocs.
<b>NumMallocsDelta</b>	The number of current mallocs since the last report.
<b>NumBytesTotal</b>	The number of current bytes allocated.
<b>NumBytesDelta</b>	The number of current bytes allocated since the last report.
<b>TotalMallocsTotal</b>	The total number of mallocs.
<b>TotalMallocsDelta</b>	The total number of mallocs since the last report.
<b>TotalBytesTotal</b>	The total number of bytes allocated.
<b>TotalBytesDelta</b>	The total number of bytes allocated since the last report.

<b>ExceptionResource Measurement</b>	<b>Description</b>
<b>ExceptionCountTotal</b>	The number of exceptions thrown.
<b>ExceptionCountDelta</b>	The number of exceptions thrown since the last report.

<b>ObjectResource Measurement</b>	<b>Description</b>
<b>NumberOfObjectsTotal</b>	The number of objects.
<b>NumberOfObjectsDelta</b>	The number of objects since the last report.

---

**Note:** There are differences in the scale factor for some of the measurements.

---

# 18

---

## Cross Result and Merged Graphs

The Analysis utility lets you compare results and graphs to determine the source of a problem.

This chapter discusses:

- Cross Result Graphs
- Generating Cross Result Graphs
- Merging Graphs
- Creating a Merged Graph

### About Cross Result and Merged Graphs

Comparing results is essential for determining bottlenecks and problems. You use Cross Result graphs to compare the results of multiple session step runs. You create Merged graphs to compare results from different graphs within the same session step run.

## Cross Result Graphs

Cross Result graphs are useful for:

- benchmarking hardware
- testing software versions
- determining system capacity


If you want to benchmark two hardware configurations, you run the same session step with both configurations and compare the transaction response times using a single Cross Result graph.

Suppose that your vendor claims that a new software version is optimized to run quicker than a previous version. You can verify this claim by running the same session step on both versions of the software, and comparing the session step results.

You can also use Cross Result graphs to determine your system's capacity. You run session steps using different numbers of Vusers running the same script. By analyzing Cross Result graphs, you can determine the number of users that cause unacceptable response times.

In the following example, two session step runs are compared by crossing their results, *res12*, and *res15*. The same script was executed twice—first with 100 Vusers and then with 50 Vusers. In the first run, the average transaction time was approximately 59 seconds. In the second run, the average time was

4.7 seconds. It is apparent that the system works much slower with a greater load.

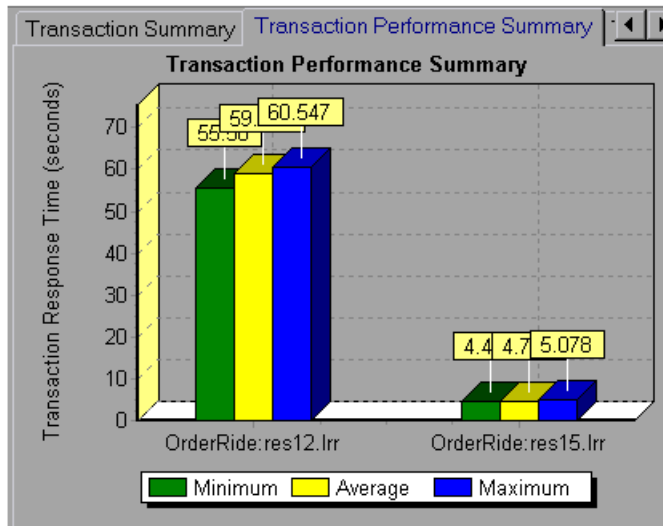


The Cross Result graphs have an additional filter and group by category: *Result Name*. The above graph is filtered to the *OrderRide* transaction for results *res12*, and *res15*, grouped by *Result Name*.

## Generating Cross Result Graphs

You can create a Cross Result graph for two or more result sets.

To generate a Cross Result graph:

- 1 Choose **File > Cross With Result**. The Cross Results dialog box opens.

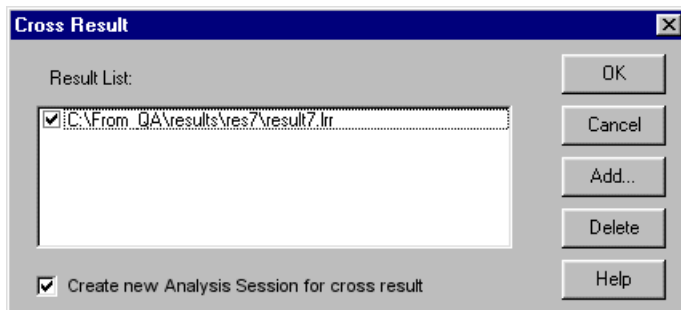

- 2 Click **Add** to add an additional result set to the **Result List**. The Select Result Files for Cross Results dialog box opens.
- 3 Locate a results directory and select its result file (*.lrr*). Click **OK**. The session step is added to the Result List.
- 4 Repeat steps 2 and 3 until all the results you want to compare are in the Result List.
- 5 When you generate a Cross Result graph, by default it is saved as a new Analysis session. To save it in an existing session, clear the **Create New Analysis Session for Cross Result** check box.
- 6 Click **OK**. The Analysis processes the result data and asks for a confirmation to open the default graphs.

After you generate a Cross Result graph, you can filter it to display specific session steps and transactions. You can also manipulate the graph by changing the granularity, zoom, and scale. For more information, see Chapter 2, “Working with Analysis Graphs.”

## Merging Graphs


The Analysis lets you merge the results of two graphs from the same session step into a single graph. The merging allows you to compare several different measurements at once. For example, you can make a merged graph to display the network delay and number of running Vusers, as a function of the elapsed time.

In order to merge graphs, their x-axis must be the same measurement. For example, you can merge Web Throughput and Hits per second, because the common x-axis is Session Elapsed Time. The drop-down list only shows the active graphs with an x-axis common with the current graph. The Analysis provides three types of merging:


- Overlay
- Tile
- Correlate

**Overlay:** Superimpose the contents of two graphs that share a common x-axis. The left y-axis on the merged graph shows the current graph's values. The right y-axis shows the values of the graph that was merged. There is no limit to the number of graphs that you can overlay. When you overlay two graphs, the y-axis for each graph is displayed separately to the right and left of the graph. When you overlay more than two graphs, the Analysis displays a single y-axis, scaling the different measurements accordingly.

In the following example, the Throughput and Hits per Second graph are overlaid with one another.

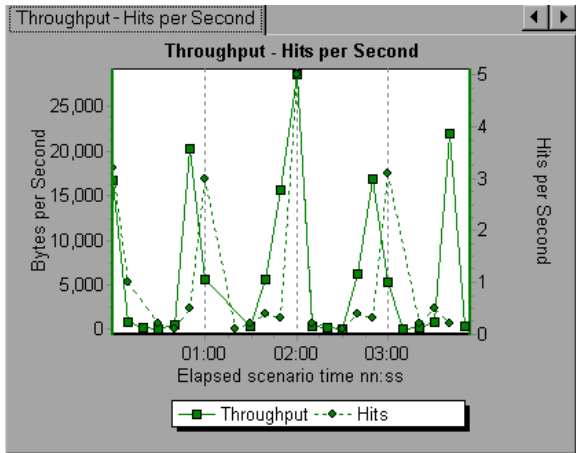


**Tile:** View contents of two graphs that share a common x-axis in a tiled layout, one above the other. In the following example the Throughput and Hits per Second graph are tiled one above the other.

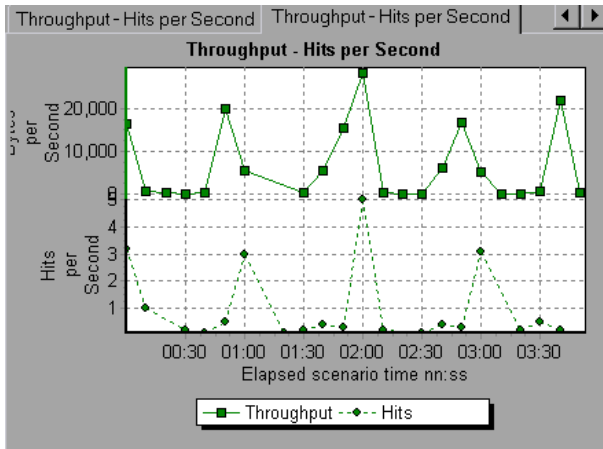

**Correlate:** Plot the y-axis of two graphs against each other. The active graph's y-axis becomes the x-axis of the merged graph. The y-axis of the graph that was merged, becomes the merged graph's y-axis.

In the following example, the Throughput and Hits per Second graph are correlated with one another. The x-axis displays the Bytes per Second (the Throughput measurement) and the y-axis shows the Hits per Second.

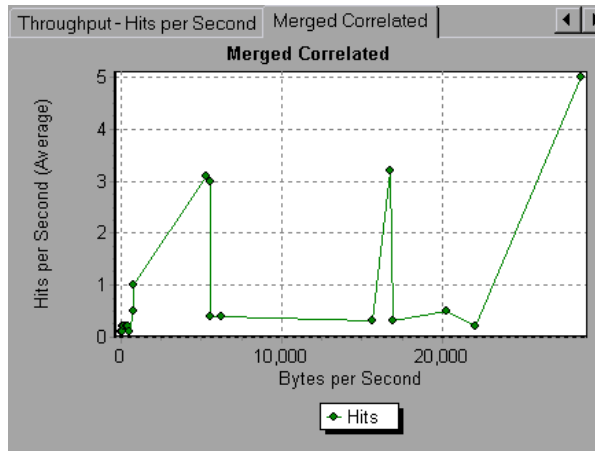

## Creating a Merged Graph


You can merge all graphs with a common x-axis.

**To create a merged graph:**

- 1 Select a graph in the tree view or click on its tab to make it active.



- 2 Choose **View > Merge Graphs** or click the **Merge Graphs** button. The Merge Graphs dialog box opens and displays the name of the active graph.

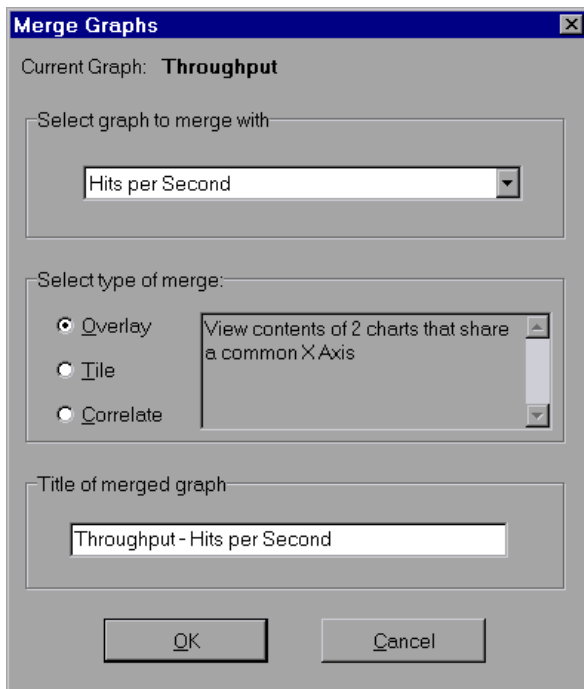

- 3 Select a graph with which you want to merge your active graph. Only the graphs with a common x-axis to the active graph are available.
- 4 Select the type of merge: **Overlay**, **Tile**, or **Correlate**.
- 5 Specify a title for the merged graph. By default, the Analysis combines the titles of the two graphs being merged.
- 6 Click **OK**.
- 7 Filter the graph just as you would filter any ordinary graph.

# 19

---

## Understanding Analysis Reports

After running a session step, you can use the Analysis reports to analyze the performance of your application.

This chapter describes:

- Viewing Summary Reports
- Creating HTML Reports
- Working with Transaction Reports
- Data Point Report
- Failed Transaction Report
- Failed Vuser Report
- Data Point Report
- Detailed Transaction Report
- Transaction Performance by Vuser Report

### About Analysis Reports

After running a session step, you can view reports that summarize your system's performance. The Analysis provides the following reporting tools:

- Summary report
- HTML reports
- Transaction reports

The Summary report provides general information about the session step run. You can view the Summary report at any time from the Analysis window.

You can instruct the Analysis to create an HTML report. The Analysis creates an HTML report for each one of the open graphs.

Transaction reports provide performance information about the transactions defined within the Vuser scripts. These reports give you a statistical breakdown of your results and allow you to print and export the data.

## Viewing Summary Reports

The Summary report provides general information about session step execution. This report is always available from the tree view or as a tab in the Analysis window. It lists statistics about the session step run and provides links to the following graphs: Running Vusers, Throughput, Hits Per Second, HTTP Responses per Second, Transaction Summary, and Average Transaction Response Time. At the bottom of the page, the Summary report displays a table containing the session step's transaction data. Included in this data is a 90 Percent column, indicating the maximum response time for ninety percent of the transactions.

The screenshot shows the 'Analysis Summary' report. At the top, it displays the scenario name, results in session, and duration. Below this is a 'Statistics Summary' section with several key metrics. At the bottom, there is a 'Transaction Summary' table with columns for Transaction Name, Minimum, Average, Maximum, 90 Percent, Pass, Fail, and Abort. The table contains two rows of data for transactions 't\_amazon\_account' and 't\_amazon\_book'.

**Analysis Summary** Period: C7/03/2001 10 06:38 - 07/C3/2001 1

**Scenario Name:** C:\Sanity\_Analysis\Scenario\Scenario.lrs  
**Results in session:** F:\Results\Sessions\v\Jres\_amazon\res\_amazon.lrs  
**Duration:** 20 minutes and 49 seconds.

**Statistics Summary**

- Maximum Running Vusers:** 3
- Total Throughput (bytes):** 50,222,795
- Throughput (bytes/second):** Average: 40,210
- Total Hits:** 12,217
- Hits per Second:** Average: 10

**Transaction Summary**

**Transactions:** Total Passed: 73, Total failed: 73, Total aborted: 3

Transaction Name	Minimum	Average	Maximum	90 Percent	Pass	Fail	Abort
t_amazon_account	2.143	2.56	3.245	2.68	12	0	0
t_amazon_book	7.871	8.825	10.425	10.31	10	2	0

You can save the Summary report to an Excel file by selecting **View > Export Summary to Excel**.

## Creating HTML Reports

The Analysis lets you create HTML reports for your session step run. It creates a separate report for each one of the open graphs and a Summary report. The Summary report is identical to the Summary report that you access from the Analysis window. The report also provides a link to an Excel file containing the graph data.

The screenshot shows a web browser window with the following content:

**Analysis Summary** Period: 07/00/2001 10:05:0

Scenario Name: C:\Eon\tyr Analysis\Scenario\Scenario1.rpt  
 Results in session: F:\Results\Sessions\v70\tires\_amazon\tyr\_analysis\amazon.rpt  
 Duration: 20 minutes and 49 seconds.


**Statistics Summary**

- Maximum Running Users: 3
- Total Throughput (bytes): 50,224,95
- Throughput (bytes/second): Average: 40,210
- Total Hits: 12,217
- Hits per Second: Average: 10

**Transaction Summary**

Transaction Name	Minimum	Average	Maximum	90 Percent	Pass	Fail
amazon.com.cn	2.143	2.56	3.245	2.66	12	0

To create HTML reports:

- 1 Open all graphs that you want to be included in the report.
- 2  Choose **Reports > HTML Report** or click the **Create HTML Report** button. The Select Report Filename and Path dialog box opens.

- 3 Specify a path and file name for the HTML report and click **OK**. The Analysis saves a Summary report called by the file name in the selected folder, and the rest of the graphs in a folder with the same name as the file name. When you create an HTML report, the Analysis opens your default browser and displays the Summary report.
- 4 To view an HTML report for one of the graphs, click on its link in the left frame.
- 5 To copy the HTML reports to another location, be sure to copy the filename and the folder with the same name. For example, if you named your HTML report *test1*, copy *test1.html* and the folder *test1* to the desired location.

## Working with Transaction Reports

ProTune's Transaction reports are divided into the following categories:

- Activity
- Performance

**Activity** reports provide information about the number of Vusers and the number of transactions executed during the session step run. The available Activity reports are *Session Execution*, *Failed Transaction*, and *Failed Vusers*.

**Performance** reports analyze Vuser performance and transaction times. The available Performance reports are *Data Point*, *Detailed Transaction*, and *Transaction Performance by Vuser*.

In order to view a report, you must generate it from the Analysis window. ProTune reports are displayed in a Report Viewer. You can print, save, or export the data using the viewer.

### Selecting and Displaying Reports

The Analysis provides several built-in reports which contain detailed summaries about the session step, the transactions and Vusers.

**To display a report:**


- 1 Open the desired Analysis session file (.lra extension), or ProTune result file (.lrr extension), if it is not already open.
- 2 From the Reports menu choose a report. The report is generated and displayed. You can display multiple copies of the same report.

**The Report Viewer**

Each report is displayed in its own report viewer. Each viewer contains a header and a toolbar.

**Report Header**

The header displays general run-time information.

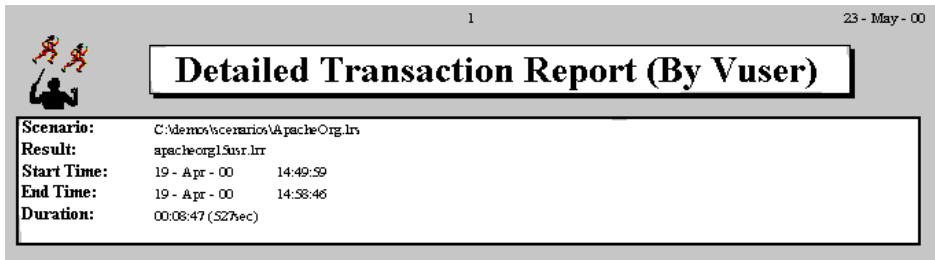

The report header contains the following information:

**Title:** The name of the report.

**Session step:** The name of the session step described in the report.

**Result:** The pathname of the session step results directory.


**Start time:** The time at which the Run Session step command was executed.

**End time:** The time at which the session step script was terminated.

**Duration:** The total run time of the session step.

## Report Viewer Toolbar

Each report viewer has a toolbar that lets you perform operations on displayed reports.

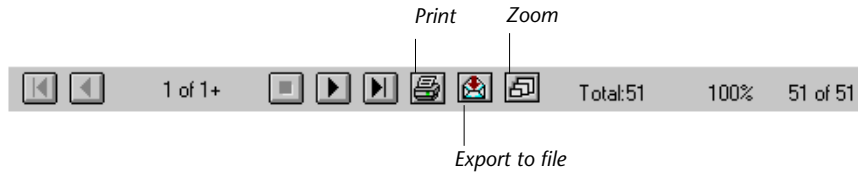

The report viewer toolbar contains the following buttons:



**Zoom** : Toggles between an actual size, full page, and magnified views of the report.



**Print** : Prints the displayed report.



**Export to file** : Exports the displayed information to a text file.

If there are multiple values for the y-axis, as in the Transaction Performance by Vuser graph (min, average, and max), all of the plotted values are displayed.

## Session Step Execution Report

The Session Step Execution report is an Activity report that provides details about major events that occurred during the session step run. This includes information on every Vuser, such as when it was ready to run and for how long it ran.

**Group:** g1

<i>Vuser</i>	<i>Host</i>	<i>Ready At</i>	<i>Running At</i>	<i>Duration</i>	<i>Termination Status</i>
Vuser1	10.1.1.30	14:52:58	14:53:30	00:05:43 (343sec)	Abort
Vuser2	10.1.1.30	14:52:58	14:53:30	00:05:43 (343sec)	Abort
Vuser3	10.1.1.30	14:52:58	14:53:30	00:05:43 (343sec)	Abort
Vuser4	10.1.1.30	14:52:58	14:53:30	00:05:43 (343sec)	Abort
Vuser5	10.1.1.30	14:52:58	14:53:30	00:05:43 (343sec)	Abort

### Summary

*Vusers:* 5  
*Passed:* 0      *Failed:* 0      *Error:* 0      *Stopped:* 5

## Failed Transaction Report

The Failed Transaction report is an Activity report that provides details about the beginning time, end time, and duration of the failed, but completed transaction.

**Group: g1**

Vuser: Vuser1

<i>Transaction</i>	<i>Start time</i>	<i>End time</i>	<i>Duration</i>
Apache_Server	14:58:36.117	14:58:37.319	00:00:01.202
Surf_Apache	14:58:33.043	14:58:37.319	00:00:04.276

Vuser: Vuser2

<i>Transaction</i>	<i>Start time</i>	<i>End time</i>	<i>Duration</i>
Apache_Server	14:58:35.265	14:58:37.328	00:00:02.063
Surf_Apache	14:58:24.810	14:58:37.328	00:00:12.518

## Failed Vuser Report

The Failed Vuser report is an Activity report that provides details about all Vusers that were in the ERROR, STOPPED, or DONE:FAILED states during the session step execution. The *Ready At* and *Running At* times are relative to the computer's system clock.

<b>Group:</b> g2						
<i>Vuser</i>	<i>Host</i>	<i>Ready At</i>	<i>Running At</i>	<i>Duration</i>	<i>Termination Status</i>	
Vuser1	localhost	14:53:26	14:54:42	00:05:14 (314sec)	Abort	
Vuser2	localhost	14:53:26	14:54:42	00:05:14 (314sec)	Abort	
Vuser3	localhost	14:53:26	14:54:42	00:05:14 (314sec)	Abort	
Vuser4	localhost	14:53:26	14:54:42	00:05:14 (314sec)	Abort	
Vuser5	localhost	14:53:26	14:54:42	00:05:14 (314sec)	Abort	

**Summary**

<i>Vusers:</i>	5			
<i>Failed:</i>	0	<i>Error:</i>	0	<i>Stopped:</i> 5

In this session step, all five Vusers were stopped.

## Data Point Report

ProTune enables you to record your own data for analysis. You instruct ProTune to record the value of an external function or variable, also known as a *data point*, during the session step run. Using the gathered data, ProTune creates a graph and report for the data point.

The data point is set by including an **lr\_user\_data\_point** function (**user\_data\_point** for GUI Vusers) in your Vuser script. For more information, refer to the online *ProTune Function Reference*.

The **Data Point** graph shows the value of the data point during the session step run. The *x-axis* represents the number of seconds that elapsed since the start time of the run. The *y-axis* displays the value of each recorded data point statement.

The **Data Point** report is a Performance report that lists the name of the data point, its value, and the time its value was recorded. The values are displayed for each Group and Vuser.

<b>Group:</b> Group1		<b>Data Point</b>	<b>Time</b>
<b>Vuser id:</b>	1		
	memory	19.00	13:37:16
	memory	1.00	13:37:20
	memory	9.00	13:37:32
	memory	1.00	13:37:36
	memory	1.00	13:37:40
<b>Vuser id:</b>	2		
	memory	6.00	13:37:05
	memory	8.00	13:37:20
	memory	9.00	13:37:32
	memory	1.00	13:37:36
	memory	1.00	13:37:40

## Detailed Transaction Report

The Detailed Transaction (by Vuser) report is a Performance report that provides a list of all transactions executed by each Vuser during a session step. The report provides details about the execution time of each transaction per Vuser.

**Group:** zorb

Vuser\_id: 1

<i>Transaction</i>	<i>Start time</i>	<i>End time</i>	<i>Duration</i>	<i>Think Time</i>	<i>Wasted Time</i>	<i>Result</i>
end_section	14:07:59.029	14:08:00.045	00:00:01.016	00:00:01.016	00:00:00.000	Pass
General	14:05:27.748	14:06:06.482	00:00:38.618	00:00:21.715	00:00:00.116	Pass
General	14:06:06.482	14:07:02.701	00:00:37.104	00:00:21.716	00:00:19.115	Pass
General	14:07:02.701	14:07:59.029	00:00:37.212	00:00:21.715	00:00:19.116	Pass
mc_run	14:05:37.310	14:05:41.764	00:00:04.453	00:00:02.609	00:00:00.001	Pass
mc_run	14:06:16.045	14:06:20.248	00:00:04.202	00:00:02.609	00:00:00.001	Pass
mc_run	14:07:12.264	14:07:15.920	00:00:03.655	00:00:02.609	00:00:00.001	Pass

The following values are reported:

**Start time:** the system time at the beginning of the transaction

**End time:** the actual system time at the end of the transaction, including the think time and wasted time.

**Duration:** the duration of the transaction in the following format: hrs:minutes:seconds:milliseconds. This value includes think time, but does not include wasted time.

**Think time:** the Vuser's think time delay during the transaction.

**Wasted time:** the ProTune internal processing time not attributed to the transaction time or think time. (primarily RTE Vusers)

**Results:** the final transaction status, either Pass or Fail.

## Transaction Performance by Vuser Report

The Transaction Performance Summary by Vuser report is a Performance report that displays the time required by each Vuser to perform transactions during the session step. The report indicates if the transaction was successful and what the minimum, maximum, and average times were for each Vuser. This report is useful when you have several different types of Vusers in a session step and you want to characterize performance for each type.

**Transaction:** Apache\_Home

<u>Group:</u>		<b>g1</b>					
			<u>P e r f o r m a n c e (sec)</u>				
<i>Vuser</i>	<i>Pass</i>	<i>Fail</i>	<i>Min</i>	<i>Avg</i>	<i>Max</i>	<i>STD</i>	
Vuser1	40	0	0.22	1.06	3.80	0.99	
Vuser2	37	0	0.22	1.37	7.40	1.60	
Vuser3	40	1	0.22	1.08	5.67	1.17	
Vuser4	39	0	0.23	1.04	3.91	0.97	
Vuser5	39	1	0.22	0.95	2.92	0.75	
<b><u>Total:</u></b>	<b>5</b>	<b>195</b>	<b>2</b>	<b>0.22</b>	<b>1.10</b>	<b>7.40</b>	

# 20

---

## Interpreting Analysis Graphs

ProTune Analysis graphs present important information about the performance of your session step. Using these graphs, you can identify and pinpoint bottlenecks in your application and determine what changes are needed to improve its performance.

This chapter presents examples of:

- ▶ Analyzing Transaction Performance
- ▶ Using the Web Page Breakdown Graphs
- ▶ Using Auto Correlation
- ▶ Identifying Server Problems
- ▶ Identifying Network Problems
- ▶ Comparing Session Step Results

---

**Note:** The chapter presents examples from Web load tests.

---


### Analyzing Transaction Performance

The **Average Transaction Response Time** and **Transaction Performance Summary** graphs should be your starting point in analyzing a session step run. Using the Transaction Performance Summary graph, you can determine which transaction(s) had a particularly high response time during session step execution. Using the Average Transaction Response Time graph, you


can view the behavior of the problematic transaction(s) during each second of the session step run.

**Question 1:** Which transactions had the highest response time? Was the response time for these transactions high throughout the session step, or only at certain points during session step execution?

**Answer:** The Transaction Performance Summary graph demonstrates a summary of the minimum, average, and maximum response time for each transaction during session step execution. In the example below, the response time of the Reservation transaction averaged 44.4 seconds during the course of the session step.

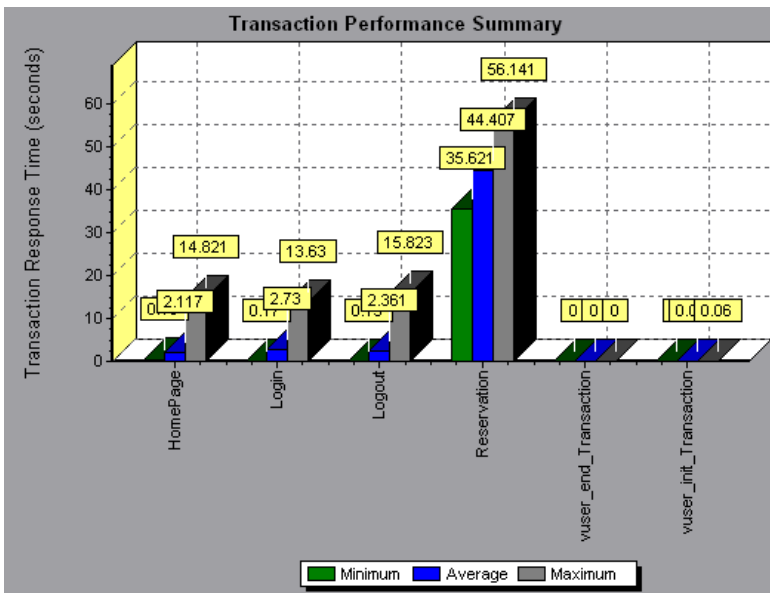

The Average Transaction Response Time graph demonstrates that response time was high for the Reservation transaction throughout the session step. Response time for this transaction was especially high—approximately 55 seconds—during the sixth and thirteenth minutes of the session step.

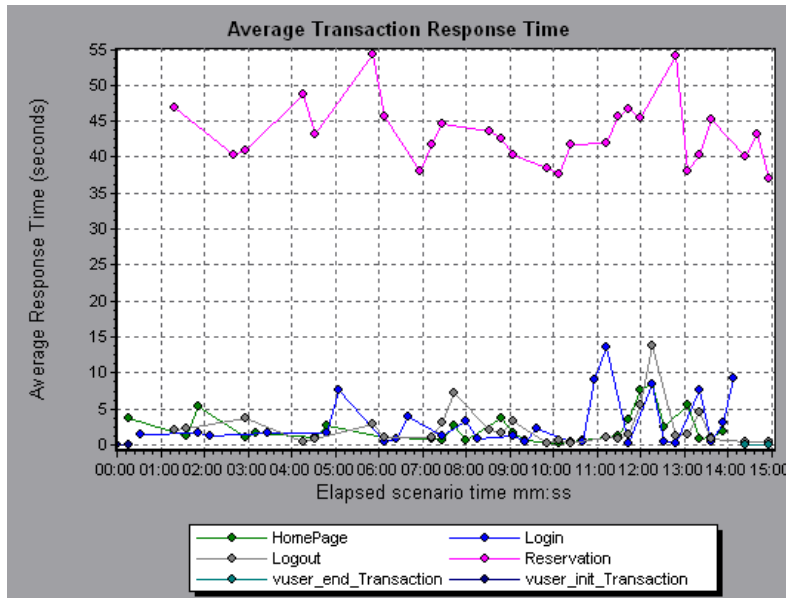


In order to pinpoint the problem and understand why response time was high for the Reservation transaction during this session step, it is necessary to break down the transactions and analyze the performance of each page component. To break down a transaction, right-click it in the Average Transaction Response Time or Transaction Performance Summary graph, and select **Web Page Breakdown for <transaction name>**.

## Using the Web Page Breakdown Graphs

Using the **Web Page Breakdown graphs**, you can drill down on the Average Transaction Response Time or Transaction Performance Summary graphs in order to view the download time for each page component in a transaction. Note that this is possible only if you enabled the Web Page Breakdown feature before running your session step.


**Question 2:** Which page components were responsible for the high transaction response time? Were the problems that occurred network- or server-related?

**Answer:** The Web Page Breakdown graph displays a breakdown of the download time for each page component in the Reservation transaction.

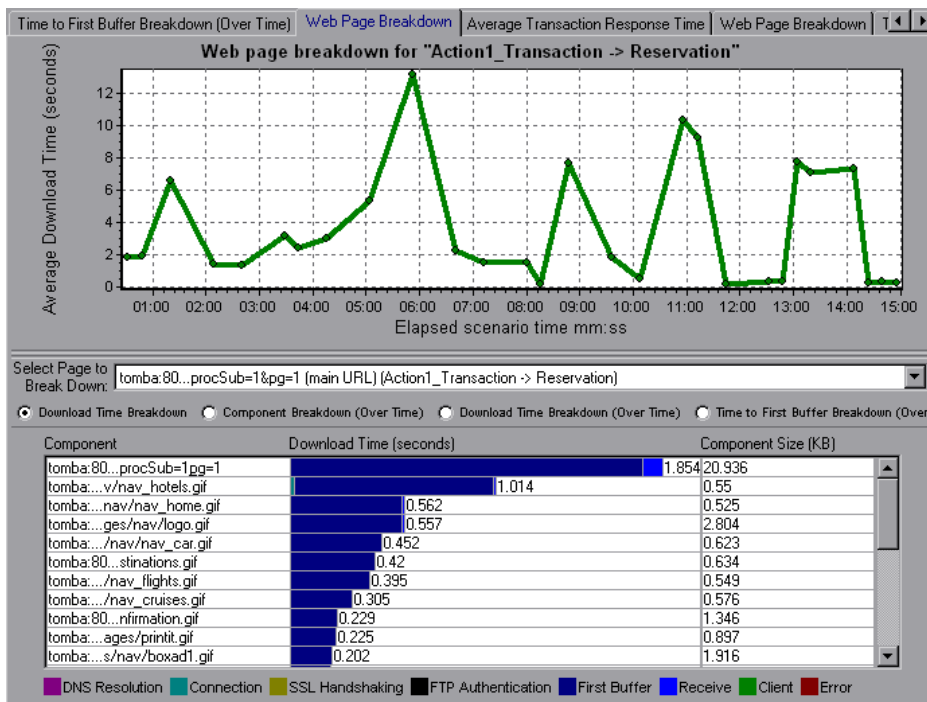

If the download time for a component was unacceptably long, note which measurements—DNS resolution time, connection time, time to first buffer, SSL handshaking time, receive time, and FTP authentication time—were responsible for the lengthy download. To view the point during the session step at which the problem occurred, select the Page Download Breakdown (Over Time) graph. For more information regarding the measurements displayed, see “Page Download Time Breakdown Graph” on page 89.

To identify whether a problem is network- or server-related, select the Time to First Buffer Breakdown (Over Time).

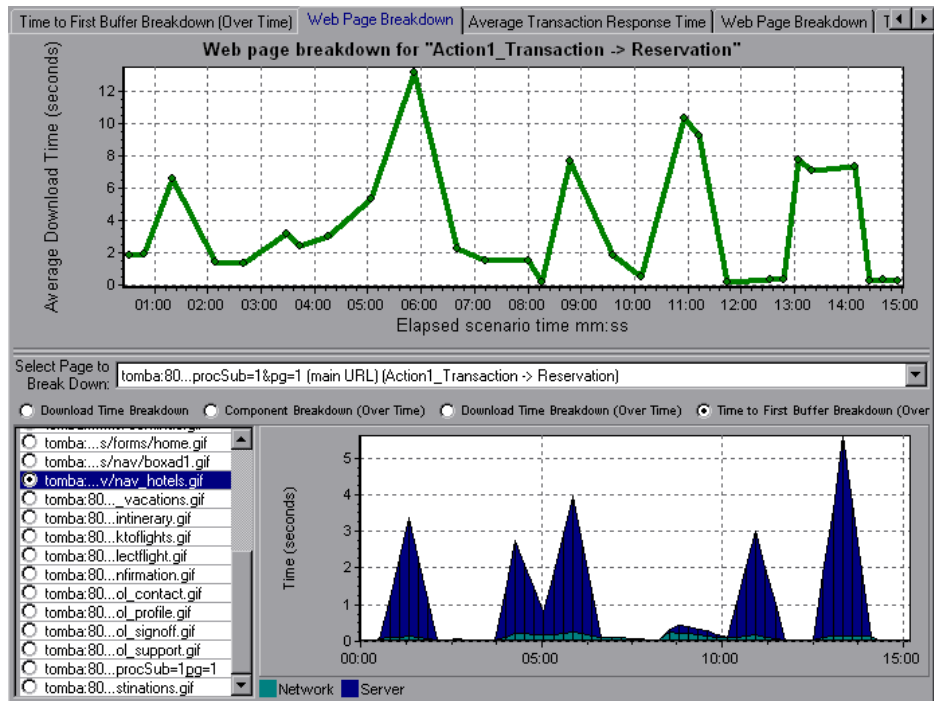


The above graph demonstrates that the server time was much higher than the network time. If the server time is unusually high, use the appropriate server graph to identify the problematic server measurements and isolate the cause of server degradation. If the network time is unusually high, use the Network Monitor graphs to determine what network problems caused the performance bottleneck.

## Using Auto Correlation

You can identify the cause of a server or network bottleneck by analyzing the Web Page Breakdown graphs, or by using the auto correlation feature. The auto correlation feature applies sophisticated statistical algorithms to pinpoint the measurements that had the greatest impact on a transaction's response time.


**Question 3:** Did a bottleneck occur in the system? If so, what was the cause of the problem?

**Answer:** The Average Transaction Response Time graph displays the average response time during the course of the session step for each transaction. Using this graph, you can determine which transaction(s) had a particularly high response time during session step execution.

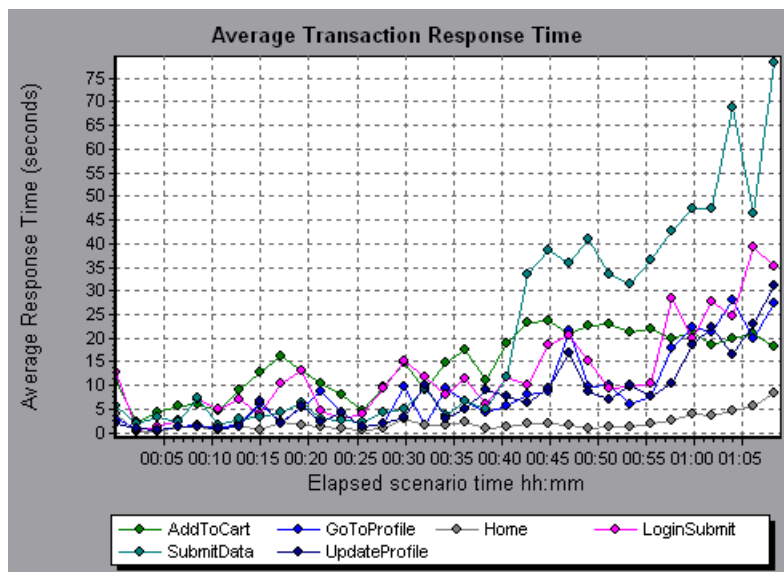


The above graph demonstrates that the response time for the SubmitData transaction was relatively high toward the end of the session step. To correlate this transaction with all of the measurements collected during the session step, right-click the SubmitData transaction and select **Auto Correlate**.


In the dialog box that opens, choose the time frame you want to examine.

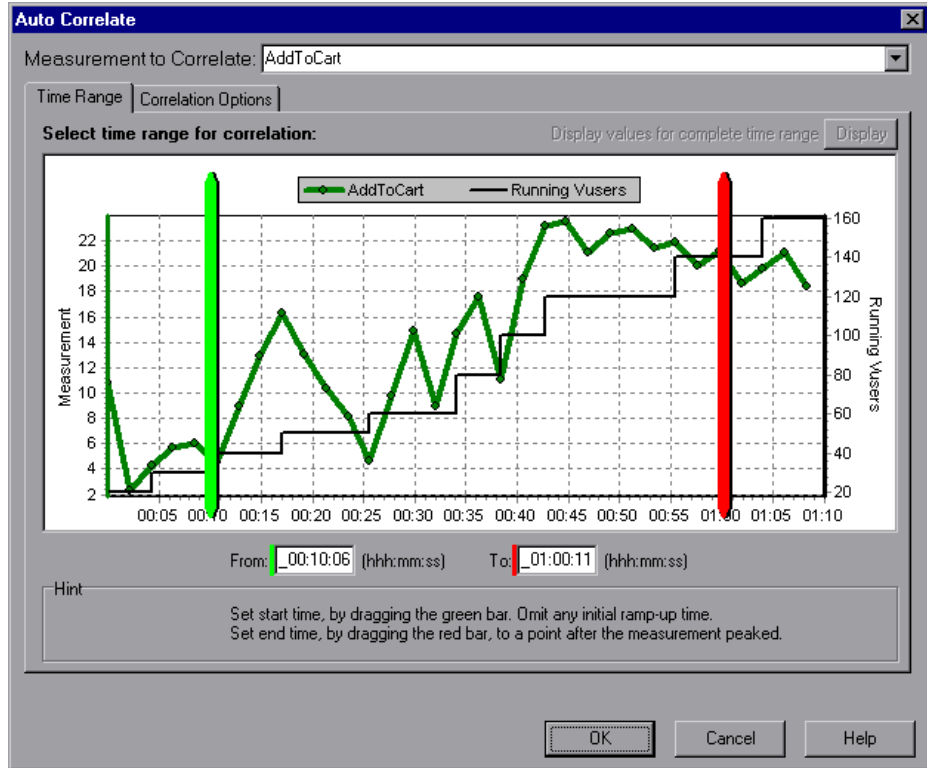

Click the **Correlation Options** tab, select the graphs whose data you want to correlate with the SubmitData transaction, and click **OK**.

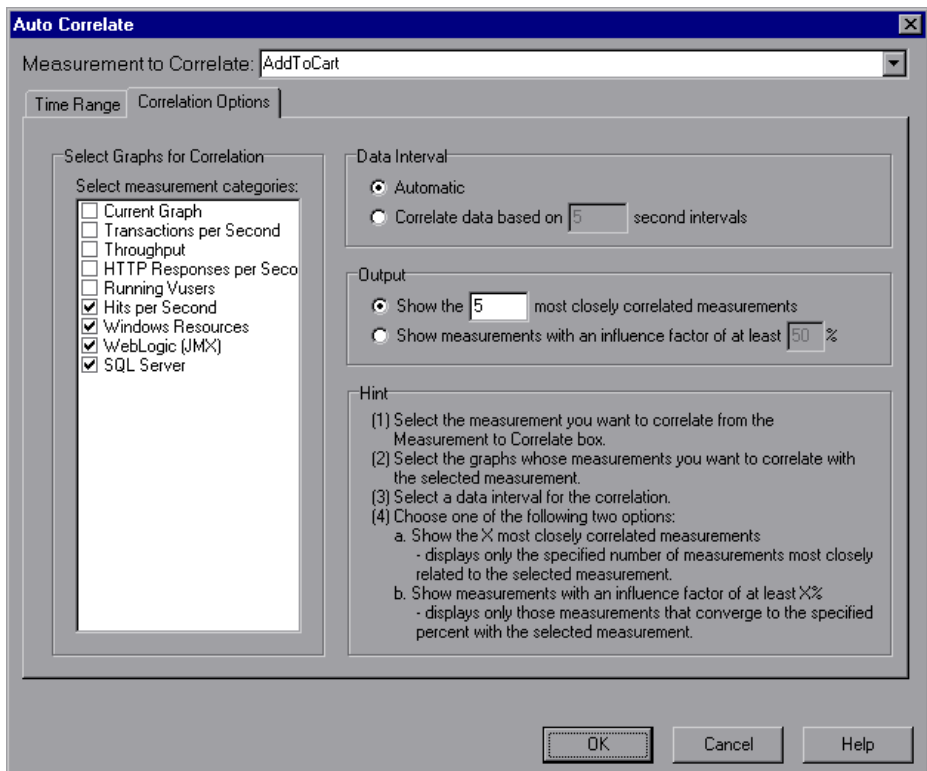


In the following graph, the Analysis displays the five measurements most closely correlated with the SubmitData transaction.

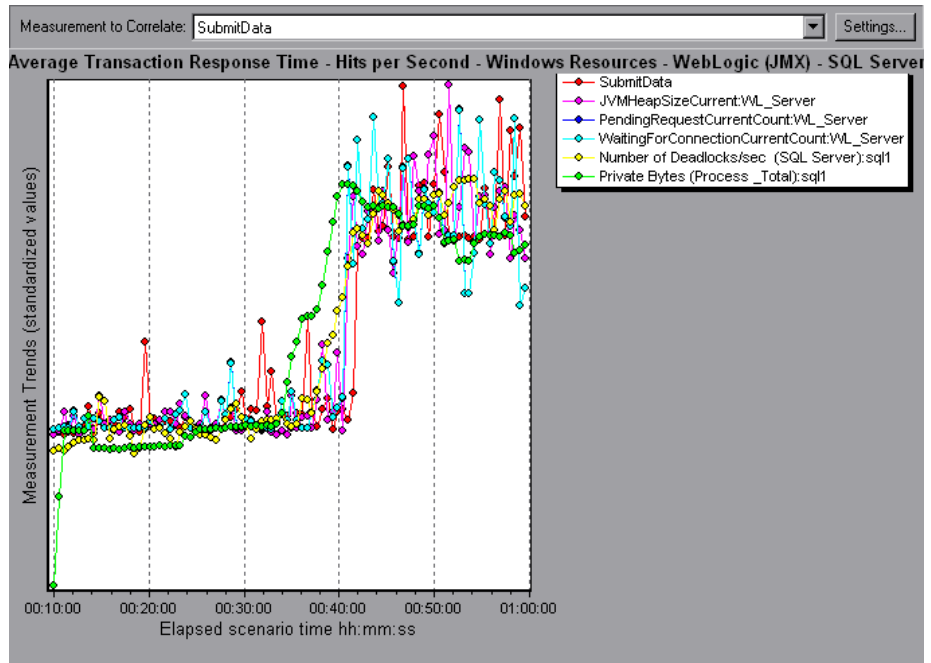

This correlation example demonstrates that the following database and Web server measurements had the greatest influence on the SubmitData transaction: *Number of Deadlocks/sec* (SQL server), *JVMHeapSizeCurrent* (WebLogic server), *PendingRequestCurrentCount* (WebLogic server), *WaitingForConnectionCurrentCount* (WebLogic server), and *Private Bytes (Process\_Total)* (SQL server). Using the appropriate server graph, you can view data for each of the above server measurements and isolate the problem(s) that caused the bottleneck in the system.

For example, the graph below demonstrates that both the *JVMHeapSizeCurrent* and *Private Bytes (Process\_Total)* WebLogic (JMX) application server measurements increase as the number of running Users increases.

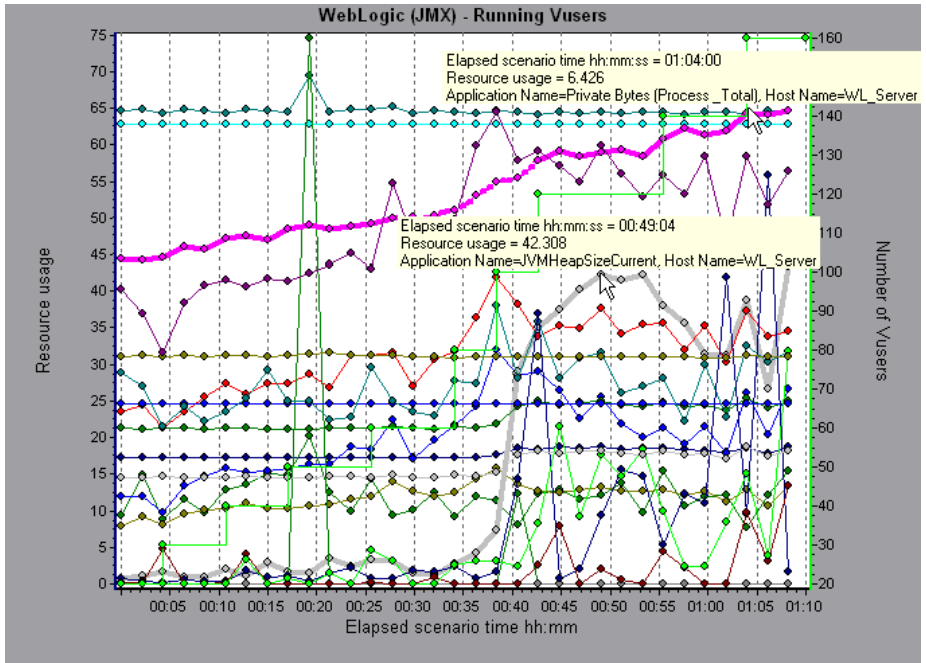

The above graph, therefore, indicates that these two measurements contributed to the slow performance of the WebLogic (JMX) application server, which affected the response time of the SubmitData transaction.

## Identifying Server Problems

Web site performance problems can be a result of many factors. Nearly half of the performance problems, however, can be traced to Web, Web application, and database server malfunctioning. Dynamic Web sites that rely heavily on database operations are particularly at risk for performance problems.

The most common database problems are inefficient index design, fragmented databases, out-of-date statistics, and faulty application design. Database system performance can therefore be improved by using smaller result sets, automatically updating data, optimizing indexes, frequently compacting data, implementing a query or a lock on time-outs, using shorter transactions, and avoiding application deadlocks.

In twenty percent of load tests, Web and Web application servers are found to be the cause of performance bottlenecks. The bottlenecks are usually the result of poor server configuration and insufficient resources. For example, poorly written code and DLLs can use nearly all of a computer's processor time (CPU) and create a bottleneck on the server. Likewise, physical memory constraints and mismanagement of server memory can easily cause a server bottleneck. It is therefore advisable to check both the CPU and physical memory of your server before exploring other possible causes of poor Web or Web application server performance.

For information about other useful Web, Web application, and database server measurements, see the *ProTune Console User's Guide*.

### HTTPS Problems

Excessive use of HTTPS and other security measures can quickly exhaust server resources and contribute to system bottlenecks. For example, when HTTPS is implemented on the Web server during a load test, system resources are quickly exhausted by a relatively small load. This is caused by secured socket layer (SSL) resource-intensive operations.

Continuously open connections can also drain server resources. Unlike browsers, servers providing SSL services typically create numerous sessions with large numbers of clients. Caching the session identifiers from each transaction can quickly exhaust the server's resources. In addition, the "keep-alive" enhancement features of most Web browsers keep connections open until they are explicitly terminated by the client or server. As a result, server resources may be wasted as large numbers of idle browsers remain connected to the server.

The performance of secured Web sites can be improved by:

- ▶ Fine-tuning the SSL and HTTPS services according to the type of application
- ▶ Using SSL hardware accelerators, such as SSL accelerator appliances and cards
- ▶ Changing the level of security according to the level of sensitivity of the data (i.e., changing the key length used for public-key encryption from 1,024 to 512 bits)
- ▶ Avoiding the excessive use of SSL and redesigning those pages that have low levels of data sensitivity to use regular HTTPS

## Identifying Network Problems


Network bottlenecks can usually be identified when the load increment is considerable and is not significantly affecting any of the server side components, as in the case of informational sites using many static Web pages. In twenty-five percent of such cases, the pipe to the Internet cannot sufficiently handle the desired load and causes delays in incoming and outgoing requests. In addition, bottlenecks are frequently uncovered between the Web site and the ISP.

Using the Network Monitor graphs, you can determine whether, in fact, the network is causing a bottleneck. If the problem is network-related, you can locate the problematic segment so that it can be fixed.

## Comparing Session Step Results

Each time the system is fine tuned and another performance bottleneck is resolved, the same load test should be run again in order to verify that the problem has been fixed and that no new performance bottlenecks have been created. After performing the load test several times, you can compare the initial results to the final results.

The following graph displays a comparison of an initial load test and a final load test for a session step.

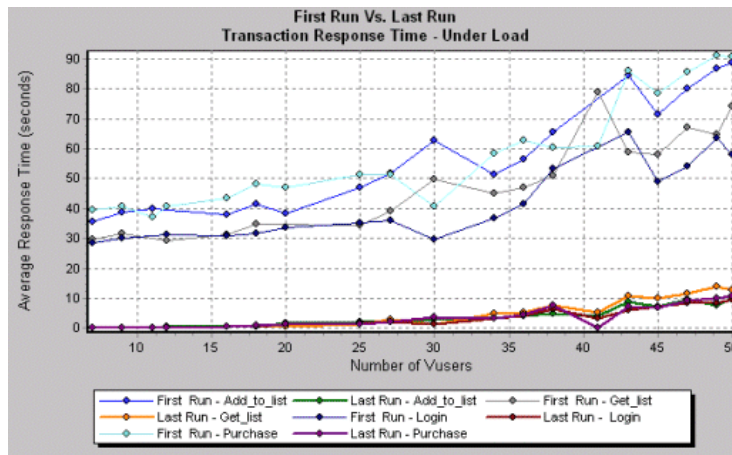

The first load test demonstrates the application's performance in its initial state, before any load testing was performed. From the graph, you can see that with approximately 50 Users, response time was almost 90 seconds, indicating that the application suffered from severe performance problems.

Using the analysis process, it was possible to determine what architectural changes were necessary to improve the transaction response time. As a result of these site architectural changes, the transaction response time for the same business process, with the same number of users, was less than 10 seconds in the last load test performed. Using the Analysis, therefore, the customer was able to increase site performance tenfold.



---

# Index

## A

Acrobat Reader ix  
Activity reports 249  
advanced display settings  
    chart 38  
    series 39  
aggregating data 5  
Analysis  
    interpreting graphs 257–269  
    overview 1–21  
    sessions 3  
    working with 23–48  
Antara FlameThrower  
    graph 116  
Apache  
    graph 136  
Apply/Edit Template dialog box 15  
Ariba  
    graph 145  
ASP  
    graph 159  
ATG Dynamo  
    graph 147  
Auto Correlate dialog box 45  
    Correlation Options tab 46  
    Time Range tab 46  
auto correlating measurements 45  
auto correlating measurements example 262  
Average Transaction Response Time graph  
    58  
    auto correlation 262

## B

Books Online ix  
breaking down transactions 84

BroadVision  
    graph 150

## C

chart settings 38  
Check Point FireWall-1  
    graph 134  
Client Time  
    in Page Download Time Breakdown  
        graph 91  
ColdFusion  
    graph 157  
collating execution results 4  
comparing session step runs 269  
Connection time  
    in Page Download Time Breakdown  
        graph 90  
Context Sensitive Help ix  
coordinates of a point 24  
Cross Result dialog box 240  
Cross Result graphs 237–244

## D

Data Aggregation Configuration dialog box 5  
Data Point report 254  
Data Points  
    (Average) graph 103  
    (Sum) graph 102  
database options 10  
DB2  
    graph 192  
Detailed Transaction report 255  
display options  
    advanced 38

display options (*cont'd*)

Display Options dialog box 36  
standard 36

DNS Resolution time

in Page Download Time Breakdown  
graph 90

documentation set x

Downloaded Component Size graph 99

drill down 25

Drill Down Options dialog box 27

## E

Editing MainChart dialog box 38

Chart tab 38  
Graph Data tab 42  
Legend tab 40  
Raw Data tab 44  
Series tab 39

EJB

graph 230

enlarging graphs 28

ERP Server Resource graphs 225–228

Error graphs 53–55

Error Statistics graph 54

Error Time

in Page Download Time Breakdown  
graph 91

Errors per Second graph 55

Excel file

exporting to 42  
viewing 248

## F

Failed Transaction report 252

Failed Vuser report 253

filter conditions

setting in Analysis 31

filtering graphs 31

FireWall Server graphs 133–134

First Buffer time

in Page Download Time Breakdown  
graph 90

FTP Authentication time

in Page Download Time Breakdown  
graph 91

Fujitsu INTERSTAGE

graph 158

Function Reference ix

## G

global filter, graphs 34

Granularity dialog box 29

graph

Antara FlameThrower 116

Apache 136

Ariba 145

ATG Dynamo 147

Average Transaction Response Time  
58

BroadVision 150

Check Point FireWall-1 134

ColdFusion 157

Data Points (Average) 103

Data Points (Sum) 102

DB2 192

Downloaded Component Size 99

EJB 230

Error Statistics 54

Errors per Second 55

Fujitsu INTERSTAGE 158

Hits per Second 70

HTTP Responses per Second 73

HTTP Status Code Summary 72

iPlanet/Netscape 140

JProbe 231

Microsoft Active Server Pages (ASP)  
159

Microsoft IIS 138

Network Delay Time 129

Network Segment Delay 131

Network Sub-Path Time 130

Oracle 206

Oracle9iAS HTTP 160

Page Component Breakdown 85

Page Component Breakdown (Over  
Time) 87

- Page Download Time Breakdown 89
- Page Download Time Breakdown (Over Time) 93
- Pages Downloaded per Second 76
- RealPlayer Client 218
- RealPlayer Server 220
- Rendezvous 52
- Retries per Second 78
- Retries Summary 79
- Running Vusers 50
- SAP 226
- SilverStream 164
- Sitraka JMonitor 231
- SNMP Resources 112
- SQL Server 209
- Sybase 211
- Throughput 71
- Time to First Buffer Breakdown 95
- Time to First Buffer Breakdown (Over Time) 97
- Total Transactions per second 61
- TowerJ 234
- Transaction Performance Summary 63
- Transaction Response Time (Distribution) 66
- Transaction Response Time (Percentile) 65
- Transaction Response Time (Under Load) 64
- Transaction Summary 62
- Transactions per second 60
- TUXEDO Resources 113
- UNIX Resources
  - UNIX Resources graph 110
- Vuser Summary 51
- WebLogic (JMX) 167
- WebLogic (SNMP) 165
- WebSphere 170
- WebSphere (EPM) 177
- Windows Media Player Client 223
- Windows Media Server 221
- Windows Resources 106
- Graph Settings dialog box 31
- graph types, Analysis
  - Database Server Resources 191–215
  - ERP Server Resource Monitor 225–228
  - Errors 53–55
  - FireWall Server Monitor 133–134
  - Java Performance 229–236
  - Network Monitor 127–132
  - Streaming Media Resources 217–224
  - System Resources 105–126
  - Transaction 57–67
  - User-Defined Data Points 101–103
  - Vuser 49–52
  - Web Application Server Resources 143, 143–190
  - Web Page Breakdown 81–100
  - Web Resources 69–79
  - Web Server Resources 135–141
- graphs, working with
  - background 39
  - crossing results 237–244
  - display options 36
  - merging 241
  - overlying, superimposing 241
- Group By dialog box
  - Available groups 35
  - Selected groups 35
- H**
- Hits per Second graph 70
- HTML
  - reports 248
- HTTP
  - Responses per Second graph 73
  - Status Code Summary graph 72
- HTTPS 267
- I**
- IIS
  - graph 138
- interpreting Analysis graphs 257–269
- iPlanet/Netscape
  - graph 140

## J

Java Performance graphs 229–236  
JProbe  
    graph 231

## L

legend 40  
Legend Columns Options dialog box 41  
legend preferences 39

## M

marks in a graph 39  
Measurement Options dialog box 40  
measurement trends, viewing 44  
measurements, auto correlating 45  
measurements, auto correlating example 262  
Media Player Client  
    graph 223  
Merge Graphs dialog box 243  
merging graphs 241  
Microsoft Active Server Pages (ASP)  
    graph 159  
Microsoft IIS  
    graph 138  
MSDE 12

## N

Network  
    Delay Time graph 129  
    Segment Delay graph 131  
    Sub-Path Time graph 130  
Network Monitor graphs 127–132

## O

Open a New Graph dialog box 21  
Options dialog box  
    Database tab 10  
    General tab 9  
    Result Collection tab 5, 8  
Oracle  
    graph 206

Oracle9iAS HTTP  
    graph 160  
    overlay graphs 241

## P

packets 128  
Page  
    Component Breakdown (Over Time)  
        graph 87  
    Component Breakdown graph 85  
    Download Time Breakdown (Over  
        Time) graph 93  
    Download Time Breakdown graph 89  
Pages Downloaded per Second graph 76  
Performance reports 249

## R

raw data 42  
Raw Data dialog box 43  
RealPlayer  
    Client graph 218  
    Server graph 220  
Receive time  
    in Page Download Time Breakdown  
        graph 91  
rendezvous  
    Rendezvous graph 52  
report  
    Data Point 254  
    Detailed Transaction 255  
    Failed Transaction 252  
    Failed User 253  
    Session Step Execution 251  
    Transaction Performance by User  
        256  
    viewer 250  
reports 245–256  
    Activity and Performance 249  
    displaying 249  
    HTML 248  
    summary 247  
Retries per Second graph 78  
Retries Summary graph 79  
Running Users graph 50

Run-Time settings  
 session 17

## S

SAP  
 graph 226

Save as Template dialog box 14

scale factor  
 Streaming Media graphs 217  
 Web Server Resource graphs 135

scale of graph 28

security problems 267

Select Report Filename and Path dialog box  
 248

Session Elapsed Time dialog box 34

Session Information dialog box 16

Session Step execution report 251

Session Step Run-Time Settings dialog box 17

sessions 3

Set Dimension Information dialog box 33

SilverStream  
 graph 164

Sitraka JMonitor  
 graph 231

SNMP Resources  
 graph 112

spreadsheet view 42

SQL Server  
 graph 209

SSL Handshaking time  
 in Page Download Time Breakdown  
 graph 90

standardizing y-axis values 44

Streaming Media graphs 217–224

summary data, viewing 4

Summary report 247

superimposing graphs 241

Support Information x

Support Online x

Sybase  
 graph 211

## T

templates  
 applying 15  
 saving 14

three-dimensional properties 39

Throughput graph 71

time filter, setting 7

Time to First Buffer Breakdown  
 (Over Time) graph 97  
 graph 95

Total Transactions per Second graph 61

TowerJ  
 graph 234

Transaction  
 Summary graph 62

Transaction graphs 57–67

Transaction Response Time graphs 58–67  
 Average 58  
 Distribution 66  
 Percentile 65  
 Under Load 64

transactions  
 breakdown 84  
 Transaction Performance by Vuser  
 report 256  
 Transaction Performance Summary  
 graph 63  
 Transactions per Second graph 60

TUXEDO  
 Resources graph 113

## U

user\_data\_point function 101

User-Defined Data Point graphs 101–103

## V

viewing measurement trends 44

Vuser graphs 49–52

Vusers  
 Vuser ID dialog box 33  
 Vuser Summary graph 51

## **W**

### Web

- Application Server Resource graphs  
143

- Web Application Server Resource graphs  
143–190

- Web Page Breakdown graphs 81–100, 260  
activating 83

- Web Resource graphs 69–79

- Web Server Resource graphs 135–141

### WebLogic

- (JMX) graph 167

- (SNMP) graph 165

### WebSphere

- graph 170

### WebSphere (EPM)

- graph 177

### Windows

- Media Server graph 221

- Resources graph 106

## **X**

- x-axis interval 28

## **Y**

- y-axis values, standardizing 44

## **Z**

- zoom 28





MERCURY INTERACTIVE

Mercury Interactive Corporation  
1325 Borregas Avenue  
Sunnyvale, CA 94089  
Tel. (408)822-5200 (800) TEST-911  
Fax. (408)822-5300

**Main Telephone:** (408) 822-5200  
**Sales & Information:** (800) TEST-911, (866) TOPAZ-4U  
**Customer Support:** (877) TEST-HLP  
**Fax:** (408) 822-5300

**Home Page:** [www.mercuryinteractive.com](http://www.mercuryinteractive.com)  
**Customer Support:** [support.mercuryinteractive.com](http://support.mercuryinteractive.com)



\*PTANUG1. 0/ 01\*