

# HP Project and Portfolio Management Center

Software Version: 8.00

---

## Tracking and Managing IT Demand Configuration Guide

Document Release Date: August 2009

Software Release Date: July 2009



# Legal Notices

## Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

## Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

## Copyright Notices

© Copyright 1997-2009 Hewlett-Packard Development Company, L.P.

## Trademark Notices

Adobe® is a trademark of Adobe Systems Incorporated.

Intel®, Intel® Itanium®, Intel® Xeon™, and Pentium® are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Java™ is a U.S. trademark of Sun Microsystems, Inc.

Microsoft®, Windows®, Microsoft Vista®, and Windows® XP are U.S. registered trademarks of Microsoft Corporation.

Oracle® is a registered U.S. trademark of Oracle Corporation, Redwood City, California.

UNIX® is a registered trademark of The Open Group.

## Documentation Updates

This manual's title page contains the following identifying information:

- Software version number, which indicates the software version
- Document release date, which changes each time the document is updated
- Software release date, which indicates the release date of this version of the software

To check for recent updates, or to verify that you are using the most recent edition of a document, go to:  
[h20230.www2.hp.com/selfsolve/manuals](http://h20230.www2.hp.com/selfsolve/manuals).

You will also receive updated or new editions if you subscribe to the appropriate product support service. Contact your HP sales representative for details.

## Support

You can visit the HP Software Support Web site at [hp.com/go/hpsoftwaresupport](http://hp.com/go/hpsoftwaresupport).

HP Software Support Online provides an efficient way to access interactive technical support tools. As a valued support customer, you can benefit by using the support site to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Download software patches
- Manage support contracts
- Look up HP support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and sign in. Many also require a support contract.

To find more information about access levels, go to: [h20230.www2.hp.com/new\\_access\\_levels.jsp](http://h20230.www2.hp.com/new_access_levels.jsp).

To register for an HP Passport ID, go to: [h20229.www2.hp.com/passport-registration.html](http://h20229.www2.hp.com/passport-registration.html).

# Contents

<b>1</b>	<b>Getting Started with Tracking and Managing IT Demand Configuration</b>	<b>7</b>
	Introduction to IT Demand Configuration	7
	Overview of IT Demand Configuration	7
	Accessing PPM Center	9
	Related Information	10
<b>2</b>	<b>Configuring Demand Sets</b>	<b>11</b>
	Overview of Demand Sets	11
	Creating Demand Sets	13
	Configuring Demand Set Fields	15
	Modifying the Mapping of Demand Set Fields to IT Demand Request Type Fields	18
	Copying Demand Sets	20
	Deleting Demand Sets	20
	Deleting IT Demand Request Types from Demand Sets	21
	Deleting Demand Set Fields from Demand Sets	22
<b>3</b>	<b>Configuring IT Demand Request Types</b>	<b>23</b>
	IT Demand Request Types Overview	23
	Default IT Demand Request Types	25
	Overview of Request Type Field Attribute	25
	Overview of Creating IT Demand Request Types	26
	Adding IT Demand to Request Header Types	26
	Adding Request Header Types to Request Types	30
	IT Demand SLA Fields	32
	IT Demand Schedule Fields	34
	Configuring Effort for IT Demand	35
	Configuring Effort for IT Demand Request Types	35

4	Configuring Workflows for IT Demand	37
	Overview of IT Demand and Workflows	37
	Accessing the IT Demand Workflows	38
	Accessing the Bug Fix Workflow	38
	Accessing the Enhancement Workflow	38
	Accessing the Initiative Workflow	39
	Configuring IT Demand Transitions	39
	Managing IT Demand Event Errors	40
5	Configuring Service Level Agreements for IT Demand	41
	Setting Up Service Level Agreements for IT Demand	41
	SLA Behavior	42
	Configuring SLA Rules	43
	Configuring SLA Levels	43
	Configuring SLA Violation Dates	45
	Configuring Service Requested Dates	46
	Configuring Service Satisfied Dates	47
	Index	49

---

# 1 Getting Started with Tracking and Managing IT Demand Configuration

## Introduction to IT Demand Configuration

HP Demand Management is an HP Project and Portfolio Management Center (PPM Center) product that provides a single application and repository to capture all IT demand placed on an IT organization. PPM Center consolidates information from many different sources to enable you to both view aggregate demand in real time and report against it. Standard demand categories allow IT organizations to normalize the demand from different sources. This helps to assign resources and distribute coverage of IT demand.

To capture and manage IT demand, you must configure HP Demand Management. To do this, you set up request types and workflows to track and manage demand, and set up Service Level Agreements (SLAs) and demand sets to meet IT demand requirements.

## Overview of IT Demand Configuration

HP Demand Management lets you capture, analyze, and manage the demand placed on your IT organization. You can use it to track and manage different types of demand, which can range from requests for defect fixes to requests for new initiatives.



This document details how to configure an HP Demand Management solution for managing IT demand. For details on how to track and manage your IT demand, see the *Tracking and Managing IT Demand User's Guide*.

To configure HP Demand Management for tracking and managing IT demand, perform the following steps.

**Step 1: Create the IT demand request type.**

To create the IT demand request type, you configure request types and their associated request header types to include the Demand Management Field Groups, and configure the SLAs in the request types. For more detailed information, see [Chapter 3, \*Configuring IT Demand Request Types\*](#), on page 23.

**Step 2: Configure the demand set.**

To configure the demand set, you set up the demand fields and map them to fields on each demand request type. For more detailed information, see [Chapter 2, \*Configuring Demand Sets\*](#), on page 11.

**Step 3: Configure the workflow for IT demand tracking and management.**

To configure the workflow for IT demand tracking and management, you use special transitions in your workflows that enable IT demand scheduling features. For more detailed information, see [Chapter 4, \*Configuring Workflows for IT Demand\*](#), on page 37.

**Step 4: Configure the SLAs.**

To configure SLAs to correspond to an acceptable level of performance or reaction time for items managed through HP Demand Management, you must configure the request types with SLA-specific levels, violation dates, service request dates, and service satisfied dates. For more information, see [Chapter 5, \*Configuring Service Level Agreements for IT Demand\*](#), on page 41



## Accessing PPM Center

Businesses often control access to certain information and business processes. This is done to protect sensitive information such as employee salaries, or to simplify business processes by hiding data that is irrelevant to the user. PPM Center includes a set of features to help control data and process security by letting you determine the following types of access:

- Who can access certain windows or pages
- Who can view or edit certain fields
- What data to display in sensitive fields or screens
- Who can view, create, edit, or process PPM Center entities such as requests, packages, projects, portfolios, and programs
- Who can view, create or edit PPM Center configuration entities, such as workflows, request types, object types, and security groups
- Who can change security settings

The following features control the data and process security in PPM Center. You can combine these features in several ways to secure your system:

- **Licenses.** Each user is assigned a license that provides access to a set of PPM Center product-related screens and functions. Licenses dictate potential behavior, but must be used with access grants to enable specific fields and functions.
- **Access grants.** Access grants are linked to users through security groups to determine which windows and functions users can access and use. Access grants also provide different levels of control over certain entities and fields.

For detailed information about security groups and access grants, see the *Security Model Guide and Reference*.

## Related Information

The following documents also include information related to tracking and managing IT demand:

- *Getting Started*
- *Tracking and Managing IT Demand User's Guide*
- *HP Demand Management User's Guide*
- *HP Demand Management Configuration Guide*
- *Commands, Tokens, and Validations Guide and Reference*
- *Open Interface Guide and Reference*
- *Reports Guide and Reference*
- *Security Model Guide and Reference*
- *Customizing the Standard Interface*
- *Creating Portlets and Modules*
- *HP Time Management Configuration Guide*
- *HP Time Management User's Guide*

---


## 2 Configuring Demand Sets

### Overview of Demand Sets

Field naming conventions across different IT demand request types can vary. However, you may find it useful to manage and report across the different IT demand types in a consistent way. Demand sets help the system “know” how to report across the different IT demands.

Each demand set can include a unique group of demand fields and demand request types. This means that each demand set can have a unique mapping of IT demand fields to IT demand request type fields (see *Figure 2-1*).

Figure 2-1. Demand set field and IT demand request type field mapping

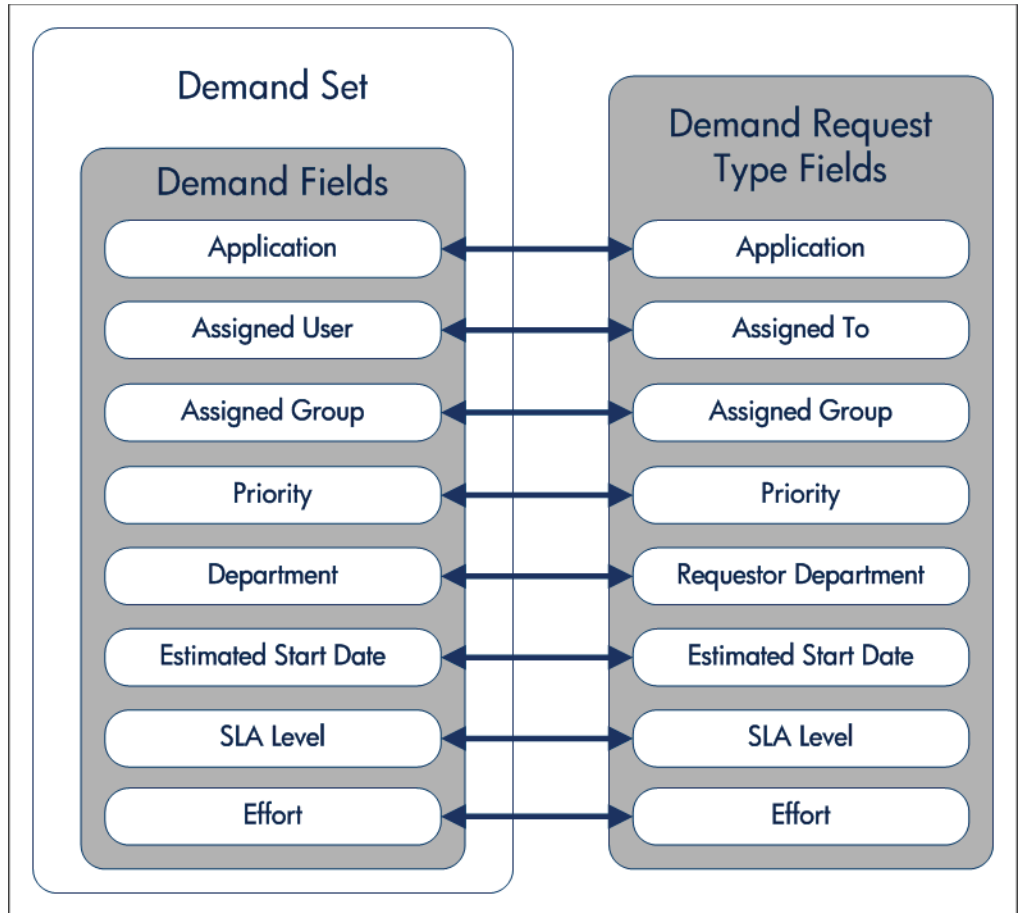

You can use the **Demand** menu to create and configure demand sets in the standard interface. If you the **Demand** menu is not viewable, contact your application administrator.

The following sections provide instructions on how to perform the following tasks:

- Create a demand set
- Add fields to the demand set
- Add IT demand request types to the demand set and map the fields

# Creating Demand Sets

To create a demand set:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Demand Sets.**

The Demand Sets page opens.

**Demand Sets**

---

Demand Set defines what is counted as demand for different parts of the organization. This allows management of demand by multiple groups within the same installation of HP Project and Portfolio Management Center. This installation's Demand Sets are listed below:

Demand Set	Description
Default Demand Set	This is a default Demand Set created by the installer.
R & D Demand Set	R & D demand set.
Sales IT Demand Set	Demand set for IT sales.

[Create New Demand Set](#)

---

[Done](#)

3. Click **Create New Demand Set.**

The Demand Set - New Demand Set page opens.

**Demand Set - New Demand Set**

---

[Copy](#) [Delete](#) [Create](#) [Cancel](#)

---

\* Name:

Description:

Enabled:  Yes  No

---

[Demand Fields](#) [Request Types](#)

Select the fields that will determine what demand is included in this set:

Field Name	Search Validation
<input type="text"/>	<input type="text"/>

[Add Field](#)

---

[Copy](#) [Delete](#) [Create](#) [Cancel](#)

4. In the **Name** field, type the name of the new demand set.
5. In the **Description** field, you can type a short description of the demand set.



Until you add at least one field to the demand set and map it to a request type (see *Configuring Demand Set Fields*), the **Enabled** option is unavailable. After you add fields and map them to request types, you can make the demand set available to the system.

6. Click the **Request Types** tab.
7. In the **Add Request Type** field, select an IT demand request type from the list.

The selected IT demand request type is displayed in the **Add Request Type** field.

8. Next to the **Add Request Type** field, click **Add**.

The IT demand request type is added to the demand set. The IT demand request type is displayed in the **Request Types** field. You must map all of the demand set fields to the IT demand request type fields before adding another IT demand request type to the demand set.

9. To select more request types, repeat [step 7](#) and [step 8](#).
10. Click **Create**.
11. Read the message and click **OK**.

The demand set is created.

# Configuring Demand Set Fields

Once the demand set is configured, you must configure the fields associated with a demand set. Once configured, these demand set fields must be mapped to IT demand request type fields. These fields should be common fields that you use for managing and reporting on the various types of demand. Each demand set field must exist in each of the IT demand request types.

To configure a demand set field:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Demand Sets**.

The Demand Sets page opens.

Demand Set	Description
Default Demand Set	This is a default Demand Set created by the installer.
R & D Demand Set	R & D demand set.
Sales IT Demand Set	Demand set for IT sales.

3. Click the name of a demand set.

The Demand Set page opens.

4. On the Demand Set page, select the **Demand Fields** tab.

The **Demand Fields** tab opens.

Demand Set - Default Demand Set

**Name:**

**Description:**

**Enabled:**  Yes  No

Select the fields that will determine what demand is included in this set:

Field Name	Search Validation
<input checked="" type="checkbox"/> Application	DEM Filter - Application - E
<input checked="" type="checkbox"/> Assigned User	DEM Filter - User Id - Enabl
<input checked="" type="checkbox"/> Assigned Group	DEM Filter - Security Group
<input checked="" type="checkbox"/> Priority	DEM Filter - Priority - Enabl
<input checked="" type="checkbox"/> Department	DEM Filter - Department - E
<input checked="" type="checkbox"/> Requestor Location	DEM Filter - Requestor Loc
<input checked="" type="checkbox"/> Business Initiative	DEM Filter - Business Initia
<input checked="" type="checkbox"/> Estimated Start Date	Date
<input checked="" type="checkbox"/> Reject Date	Date
<input checked="" type="checkbox"/> SLA Level	DEM - SLA Level
<input checked="" type="checkbox"/> SLA Violation Date	Date
<input checked="" type="checkbox"/> Service Requested Date	Date
<input checked="" type="checkbox"/> Service Satisfied Date	Date
<input checked="" type="checkbox"/> Effort	Numeric Text Field

5. Create a demand set field:

- At the bottom of the **Field Name** column, in the empty field, type a field name.
- At the bottom of the **Search Validation** column, in the empty field, select the validation from the list.

The search validation offers the full set of available values. For example, if one demand type is only available to users in the United States and another is available to users in Europe. Each IT demand request type would use its own field but the search field would include all possible choices.



c. Click **Add Field**.

The configured field is saved to the demand set. A delete icon is displayed next to the configured field. A new, empty field is made available.

6. Map the demand set field to a request type. Select the **Request Types** tab.
7. Under **Field Mapping**, map the fields of the **Demand Fields** column to the fields of the **Request Type Field** column.

Select the IT demand request type field using the list. Map the **Demand Fields** to **Request Type Fields** with the same validation type. The information stored in the fields should be similar across the multiple IT demand request types. This enables you to view an accurate picture of demand across multiple demand types.

8. Click **Done**.

A message window opens.

9. Read the message and click **OK**.

The fields are added to the demand set.

# Modifying the Mapping of Demand Set Fields to IT Demand Request Type Fields

Mapping a demand set field to an IT demand request type field is completed when configuring the demand set field.

To modify the mappings:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Demand Sets.**

The Demand Sets page opens.

Demand Set	Description
Default Demand Set	This is a default Demand Set created by the installer.
R & D Demand Set	R & D demand set.
Sales IT Demand Set	Demand set for IT sales.

3. Click the name of a demand set.

The Demand Set page for the demand set opens.

- On the Demand Set page, select the **Request Types** tab.

The Request Types tab page opens.

Demand Set - Default Demand Set

Copy Delete Done Cancel

\* Name: Default Demand Set

Description: This is a default Demand Set created by the installer.

Enabled:  Yes  No

Demand Fields Request Types

Select the Request types which will be counted as demand in this set. Then select which field in the Request Type will be mapped to each of the Demand Fields

Add Request Type:  Add

Request Types:

- DEM - Application Bug
- DEM - Application Enhancement
- DEM - Database Refresh
- DEM - Initiative

Remove

Field Mapping:

Demand Fields	Request Type Field
Application	Application: (Request Hea
Assigned User	Assigned To: (Request He
Assigned Group	Assigned Group: (Reques
Priority	Priority: (Request Header
Department	Requestor Department: (R
Requestor Location	Requestor Location: (Req
Business Initiative	Business Initiative: (Reque
Estimated Start Date	Estimated Start Date: (Dem
Reject Date	Reject Date: (Demand Man
SLA Level	SLA Level: (Demand Man
SLA Violation Date	SLA Violation Date: (Dema
Service Requested Date	Service Requested Date: (
Service Satisfied Date	Service Satisfied Date: (D
Effort	Estimated Effort: (Demand

Copy Delete Done Cancel

- Under **Field Mapping**, modify the **Request Type Field** column.

Select the IT demand request type field using the list. Map the **Demand Fields** to **Request Type Fields** with the same validation type. The information stored in the fields should be similar across the multiple IT demand request types. This lets you view an accurate picture of demand across multiple demand types.

- Repeat the process as many times as necessary.
- On the Demand Set page, click **Done**.

The changes to the demand set are saved.

## Copying Demand Sets

To copy a demand set:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Demand Sets.**

The Demand Sets page opens.

3. Click the name of a demand set.

The Demand Set page for the demand set opens.

4. On the Demand Set page, click **Copy.**

A copy of the demand set is created.

5. On the Demand Set page of the copy, in the **Name** field, type a new name for the copied demand set.

6. Click **Done.**

A message window opens.

7. Read the message and click **OK.**

The copy of the demand set is completed.

## Deleting Demand Sets

To delete a demand set:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Demand Sets.**

The Demand Sets page opens.

3. Click the name of a demand set.

The Demand Set page for the demand set opens.

4. On the Demand Set page, click **Delete**.

A delete confirmation window opens.

5. In the delete confirmation window, click **OK**.

The selected demand set is deleted.

## Deleting IT Demand Request Types from Demand Sets

To delete an IT demand request type from a demand set:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Demand Sets**.

The Demand Sets page opens.

3. Click the name of a demand set.

The Demand Set page for the demand set opens.

4. Click the **Request Types** tab.
5. In the **Request Types** field, select an IT demand request type.
6. Below the **Request Types** field, click **Remove**.

The request type is removed from the **Request Types** field.

7. In the Demand Set page, click **Done**.

A message window opens.

8. Read the message and click **OK**.

The request type is removed from the demand set.

# Deleting Demand Set Fields from Demand Sets

To delete a demand set field from a demand set:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Demand Sets.**

The Demand Sets page opens.

3. Click the name of a demand set.

The Demand Set page for the demand set opens.

4. Click the **Demand Fields** tab.

5. Click the Delete icon next to the demand set field.

A delete confirmation window opens.

6. In the delete confirmation window, click **OK.**

The demand set field is removed.

7. In the Demand Set page, click **Done.**

The demand set field is deleted from the demand set.

---

# 3 Configuring IT Demand Request Types

## IT Demand Request Types Overview

Requests are a fundamental work unit of a request tracking and resolution system. Users create, and then submit requests along a resolution process that is defined in the assigned workflow.

The request page contains all information typically required to complete a specific business process. The HP Demand Management solution for managing and tracking IT demand requires that two specific categories (and associated fields) be included on an IT demand request type (see *Figure 3-1*):

- HP Demand Management SLA fields
- HP Demand Management scheduling fields

Figure 3-1. IT demand request

Create New DEM - Application Bug



Expand All Collapse All Submit Cancel



Header


Summary


Requested By: Jane Smith  
Request Status: Unreleased


Workflow: DEM - Bug Request Workflow

Assigned To:   

Assigned Group:   

\*Requestor Department:  

\*Priority:  

\*Application:  

\*Description:

Details

Problem/Resolution

Environment

Analysis

Project Information

Demand Management SLA Fields


SLA Level:


SLA Violation Date:


Service Requested Date:


Service Satisfied Date:

Demand Management Scheduling Fields

Estimated Start Date:  

Estimated Effort:  

Reject Date:  

Demand Satisfied Date:  

Notes

References

Submit Cancel

Adding the IT demand fields to a request requires changes to the associated request type. If you do not want to change a request type, you can create a new request type that includes the IT demand fields.



## Default IT Demand Request Types

*Table 3-1* provides a list of the HP-supplied IT demand request types.

Table 3-1. IT demand request types

Request Type	Description
DEM - Application Bug	Report an existing application bug and request its correction. By default, SLAs are not selected and scheduling fields are selected.
DEM - Application Enhancement	Request an enhancement to an existing application. By default, SLAs are not selected and scheduling fields are selected.
DEM - Database Refresh	Request a database refresh. By default, SLAs are selected and scheduling fields are selected.
DEM - Initiative	Request something new, such as a new project or a new program. By default, SLAs are not selected and scheduling fields are selected.

## Overview of Request Type Field Attribute

When creating request type fields, there are three general attributes associated with each field.

- **Criteria for Visible Fields.** Fields can be set to be visible or hidden to the user based on their settings. For example, the **SLA Level** field might be hidden after a request is first created.
- **Criteria for Editable Fields.** Fields can be set to become read-only based on their settings. For example, the **SLA Level** field might be read-only after a request is first created and editable after the request is accepted.
- **Criteria for Default Fields.** Fields can be configured to update automatically based on the settings. For example, the **SLA Violation Date** can be automatically updated based on the **SLA Level** and **Service Requested Date** fields.

For more information about how to configure request types, see the *HP Demand Management Configuration Guide*.

# Overview of Creating IT Demand Request Types

To create an IT demand request type:

**Step 1: Add the IT demand fields to a request header type.**

See *Adding IT Demand to Request Header Types*.

**Step 2: Add the IT demand request header type to a request type.**

For instructions, see *Adding Request Header Types to Request Types* on page 30.

**Step 3: Configure the SLA fields.**


For instructions, see *IT Demand SLA Fields* on page 32.

## Adding IT Demand to Request Header Types

To add the IT demand fields to a request header type:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Open Workbench**.  
The PPM Workbench opens.
3. From the shortcut bar, select **Demand Mgmt > Request Header Types**.  
The Request Header Type Workbench opens.

- Open an existing request header type or create a new request header type.  
The Request Header Type window opens.

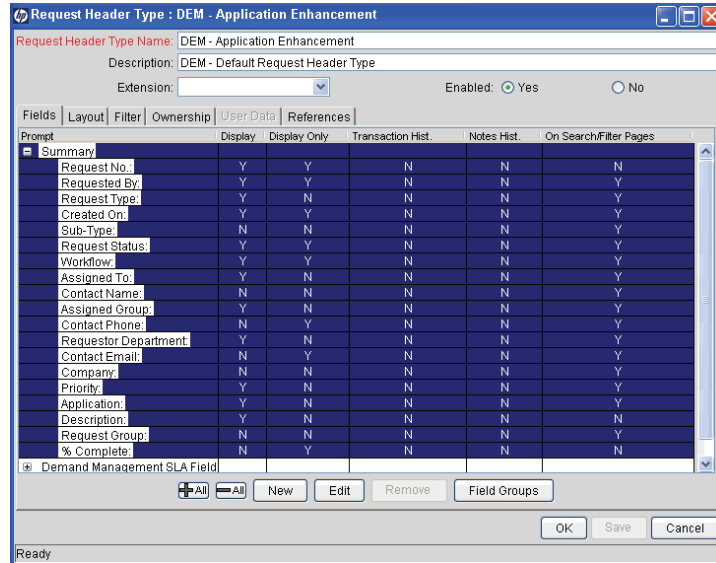


- Make sure that the request header type general information is complete.  
The following table provides a list of the general information fields and descriptions for request header types.

Field Name	Description
Request Header Type Name	Name of the request header type
Description	Description of request type use
Extension	For release types created for an HP Deployment Management Extension. Select the Extension from the list.
Enabled	Indicates whether or not the request type is available to PPM Center.

6. Click **Field Groups**.

The Field Groups window opens.

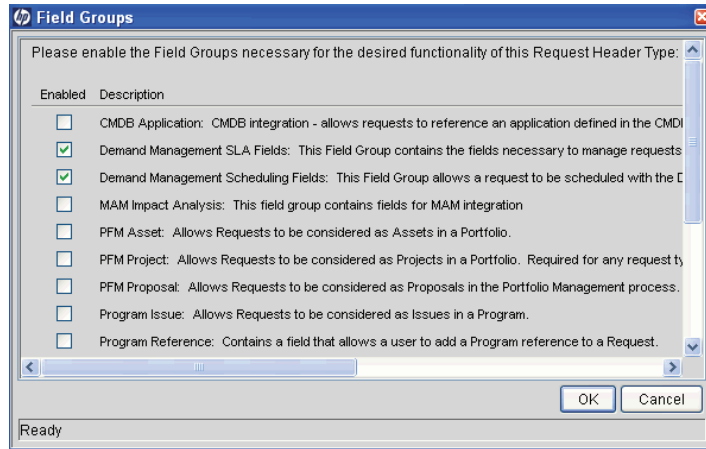


7. Select the checkboxes for the IT demand fields.

The IT demand fields are:

- **Demand Management SLA Fields**
- **Demand Management Scheduling Fields**

8. Click **OK**.

The Field Groups window closes. The selected IT demand fields are displayed in the Request Header Type window. To view the IT demand fields, select the **Fields** tab. Expand the category heading to view the associated fields.

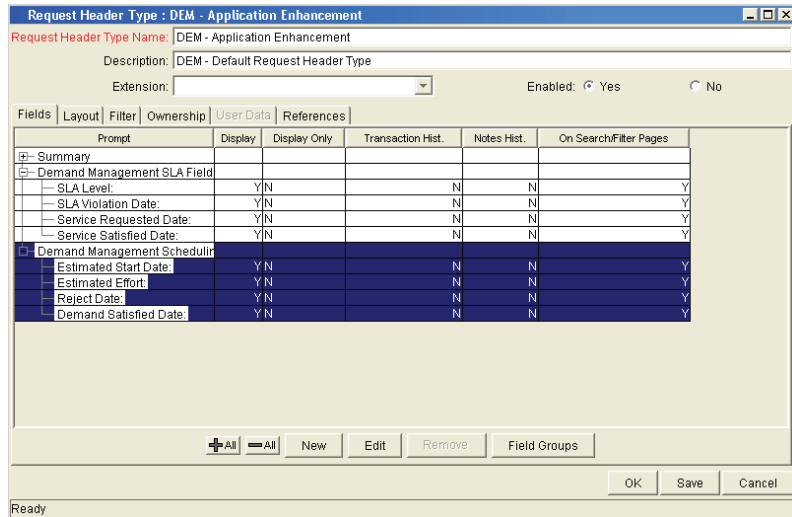

9. Complete the request header type as required.

See the *HP Demand Management Configuration Guide*.

10. In the **Enable** field, click **Yes**.

The request header type is enabled.

11. Click **OK** to save the changes and close the Request Header Type window.

Click **Save** to save the changes and leave the Request Header Type window open.

[For More Information](#)

For more information about how to configure request types, see the *HP Demand Management Configuration Guide*.

# Adding Request Header Types to Request Types

To add a request header type to a request type:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Open Workbench**.

The PPM Workbench opens.

3. From the shortcut bar, select **Demand Mgmt > Request Types**.

The Request Type Workbench opens.

4. Open an existing request type or create a new request type.

The Request Type window opens.

The screenshot shows the 'Request Type : DEM - Application Enhancement' window. The 'Request Type Name' is 'DEM - Application Enhancement' and the 'Request Header Type' is '- Application Enhancement'. The 'Creation Action Name' is 'Request an Application Enhancement'. The 'Description' is 'Application Enhancements should be used to request new functionality in IT current applications'. The 'Meta Layer View' is 'MREQ\_ | DEM\_APPS\_ENHANCEMENT'. The 'Max Fields' is '50' and 'Enabled' is 'Yes'. The window has a menu bar with 'Commands', 'Sub-Types', 'Workflows', 'User Access', 'Notifications', 'User Data', 'Ownership', and 'Help Content'. Below the menu bar is a table with columns 'Prompt', 'Token', 'Enabled', 'Component Type', and 'Validation'. The table contains the following rows:

Prompt	Token	Enabled	Component Type	Validation
[-] Summary				
[-] Enhancement Details				
[-] Analysis				
[-] Demand Management SLA Field				
[-] Demand Management Scheduling				

At the bottom of the window, there are buttons for '+ All', '= All', 'New', 'Edit', 'Remove', 'OK', 'Save', and 'Cancel'. The status bar at the bottom left says 'Ready'.

5. Make sure the request type general information is complete.

The following table lists general information fields and definitions for request types.

Field Name	Description
Request Type Name	The name of the request type.
Creation Action Name	A description of the request type's function. For example <b>Log a Product Bug. Creation Action Names</b> display on the Create New Request page.
Category	The category containing the request type. Categories are created by an application administrator and are based on the business needs of the organization. Examples of categories which an organization might use are <b>Sales and Support</b> and <b>General Administration</b> . Categories display on the Create New Request window in the standard interface.  [Validation = CRT - Request Type Category]
Extension	For release types created for an HP Deployment Management Extension. Select the Extension from the list.
Description	Description of how to use the request type.
Meta Layer View	Meta layer views relate information specific to the PPM Center. For example, the reporting meta layer view MREQ_OPENED_CLOSED_BY_TYPE_D provides summary information for request submission and completion activity, broken down by request type and by calendar day.
Max Fields	The maximum number of fields the request type can have.
Enabled	Indicates whether or not the request type is available to PPM Center.
Request Header Type	Selects a request header type to be used with this request type. Select an existing request header type from the auto-complete list. To start to create a new request header type, click <b>New</b> .

6. In the **Request Header Type** field, select the IT demand request header type from the list.

All enabled request header types are displayed in the list. If you cannot find your IT demand request header type, return to the Request Header Type window and make sure the request header type is enabled.

7. Complete the request type as required.

See the *HP Demand Management Configuration Guide*.

8. For the **Enable** option, select **Yes**.

9. Click **OK**.

For more information about request type configuration, see the *HP Demand Management Configuration Guide*.

## IT Demand SLA Fields

IT demand can be tracked and reported by using a predefined set of Service Level Agreements (SLAs). These SLAs correspond to an acceptable level of performance or reaction time as specified by your business processes.

The **Service Requested Date** is set upon initiation on the request. The user then sets the SLA level in the request and the SLA violation date is calculated. If the request is not closed before the SLA violation date, an SLA exception occurs.

Figure 3-2. IT demand SLA fields

The screenshot shows a software interface with a sidebar on the left containing the following menu items: Details, Enhancement Details, Analysis, and Demand Management SLA Fields. The main area displays four fields for configuration:

SLA Level:	<input type="text" value="Critical - 3 Days"/>	
SLA Violation Date:	<input type="text" value="November 5, 2004"/>	
Service Requested Date:	<input type="text" value="November 1, 2004"/>	
Service Satisfied Date:	<input type="text"/>	

At the bottom of the main area, there is a menu item: Demand Management Scheduling Fields.



The service requested date need not correlate to the request creation date. For example, the customer SLA might be based on the time it takes to implement a bug fix after bug approval (rather than bug creation).

*Table 3-2* lists the IT demand SLA fields.

Table 3-2. IT demand SLA fields

Field Name	Description
SLA Level	The <b>SLA Level</b> field is set by a rule based on the priority of the request. The default values for the <b>DEM - SLA Level Validation</b> are: <ul style="list-style-type: none"> <li>• Critical - 3 Days</li> <li>• High - 5 Days</li> <li>• Normal - 15 Days</li> <li>• Low - 30 Days</li> </ul>
SLA Violation Date	The <b>SLA Violation Date</b> is set by a rule based on <b>Service Level</b> and <b>Service Requested Date</b> . The SLA violation date equals the service requested date plus the time specified by the service level validation.
Service Requested	The <b>Service Requested Date</b> is set by a rule to the creation date of the request. It can be set to correlate with any workflow step.
Service Satisfied	The <b>Service Satisfied Date</b> is set by the execution workflow step, DEM - SLA Satisfied On.

# IT Demand Schedule Fields

Once IT demand is created, an IT manager or IT work scheduler must decide when to start work on the IT demand, the estimated effort required, when the IT demand is satisfied, and if the IT demand should be rejected.

Figure 3-3. IT demand schedule fields

The screenshot shows a web-based form with a sidebar on the left containing a tree view with the following items: Details, Enhancement Details, Analysis, Demand Management SLA Fields, and Demand Management Scheduling Fields. The main content area is under the 'Demand Management Scheduling Fields' section and contains four labeled input fields: 'Estimated Start Date' with the value 'November 5, 2004', 'Estimated Effort', 'Reject Date', and 'Demand Satisfied Date'. Each input field has a small icon to its right.

Table 3-3 lists the IT demand scheduling fields.

Table 3-3. IT demand scheduling fields

Field Name	Description
Estimated Start Date	The anticipated date when the task to complete the IT demand will start. The <b>Estimated Start Date</b> is provided by the IT manager or responsible IT work scheduler.
Estimated Effort	The <b>Estimated Effort</b> is set by a rule. This rule can be changed for your specific request type. The following lists the default effort associated with the IT demand request type: <ul style="list-style-type: none"> <li>• DEM - Application Bug = 2</li> <li>• DEM - Application Enhancement = 5</li> <li>• DEM - Initiative = 5</li> <li>• DEM - Database Refresh = 1</li> </ul>
Reject Date	The date the request was rejected. The <b>Reject Date</b> is provided by the IT manager or responsible IT work scheduler.
Demand Satisfied Date	The date the IT demand was completed. The <b>Demand Satisfied Date</b> is provided by the IT manager or responsible IT work scheduler.

# Configuring Effort for IT Demand

IT demand allows you to analyze demand based on one of the following:

- The number (total count) of IT demand requests
- The accumulation of effort associated with each IT demand request

Consider the case where you have ten requests for database refreshes and ten requests for defect fixes. If a database refresh takes one hour to fulfill and a defect fix takes two days to fulfill, it might be more meaningful for the organization to factor in the effort involved in fulfilling demand. If you want effort to equal the total count of IT demand requests, set the estimated effort of each IT demand request type to one.

Each IT demand request type has a default effort assigned to it (see *IT Demand Schedule Fields*). This effort can be reconfirmed or changed during an analysis phase later in the process (on the request). The following are a few examples of how you can set the default effort for a request type:

- Single default using field defaults
- Advanced defaults driven by other request type fields using rules
- Using status dependencies in an analysis phase in the request process with reconfirm

## Configuring Effort for IT Demand Request Types

To configure effort for IT demand:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Open Workbench**.

The PPM Workbench opens.

3. From the shortcut bar, select **Demand Mgmt > Request Types**.

The Request Type Workbench opens.

4. To view the complete list of request types, click **List**.

5. Open an IT demand request type or create a new IT demand request type.

The Request Type window opens to the **Fields** tab.

6. Click the **Rules** tab.

7. Select **Default for Estimated Effort**, and then click **Edit**.

The Rules window opens and displays the Default for Estimated Effort.

8. In the **SQL** field, change the default number.

For example, to set the Default for Estimated Effort to 10, change

```
select 5,5 from dual
```

to

```
select 10,10 from dual
```

9. In the Rules window, click **OK**.

10. Click **OK**.

# 4 Configuring Workflows for IT Demand

## Overview of IT Demand and Workflows

The schedule, reject, and assign functions in HP Demand Management interact directly with workflows. When a request is scheduled, rejected, or assigned, the current workflow step is selected for a transition. If the workflow step is configured with a scheduling-related transition, the request follows the transition out of the step. If this transition is not defined for the current workflow step, no processing occurs, but the IT demand is still marked as scheduled, rejected, or assigned (see *Figure 4-1* and *Figure 4-2*).

Figure 4-1. Workflow step without IT demand transitions





Figure 4-2. Workflow step with IT demand transitions

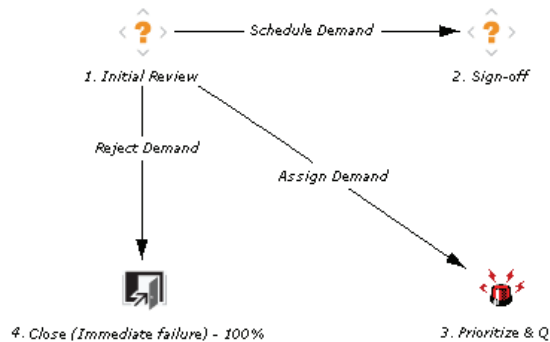

# Accessing the IT Demand Workflows

PPM Center includes a quick way to select and open IT demand workflows. The following section includes details about how to open the following workflows:

- Bug (defect) fixes
- Enhancement requests
- Initiatives

## Accessing the Bug Fix Workflow

To quickly access the Bug Fix Workflow Workbench:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Bug Fix Process.**

The workflow for IT demand bug fixes opens.

## Accessing the Enhancement Workflow

To quickly access the Enhance Workflow Workbench:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Enhancement Process.**

The workflow for IT demand enhancements opens.

## Accessing the Initiative Workflow

To quickly access the Initiative Workflow Workbench:

1. Log on to PPM Center.
2. From the menu bar, select **Open > Administration > Demand Sets & Processes > Manage Initiative Process**.

The workflow for IT demand initiatives opens.


## Configuring IT Demand Transitions

HP Demand Management for IT demand includes an additional method for transitioning out of a workflow decision step that coincides with an IT demand scheduling event. When adding a transition from one workflow decision step to another workflow step, in the Define Transition window (see *Figure 4-3*), select **Specific Event**, and then specify the event for the transition.

The following is a list of the HP Demand Management for IT demand transitions:

- Assign Demand
- Schedule Demand
- Reject Demand

Figure 4-3. Specific event transition from a workflow step

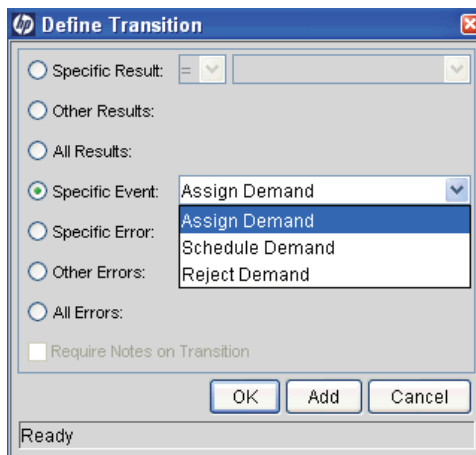

For more information about how to configure workflow steps, see the *HP Demand Management Configuration Guide*.

## Managing IT Demand Event Errors

HP Demand Management for IT demand events do not occur if one of the following conditions exists:

- There is required look-ahead for the transition. The exception to this exception is when the look-ahead requires you to specify an assigned-to user during the assignment of IT demand.
- You do not have the required security permissions (IT demand request type and workflow step) to transition out of the workflow step.
- The IT demand request type is locked for editing by another user.

If the scheduling, assignment, or rejecting event does not work, an error message is returned.



---

# 5 Configuring Service Level Agreements for IT Demand

## Setting Up Service Level Agreements for IT Demand

The HP Demand Management IT demand solution tracks and reports on a predefined set of service level agreements (SLAs). SLAs correspond to an acceptable level of performance or reaction time for items you manage through HP Demand Management. After you configure the IT demand types, demand sets and workflows, you can use request type rules and validations to set up the SLAs.

In the default HP Demand Management for IT demand solution installation, SLAs are only enabled for the Database Refresh demand type. However, you can enable SLAs for all IT demand types.

# SLA Behavior

SLA behavior is driven by the Demand Management SLA fields on the request type. The SLA fields are shown in *Figure 5-1*.

Figure 5-1. Demand Management SLA Fields

The screenshot shows a software interface with a sidebar on the left containing expandable sections: 'Details', 'Enhancement Details', 'Analysis', and 'Demand Management SLA Fields'. The 'Demand Management SLA Fields' section is expanded, showing four input fields: 'SLA Level' (set to 'Critical - 3 Days'), 'SLA Violation Date' (set to 'November 5, 2004'), 'Service Requested Date' (set to 'November 1, 2004'), and 'Service Satisfied Date' (empty). Below these fields is another expandable section labeled 'Demand Management Scheduling Fields'.

**Service Requested Date** is set when the request is submitted. The **SLA Level** is set in the request. The **Request SLA Violation Date** is then calculated. If the request is not satisfied before the date specified in the **SLA Violation Date** field, an SLA exception occurs.

➤ The service requested date does not need to correlate to the request creation date. For example, the customer's SLA might be based on the time it takes to implement a bug fix following bug approval (rather than the bug creation). The service satisfied date marks the end of the request resolution process. Demand Management for IT demand can be set to be satisfied at any point in the process.

# Configuring SLA Rules

SLA behavior is based on the request type rules and workflow configurations. *Figure 5-2* shows an example of the SLA fields on a request type.

Figure 5-2. DEM - Database Refresh request type

Fields	Prompt	Display	Display Only	Transaction Hist.	Notes Hist.	On Search/Filter Pages
[-] Summary						
[-] Demand Management SLA Field						
[-] SLA Level:		Y N		N	N	Y
[-] SLA Violation Date:		Y N		N	N	Y
[-] Service Requested Date:		Y N		N	N	Y
[-] Service Satisfied Date:		Y N		N	N	Y
[-] Demand Management Scheduling						
[-] Estimated Start Date:		Y N		N	N	Y
[-] Estimated Effort:		Y N		N	N	Y
[-] Reject Date:		Y N		N	N	Y
[-] Demand Satisfied Date:		Y N		N	N	Y



If you use a validation to store the SLA configuration information, the validation is easier to change. Use one validation per request type with an SLA.

## Configuring SLA Levels

The **SLA Level** is set by a rule based on request priority. The validation for the **SLA Level** field is DEM - SLA Level. *Figure 5-3* shows the rules window and validation for SLA level. The default values for the DEM - SLA Level validation are:

- Critical - 3 Days
- High - 5 Days
- Normal - 15 Days
- Low - 30 Days

Figure 5-3. SLA Level Rule and Validation windows

**Rules Window**

Rule Name: SLA Level & SLA Violation Date Setup  
 Description: SLA Level & SLA Violation Date Setup  
 Enabled:  Yes  No  
 Rule Event: Apply On Field Change  
 Rule Type: Advanced Defaults

Dependencies:

Priority	Field Name	Value
		All Values

[New] [Edit] [Remove]

**Results:**

Field Name	Column	Token
SLA Violation Date:	1	REQ.P.KNTA_SLA_VIOLATION_DATE
	2	REQ.VP.KNTA_SLA_VIOLATION_DATE
SLA Level:	3	REQ.P.KNTA_SLA_LEVEL
	4	REQ.VP.KNTA_SLA_LEVEL

[New] [Remove]

**SQL:**

```
SELECT
sysdate + to_number(kl.description),
sysdate + to_number(kl.description),
kl.meaning,
kl.meaning
FROM knta_lookups kl
WHERE kl.lookup_type = 'DEM - SLA Level : Bug'
AND kl.lookup_code = 'REQ.PRIORITY_CODE'
AND kl.enabled_flag = 'Y'
```

[OK] [Apply] [Cancel]

Ready

**Validation : DEM - SLA Level**

Name: DEM - SLA Level  
 Description:  
 Enabled:  Use in Workflow?

Component Type: Auto Complete List

Validated By: List Expected list length:  Short  Long  
 Selection mode:  Starts With  Contains Number of results per page: 50

Configuration Filter Fields Filter Layout

**Validation Values:**

Seq	Code	Meaning	Description	Enabled	Default
1	1	Critical - 3 Days	3	Y	N
2	2	High - 5 Days	5	Y	N
3	3	Medium - 15 Days	15	Y	N
4	4	Low - 30 Days	30	Y	N

[New] [Edit] [Delete] [Copy From] [Up] [Down]

Used By Ownership [OK] [Save] [Cancel]

Ready (Read-Only, Seed Data)

## Configuring SLA Violation Dates

The **SLA Violation Date** is set by a rule based on the service level and service requested date. The SLA violation date equals the service requested date plus the time determined by the service level validation. *Figure 5-4* shows the Rules window for SLA violation date.

Figure 5-4. SLA violation date rule

**Rules Window**

Rule Name: SLA Level & SLA Violation Date Setup

Description: SLA Level & SLA Violation Date Setup

Enabled:  Yes  No

Rule Event: Apply On Field Change

Rule Type: Advanced Defaults

Dependencies

Field Name	Value
Priority:	All Values

New Edit Remove

**Results:**

Field Name	Column	Token
SLA Violation Date:	1	REQ.P.KNTA_SLA_VIOLATION_DATE
	2	REQ.VP.KNTA_SLA_VIOLATION_DATE
SLA Level:	3	REQ.P.KNTA_SLA_LEVEL
	4	REQ.VP.KNTA_SLA_LEVEL

New Remove

**SQL:**

```
SELECT
sysdate + to_number(kl.description),
sysdate + to_number(kl.description),
kl.meaning,
kl.meaning
FROM knta_lookups kl
WHERE kl.lookup_type = 'DEM - SLA Level : Bug'
AND kl.lookup_code = 'REQ.PRIORITY_CODE'
AND kl.enabled_flag = 'Y'
```

OK Apply Cancel

Ready

## Configuring Service Requested Dates

The service requested date is set by a rule to the creation date of the request. The service requested date could be set to correlate with any workflow step. *Figure 5-5* shows the rules window for service requested date.

Figure 5-5. Service requested date rule

The screenshot shows the 'Rules Window' interface. The 'Rule Name' is 'Service Requested On Setup'. The 'Description' is 'Default Service Requested On Setup'. The 'Enabled' checkbox is checked. The 'Rule Event' is 'Apply On Creation' and the 'Rule Type' is 'Advanced Defaults'. The 'Dependencies' table shows a dependency on 'Priority' with the value 'All Values'. The 'Results' table shows two columns: 'Service Requested Date' with column '1' and token 'REQ.P.KNTA\_SLA\_SERV\_REQUESTI', and column '2' with token 'REQ.VP.KNTA\_SLA\_SERV\_REQUES'. The 'SQL' field contains the query: 'SELECT sysdate, sysdate FROM dual'. The status bar at the bottom indicates 'Ready'.



Field Name	Column	Token
Service Requested Date:	1	REQ.P.KNTA_SLA_SERV_REQUESTI
	2	REQ.VP.KNTA_SLA_SERV_REQUES

```
SELECT
sysdate,
sysdate
FROM dual
```

## Configuring Service Satisfied Dates

The service satisfied date is set by the execution workflow step, DEM - SLA Satisfied On. *Figure 5-6* shows the DEM - SLA Satisfied On execution step in the Database Refresh workflow.

Figure 5-6. Database refresh workflow execution

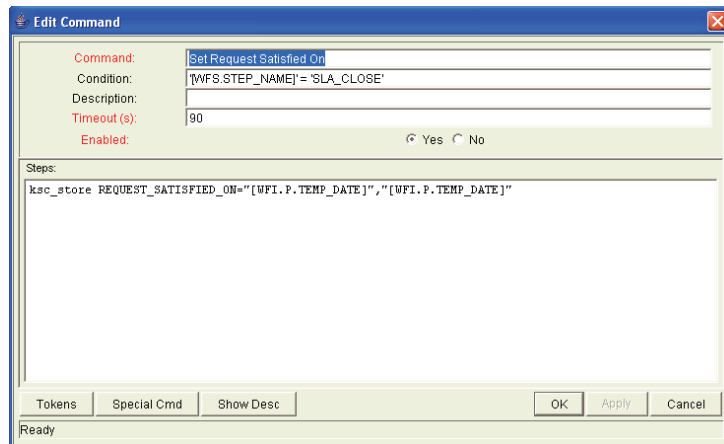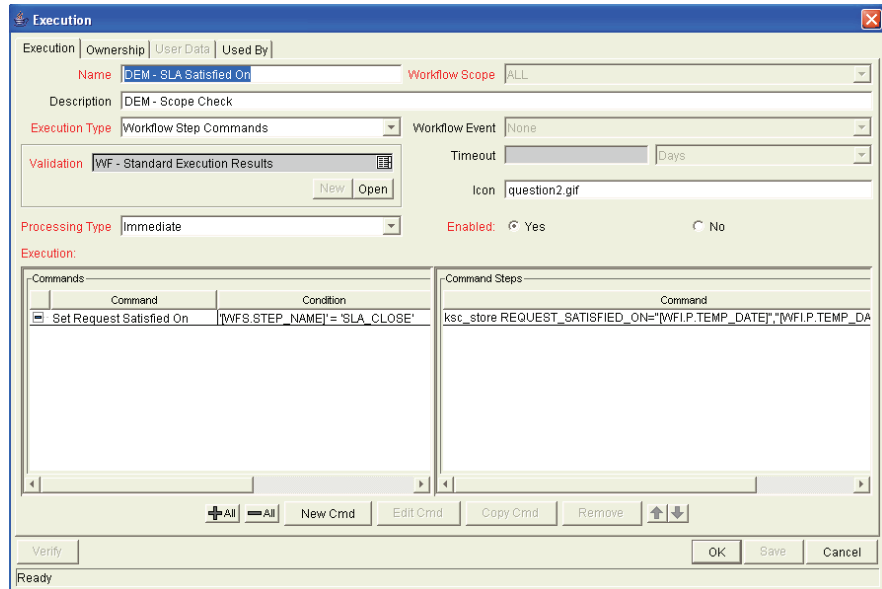





# Index

## A

- access grants
  - Demand Management solution, [9](#)
- accessing
  - workflows for IT demand, [38](#)
- adding
  - request header types for IT demand, [26](#)
  - request header types to request types, [30](#)

## C

- configuring
  - Demand Management solution, [8](#)
  - demand set fields, [15](#)
  - demand sets, [12](#)
  - effort for IT demand, [35](#)
  - effort for request types, [35](#)
  - field groups, [28](#)
  - request header types for IT demand, [26](#)
  - service requested dates, [46](#)
  - service satisfied dates, [47](#)
  - SLA violation dates, [45](#)
- copying
  - demand sets, [20](#)
- creating
  - demand set fields, [15](#)
  - demand sets, [13](#)
  - request types for IT demand, [26](#)

## D

- deleting

- demand set fields, [22](#)
- demand sets, [20](#)
  - request types from demand sets, [21](#)
- DEM - Application Bug request type, [25](#)
- DEM - Application Enhancement request type, [25](#)
- DEM - Database Refresh request type, [25](#)
- DEM - Initiative request type, [25](#)
- demand
  - See also* IT demand.
  - configuring
    - effort, [35](#)
    - fields, [15](#)
    - request header types, [26](#)
  - creating sets, [13](#)
  - mapping demand set and request type fields, [17](#)
  - modifying demand set and request type field mappings, [18](#)
  - schedule fields, [34](#)
  - SLA fields, [32](#)
- Demand Management solution
  - configuring, [8](#)
- demand set fields
  - configuring, [15](#)
  - deleting, [22](#)
  - mapping to request types, [17](#)
  - modifying request type mappings, [18](#)
- demand sets, [11](#)
  - configuring, [12](#)

- configuring fields, **15**
- copying, **20**
- creating, **13**
- deleting, **20**
  - fields, **22**
  - request types, **21**
- mapping to request types, **17**
- modifying request type mappings, **18**

## **E**

- effort
  - configuring for IT demand, **35**
- errors
  - managing for IT demand, **40**

## **F**

- field groups
  - configuring, **28**

## **I**

- IT demand
  - See also* demand.
  - accessing workflows, **38**
  - adding to request header types, **26**
  - configuring effort, **35**
  - configuring request header types, **26**
  - creating request types, **26**
  - errors, **40**
  - mapping demand set and request type fields, **17**
  - modifying demand set and request type field mappings, **18**
  - request type defaults, **25**
  - request type field attributes, **25**
  - request types, **23**
  - schedule fields, **34**
  - SLA fields, **32**
  - workflows, **37**

## **L**

- licenses
  - Demand Management solution, **9**

## **M**

- managing
  - errors for IT demand, **40**
- mapping
  - demand set and request type fields, **17**
  - modifying for demand set and request type fields, **18**

## **R**

- request types
  - adding IT demand, **26**
  - adding request header types, **30**
  - configuring effort for IT demand, **35**
  - creating for IT demand, **26**
  - defaults for IT demand, **25**
  - deleting from demand sets, **21**
  - DEM - Application Bug, **25**
  - DEM - Application Enhancement, **25**
  - DEM - Database Refresh, **25**
  - DEM - Initiative, **25**
  - field attributes for IT demand, **25**
  - IT demand, **23**
  - mapping to demand sets, **17**
  - modifying demand set mappings, **18**

- requested dates
  - configuring, **46**

## **S**

- satisfied dates
  - configuring, **47**
- schedules
  - fields for IT demand, **34**
- security
  - access grants, **9**
  - licenses, **9**
- service
  - configuring requested dates, **46**
  - configuring satisfied dates, **47**
- service level agreements, **42**
  - See also* SLAs.

## SLAs

*See also* service level agreements.

behavior, [42](#)

configuring violation dates, [45](#)

fields for IT demand, [32](#)

## W

### workflows

accessing IT demand, [38](#)

IT demand, [37](#)