

HP OpenView Operations Smart Plug-in for SAP

Printed On-line Help

Version: B.08.70

MS Windows®

**This PDF file contains the same information found in the online help. Some
interactive pages are not included.**



Manufacturing Part Number: None

March 2004

© Copyright 1998-2004 Hewlett-Packard Development Company, L.P.

Legal Notices

Warranty.

Hewlett-Packard makes no warranty of any kind with regard to this manual, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Hewlett-Packard shall not be held liable for errors contained herein or direct, indirect, special, incidental or consequential damages in connection with the furnishing, performance, or use of this material.

A copy of the specific warranty terms applicable to your Hewlett-Packard product can be obtained from your local Sales and Service Office.

Restricted Rights Legend.

Use, duplication or disclosure by the U.S. Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause in DFARS 252.227-7013.

Hewlett-Packard Company
United States of America

Rights for non-DOD U.S. Government Departments and Agencies are as set forth in FAR 52.227-19(c)(1,2).

Copyright Notices.

©Copyright 1998-2004 Hewlett-Packard Development Company, L.P., all rights reserved.

No part of this document may be copied, reproduced, or translated to another language without the prior written consent of Hewlett-Packard Company. The information contained in this material is subject to change without notice.

Trademark Notices.

Java™ is a U.S. trademark of Sun Microsystems, Inc.

Microsoft® is a U.S. registered trademark of Microsoft Corporation.

Windows NT® is a U.S. registered trademark of Microsoft Corporation.

Windows® 2000 is a U.S. registered trademark of Microsoft Corporation.

Windows® and MS Windows® are U.S. registered trademarks of Microsoft Corporation.

Netscape and Netscape Navigator are U.S. trademarks of Netscape Communications Corporation

Oracle® is a registered U.S. trademark of Oracle Corporation, Redwood City, California.

Oracle7™ is a trademark of Oracle Corporation, Redwood City, California.

OSF/Motif® and Open Software Foundation® are trademarks of the Open Software Foundation, Inc. in the U.S. and other countries.

Pentium® is a U.S. registered trademark of Intel Corporation.

UNIX® is a registered trademark of The Open Group.

All other product names are the property of their respective trademark or service mark holders and are hereby acknowledged.

1. Introduction

Overview	14
----------------	----

2. Customizing the SPI for SAP Monitors

Introduction to the SPI for SAP Monitors	18
Before Using the SPI for SAP Monitors	19
r3itosap: Monitoring SAP R/3	19
The SPI for SAP Monitors	22
Important Monitor-configuration Concepts	25
Monitor Configuration Files	25
Monitor Configuration File: Global vs. Local	26
Monitor Configuration Modes	26
Alert Monitor Order of Precedence	26
Remote Monitoring with the Alert Monitors	28
The SPI for SAP Monitor Configuration File	31
To Configure the SPI for SAP Alert Monitors	43
Distributing Alert-Monitor Configuration Files	47
Local and Global Configurations	48
To Apply a Global Configuration	48
To Apply a Local Configuration	49
To Delete All Local Configurations on a Node	50
To Delete Selected Local Configurations on a Node	51

3. The SPI for SAP Alert Monitors

Introducing the SPI for SAP Monitors	54
Using the CCMS Alert Monitors	55
The Alert-Monitor Configuration Files	56
r3monal: Introducing the CCMS 4.x Alert Monitor	58
CCMS Alert Monitors	59
r3monal: Trace Levels	61
r3monal: File Locations	61
r3monal: Environment Variables	62
r3monal: Severity Levels	62
r3monal: Remote Monitoring	63
r3monal: CCMS 4.x Alert Monitor with Shared Memory	64
r3monal: Monitoring Conditions	65
r3monal: Severity Levels	65
r3monal: Alert Classes	66

Contents

r3monal: CCMS 4.x Alert Monitor with XMI/XAL.	69
r3monal: Monitoring Conditions	69
r3monal: RFCTimeOut.	70
r3monal: CCMS Interface.	70
r3monal: CCMS Monitor Sets	71
r3monal: CCMS Acknowledge Message.	75
r3monal: Severity Levels	76
r3mondev: The Trace-file Monitor	79
r3mondev: File Locations	79
r3mondev: Environment Variables	80
r3mondev: Monitoring Conditions	80
Editing the r3mondev.cfg File	81
r3monpro: The Process Monitor	82
r3monpro: File Locations	82
r3monpro: Environment Variables	83
r3monpro: Monitoring Conditions	83
r3monpro: Example Configuration	84
r3monsap: CCMS 3.x Alert Monitor	86
r3monsap: File Locations	86
r3monsap: Environment Variables	87
r3monsap: Monitoring Conditions	87
r3monsap: Alert Classes.	89
r3monxmi: The System-log Monitor (via XMI).	92
r3monxmi: File Locations	93
r3monxmi: Environment Variables	93
r3monxmi: Monitoring Conditions	94
r3monxmi: Severity Levels.	94
r3monxmi: Syslog Message Components.	95
r3monxmi: Alert Classes	97
r3status: The SAP R/3 Status Monitor.	99
r3status: File Locations	99
r3status: Environment Variables	100
r3status: History File	101
The r3status Configuration File	102
Remote Monitoring with the r3status Monitor.	104

4. The SPI for SAP Alert-Collector Monitors

Introducing r3moncol and the Alert-collector Monitors.	108
Configuring the SPI for SAP Alert-collector Monitors.	111
Report Types for the Alert-collector Monitors.	111
Polling Rates and Run Locations for the Alert-collector Monitors.	112
Alert-collector Monitor History	114
Alert-collector Monitor Query Conditions	114
Alert-collector Monitor Environment Variables	118
Alert-collector Monitor Command-Line Parameters	118
Remote Monitoring with the Alert-collector Monitors	119
The Alert-collector Monitor Configuration Files	122
r3monale: The iDOC-Status Monitor	127
Configuring iDOC-Monitor Alert Types	128
IDOC_CURRENT_STATUS.	129
Checking the iDOC Status	132
r3monchg: The SYSTEM CHANGE OPTION Monitor	137
Configuring SYSTEM CHANGE OPTION Monitor Alert Types.	139
CHANGE_OPT (SAP R/3 3.x)	139
CHANGE_OPT (SAP R/3 4.0x/4.5x)	140
CHANGE_OPT (SAP R/3 4.6x)	143
r3moncts: The CORRECTION & TRANSPORT SYSTEM Monitor	147
Configuring CTS Monitor Alert Types.	149
REQUEST_CREATED	151
REQUEST_RELEASED.	152
TASK_CREATED	154
TASK_RELEASED	155
OBJECT_USED	156
OBJECT_RELEASED	158
r3mondmp: The ABAP Dump Monitor	160
Configuring ABAP DUMP Monitor Alert Types.	162
ABAP4_ERROR_EXIST	162
r3monjob: The JOBREPORT Monitor	163
Configuring JOBREPORT Monitor Alert Types.	166
JOB_MAX_RUN_TIME	167
JOB_MIN_RUN_TIME	169
START_PASSED.	170
JOB_ABORTED	172
r3monlck: The LOCK_CHECK Monitor	173

Contents

OLD_LOCKS	175
r3monoms: The OPERATION MODE Monitor	176
OM_SWITCH_OVERDUE	178
r3monrfc: The RFC-destination Monitor	180
Configuring RFC-destination Alert Types	181
CHECK	182
r3monspl: The SPOOLER Monitor	184
Configuring SPOOLER Monitor Alert Types	186
SPOOL_ENTRIES_RANGE	186
SPOOL_ERROR_RANGE	187
PRINT_ERROR_EXISTS	188
r3montra: The TRANSPORT Monitor	189
Configuring TRANSPORT Alert Types	191
TRANS	191
REPAIR	194
RFCCONNECT	195
TPTEST	196
r3monupd: The UPDATE Monitor	198
Configuring UPDATE Monitor Alert Types	200
UPDATE_ACTIVE	200
UPDATE_ERRORS_EXIST	200
r3monusr: The USER Monitor	201
USER_LOGGEDIN_MAX	202
r3monwpa: The WORKPROCESS Monitor	204
Configuring WORKPROCESS Alert Types	206
WP_AVAILABLE	207
WP_IDLE	210
WP_CHECK_CONFIGURED	213
WP_STATUS	214
Monitoring the TEMSE file	217

5. Understanding Message Flow

In this Section	220
OVO Message Customization	221
Setting Up the Message Filters	221
Changing the Message Severity	223

Customizing CCMS Message Flow by Central OVO Configuration	224
Thresholds for Performance Alerts	225
Thresholds for Syslog Alerts	226
Thresholds for Buffer Alerts	228
Thresholds for Other Alerts	229
Thresholds for Oracle Databases	230
Thresholds for Informix Databases	232
Customizing CCMS Message Flow in SAP R/3	233
Disabling Messages	233
Setting Thresholds for SAP R/3 CCMS Alert Monitor Messages.	235
Setting Up Messages for Inclusion in the SAP R/3 System Log File.	236
Obtaining a Message ID from the SAP R/3 Syslog File	236
Configuring the System Log Filter for Alert Generation	237
SAP Solution-Manager Integration	239
Pre-requisites	239
Integration Overview	240
Sending Messages from SAP to OVO.	241
Sending Messages from OVO to SAP.	243
The r3ovo2ccms Command.	246

6. The SPI for SAP Performance Monitors

In this Section	250
Performance Monitors Overview.	251
Upgrading the SAP/Performance Subagent.	253
Migrating the SAP/Performance subagent with the OpenView Performance Agent	254
Upgrading the SAP/Performance subagent with CODA	256
Installing the SAP/Performance Subagent.	259
Locating the SAP/Performance Subagent Files	261
SAP/Performance Subagent Files: AIX	261
SAP/Performance Subagent Files: HP-UX/Solaris	262
SAP/Performance Subagent Files: MS Windows	262
Configuring the SAP/Performance Subagent.	264
Selecting the Performance-data Source.	264
To Configure the SAP/Performance Subagent	266
Remote Performance Monitoring	269
The Performance-Monitor Scheduler.	271
The r3perfagent.cfg Configuration File	273
Managing the SAP/Performance Subagent	278

Contents

SAP/Performance agent Command Line Syntax	278
SAP Logins for the SAP/Performance agent	279
SAP/Performance agent Tools	280
The SPI for SAP Performance Monitors	281
DBINFO_PERF	283
DOCSTAT_PERF	287
ICMSTAT_PERF	288
JOBREP_PERF	290
SAPBUFFER_PERF	292
SAPMEMORY_PERF	294
SPOOL_PERF	296
STATRECS_PERF	297
Configuring and Uploading STATRECS_PERF	298
SYSUP_PERF	301
UPDATE_PERF	302
USER_PERF	303
WLSUM_PERF	304
WP_PERF	307
De-installing the SAP/Performance Subagent	309

7. The ITS Monitor

In this Section	312
What is ITS?	313
ITS Installations	314
The ITS Monitor	317
Installing the ITS Monitor	319
ITS-Monitor: Installation Pre-requisites	319
ITS Monitor Deployment Tasks	320
Verifying the ITS Monitor Installation	323
Configuring the ITS Monitor	324
ITS Monitor: Selecting the Performance-Data Source	324
ITS-Monitor: Configuration Tasks	326
ITS-Monitor: Default Configuration	327
ITS-Monitor: File Locations	328
ITS-Monitor: Configuration-File Key Words	329
ITS-Monitor: the Command-line Interface	332

ITS Performance Metrics	333
ITS Service Reports	337
ITS Service Reports: Installation Pre-requisites	337
ITS Service Reports: Configuring the OpenView Reporter	337
Viewing ITS Service Reports	338
ITS Performance Graphs	340
ITS Performance Graphs: Installation Pre-requisites	340
ITS Performance Graphs: Configuring OpenView Performance Manager	340
Viewing ITS Performance Graphs	341
ITS Status and Availability	343
Removing the ITS Monitor	344

8. Service Views

In this Section	348
What are Service Views?	349
Service Views in the SPI for SAP	351
Line of Business Views	353
Configuring Service Views for SAP R/3	356
Troubleshooting Service Discovery	357

9. Service Reports

In this Section	360
What Are Service Reports?	361
Upgrading the SPI for SAP Reports	363
Installing the SPI for SAP Reports	364
Before You Begin	364
To Install SAP R/3 Service Reports	365
Service Reports in the SPI for SAP	368
SAP R/3 Reports	369
SAP-ITS Service Reports	374
Defining the Scope of SAP R/3 Service Reports	376
Generating SPI for SAP Reports	377
Viewing SPI for SAP Reports	377
SPI for SAP Report Metrics	379
SAP R/3 Report Metrics	379
SAP ITS Report Metrics	380
Removing the SPI for SAP Reports	382
To Remove OpenView Reporter Snap-in Packages	382

Contents

To Remove the SPI for SAP from the OV Reporter System	382
---	-----

1 Introduction

This section describes what information you can find in the on-line Help and where you can find it.

Overview

The *HP OpenView Smart Plug-in for SAP On-line Help* provides information designed to help the administrators of both OVO for Windows and SAP R/3 to configure the SPI for SAP to suit the needs and requirements of the SAP R/3 landscape which they plan to manage with OVO for Windows. This on-line Help system also explains how to install and configure the various, additional sub-agents that come with the SPI for SAP. Finally, the *HP OpenView Smart Plug-in for SAP On-line Help* describes how to integrate the SPI for SAP with performance-related products that are available as part of HP OpenView.

The *HP OpenView Smart Plug-in for SAP On-line Help* comprises the following sections:

- [“Customizing the SPI for SAP Monitors” on page 17](#)

A general introduction to the SPI for SAP monitors, including configuration-file locations, environment variables, and information about default configurations.

- [“The SPI for SAP Alert Monitors” on page 53](#)

Reference and configuration information for the CCMS alert monitors `r3monsap`, `r3monal`, `r3monxmi`, `r3monpro` and `r3mondev`.

- [“The SPI for SAP Alert-Collector Monitors” on page 107](#)

Reference and configuration information for `r3moncol` and the alert-collector monitors `r3monale`, `r3mondmp`, `r3monwpa` and so on.

- [“Understanding Message Flow” on page 219](#)

This section describes how to use both OVO for Windows functionality and CCMS to control the flow of messages between SAP R/3 and OVO for Windows.

- [“The SPI for SAP Performance Monitors” on page 249](#)

This section describes how to install, configure, and use the SPI for SAP performance monitors.

- [“The ITS Monitor” on page 311](#)

This section describes how to install and configure the ITS Monitor. The **Internet Transaction Server** (ITS) provides the SAP R/3 user with an SAP R/3 transaction interface in a web browser.

- [“Service Views” on page 347](#)

This section introduces the concept of service views and explains how to use service views to improve the management of your SAP R/3 landscape.

- [“Service Reports” on page 359](#)

This section describes how to install the SPI for SAP service reports, configure the OpenView Reporter to generate the reports, and use the reports to monitor and manage your SAP R/3 landscape.

2 Customizing the SPI for SAP Monitors

This section describes how to set up the SPI for SAP monitors and deploy them to the SAP R/3 servers in your SAP R/3 landscape.

Introduction to the SPI for SAP Monitors

The SPI for SAP includes a set of monitors, which you configure to run at regular intervals to collect information regarding various aspects of your SAP environment's health.

The OVO for Windows administrators, working from the OVO for Windows Console, deploy the appropriate SPI for SAP message-source policies to the SAP R/3 servers which they want to manage and monitor with OVO for Windows. Monitor deployment is usually completed as part of the SPI for SAP installation and configuration process.

If you have never configured the SPI for SAP monitors, you will want to read the detailed description of each alert monitor and alert-monitor configuration file. The alert-monitor configuration files include information about default configurations as well as a list of changes you need to make to ensure that the monitor works correctly in your SAP environment.

This section contains information about the following topics:

- [“Before Using the SPI for SAP Monitors” on page 19](#)
- [“The SPI for SAP Monitors” on page 22](#)
- [“Important Monitor-configuration Concepts” on page 25](#)
- [“The SPI for SAP Monitor Configuration File” on page 31](#)
- [“Distributing Alert-Monitor Configuration Files” on page 47](#)
- [“Local and Global Configurations” on page 48](#)

Before Using the SPI for SAP Monitors

Before using any of these monitors, be sure to complete the following tasks:

- set up the required SAP R/3 users and their associated logons as described in the *HP OpenView for Windows SMART Plug-In for SAP Configuration Guide*
- specify in the `r3itosap.cfg` file details of all SAP systems to be monitored. You can define entries in `r3itosap.cfg`:
 - as part of the installation procedure (see the *HP OpenView for Windows SMART Plug-In for SAP Configuration Guide*)
 - or,
 - at any time, using the configuration-file policy editor. For more information, see [“r3itosap: Monitoring SAP R/3” on page 19](#).

NOTE

If the SAP instance you want to monitor is configured in a high-availability cluster, such as MC/ServiceGuard, you need to add an extra entry to the “cluster host mapping” section of the `r3itosap.cfg` file in order to tell the SPI for SAP about the nodes configured in the cluster. If the host-mapping entry is not present in the `r3itosap.cfg` file, the SPI for SAP might encounter problems monitoring the nodes in the cluster, for example; resolving the hostname of the cluster nodes, starting the monitors at the correct time, and associating messages with the appropriate managed nodes.

For more information about configuring the SPI for SAP to monitor SAP in a high-availability environment, see the section “Specifying SAP R/3 Systems to Monitor” in the *HP OpenView for Windows SMART Plug-In for SAP Configuration Guide*.

r3itosap: Monitoring SAP R/3

This section describes how to use the configuration-file policy editor to modify the `r3itosap.cfg` configuration file: the `r3itosap.cfg` configuration file defines the SAP R/3 Systems, which the SPI for SAP

should monitor. In order to complete this task successfully, you need to ensure that you have already installed the ConfigFile Editor for Administrator Console package, and in addition, the appropriate SPI for SAP policies. For more information about installing packages and policies, see the *HP OpenView for Windows SMART Plug-In for SAP Configuration Guide*.

To define the SAP R/3 Systems you want the SPI for SAP to monitor:

1. Locate the SPI for SAP configuration files

In the OVO for Windows Console, browse to the following directory:

Policy Management > Policy Groups > SPI for SAP

NOTE

You have to set up SAP R/3 users for each SAP R/3 client. The list of SAP R/3 clients you made in “Before You Begin” in the *HP OpenView for Windows SMART Plug-In for SAP Configuration Guide* includes the information you need for each configuration line.

For more information about how to set up SAP R/3 users for OVO for Windows, see “Setting Up an SAP User for OVO” in the *HP OpenView for Windows SMART Plug-In for SAP Configuration Guide*.

2. Create a new configuration file

In the OVO for Windows Console, select and right-click the SPI for SAP policy group and, in the menu that pops up, click the following menu option:

New > ConfigFile

3. Enter the ConfigFile details

Click the General tab and use the pull-down menus provided to enter the following values in the named boxes:

- Application: **SAP SPI**
- Sub Group: **Global**
- File Name: **r3itosap.cfg**

4. Load the new ConfigFile

Select the Data tab and click the Load Template button. The `r3itosap.cfg` file is displayed.

5. Add the names of the SAP Systems you want to monitor

Using the format of the examples in the `r3itosap.cfg` configuration file, add an entry for each SAP R/3 instance, which you want to monitor with the SPI for SAP.

NOTE

If the SAP instance you want to monitor is configured in a high-availability cluster, such as MC/ServiceGuard, you need to add an entry to the “cluster host mapping” section of the `r3itosap.cfg` file in order to tell the SPI for SAP about the nodes configured in the cluster. If the host-mapping entry is not present in the `r3itosap.cfg` file, the SPI for SAP could encounter problems monitoring the nodes in the cluster, for example; resolving the hostname of the cluster nodes and associating messages with the correct managed node in the cluster.

6. Save the changes you made and exit the text editor

When saving the template, it is recommended to use the naming conventions for the configuration-file policy type, for example: `global_r3itosap`.

The SPI for SAP Monitors

Table 2-1 provides an overview of SPI for SAP alert-monitors.

Table 2-1 **The CCMS Alert Monitors**

CCMS Alert Monitor	Monitor Function
r3monaco	Although this is not strictly speaking an alert monitor, you must assign r3monaco to the managed nodes.
r3monal	Monitors SAP R/3 system log events and alerts from the internal SAP R/3 CCMS 4.x alert monitor
r3mondev	Monitors errors in SAP R/3 trace and log files
r3monpro	Monitors SAP R/3 work processes and database processes
r3monsap	Monitors SAP R/3 system-log events and alerts from the internal SAP R/3 CCMS 3.x alert monitor
r3status	Monitors the status of the SAP R/3 instances configured in the r3itosap.cfg file
r3monxmi	Monitors SAP R/3 system-log events

Table 2-2 provides an overview of the alert-collectors used by r3moncol, the SPI for SAP Alert Collector.

Table 2-2 **The r3moncol Alert-Collector Monitors**

Alert-Collector Monitor	Monitor Function
r3monale	Monitors the status of iDOCs in the SAP R/3 System
r3monchg	Monitors the SAP R/3 system change options.

Table 2-2 The r3moncol Alert-Collector Monitors (Continued)

Alert-Collector Monitor	Monitor Function
r3moncts	Monitors the correction-and-transport system.
r3mondmp	Monitors ABAP/4 Dumps.
r3monjob	Monitors SAP R/3 batch jobs.
r3monlck	Monitors the Enqueue process, which manages logical locks for SAP R/3 transactions and reports on obsolete locks.
r3monoms	Monitors the operation mode switch to determine whether a scheduled operation mode has been activated after the specified time.
r3monrfc	Checks the status of RFC destinations in an SAP environment
r3monspl	Monitors spooler entries, spooler errors, and print errors.
r3montra	Monitors the transport system.
r3monupd	Monitors the update process for active status and errors
r3monusr	Monitors the number of users logged-in to SAP R/3.
r3monwpa	Monitors the status of the work processes. It reports any processes that are running in debug, private, or no restart modes, compares the number of configured work processes with the actual number running, and checks the number of expected work processes waiting and the number running

NOTE

The SPI for SAP allows you to check the consistency of the Temporary Sequential (TEMSE) File. You do this by setting up a report in SAP R/3 instead of configuring an alert monitor. For more information, see [“Monitoring the TEMSE file” on page 217](#).

Important Monitor-configuration Concepts

This section describes the concepts underpinning the CCMS alert-monitors and, in addition, explains how to configure the monitors. The section covers the following areas:

- [“Monitor Configuration Files” on page 25](#)
- [“Monitor Configuration File: Global vs. Local” on page 26](#)
- [“Monitor Configuration Modes” on page 26](#)
- [“Alert Monitor Order of Precedence” on page 26](#)
- [“Remote Monitoring with the Alert Monitors” on page 28](#)

Monitor Configuration Files

Each alert or alert-collector monitor has an associated configuration file, which you can edit to define your own rules for how you want CCMS alerts to be monitored. However, the monitors all have usable default configurations, which you can use without modification. For more information about the contents of the SPI for SAP’s monitor-configuration files, see:

- [“The SPI for SAP Monitor Configuration File” on page 31](#)
General information which applies to the configuration of *all* the SPI for SAP monitors
- [“The Alert-Monitor Configuration Files” on page 56](#)
Information, which applies to the configuration of the Alert Monitors `r3monal`, `r3mondev`, `r3monpro`, `r3monsap`, and `r3monxmi`.
- [“The `r3status` Configuration File” on page 102](#)
- [“The Alert-collector Monitor Configuration Files” on page 122](#)
Information which applies to the configuration of the Alert-collector Monitor `r3moncol` and the alert collectors it uses, for example; `r3monale`, `r3mondmp`, `r3monjob`, and so on.

Monitor Configuration File: Global vs. Local

For more information about when to use each of these deployment methods and for instructions on editing the configuration files, see [“The SPI for SAP Monitor Configuration File” on page 31](#).

Monitor Configuration Modes

The SPI for SAP supports the following configuration modes:

- **Global**

You define in a single configuration file the monitoring conditions for all managed nodes. If you specify a *global* configuration, the monitoring conditions you define must cover the monitoring needs of all managed nodes.

- **Local**

You define the monitoring conditions for a particular node in a configuration file associated only with that single, managed node. If a *local* configuration is used, each node can have its own configuration file, which defines only the monitoring conditions for that particular node.

You can deploy a mixture of global and local configurations. For an explanation of the relationship between local and global configuration as well as instructions on the use of each configuration mode, see [“Distributing Alert-Monitor Configuration Files” on page 47](#).

Alert Monitor Order of Precedence

Each time an alert monitor runs, its behavior is determined by information defined in an alert-monitor-specific configuration file. An alert monitor chooses which configuration file to use according to a defined “order of precedence”, as follows:

1. The monitor first checks for the presence of the SAPOPC_<R3monitor_name>_CONFIGFILE variable and determines the location of the configuration files from this. For more information about the SAPOPC_<R3monitor_name>_CONFIGFILE variable, see [“Alert-collector Monitor Environment Variables” on page 118](#).

2. If the `SAPOPC_<R3monitor_name>_CONFIGFILE` variable is not set, the monitor checks the `$PATH` variable and uses the configuration file it specifies.

If the `$PATH` variable is set, alert monitors assume that all alert-monitor configuration files (for all alert types) are stored in the directory defined in `$PATH`. If any of the alert monitor types is missing a configuration file, the monitor will not run. Consequently, if you are using the `$PATH` variable, you must ensure that configuration files for *all* alert monitors are copied to the directory specified in `$PATH`.

IMPORTANT

Neither the SPI for SAP nor OVO for Windows is able to deploy configuration files to the `$PATH` variable. The `$PATH` variable can only be modified manually and should be modified for test purposes only. If you *do* copy configuration files into the user path, you will no longer be able to manage the configuration files from the OVO for Windows Console. In addition, manual modification on the managed systems will be required to correct this situation.

3. If no `$PATH` variable is found, the monitor checks the path for the OVO for UNIX local configuration file. If found, the monitor uses the OVO for UNIX local configuration file.
4. If the monitor does not find an OVO for UNIX local configuration file and there is no configuration file specified in the system path variable, the monitor checks for the OVO for UNIX global configuration file. If found, the monitor uses the OVO for UNIX global configuration file.
5. If the monitor does not find an OVO for UNIX local or global configuration file and there is no configuration file specified in the system path variable, the monitor checks the path for the OVO for Windows local configuration file. If found, the monitor uses the OVO for Windows local configuration file.
6. Lastly, the monitor checks the path for the OVO for Windows global configuration file. If found, the monitor uses the OVO for Windows global configuration file. If not found, an error message is displayed.

In [Example 2-1](#), the first line relates only to instance 01 on SAP system LPO. Therefore, if instance 01 is being monitored, the monitor applies the rules as defined on this line *only*. The second line of the example refers to all other instances on LPO. The final line refers to all instances on all systems except for LPO

Example 2-1 Order of Precedence for Configuration Files

Order of Precedence	SAP System	SAP Number	
1	=LPO	=01	=<monitor-spec conf>
2	=LPO	=ALL	=<monitor-spec conf>
3	=ALL	=ALL	=<monitor-spec conf>

Remote Monitoring with the Alert Monitors

The current version of the SPI for SAP includes a feature which allows you to extend the scope of all the Alert, Alert-collector, and Performance Monitors to monitor the status of SAP on remote SAP servers, which are *not* OVO managed nodes and where the SPI for SAP is *not* installed. You set up and perform the remote monitoring from an OVO managed node, where the SPI for SAP software is installed, correctly configured, and running.

NOTE Although the SAP Server defined in the RemoteHost parameter is not an OVO for Windows managed node, it must still be present in the OVO for Windows Node list. If you do not add the SAP Server defined in RemoteHost to the OVO for Windows Node list, OVO for Windows cannot resolve the host name associated with the remote host and, as a consequence, will not be able to display any messages from the remote host in the OVO for Windows Console.

To make use of the remote-monitoring feature provided by the SPI for SAP, for example; to monitor an SAP System running in an environment that is not supported by the SPI for SAP, you need to perform the following actions. [Example 2-2 on page 29](#) shows how a new line is required for each *additional* SAP server, which you want to monitor remotely.

- Activate the new **RemoteMonitoring** keyword by removing the leading hash symbol “#” in each monitor’s configuration file
- Define the name of the *local* host, which you want to perform the monitoring. Note that you need a new line for each *local* host that you want to associate with a remote host
- Define the name of the *remote* SAP server (*RemoteHost*), which you want to monitor.
- Make sure that the remote host is added to the OVO for Windows Node list

The RemoteMonitoring keyword accepts the following parameters:

- **LocalHost**

This is the name of the local OVO for Windows managed node where the SPI for SAP software is installed and running and whose performance agent will be used to remotely monitor the SAP server defined in the parameter “RemoteHost”.

- **RemoteHost**

This is the name of the *remote* SAP server you want to monitor from the host defined in the parameter “LocalHost”. Although the remote host does not have the SPI for SAP software installed and is *not usually* an OVO for Windows managed node, it must be present in the OVO for Windows Node list in order for messages to be handled correctly.

- **SAP System/Number** (*r3monal* and *r3monxmi* only)

The CCMS Alert Monitor *r3monal* and the syslog monitor *r3monxmi* need to know both the ID and the Number of the SAP System running on the SAP server defined in the parameter “RemoteHost”.

For more information about any additional requirements when defining remote monitoring with the Alert Monitors, and in particular *r3monal* (the CCMS Alert Monitor) and *r3monxmi* (the syslog monitor), see [“The SPI for SAP Monitor Configuration File” on page 31](#) and [“The Alert-Monitor Configuration Files” on page 56](#).

Example 2-2

Specifying Individual Remote Servers to Monitor

```
#-----  
# Remote           Local           Remote  
# Monitoring       Host           Host
```

Important Monitor-configuration Concepts

```
RemoteMonitoring      =sap1      =sdsap1
RemoteMonitoring      =sap1      =sdsap2
RemoteMonitoring      =sap2      =sdsap3
#-----
```

Note that you can use the Alert-classes section at the end of the monitor-configuration file to associate an instance of a monitor with a specific host, SAP instance, or processes on the remote server in the same way as you can with a normal (local) managed node. For more information about configuration-file keywords, see [“The SPI for SAP Monitor Configuration File” on page 31](#).

The SPI for SAP Monitor Configuration File

During SPI for SAP installation and configuration, the SAP specialist must set up initial configuration values for the SPI for SAP monitors by alert type and deploy the modified configuration files to the managed nodes.

Each configuration file provided with the SPI for SAP defines particular default settings by means of keywords. This section indicates which keywords you can use with which monitors and, where appropriate, shows permitted values for keyword parameters. This section provides detailed information about the following keywords:

- [“Agent Hostname” on page 32](#)
- [“Alert Classes” on page 32](#)
- [“AlerMonSyslog” on page 36](#)

Configure filtering of CCMS alerts or system logs

- [“CCMS Acknowledge Message” on page 36](#)
- [“CCMS Interface” on page 37](#)
- [“CCMS Monitor Set” on page 37](#)
- [“History Path” on page 38](#)
- [“Local Auto Ack” on page 38](#)

Enable or disable the CCMS local auto-acknowledge feature

- [“Monitoring Conditions” on page 38](#)
- [“Remote Monitoring” on page 39](#)
- [“RFCTimeOut” on page 40](#)
- [“Severity Levels” on page 41](#)
- [“SAP SHM Check” on page 41](#)

Perform a check of the SAP Shared-memory

- [“Trace File” on page 42](#)
- [“Trace Level” on page 43](#)

Agent Hostname	The AgentHostname keyword is currently disabled in the monitor-configuration file.
Alert Classes	You use the Alert Classes section at the end of the monitor-configuration file to define conditions for the alert classes in order to generate messages. The Alert Classes section only needs to be configured if you are using the shared-memory interface to monitor SAP alerts, and changes according to the parameters that are allowed for a given monitor. For example, the parameters SAP Hostname, SAP system, and SAP number tend to be present in all the monitor-configuration files: the parameter SyslogId, on the other hand, appears only in the r3monxmi monitor's configuration file. For more information about which Alert Types and parameters are allowed with which monitor-specific Alert Classes, see the information in this section and, in addition, the section which corresponds to the individual monitor you are interested in, for example; the =CHANGE_OPT alert type can only be used with r3monchg, the System Change Monitor.

NOTE	The SPI for SAP monitors are configured by default to manage <i>all</i> SAP Systems, which are discovered on the host systems where the SPI for SAP software is installed. The monitor-configuration files should not be edited by anyone who does not have a detailed knowledge of SAP R/3 and, in addition, the local SAP R/3 Landscape, which the SPI for SAP is being configured to manage.
-------------	---

The following list shows *all* the parameters in the Alert Class section of *all* the SPI for SAP monitor configuration files. Where appropriate, restrictions are indicated in brackets (), for example; (r3mondev only).

- **Alerttype:**

=<Alerttype> For more information about the values an alert-collector monitor accepts, see the Alert Types section for a given monitor, for example; “[r3monale: The iDOC-Status Monitor](#)” on page 127 refers to the alert type “IDOC_CURRENT_STATUS”.

- **AlertMonitor:**

=<Monitor_Name>

where <Monitor_Name> is the short form of the alert monitor you are configuring, for example; =ALE for r3monale, =CTS for the r3moncts, and so on.

- **Enable/Disable:**

=0 *Disable* the monitor

=1 *Enable* the monitor. This is the default setting.

- **Filemask** (r3mondev only):

=<File_Name>

where <File_Name> is the name of the trace file you want r3mondev to monitor. You can use the wildcard “*” (asterisk) to monitor multiple file names, for example; =dev_*

- **Mode** (r3monpro only):

=<mode_value> where <mode_value> is the way you want ProcessNumber to be evaluated, for example; Maximum, Minimum, Exact, and Delta. For more detailed information about the possible values, see [“r3monpro: The Process Monitor” on page 82](#).

- **OPC MsgGroup:**

=<OVO_Msg_Group>

where <OVO_Msg_Group> is the name of the OVO for Windows Message Group to which the generated message belongs, for example: R3_CTS, or R3_DMP. The default names all start with “R3_” and reflect the names of the alert monitors to which they correspond, for example; r3moncts or r3mondmp. Note that if you change the names of the OVO for Windows Message Groups in the monitor-configuration files, remember to ensure that the changes are reflected in the message conditions in order to avoid the generation of unmatched messages.

- **OPC Object:**

=<OpC_Object> where <OpC_Object> is the OVO for Windows object associated with the generated message. The object names tend to reflect the names of the alert types associated with the alert-collector monitor, for example; REQUEST or TASK for r3moncts.

If you change the names of the OVO for Windows objects in the monitor-configuration files (or add new ones), you must ensure that these changes are reflected in the message conditions in order to avoid the generation of unmatched messages.

The =SyslogId string in the OPC Object field has nothing to do with the SyslogId Alert Class described below.

- **OPC Severity:**

=<OVO_Msg_Severity>

where <OVO_Msg_Severity> is the severity level of the OVO for Windows message you want to map the CCMS alert to, for example: Normal, Warning, Major, Critical.

- **ProcessName** (r3monpro only):

=<NameSID> where <NameSID> is the name of the SAP process you want r3monpro to monitor.

- **ProcessNumber** (r3monpro only):

=<nn> where <nn> is the number of instances of the SAP process defined in ProcessName. You can qualify the number with Max, Min, Exact, and Delta. For more information see [“r3monpro: The Process Monitor” on page 82](#).

- **RFC Parameter** (r3moncol only):

=<RFC_Param> where RFC_Param is the name of the parameter followed by any required Query Conditions, each with the prefix “=”, for example; =CP (for “Contains Pattern”) or EQ for (“Equals”). For more information about Query Conditions, see

[“Alert-collector Monitor Query Conditions” on page 114](#). For more information about monitor-specific, alert-type parameters, see the appropriate monitor description, for example: [Table 4-8, “Configuration Parameters,” on page 129](#) for the `r3monale` monitor.

- **SAP Client:**

<code>=ALL</code>	All SAP clients being monitored by the SPI for SAP. This is the default setting.
<code>=<SAP_host></code>	the specific SAP client for which performance monitoring is to be enabled, for example; 099. Use a new line for each individual host.

- **SAP Hostname:**

<code>=ALL</code>	All SAP hosts will be monitored by the SPI for SAP. This is the default setting.
<code>=<SAP_host></code>	the host name of a specific SAP server where performance monitoring is to be enabled. Use a new line for each individual host.

- **SAP Number:**

<code>=ALL</code>	All SAP numbers will be monitored by the SPI for SAP. This is the default setting.
<code>=<SAP_host></code>	the specific SAP number for which performance monitoring is to be enabled, for example; 00, 99. Use a new line for each individual host.

- **SAP System:**

<code>=ALL</code>	All SAP Systems will be monitored by the SPI for SAP. This is the default setting.
<code>=<SAP_host></code>	the SAP SID for which performance monitoring is to be enabled, for example; DEV. Use a new line for each individual host.

- **SyslogId** (`r3monal` and `r3monxmi` only):

<code>=A00</code>	The <i>lower</i> end of the range of SAP SIDs, whose CCMS Alerts or syslogs you want to monitor.
-------------------	--

=ZZZ The *upper* end of the range of SAP SIDs, whose CCMS Alerts or syslogs you want to monitor.

AlerMonSyslog Syslog filtering can be used *only* with the `r3monal` and `r3monxmi` alert monitors. You use it to configure filtering in combination with either the SAP shared-memory (SHM) or the XMI/XAL interface. The AlerMonSyslog keyword requires a value for the following parameters:

- **SAP System**

The SAP System ID whose CCMS alerts or system logs you want to monitor

- **SAP Number**

This SAP number associated with the SAP System whose CCMS alerts or system logs you want to monitor

- **SyslogId:**

=A00 The *lower* end of the range of SAP SIDs, whose CCMS alerts or syslogs you want to monitor.

=ZZZ The *upper* end of the range of SAP SIDs, whose CCMS alerts or syslogs you want to monitor.

- **Enable/Disable:**

=0 *Disable* the monitor

=1 *Enable* the monitor. This is the default setting.

**CCMS
Acknowledge
Message**

Only with `r3monal` with SAP 4.6 (and later) and the XMI/XAL interface
The `r3monal` monitor uses the CCMSAcknowledgeMessage keyword to switch the CCMS auto-acknowledge feature on or off in SAP. This keyword can only be used if you have configured `r3monal` to use the XMI/XAL interface and requires a value for the following parameters:

- **SAP System** (`r3monal` with SAP 4.6 and later *only*)

The SAP System ID whose CCMS Alerts you want to acknowledge (or **complete**) in SAP.

- **Ack. Filtered Messages**

This feature determines whether or not CCMS Alerts which match the defined conditions are acknowledged (or completed) in CCMS or not.

=0 *Do not* acknowledge (complete) the CCMS Alerts in SAP. This is the default setting.

=1 *Acknowledge* the CCMS Alerts in SAP. This is the same as clicking the [Complete Alert] button in SAP CCMS.

- **Enable/Disable**

=0 *Disable* the monitor. Note that this also disables the setting for **Ack. Filtered Messages**. This is the default setting.

=1 *Enable* the monitor.

CCMS Interface *Only with r3monal with SAP 4.6 (and later) and the XMI/XAL interface*
Configure the r3monal monitor to use either the old shared-memory interface or the new, enhanced XMI/XAL interface (BAPI). The CCMSInterface keyword requires *one* of the following values;

=SHM enable the old shared-memory interface

=XAL enable the new, enhanced XMI/XAL interface (BAPI)

CCMS Monitor Set *Only with r3monal with SAP 4.6 (and later) and the XMI/XAL interface*
Define a CCMS monitor set to use with the new, enhanced XMI/XAL interface (BAPI). The CCMSMonitorSet keyword can only be used if you have configured r3monal to use the XMI/XAL interface and requires a value for the following parameters, for example;

- **SAP System**

The SAP System ID whose CCMS Alerts are defined in the parameter Monitor Set

- **SAP Number**

This SAP number of the SAP System whose CCMS Alerts are defined in the parameter Monitor Set

- **Monitor Set:**

=SAP CCMS Technical Expert Monitors

The name of the monitor set as it appears in the CCMS Alert-Monitor tree.

- **Monitor:**
=System / All Monitoring Segments / All Monitoring Context
The names of the monitors belonging to the monitor set defined in the parameter “Monitor Set” separated by a forward slash (/).

History Path

The HistoryPath[Unix | AIX | WinNT] keyword in the monitor-configuration file accepts the following parameters:

- **Hostname:**
=ALL All hosts being monitored by the SPI for SAP. This is the default setting.
=<SAP_host> the name of a SAP server, where you want to specify the path to the monitor history file. Use a new line for each individual host.
- **Path:**
UNIX: =/var/opt/OV/tmp
AIX: =/var/lpp/OV/tmp
Windows: =default

Local Auto Ack

r3monsap only

The *r3monsap* monitor uses the LocalAutoAck keyword to switch the local CCMS auto-acknowledge feature on (=1) or off (=0). This feature determines whether or not CCMS Alerts appear as messages in the OVO for Windows Console. Disabling CCMS auto-acknowledge produces messages in the OVO for Windows Console: if CCMS alerts are automatically acknowledged in CCMS, no messages appears in the OVO for Windows Console.

Monitoring Conditions

The monitoring conditions you specify in the monitor-configuration file determine which alert collection functions are called when the monitor runs, as well as any limiting parameters for these functions. The conditions also define rules for any messages that may be generated when the alert collectors run. You can define default conditions that apply to all SAP systems and instances and exceptions that apply only to specific systems and instances.

Note that the keywords you use to define the conditions associated with a particular monitor differ according to the scope of the monitor and the specific area of SAP, which the monitor is designed to manage. For

example, the `AlertDevMon` keyword can only be used in the configuration file for the `r3mondev` monitor. Similarly, the `AlertMonPro` and `AlertInstMonPro` keywords only appear in the `r3mondev` monitor's configuration file. For more information about which keywords may be used with a particular monitor, see the section that describes the monitor you are configuring, for example; `r3mondump`, the ABAP dump monitor.

Ambiguous definitions should be avoided if at all possible. For example, in the configuration below, the final two lines cause a logical clash because both `msg4` and `msg5` are defined as OVO for Windows objects for roll paging messages from the same SAP instance of the same SAP system.

```
AlertClassRollpag =ALL =ALL =1 =RollPag =R3_Roll-Paging
AlertClassRollpag =ALL =01 =1 =msg2 =R3_Roll-Paging
AlertClassRollpag =LPO =ALL =1 =cwmsg3 =R3_Roll-Paging
AlertClassRollpag =LPO =01 =1 =msg4 =R3_Roll-Paging
AlertClassRollpag =LPO =01 =1 =msg5 =R3_Roll-Paging
```

Remote Monitoring

The `RemoteMonitoring` keyword in the monitor-configuration file can be used with all the SPI for SAP monitors *except* `r3mondev` and `r3monpro`. `RemoteMonitoring` accepts the following parameters:

- **LocalHost**

the name of the OVO for Windows managed node where the SPI for SAP is installed and running and whose performance agent will be used to do the monitoring on the host defined in “RemoteHost”.

- **RemoteHost**

the name of the *remote* SAP system to be monitored by the host defined in “LocalHost”. The `RemoteHost` does not have the SPI for SAP installed and is not usually (but could theoretically be) an OVO managed node.

- **SAP System** (`r3monal` and `r3monxmi` *only*)

This is the ID of the SAP System running on the SAP server defined in the parameter “RemoteHost” which you want to remotely monitor with the SPI for SAP running on “LocalHost”.

- **SAP Number** (`r3monal` and `r3monxmi` *only*)

This is the specific Number of the SAP System running on the SAP server defined in the parameter “RemoteHost” which you want to remotely monitor with the SPI for SAP running on “LocalHost”.

Note that the remote-monitoring feature does not work with all the alert monitors, for example; you cannot configure `r3mondev` or `r3monpro` to monitor SAP instances running on a remote server. For more information, see the appropriate section on the individual alert monitor.

Example 2-3 Setting up Remote Monitoring for `r3monal` and `r3monxmi`

```
#-----
# Remote           Local           Remote           SAP           SAP
# Monitoring       Host           Host           System       Number
RemoteMonitoring   =sap1      =sdsap1        =SP6          =00
RemoteMonitoring   =sap1      =sdsap2        =SP6          =00
RemoteMonitoring   =sap2      =sdsap3        =WA1          =33
#-----
```

For more information about using the `RemoteMonitoring` keyword, see the individual alert monitors and, in addition:

- [“Remote Monitoring with the Alert Monitors” on page 28](#)
- [“Remote Monitoring with the `r3status` Monitor” on page 104](#)
- [“Remote Monitoring with the Alert-collector Monitors” on page 119](#)
- [“Remote Performance Monitoring” on page 269](#)

RFCTimeOut `r3monal` and `r3monxmi` *only* and SAP 4.6 (XAL/XMI) and later only

`RFCTimeout` defines the maximum amount of time, in seconds, before an RFC XMI/XAL function call is canceled, for example; `=120`. If the RFC call takes longer than expected to complete, that is; to receive a reply to the initial request, the System is probably down or has a serious performance problem. Note that after the call has completed and a free Dialog process has been allocated, the time limit no longer applies.

The `RFCTimeout` keyword can only be used if you have configured `r3monal` to use the XMI/XAL interface in the `r3monal.cfg` configuration file. For more information, see the `CCMSInterface` keyword [“CCMS Interface” on page 37](#). For more information about configuring the `r3monal` monitor to use the XMI/XAL interface with SAP R/3, see [“r3monal: CCMS 4.x Alert Monitor with XMI/XAL” on page 69](#).

Severity Levels The SeverityValue keyword enables the r3monal, r3monsap, and r3monxmi monitors to map the severity of CCMS alerts (for example; SeverityCritical) in the SAP subsystem to messages in OVO (for example; CRITICAL) and accepts the following values:

Table 2-3 Mapping Severity Levels

CCMS Alert Severity	OVO for Windows Message Severity
SeverityNull	=UNKNOWN
SeverityNormal (green)	=NORMAL
SeverityWarning (yellow)	=WARNING
SeverityCritical (red)	=CRITICAL

NOTE The alert-collector monitors (r3moncol) have two additional severity levels; Minor and Major. The severity hierarchy in ascending order is; Normal, Warning, Minor, Major, Critical.

You can customize these severity levels to suit the severity conditions you wish to define. For example, for the alert type OLD_LOCKS for the alert monitor LOCK_CHECK you could specify that if the lock is older than 12 hours you receive a WARNING message and if it is older than 24 hours you receive a CRITICAL message.

SAP SHM Check Alert Monitors r3monal, r3mondev, r3monpro, and r3monxmi *only*.
The SAPSHMCheck keyword enables or disables the automatic SAP shared-memory check which the Alert Monitors use at run time to determine the status of the SAP Systems defined in the r3itosap.cfg file. The shared-memory check compares the results of the current run with the results of the previous run to determine whether or not any change in status has occurred in the SAP Systems to be monitored. The SAPSHMCheck keyword requires a value for the following parameters:

- **Hostname:**
=ALL Enable/disable the SAP shared-memory check on all SAP servers being monitored by the SPI for SAP. This is the default setting.

=<SAP_host> the name of a specific SAP server, where you want to enable/disable the SAP Shared-memory check. Use a new line for each individual host.

- **Enable/Disable:**

=0 *Disable* the shared-memory check. This is the default setting for all monitors *except* r3monpro, which the SPI for SAP uses to monitor SAP processes. The default setting for SAPSHMCheck in the r3monpro Alert Monitor's configuration file, r3monpro.cfg, is =1 (enabled).

=1 *Enable* the shared-memory check.

If the SAP shared-memory check is neither enabled nor disabled in the monitor-configuration file, for example; because you are using an old version of the configuration file where the SAPSHMCheck keyword does not appear, the Alert Monitors assume the default state (disabled) is true.

Example 2-4

Enabling and Disabling the SAP Shared-memory Check

```
#-----
# SAPSHMCheck      hostname      Enable   =1
#                                     Disable  =0
SAPSHMCheck        =ALL          =0
#-----
```

Trace File

The TraceFile keyword in the monitor-configuration file accepts the following parameters:

- **Hostname:**

=ALL All SAP servers being monitored by the SPI for SAP. This is the default setting.

=<SAP_host> the name of a specific host where tracing is enabled and you want to specify a trace level. Use a new line for each individual host.

- **Filename:**

=r3mon<alert_monitor_name>.log, for example; r3mondev.log, or r3mondmp.log, etc. This is the default setting. Alternatively, you can specify the name of the file to which you want to write the trace log. By default, monitor trace files are located in the following directories:

- **UNIX:** /var/opt/OV/conf/SAP_SPI/[global|local]
- **AIX:** /var/opt/OV/conf/SAP_SPI/[global|local]
- **NT:** %OVAGENTDIR%\conf\SAP_SPI\[global | local]

For more information about changing the path, see the environment variable SAPOPC_TRACEPATH in [“Alert-collector Monitor Environment Variables”](#) on page 118.

Trace Level

The TraceLevel keyword in the monitor-configuration file accepts the following parameters:

- **Hostname:**
 - =ALL All hosts being monitored by the SPI for SAP. This is the default setting.
 - =<SAP_host> the name of a SAP server, where you want to specify a trace level. Use a new line for each individual host.
- **Trace level:**
 - =0 Disable. This is the default setting.
 - =1 Log only error messages
 - =2 Log all messages
 - =3 Log only debug messages

NOTE

Trace levels 2 and 3 are *only* available for r3moncol.

To Configure the SPI for SAP Alert Monitors

1. In the OVO for Windows Console, expand the following policy group:

Policy Management > Policy Groups > SPI for SAP R/3

2. In the details pane, double click the appropriate ConfigFile Policy, for example; global_r3moncts.cfg. The selected alert monitor's configuration file opens in the configuration-file policy editor. Note that there are two types of ConfigFile Policies for the SPI for SAP:

- **global**

for *global* configurations, for example; `global_r3moncts.cfg`

- **local**

for *local* configurations, for example; `local_r3moncts.cfg`

3. Edit or enter lines to define *trace levels*. For example, You can set a default for ALL hosts (hostname = ALL), then add lines for any hostname exceptions. For example:

```
TraceLevel      =ALL           =0
TraceLevel      =hpbbx10       =1
```

In this example, tracing is turned off for all hosts except for host `hpbbx10`. For more information about trace levels, see [“Trace Level” on page 43](#).

4. Specify the name of the *trace file* in which trace information is to be recorded. For example:

```
TraceFile       =ALL           =r3monpro.log
```

Default trace file names for each monitor are given in [Table 2-4](#)

Table 2-4 **Default Trace File Names**

Tracefile Name	Monitor Alert Type
<code>r3monaco.log</code>	Alert Calls
<code>r3monal.log</code>	Alerts (SAP R/3 4.x)
<code>r3monale.log</code>	iDOC alerts
<code>r3monchg.log</code>	System Change
<code>r3moncts.log</code>	Correction and Transport System
<code>r3mondev.log</code>	Trace and Log Files
<code>r3mondmp.log</code>	ABAP/4 Dumps
<code>r3monjob.log</code>	Job
<code>r3monlck.log</code>	Lock_Check
<code>r3monoms.log</code>	OM Switch
<code>r3monpro.log</code>	Work and Database Processes

Table 2-4 Default Trace File Names (Continued)

Tracefile Name	Monitor Alert Type
r3monsap.log	Alerts
r3monspl.log	Spooling
r3montra.log	Transport
r3monupd.log	Update
r3monusr.log	User
r3monwpa.log	WorkProcess Availability
r3monxmi.log	Syslog

5. Specify the *history path*, which is the directory path by which you can locate an alert monitor's history file. Alert monitors include the following default paths for UNIX, AIX and NT servers:

```
HistoryPathUnix      =ALL      =/var/opt/OV/tmp
HistoryPathAIX       =ALL      =/var/lpp/OV/tmp
HistoryPathWinNT     =ALL      =default
```

NOTE

You can tell the alert monitors to use a specific, default history path on NT managed nodes rather than the hard-coded: C:\Temp, for example: %OVAGENTDIR%\Tmp. For more information, see the SAPOPC_HISTORYPATH environment variable and the alert-monitor configuration-file keyword HistoryPath[Unix | Aix | WinNT].

Each alert monitor writes its own history file. Each time an alert monitor completes a run, it adds a new section to its history file. This feature enables the alert monitor to check for changes since the previous run.

IMPORTANT

Do *not* edit any of the monitor history (*.his) files. Editing the monitor history file could compromise the accuracy and consistency of your records. The monitor uses its history file to determine which, if any, events have occurred since the last run and whether or not to send any messages.

6. Define the monitoring conditions. Monitoring conditions are rules that control the checks which the alert monitor makes each time it runs. The monitoring conditions you enter are different for each alert monitor. See [“Monitoring Conditions” on page 38](#) and [“Alert Classes” on page 32](#) for general information about the keywords and parameters that are allowed with each monitor.

NOTE

For specific information on the Monitoring Conditions for each alert monitor, see the appropriate section on the particular alert monitor.

Distributing Alert-Monitor Configuration Files

Configuration files can be deployed to the OVO for Windows managed nodes in the same way as OVO for Windows policies using the standard policy-deployment mechanism.

It is possible to have configuration files in both the global and local directories on a managed node. When a monitor executable runs, it uses an order of precedence to determine which configuration file should be used. For more information, see [“Alert Monitor Order of Precedence” on page 26](#).

Local and global configuration files are installed in the following directories on the OVO for Windows managed node:

- **UNIX:** `/var/opt/OV/conf/SAP_SPI/[global|local]`
- **AIX:** `/var/opt/OV/conf/SAP_SPI/[global|local]`
- **NT:** `%OVAGENTDIR%\SAP_SPI\[global | local]`

Local and Global Configurations

This section explains briefly how to apply either a local or a global Alert-Monitor configuration and, in addition, how to delete configurations, which have already been deployed. This section provides instructions for the following tasks:

- [“To Apply a Global Configuration” on page 48](#)
- [“To Apply a Local Configuration” on page 49](#)
- [“To Delete All Local Configurations on a Node” on page 50](#)
- [“To Delete Selected Local Configurations on a Node” on page 51](#)

It is possible to configure both global and local directories on the same machine. When a monitor executable runs, it uses an order of precedence to determine which configuration file should be used. For more information, see [“Alert Monitor Order of Precedence” on page 26](#).

To Apply a Global Configuration

1. In the OVO for Windows Console, browse to the following directory:
Policy Management > Policy Groups > SPI for SAP R/3
2. In the details pane, locate and double-click the configuration file associated with the alert monitor you want to configure, for example; the `global_r3mondmp` file for the ABAP DUMP monitor. The ConfigFile Policy Editor displays the selected file.
3. Make any modifications as required.

NOTE

You do not *have* to modify the configuration files: the default configuration-file policies work without modification.

4. Save your changes and close the ConfigFile Policy Editor. When saving the modified policy, we recommend that you use the naming conventions for configuration-file policy types, for example; `global_r3mondmp`. The modified configuration-file policy for the SPI for SAP `r3mondmp` monitor appears in the list of policies in the details pane.

5. In the details pane, select and right-click the policies you want to deploy and use the following menu option:

All Tasks > Deploy on...

6. Use the Deploy Policies on... window to select the managed nodes to which you want to deploy the selected policies. Click **[OK]** to start the deployment.
7. Verify that the deployment operation completed successfully by right-clicking a managed node in the Console and selecting the following option from the menu that pops up:

View > Policy Inventory

The configuration files are copied to one of the following directories on each of the selected managed nodes:

- **UNIX:** /var/opt/OV/conf/SAP_SPI/[global|local]
- **AIX:** /var/opt/OV/conf/SAP_SPI/[global|local]
- **NT:** %OVAGENTDIR%\conf\SAP_SPI\[global | local]

To Apply a Local Configuration

1. In the OVO for Windows Console, browse to the following directory:

Policy Management > Policy Groups > SPI for SAP R/3

2. In the details pane, locate and double-click the configuration file associated with the alert monitor you want to configure, for example; the local_r3mondmp file for the ABAP DUMP monitor. The ConfigFile Policy Editor displays the selected file allowing you to make any modifications as required.
3. Save your changes and close the ConfigFile Policy Editor. When saving the modified policy, we recommend that you replace “local” with the name of the SAP R/3 server for which the local configuration is intended, for example; <SAP_Server_Name>_r3mondmp. The modified configuration-file policy for the SPI for SAP r3mondmp monitor appears in the list of policies in the details pane.

NOTE

Repeat steps 1 through 3 for each of the alert monitors for which you want to create a local configuration. Make sure that you also modify accordingly the corresponding alert-monitor configuration files.

4. In the details pane, select and right-click the policies you want to deploy and use the following menu option:

All Tasks > Deploy on...

5. Use the Deploy Policies on... window to select the managed nodes to which you want to deploy the selected policies. Click **[OK]** to start the deployment.
6. Verify that the deployment operation completed successfully by right-clicking a managed node in the Console and selecting the following option from the menu that pops up:

View > Policy Inventory

The configuration files are copied to one of the following directories on each of the selected managed nodes:

- **UNIX:** /var/opt/OV/conf/SAP_SPI/[global|local]
- **AIX:** /var/opt/OV/conf/SAP_SPI/[global|local]
- **NT:** %OVAGENTDIR%\conf\SAP_SPI\[global | local]

To Delete All Local Configurations on a Node

1. In the OVO for Windows Console, right-click the managed node whose local alert-monitor configuration you want to delete and select the following option from the menu that pops up:

View > Policy Inventory

2. Holding down the **Ctrl** key, select and right click the local configuration-file policies you want to remove, and select the following option from the men that pops up:

All Tasks > Remove from node

To Delete Selected Local Configurations on a Node

1. In the OVO for Windows Console, right-click the managed node whose local alert-monitor configuration you want to delete and select the following option from the menu that pops up:

View > Policy Inventory

2. Holding down the **Ctrl** key, select and right click the local configuration-file policies you want to remove, and select the following option from the menu that pops up:

All Tasks > Remove from node

3 The SPI for SAP Alert Monitors

This section describes the CCMS alert monitors `r3monsap`, `r3monal`, `r3monxmi`, `r3monpro` and `r3mondev` and explains how to use them.

Introducing the SPI for SAP Monitors

The SPI for SAP includes a set of monitors, which you configure to be run at regular intervals to collect information regarding various aspects of your SAP environment.

Monitors must be deployed on the SAP R/3 servers which you want to manage and monitor with OVO for Windows. To deploy a monitor, the OVO for Windows administrator, working from the OVO for Windows Console, deploys the appropriate SPI for SAP message-source policies. Monitor deployment is usually completed as part of the SPI for SAP installation and configuration process.

If you are new to configuring the monitors, you will want to read the detailed description of each Alert Monitor and Alert-monitor configuration file. Each Alert-monitor configuration file includes information about default configurations as well as a list of changes you must make to the configuration file.

This section describes the CCMS alert monitors (`r3monsap`, `r3monal`, `r3monxmi`) and the monitors `r3monpro` and `r3mondev` and explains how to use them. The section covers the following areas:

- [“Using the CCMS Alert Monitors” on page 55](#)
- [“The Alert-Monitor Configuration Files” on page 56](#)
- [“r3monal: Introducing the CCMS 4.x Alert Monitor” on page 58](#)
- [“r3monal: CCMS 4.x Alert Monitor with Shared Memory” on page 64](#)
- [“r3monal: CCMS 4.x Alert Monitor with XMI/XAL” on page 69](#)
- [“r3mondev: The Trace-file Monitor” on page 79](#)
- [“r3monpro: The Process Monitor” on page 82](#)
- [“r3monsap: CCMS 3.x Alert Monitor” on page 86](#)
- [“r3monxmi: The System-log Monitor \(via XMI\)” on page 92](#)
- [“r3status: The SAP R/3 Status Monitor” on page 99](#)

Using the CCMS Alert Monitors

The alert monitors you use for your CCMS monitoring requirements can vary according to the SAP R/3 version of your system as illustrated in [Table 3-1](#).

Table 3-1 **CCMS Alert Monitors with Different Versions of SAP R/3**

SAP R/3 Version	r3monsap	r3monal	r3monxmi
SAP R/3 3.1I	✓		✓
SAP R/3 4.0B	✓	(✓)	✓
SAP R/3 4.5B	(✓) ^a	✓	✓
SAP R/3 4.6		✓	✓
SAP R/3 6.10		✓	✓
SAP R/3 6.20		✓	✓

a. Configurations marked with (✓) are not recommended

NOTE

Starting with version B.08.11, the SPI for SAP addresses the problem of particular CCMS alert monitors only working with specific SAP R/3 versions by providing specific template groups for specific versions of SAP R/3.

The Alert-Monitor Configuration Files

Each SPI for SAP Alert Monitor is specified in an OVO for Windows message-source policy and in several files, including an executable file and a configuration file.

The message-source policy defines the rules for generating messages to appear in the OVO for Windows message browser. The message-source policy also controls the frequency with which the associated executable file runs. If you want to customize a message-source policy, follow the instructions given in the online help for OVO for Windows Administrators.

The monitor executable file runs at the regular interval defined in the message-source policy. It checks for and reports conditions according to monitoring conditions defined in the individual monitor's associated configuration file. You can define these monitoring conditions to suit the needs of your environment.

The SPI for SAP monitor's configuration file allows you to use keywords to set up the monitor to meet the requirements of your particular environment. Note that although most of the keywords appear in *all* the configuration files, some of the keywords can only be used in conjunction with specific monitors.

For more information about the keywords which you can use in the SPI for SAP alert-monitor configuration files, see [“Monitor Configuration Files” on page 25](#). Note too, that the contents of `r3status.cfg`, the `r3status` monitor configuration file, are explained in greater detail in [“The r3status Configuration File” on page 102](#):

[Example 3-1 on page 56](#) shows what a complete configuration file looks like for the `r3mondev` monitor, which scans the trace and log files of the SAP system for the string “ERROR”.

Example 3-1 Excerpt from the `r3mondev.cfg` File

```
#-----
# TraceLevel  hostname  only error messages=1  info messages=2  debug messages=3
#                               Disable=0
TraceLevel      =ALL          =0
#-----
# TraceFile  hostname  filename
#
```



```

TraceFile      =ALL      =r3moncts.log
#-----
# History      hostname  path
# Path
#
HistoryPathUnix =ALL      =/var/opt/OV/tmp
HistoryPathAIX  =ALL      =/var/lpp/OV/tmp
HistoryPathWinNT =ALL      =default
#-----
# AgentHostname hostname  aliasname
#
AgentHostname   =ALL      =default
#-----

# SAPSHMCheck hostname    Enable = 1
#                          Disable = 0
SAPSHMCheck     =ALL      =0
#-----
# AlertDevMon  SAP  SAP    Enable =1  Filemask  Severity  Opc      OpC
#              Sys  Number Disable=0              Object      MsgGroup
#AlertDevMon   =ALL  =ALL    =1      =dev_*     =WARNING  =r3mondev =R3_Trace
#AlertDevMon   =ALL  =ALL    =1      =std*      =CRITICAL =r3mondev =R3_Trace
#Dispatcher trace file
AlertDevMon    =ALL  =ALL    =1      =dev_disp  =WARNING  =r3mondev =R3_Trace
#Workprocess trace file for workprocess with number 0
AlertDevMon    =ALL  =ALL    =1      =dev_w0    =WARNING  =r3mondev =R3_Trace
#message server trace file
AlertDevMon    =ALL  =ALL    =1      =dev_ms    =WARNING  =r3mondev =R3_Trace
#screen processor trace file
AlertDevMon    =ALL  =ALL    =1      =dev_dy0   =WARNING  =r3mondev =R3_Trace
#tp process trace file
AlertDevMon    =ALL  =ALL    =1      =dev_tp    =WARNING  =r3mondev =R3_Trace

```

r3monal: Introducing the CCMS 4.x Alert Monitor

The `r3monal` monitor uses the SAP R/3 CCMS monitoring architecture introduced at SAP version 4.0 and enables you to monitor the output of SAP's own internal monitor, the CCMS alert monitor. The `r3monal` monitor maps the alerts identified by the CCMS monitor to OVO for Windows messages, which you can view in the OVO for Windows Console.

How you configure the `r3monal` monitor depends on the version of SAP R/3 you want to monitor with the SPI for SAP, as follows:

- **SAP R/3 4.0 and 4.5**

If the SAP Servers you want to monitor with the SPI for SAP are running SAP R/3 4.0 and 4.5, then you need to configure the `r3monal` CCMS Alert Monitor to use the SAP shared memory as described in the section [“r3monal: CCMS 4.x Alert Monitor with Shared Memory” on page 64](#). Remember to pay particular attention to the Alert Classes section at the end of the configuration file.

- **SAP R/3 4.6(6.x)**

If the SAP Servers you want to monitor with the SPI for SAP are running SAP R/3 4.6 (6.10, 6.20 etc.), then you can configure the CCMS Alert Monitor to use either:

- the SAP shared memory as described in [“r3monal: CCMS 4.x Alert Monitor with Shared Memory” on page 64](#).
- the new XMI/XAL interface as described in [“r3monal: CCMS 4.x Alert Monitor with XMI/XAL” on page 69](#).

NOTE

Since SAP has indicated that it intends to phase out support for the shared-memory interface, future releases of the SPI for SAP will only support the XMI/XAL interface.

The rest of the information in this section applies to both configurations of the r3monal CCMS Alert Monitor and includes information about the following topics:


- [“CCMS Alert Monitors” on page 59](#)
- [“r3monal: Trace Levels” on page 61](#)
- [“r3monal: File Locations” on page 61](#)
- [“r3monal: Environment Variables” on page 62](#)
- [“r3monal: Severity Levels” on page 62](#)

CCMS Alert Monitors

Alerts are the most basic element of the strategy that the SAP uses to monitor the health of the SAP Landscape. Alerts are associated with objects such as disks and CPUs, and objects have attributes such as response times and usage statistics. The status of the object as well as its performance and availability over time are important to the SAP System administrator. The SAP R/3 CCMS Alert Monitor displays the configured alerts (along with any associated objects and attributes) as CCMS **Monitors** in a **Monitor Tree**, which you can browse, as illustrated in [Figure 3-1](#). Note that *public* Monitor sets are visible to (and usable by) all SAP users.

Figure 3-1


CCMS Monitor Sets

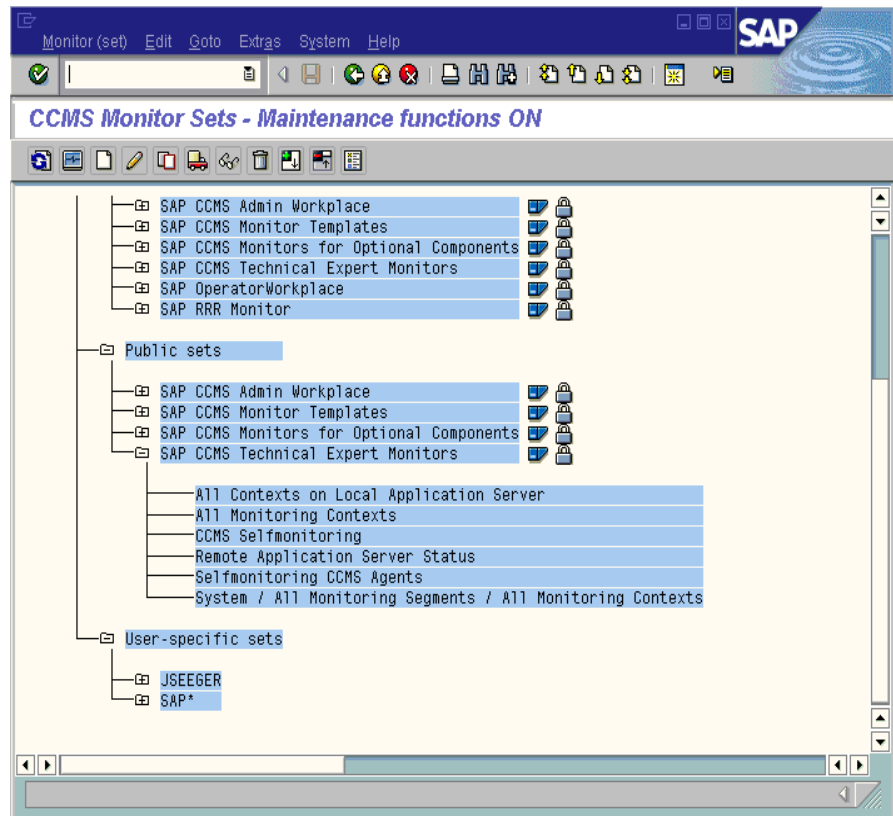

For ease of navigation, the CCMS monitors are grouped into pre-defined **Monitor Sets**, for example; SAP CCMS Technical Expert Monitors or SAP CCMS Admin Workplace. The pre-defined monitor sets contain a large number of sub sets and monitors, which can generate thousands of alerts, some of which you really do not need. If you switch *on* the maintenance function for the CCMS Monitor Sets, you can create your own CCMS Monitor Sets, which contain only the monitors for the alerts you want to know about on a regular basis. When you have created your own Monitor Sets, you can add them to the Monitor-set tree and

configure the SPI for SAP to monitor them. In this way, you can reduce the alerts you hear about and the information you receive so that it is easier to manage.

Figure 3-2 CCMS Alert Properties

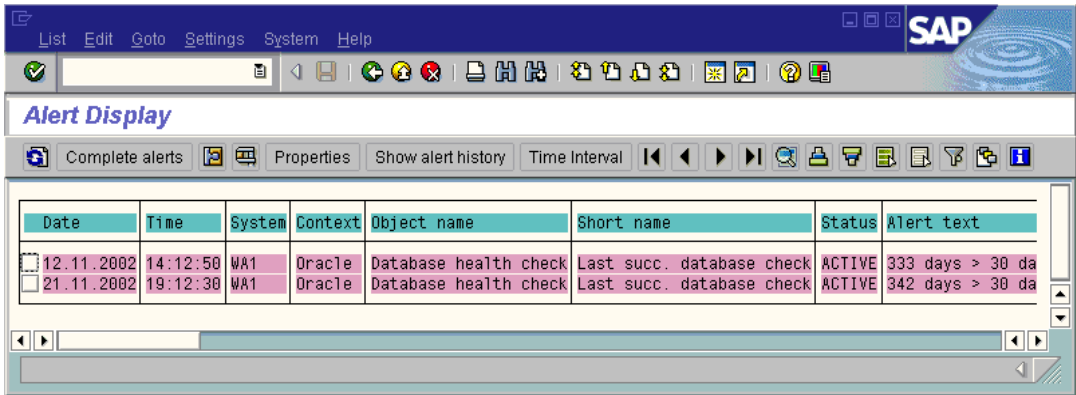

When a condition is reported in the SAP R/3 CCMS monitor, the monitoring object and its attributes are included in the resulting alert as shown in [Figure 3-2](#).

r3monal: Trace Levels

For more information about the trace levels the Alert Monitors use and, in particular, the trace levels available to the r3monal monitor, see [Trace Level](#) in the section “[Monitor Configuration Files](#)” on [page 25](#).

r3monal: File Locations

The r3monal monitor uses the default files listed in [Table 3-2](#).

Table 3-2 r3monal Files

File Name	Description
r3monal(.exe)	Executable for the SAP R/3 CCMS alert monitor
r3monal.cfg	Configuration file for the CCMS alert monitor
r3monal.his	History file for storing data after each monitor run
r3monal.msg	SAP R/3 syslog message mapping table

r3monal: Environment Variables

Table 3-3 lists the environment variables, which you can use to configure the r3monal monitor.

Table 3-3 **r3monal Environment Variables**

Environment Variable	Description
SAPOPC_DRIVE	The Windows drive where the OVO for Windows agent is installed, for example; E:\usr\...
SAPOPC_HISTORYPATH	History path
SAPOPC_R3MONAL_CONFIGFILE	Name of the configuration file
SAPOPC_SAPDIR	The Windows drive where SAP R/3 is installed, for example; E:\usr\sap
SAPOPC_TRACEMODE	Trace mode: a = append w = create (default)
SAPOPC_TRACEPATH	Trace path

r3monal: Severity Levels

Table 3-4 on page 62 shows how the “Severity Levels” section of the r3monal.cfg file allows you to define how the severity level associated with a CCMS Alert corresponds to the severity level assigned to the OVO for Windows messages, which are generated by the CCMS Alerts.

Table 3-4 **Mapping CCMS Alert Severity Levels to OVO for Windows Messages**

CCMS Alert	OVO for Windows Message
SeverityNull	=UNKNOWN
SeverityNormal (green)	=NORMAL

Table 3-4 Mapping CCMS Alert Severity Levels to OVO for Windows Messages (Continued)

CCMS Alert	OVO for Windows Message
SeverityWarning (yellow)	=WARNING
SeverityCritical (red)	=CRITICAL

r3monal: Remote Monitoring

The RemoteMonitoring keyword in the monitor-configuration file can be used *only* with the SPI for SAP Alert Monitors r3monal and r3monxmi (the System-log Monitor). For more information about the parameters you can use with the RemoteMonitoring keyword, see the list of keywords in [“Remote Monitoring with the Alert Monitors” on page 28](#). Note that SAP System and SAP Number are only required by r3monal and r3monxmi.

Example 3-2 Enabling Remote Monitoring in the r3monal.cfg File

```
#-----
# Remote Host      Localhost   Remotehost   SAP      SAP
#                               System      Number
RemoteMonitoring  =hpspi003   =ovsdsap6   =SP6     =00
#-----
```

r3monal: CCMS 4.x Alert Monitor with Shared Memory

The CCMS Alert Monitor (r3monal) provided with version B.07.10 (and newer) of the SPI for SAP can use either the old SAP shared-memory (SHM) interface or the new XMI/XAL interface to monitor CCMS alerts. Note that the new XMI/XAL interface is only available with SAP R/3 4.6 and higher. If you want to use the SPI for SAP to monitor older 4.x versions of SAP R/3 such as 4.0 or 4.5, you will have to configure the SPI for SAP to use the SAP shared-memory interface, as described in this section.

NOTE

Since SAP has indicated that it intends to phase out support for the shared-memory interface, future releases of the SPI for SAP will only support the XMI/XAL interface.

For information about using the XMI/XAL interface to monitor CCMS alerts in SAP R/3 4.6, see [“r3monal: CCMS 4.x Alert Monitor with XMI/XAL” on page 69](#); for information about monitoring CCMS alerts in SAP R/3 3.x, see [“r3monsap: CCMS 3.x Alert Monitor” on page 86](#).

This section contains information about the following topics:

- [“r3monal: Monitoring Conditions” on page 65](#)
- [“r3monal: Severity Levels” on page 65](#)
- [“r3monal: Alert Classes” on page 66](#)

[Table 3-5](#) shows how the CCMS Alert components are mapped to the corresponding components in OVO for Windows.

Table 3-5

Mapping CCMS Alert Components to OVO for Windows Messages

CCMS Alert	OVO for Windows Message
Monitoring Object	OVO for Windows Message Object
Attribute	OVO for Windows Message Prefix

Table 3-5 Mapping CCMS Alert Components to OVO for Windows Messages (Continued)

CCMS Alert	OVO for Windows Message
Alert Text	Message Text

r3monal: Monitoring Conditions

The entries that are required in the `r3monal` monitor configuration file depend on which SAP interface you are using to collect the alerts, namely; SAP shared memory or the new XMI/XAL interface, which is only available from SAP R/3 version 4.6. When `r3monal` is configured to use the SAP shared memory, you define any monitoring conditions in the following two sections, which are described in greater detail later in this section:

- Severity Levels
- Alert Classes

For more information about the contents of the `r3monal.cfg` file including keywords and their possible values along with a description of each editable parameter, see [“The Alert-Monitor Configuration Files” on page 56](#).

r3monal: Severity Levels

The “Severity Levels” section of the `r3monal.cfg` file maps severity levels for CCMS Alerts to the desired OVO for Windows severity levels for the corresponding OVO for Windows messages. By adding a new line for each individual SAP system ID/SAP number combination, you can tie the severity mapping to a specific SAP System ID and SAP Number. [Example 3-3 on page 65](#) shows the default severity-level settings in the `r3monal.cfg` file.

Example 3-3 Default Severity Levels in the r3monal Configuration File

```
#-----
#Severity      SAP      SAP      Enabled=1    OpCSeverity
#Values       System   Number   Disabled=0
SeverityWarning =ALL    =ALL     =1           =WARNING
```

```
SeverityCritical =ALL      =ALL      =1          =CRITICAL
#-----
```

You can edit the severity levels in `r3monal.cfg` in the following ways:

1. Enable or disable severity levels

If you want to disable (=0) messages for normal conditions, add a new (or change the existing) `SeverityNormal` line as follows:

```
SeverityNormal      =ALL      =ALL      =0          =NORMAL
```

2. Change how CCMS severity levels are mapped to OVO for Windows severity levels.

If you want all `SeverityNull` events to be reported as WARNINGS, add a new (or change the existing) `SeverityNull` definition, as follows:

```
SeverityNull        =ALL      =ALL      =1          =WARNING
```

3. Define SID-Specific exceptions

If you want `SeverityWarning` events that occur on SAP system LP2 to be reported as critical, leave the default settings for ALL systems, and add the following line:

```
SeverityWarning     =LP2      =ALL      =1          =CRITICAL
```

r3monal: Alert Classes

In the alert classes section of the `r3monal.cfg` file, you can define how OVO for Windows alert classes are mapped to a specified part of the monitoring tree. You can define a configuration which applies to *all* SAP systems and instance numbers, or for each individual SAP system and instance number. Each definition associates the mapped alerts with an OVO for Windows message group.

NOTE

The SPI for SAP uses a combination of the `r3monsap` and `r3monal` monitors to monitor CCMS alerts in SAP R/3 versions 4.0 and 4.5. To avoid duplication, alert conditions that are identified by the `r3monal` monitor should be disabled in the `r3monsap` configuration file.

The `r3monal.cfg` file includes the following defaults in the Alert Classes section.

```
Alert      SAP      SAP      Monitoring      Enabled=1      VPO MsgGroup
Classes    System   Number  Tree            Disabled=0
AlertMonObj =ALL    =ALL    =*\OperatingSystem\CPU      =1      =R3_
AlertMonObj =ALL    =ALL    =*\OperatingSystem\Paging  =1      =R3_Roll-Paging
AlertMonObj =ALL    =ALL    =*\OperatingSystem          =1      =OS
AlertMonObj =ALL    =ALL    =*\DatabaseClient           =1      =R3_DB
AlertMonObj =ALL    =ALL    =*\R3Services                =1      =R3_
AlertMonObj =ALL    =ALL    =*\R3BasisSystem\TraceSwitches =1      =R3_Trace
AlertMonObj =ALL    =ALL    =*\R3BasisSystem            =1      =R3_
AlertMonObj =ALL    =ALL    =*\R3Syslog                  =1      =R3_Syslog
AlertMonObj =ALL    =ALL    =\*                          =1      =R3_General
#-----
# Alert      SAP      SAP      SyslogId      Enabled=1      VPO MsgGroup
# Classes    System   Number  From To      Disabled=0
AlerMonSyslog =ALL    =ALL    =A00  =ZZZ  =1      =R3_
```

When you customize the `r3monal.cfg` file's alert classes section, keep in mind the following information:

- **OVO for Windows Message Group:**

Each object to be monitored by `r3monal` is identified in the alert classes section by a reference to its location in the CCMS monitoring tree. For example, in the second line of the default `r3monal.cfg` file, which is `*\OperatingSystem\Paging`, you can see that for all SAP systems and instances, Paging events for all operating systems are reported in the message group, `R3_Roll-Paging`.

- **Order of definitions:**

The order of the definitions in the configuration file is important. Conditions are considered from top to bottom of the list. Consequently, more specific definitions must precede general ones. For example, if the order of the first three default lines were changed to:

```
AlertMonObj =ALL =ALL =*\OperatingSystem      =1 =OS
AlertMonObj =ALL =ALL =*\OperatingSystem\CPU    =1 =OS
AlertMonObj =ALL =ALL =*\OperatingSystem\Paging =1 \
=R3_Roll-Paging
```

All operating system alerts would be assigned to the OS message group and the conditions that assign CPU and Paging alerts to the CPU and `R3_Roll-Paging` groups would never be considered.

- **Syslog alert formats:**

The settings for syslog alerts can have different formats. The default setting:

```
AlerMonSyslog    =ALL    =ALL    =A00    =ZZZ    =1
```

enables global reporting of all syslog alerts. You can change this by enabling and disabling ranges of syslog IDs either globally or for specified SAP systems and instances. For example:

```
AlerMonSyslog    =ALL    =ALL    =A00    =MZZ    =1
AlerMonSyslog    =ALL    =ALL    =N00    =ZZZ    =0
AlerMonSyslog    =LPO    =01     =A00    =ZZZ    =1
```

You can also monitor syslog messages using the `r3monxmi` monitor, which monitors the SAP R/3 system log rather than syslog alerts in the CCMS alerts monitor.

NOTE

If you are using the `r3monxmi` monitor, make sure that you disable syslog alerts in the `r3monal` monitor.

r3monal: CCMS 4.x Alert Monitor with XMI/XAL

The `r3monal` monitor provided with version B.07.10 (and newer) of the SPI for SAP uses the SAP R/3 CCMS monitoring architecture introduced at SAP version 4.6 and enables you to monitor the output of SAP's own internal monitor. You can configure the new `r3monal` CCMS Alert Monitor to use either the old SAP shared-memory interface or the new XMI/XAL interface to monitor CCMS alerts. Note that the new XMI/XAL (BAPI) interface is only available with SAP R/3 4.6 and higher.

NOTE

Since SAP has indicated that it intends to phase out support for the shared-memory interface, future releases of the SPI for SAP will only support the XMI/XAL interface.

For information about monitoring CCMS alerts in SAP R/3 4.x, see [“r3monal: CCMS 4.x Alert Monitor with Shared Memory” on page 64](#); for information about monitoring CCMS alerts in SAP R/3 3.x, see [“r3monsap: CCMS 3.x Alert Monitor” on page 86](#).

This section contains information about the following topics:

- [“r3monal: Monitoring Conditions” on page 69](#)
- [“r3monal: RFCTimeOut” on page 70](#)
- [“r3monal: CCMS Interface” on page 70](#)
- [“r3monal: CCMS Monitor Sets” on page 71](#)
- [“r3monal: CCMS Acknowledge Message” on page 75](#)
- [“r3monal: Severity Levels” on page 76](#)

r3monal: Monitoring Conditions

The conditions which you have to define in the `r3monal` monitor configuration file depend on which SAP interface you are using to collect the alerts, namely; SAP shared memory or the new XMI/XAL interface, which is only available from SAP R/3 version 4.6.

- **Shared-memory Interface:**

You must set the CCMS Interface keyword as described in “[r3monal: CCMS Interface](#)” on page 70 and, in addition, define and enable the Severity-levels, and Alert-classes keywords as described in “[r3monal: CCMS 4.x Alert Monitor with Shared Memory](#)” on page 64.

- **XMI/XAL Interface:**

You must set the CCMSInterface keyword as described in “[r3monal: CCMS Interface](#)” on page 70 and, in addition, define and enable the keywords; Severity levels, RFCTimeOut, CCMS Monitor Set, and CCMSAcknowledgeMessage. If you are using the XMI/XAL interface, you do not need to define or enable the Alert Classes keyword.

r3monal: RFCTimeOut

You use the RFCTimeout keyword to define the maximum amount of time in seconds before an RFC XMI/XAL function call is canceled, for example; =120. You need to set a time-out which takes into account the environment in which SAP is running. For example, if the RFC call takes longer than expected to complete, that is; to receive a reply to the initial request, the SAP System is probably down or has a serious performance problem. Note that after the RFC call has completed and a free Dialog process has been allocated, the time limit no longer applies.

The RFCTimeout keyword can only be used if you have configured r3monal to use the XMI/XAL interface in the r3monal.cfg configuration file, as described in “[r3monal: CCMS Interface](#)” on page 70.

Example 3-4

Setting the Time-out period for XMI/XAL Function Calls

```
#-----
# Max. time in sec. before a RFC XMI/XAL function call is
# canceled. If the RFC call takes longer than expected, the
# system is probably down or has a major performance problem.
RFCTimeOut = 120
#-----
```

r3monal: CCMS Interface

To select the interface you want the r3monal monitor to use with SAP 4.6/6.x, you use the **CCMSInterface** keyword in the r3monal.cfg configuration file. “[The Alert-Monitor Configuration Files](#)” on page 56

lists all the keywords you can use in the SPI for SAP monitors' configuration file as well as any allowed parameters. Note that we recommend configuring the `r3monal` monitor to use the XAL interface in order to take advantage of the greater functionality. The XAL interface is enabled by default in the example configuration file provided for the `r3monal` monitor

Example 3-5

Selecting the CCMS Interface

```
# The XAL interface can be only used with SAP 4.6 and higher.
#-----
# SHM => for the shared-memory interface (old interface)
# XAL => for the new enhanced XMI/XAL interface (BAPI)
CCMSInterface = XAL
#-----
```

Note that if you select the new XAL interface, you have to apply and distribute the `r3monal` monitor *only* to the SAP Central Instance. This is because the SAP Application Servers are already known to the Central Instance. If on the other hand you select the old, shared-memory interface, you have to apply and distribute the `r3monal` monitor to both the SAP Central Instance and *all* the Application Servers, too. In addition, if you select the XAL interface, you do *not* have to configure the Application Servers as OVO for Windows managed nodes. However, the Application Servers must be added to the node list in the OVO for Windows Console so that messages are matched and appear in the OVO for Windows message browser.

r3monal: CCMS Monitor Sets

The new XMI/XAL interface allows the SPI for SAP to read, write, and reset CCMS alerts directly in the CCMS alert-monitor tree. The most obvious advantage of this feature is that you can use existing CCMS Monitor Sets as templates to define your own Monitor Sets, which contain only those CCMS alerts you want to monitor with the SPI for SAP.

NOTE

In order to create or modify items in the CCMS Monitor tree, you need to make sure that the Maintenance Function for the CCMS Monitor Sets is switched on. You can find the Maintenance function option in the Extras menu, as follows:

Extras > Activate Maintenance Function

Remember to login to SAP and define the new CCMS Monitor Sets which you want the SPI for SAP to use to generate messages *before* you start the configuration of the r3monal monitor in OVO for Windows .

[Figure 3-3](#) shows how the application servers `bounty` and `hpspi003` appear in the Monitor-tree when you select and expand the Central Instance item `WA1`. If you are not interested in receiving messages concerning *all* the alerts present in the default Monitor Set, for example; `OperatingSystem`, `DatabaseClient`, and so on, you can expand the individual Application Server item and select only the alerts which you want to use to generate messages that will be sent to OVO for Windows. In the example configuration shown in [Figure 3-3](#), we have also selected the Oracle item so that we hear about problems with the database, too.


Make sure that the new Monitor Sets you define for the SPI for SAP are visible to and usable by the OVO for Windows user, which you have defined for the SPI for SAP. If you are logged into SAP as the defined OVO for Windows user, then you can see only the CCMS Monitor Sets defined for the defined OVO for Windows user and those marked “Public”. If you are logged into SAP as the administrator, you can see *all* available Monitor Sets, in which case you have to remember to ensure that you make the *new* Monitor Sets you define for the SPI for SAP visible either to the defined OVO for Windows user for the SPI for SAP or everyone by using the option “Public”.

One SAP System/SID can have multiple Monitor Sets. If you need to define multiple Monitor Sets for a SAP System/SID, remember to include each new Monitor Set on a new line in the Monitor Set section of the `r3monal.cfg` monitor configuration file, as illustrated in [Example 3-6](#). The name you define in the Monitor parameter must match the name of

the Monitor Set as it appears in the CCMS Alert-monitor tree. The names of monitor groups and subgroups must be separated by a forward slash (/) in the r3monal.cfg configuration file, as shown in [Example 3-6](#).

Figure 3-3

Defining a Monitor Set

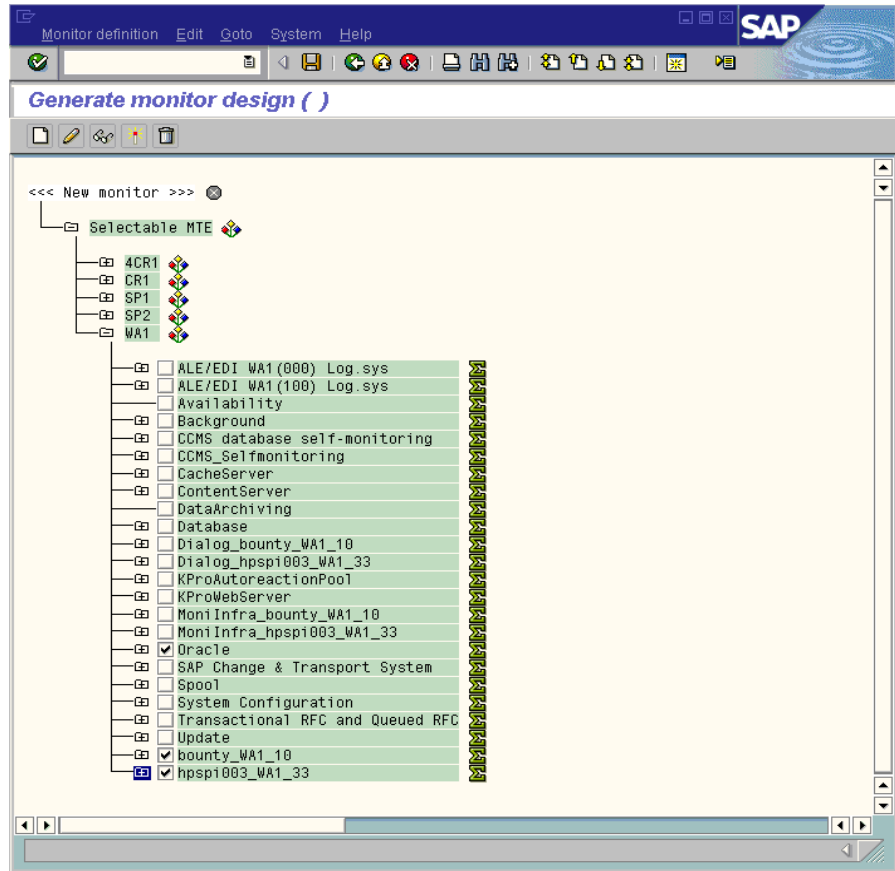

Note that the combination of traditional long SAP names and the line break in the example configuration file shown in [Example 3-6](#) disguises the name of the Monitor. The complete name of the last Monitor is: =System / All Monitoring Segments / All Monitoring Contexts. Note that the names you use do not have to be this long. In addition, if you want to associate multiple Monitors with one, single Monitor Set, you have to specify each individual Monitor on a new line as shown by the first two entries in [Example 3-6](#), where the **SPISAP** monitor set has two Monitors; **System** and **DB_ALERT**.

Example 3-6 Configuring Multiple Monitor Sets

```
#-----
# Monitor Set      SAP      SAP      Monitor Set      Monitor
#                  System    Number
CCMSMonitorSet    =WA1      =33      =SPISAP              =System
CCMSMonitorSet    =WA1      =33      =SPISAP              =DB_ALERT
CCMSMonitorSet    =SP6      =00      =SAP CCMS Technical Expert Monitors =System /
                                     All Monitoring Segments / All Monitoring Contexts
#-----
```


The default configuration of individual CCMS Alert Monitors does not always meet the demands of your environment and, in some instances, will need to be changed. You can check and, if necessary, modify a Monitor's properties in the Performance Attribute tab of the Monitor: Properties and Methods window, as illustrated in [Figure 3-4](#). You need to:

- ensure that the severity level of the CCMS Alerts matches the severity level of the OVO for Windows messages, which are generated by the CCMS Alerts.
- ensure that severity-level thresholds configured for a given CCMS Alert Monitor are appropriate for your needs.

To open the Monitor: Properties and Methods window for a specific CCMS Monitor, browse to the desired Monitor in the Monitor-set tree and either click the **Properties** button or double-click the Monitor you want to view.

Figure 3-4

Checking and Modifying CCMS Alert-Monitor Thresholds

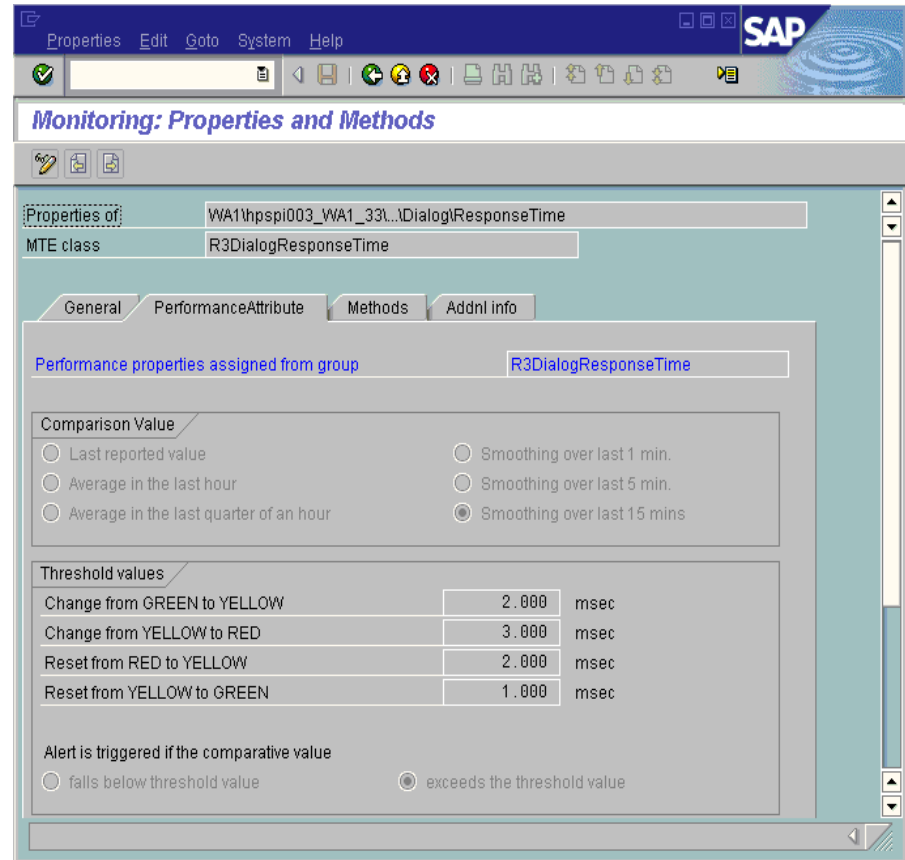

r3monal: CCMS Acknowledge Message

This feature determines whether or not CCMS Alerts which match the defined conditions are acknowledged (or completed) in CCMS or not. Enabling the CCMSAutoAcknowledge feature in the `r3monal.cfg` configuration file is the same as selecting the alert and clicking the **Complete Alert** button in SAP CCMS.

You can only use the `r3monal` monitor to automatically acknowledge CCMS Alerts in SAP if you have configured the `r3monal` monitor to use the XMI/XAL interface. If you have configured the `r3monal` monitor to use the old SAP shared-memory interface, any settings you make in the `AutoAcknowledge` section of the `r3monal.cfg` configuration file are ignored.

Example 3-7

Automatically Acknowledging CCMS Alerts

```
# AutoAcknowledge of CCMS alerts will only work if you use the
# XMI/XAL interface. If you use the SHM interface, the XAL
# settings are ignored.
#-----
# CCMSAcknowledgeMessage  SAP      Ack. filtered  Enable=1
#                          System  Messages      Disable=0
CCMSAcknowledgeMessage    =ALL      =0            =0
CCMSAcknowledgeMessage    =SP6      =0            =0
#-----
```

You can enable or disable the `r3monal` monitor for specific SAP Systems defined on individual lines in the `r3monal.cfg` configuration file. Note, however, that if you *disable* the `r3monal` monitor (=0) for a specific SAP System, `r3monal` ignores the setting for **Ack. Filtered Messages** defined on the same line.

r3monal: Severity Levels

The “Severity Levels” section of the `r3monal.cfg` file maps severity levels for CCMS Alerts to the desired OVO for Windows severity levels for the corresponding OVO for Windows messages. By adding a new line for each individual SAP system ID/SAP number combination, you can tie the severity mapping between CCMS Alerts and OVO for Windows messages to a specific SAP System ID and SAP Number. [Example 3-8](#) shows the default settings for severity levels in the `r3monal.cfg` file.

Example 3-8

Default Settings for Severity Levels in r3monal.cfg

```
#-----
#Severity          SAP      SAP      Enabled=1   OpCSeverity
#Values           System   Number   Disabled=0
SeverityWarning    =ALL      =ALL      =1           =WARNING
SeverityCritical   =ALL      =ALL      =1           =CRITICAL
#-----
```

You can edit the severity levels in `r3monal.cfg` in any one of the following ways:

1. Enable or disable severity levels

For example, if you want to disable messages for normal conditions, change the `SeverityNormal` line as follows:

```
SeverityNormal      =ALL      =ALL      =0      =NORMAL
```

2. Change how CCMS severity levels map to OVO for Windows severity levels.

For example, if you want all `SeverityNull` events to be reported as WARNINGS, change the `SeverityNull` definition, as follows:

```
SeverityNull        =ALL      =ALL      =1      =WARNING
```

3. Define SID-Specific exceptions

For example, if you want `SeverityWarning` events that occur on SAP system LP2 to be reported as critical, leave the default settings for ALL systems, and add the following line:

```
SeverityWarning     =LP2      =ALL      =1      =CRITICAL
```

Example 3-9 Excerpt from a Default r3monal Configuration File

```
#-----  
# Max. time in sec. before a RFC XMI/XAL function call is canceled.  
# If the RFC call takes longer than expected the system is probably down  
# or has a major performance problem.  
RFCTimeOut = 120  
  
# The XAL interface can be only used with SAP 4.6 and higher.  
#-----  
# SHM => for the shared memory interface (old interface)  
# XAL => for the new enhanced XMI/XAL interface (BAPI)  
CCMSInterface = XAL  
  
# A Monitor Set defines the messages you want to forward to  
# the OVO console. The Monitor Set can be only used with the  
# XMI/XAL interface. You can build up your own Monitor Set  
# (recommended).  
#-----  
# Monitor Set      SAP      SAP      Monitor Set  Monitor  
#                  System Number  
#CCMSMonitorSet    =WA1      =33      =SPISAP      =System
```

```
#CCMSMonitorSet    =WA1    =33      =SPISAP      =DB_ALERT
#CCMSMonitorSet    =SP6     =00      =SAP CCMS Technical Expert Monitors =System
/ All Monitoring Segments / All Monitoring Contexts

#-----
# Remote Host      Localhost  Remotehost  SAP      SAP
#                                     System    Number
#RemoteMonitoring  =hpspi003   =ovsdsap6   =SP6     =00

# AutoAcknowledge of CCMS alerts will only work if you use the
# XMI/XAL interface. If you use the SHM interface, the XAL settings
# are ignored.
#-----
# CCMSAcknowledgeMessage  SAP      Ack. filtered      Enable=1
#                          System    Messages            Disable=0
CCMSAcknowledgeMessage    =ALL      =0                  =0
CCMSAcknowledgeMessage    =SP6      =0                  =0

#-----
```

r3mondev: The Trace-file Monitor

The r3mondev monitor scans the trace files and log files of the SAP system for the string “ERROR”. Because it monitors only what has occurred since its previous run, any error within a trace file generates only a single alert. The file monitor scans the following directories:

- **UNIX:** /usr/sap/<SID>/<InstanceNumber>/work/
- **AIX:** /usr/sap/<SID>/<InstanceNumber>/work/
- **NT:** <drive:>\usr\sap\<SID>\<InstanceNumber>\work

where <SID> stands for the SAP system ID and <InstanceNumber> stands for the SAP instance number.

This section contains information about the following topics:

- [“r3mondev: File Locations” on page 79](#)
- [“r3mondev: Environment Variables” on page 80](#)
- [“r3mondev: Monitoring Conditions” on page 80](#)
- [“Editing the r3mondev.cfg File” on page 81](#)

r3mondev: File Locations

The file monitor, r3mondev, includes the files listed in [Table 3-6](#).

Table 3-6

r3mondev Files

File	Description
r3mondev(.exe)	Executable for the file monitor
r3mondev.cfg	Configuration file for monitored files
r3mondev.his	History file for storing data after each monitor run

r3mondev: Environment Variables

The file monitor uses environment variables listed in [Table 3-7](#).

Table 3-7 **r3mondev Environment Variables**

Environment Variable	Description
SAPOPC_DRIVE	The Windows drive where the OVO agent is installed, for example; E:\usr\...
SAPOPC_HISTORYPATH	History path
SAPOPC_R3MONDEV_CONFIGFILE	Name of the configuration file
SAPOPC_SAPDIR	The Windows drive where SAP R/3 is installed, e.g.; E:\usr\sap
SAPOPC_TRACEMODE	Trace mode: a = append w = create (default)
SAPOPC_TRACEPATH	Trace path

r3mondev: Monitoring Conditions

This section of the `r3mondev.cfg` file enables you to specify the device monitoring details for the SPI for SAP R/3.

For more information about the entries in the `r3mondev.cfg` file including keywords and their possible values along with a description of each editable parameter, see [“The Alert-Monitor Configuration Files” on page 56](#).

The monitoring conditions section of the `r3mondev.cfg` file includes the following default settings:

```
# AlertDevMon  SAP      SAP      Enable=1  File      Severity  Opc      OpC
#              System Number Disable=0  Mask
AlertDevMon    =ALL     =ALL     =1        =dev_*    =WARNING  =r3mondev =R3_Trace
AlertDevMon    =ALL     =ALL     =1        =std*     =CRITICAL =r3mondev =R3_Trace
```


Editing the r3mondev.cfg File

You can edit `r3mondev.cfg` in the following ways:

- **Disable messages**

Disable messages. For example, if you don't want to receive any messages relating to `dev_*` files for any SAP system, change the first line as follows:

```
AlertDevMon      =ALL      =ALL      =0      =dev_* =WARNING =  
r3mondev =R3_Trace
```

- **Change a message's severity level**

Change the severity level of the message. For example, if you want to demote messages relating to `std*` files from critical to warning, change the second line as follows:

```
AlertDevMon      =ALL      =ALL      =1      =std* =WARNING  
=r3mondev =R3_Trace
```

- **Define exceptions**

Define an exception to the general rule. For example, if you want to promote messages relating to `dev_*` files on SAP system LP2 from warning to critical, leave the default settings as they are and add the following line.

```
AlertDevMon =LP2 =ALL =1 =dev_* =CRITICAL =r3mondev =R3_Tr  
ace
```

NOTE

Wildcards are only allowed at the end of the string. Only SAP trace files (located in the work directory) are relevant and these files must begin with `dev` or `std`.

r3monpro: The Process Monitor

The `r3monpro` monitor scans all processes associated with a given instance, such as `dialog`, `enqueue`, `update`, `batch`, `dispatch`, `message`, `gateway`, and `spool` work processes. It is also used for monitoring database processes.

This section contains information about the following topics:

- [“r3monpro: File Locations” on page 82](#)
- [“r3monpro: Environment Variables” on page 83](#)
- [“r3monpro: Monitoring Conditions” on page 83](#)
- [“r3monpro: Example Configuration” on page 84](#)

r3monpro: File Locations

The process monitor `r3monpro` contains the files listed in [Table 3-8](#).

Table 3-8

r3monpro Files

File	Description
<code>r3monpro(.exe)</code>	Executable for the process monitor
<code>r3monpro.cfg</code>	Configuration file for the process monitor
<code>r3monpro.his</code>	History file for storing data after each monitor run

r3monpro: Environment Variables

The process monitor `r3monpro` uses the environment variables listed in [Table 3-9](#).

Table 3-9 **r3monpro Environment Variables**

Environment Variable	Description
SAPOPC_DRIVE	The Windows drive where the OVO agent is installed, for example; E:\usr\...
SAPOPC_HISTORYPATH	History path
SAPOPC_R3MONPRO_CONFIGFILE	Name of the configuration file
SAPOPC_SAPDIR	The Windows drive where SAP R/3 is installed, e.g.; E:\usr\sap
SAPOPC_TRACEMODE	Trace mode: a = append w = create (default)
SAPOPC_TRACEPATH	Trace path

r3monpro: Monitoring Conditions

Monitoring conditions for `r3monpro` are specified in the `r3monpro.cfg` file. Individual rows define monitoring conditions for specific processes. You use the `r3monpro.cfg` file to set the rules which define how the number of processes running should be measured and what severity level should be assigned to the alert that is generated if the number of processes exceeds the limits you define.

You can set monitoring conditions for a specific process to any of the following modes:

- **Exact**

The number of process running on a managed node must be equal to the specified number.

- **Min**

The number of processes running on a managed node must not be less than the specified number.

- **Max**

The number of processes running on a managed node must not be more than the specified number.

- **Delta**

An alert is triggered if there is any change in the number of processes running on a managed node or if the specific amount of allowed change in the number of instances of the same process exceeds the defined limit. This mode enables you to recognize changes without having to define an absolute number of processes for a managed node.

For example, if Delta =2, then a difference of 2 or more between the number of processes (n) found in the previous and current monitor run on a managed node triggers an alert. Note that, if an alarm is triggered, n is reset to the number of processes discovered in the most recent monitor run, and any new Delta is calculated on the basis of the new number of processes found to be running.

Messages generated when one of these conditions is identified include an operated-initiated action. This action calls an SPI for SAP module which lists all the current processes for the affected SAP instance.

For more information about the entries in the `r3monpro.cfg` file including keywords and their possible values along with a description of each editable parameter, see [“The Alert-Monitor Configuration Files” on page 56](#).

r3monpro: Example Configuration

In the first row of the following example, the `saposcol` process is monitored on all hosts. Exactly one such process should run at any given time. Any violation of this number is critical. It affects the OVO for Windows object `saposcol`. The associated OVO for Windows message group is `State`.

The last row of the same example specifies that eight or fewer instances of the `dw.sapSID` process should run on all hosts. If the number is larger than eight, a warning message associated with OVO for Windows object `dw.sap` and OVO for Windows message group `State` is issued.

The string `SID` has special meaning in this context. `SID` will be replaced by the SAP System name on the managed node. This enables global definitions for different SAP Systems.

```
AlertInstMonPro =ALL =T11 =saposcol =1 =Exact=1 =CRITICAL =saposcol =R3_State
AlertInstMonPro =C01 =00 =explorer =1 =Max =1 =CRITICAL =explorer =R3_State
AlertInstMonPro =T11 =00 =dw.sapSID =1 =Min =8 =WARNING =dw.sap =R3_State
```

It is also possible to ensure that a process is not running. To do so, use the mode `Exact` and enter 0 as the number.

NOTE

On HP-UX servers, `r3monpro` can identify processes at the instance level. On MS Windows servers, you need to define on a single line the total number of work processes on the node. For example, if there are two instances, each with four (4) work processes, the total number of processes is eight (8).

r3monsap: CCMS 3.x Alert Monitor

The `r3monsap` alert monitor enables you to monitor the output of SAP's own internal monitor, the CCMS alert monitor. It maps CCMS alerts to OVO for Windows messages, which you can view in the OVO for Windows Console.

NOTE

If you are using SAP R/3 version 4.x, use the `r3monal` CCMS alert monitor for the majority of your CCMS monitoring requirements.

At SAP R/3 version 4.0B you must use `r3monsap` for database alerts.

This section contains information about the following topics:

- [“r3monsap: File Locations” on page 86](#)
- [“r3monsap: Environment Variables” on page 87](#)
- [“r3monsap: Monitoring Conditions” on page 87](#)
- [“r3monsap: Alert Classes” on page 89](#)

r3monsap: File Locations

[Table 3-10](#) lists the files used to monitor `r3monsap` alerts.

Table 3-10

r3monsap Files

File	Description
<code>r3monsap (.exe)</code>	Executable for the SAP R/3 CCMS alert monitor
<code>r3monsap.cfg</code>	Configuration file for the monitoring of R/3 CCMS alerts
<code>r3monsap.his</code>	History file for storing data after each monitor run
<code>r3monsap.msg</code>	SAP R/3 syslog message mapping table
<code>r3monsap.log</code>	Trace file for storing trace data.

r3monsap: Environment Variables

Table 3-11 lists the environment variables used in monitoring r3monsap alerts.

Table 3-11 **r3monsap Environment Variables**

Environment Variable	Description
SAPOPC_DRIVE	The Windows drive where the OVO for Windows agent is installed, for example; E:\usr\...
SAPOPC_HISTORYPATH	History path
SAPOPC_R3MONSAP_CONFIGFILE	Name of the configuration file
SAPOPC_R3MONSAP_SAPMSGFILE	SAP R/3 syslog message ID to message text mapping table
SAPOPC_SAPDIR	The Windows drive where SAP R/3 is installed, e.g.; E:\usr\sap
SAPOPC_TRACEMODE	Trace mode: a = append, w = create (default)
SAPOPC_TRACEPATH	Trace path

r3monsap: Monitoring Conditions

The monitoring conditions for r3monsap are defined in three sections:

- CCMS syslog auto-acknowledge on or off
- Severity values
- Alert classes

To ensure that all CCMS alert messages are viewable in the OVO for Windows Console you have to enable the auto-acknowledge function by setting this value to 1 in the `r3monsap.cfg` file. For more detailed information about the individual entries in the `r3monpro.cfg` file including keywords and their possible values along with a description of each editable parameter, see [“The Alert-Monitor Configuration Files” on page 56](#).

The “Severity Levels” section of the `r3monsap.cfg` file maps CCMS severity levels to OVO for Windows severity levels by SAP system ID and SAP number. as shown in [Table 3-12](#)

Table 3-12 Mapping CCMS Severity Levels to OVO for Windows

CCMS	OVO for Windows
SeverityNull	=UNKNOWN
SeverityNormal (green)	=NORMAL
SeverityWarning (yellow)	=WARNING
SeverityCritical (red)	=CRITICAL

The defaults severity-level mapping in the `r3monsap.cfg` file are:

Severity	SAP	SAP	Enabled=1	OpCSeverity
Values	System	Number	Disabled=0	
SeverityNull	=ALL	=ALL	=1	=UNKNOWN
SeverityNormal	=ALL	=ALL	=1	=NORMAL
SeverityWarning	=ALL	=ALL	=1	=WARNING
SeverityCritical	=ALL	=ALL	=1	=CRITICAL

You can edit the severity levels in `r3monsap` in the following ways:

- **Enable or disable severity levels**

Enable or disable severity levels. For example, if you want to disable messages for normal conditions, change the `SeverityNormal` line as follows:

```
SeverityNormal    =ALL    =ALL    =0    =NORMAL
```

- **Re-map severity levels**

Change how CCMS severity levels map to OVO severity levels. For example, if you want all SeverityNull events to be reported as warnings, change the SeverityNull definition, as follows:

```
SeverityNull      =ALL      =ALL      =1      =WARNING
```

- **Define mapping exceptions**

Define mapping exceptions, where specified SAP system/instances are mapped in a way that is an exception to the general rule. For example, if you want SeverityWarning events that occur on SAP system LP2 to be reported as critical, leave the default settings for ALL systems, and add the following line:

```
SeverityWarning  =LP2      =ALL      =1      =CRITICAL
```

r3monsap: Alert Classes

The alert classes section of the `r3monsap.cfg` file controls the handling of CCMS Collector alert classes by the following values:

- SAP system
- SAP number
- OVO object
- OVO message group

When defining custom settings for alert classes, be aware of the fact that OVO for Windows objects can be added arbitrarily. OVO for Windows objects specified in this file are displayed in the associated Console column. However, be sure to specify only *defined* OVO for Windows message groups in this file, namely; message groups known to OVO for Windows.

The alert classes defined by default in the `r3monsap.cfg` file shown in [Example 3-10](#) provide standard monitoring for all SAP systems and instances. You can use this default alert classes configuration for situations where only `r3monsap` is being used to monitor the CCMS alerts monitor.

For more detailed information about the individual entries in the `r3monpro.cfg` file including keywords and their possible values along with a description of each editable parameter, see [“The Alert-Monitor Configuration Files” on page 56](#).

IMPORTANT

The SPI for SAP uses a combination of the `r3monsap` and `r3monal` monitors to monitor CCMS alerts in SAP R/3 versions 4.0 and 4.5. To avoid duplication, alert conditions that are identified by the `r3monal` monitor should be disabled in the `r3monsap` configuration file.

You can edit the alert classes in `r3monsap` and define exceptions for a particular SAP system or instance by adding a line to the `r3monsap.cfg` file which specifies the system ID and instance number. For example, you can disable all `AlertClassRollpag` messages from SAP instance number 01 of SAP system LPO, by adding the following line to the Alert Classes section:

```
AlertClassRollpag =LPO =01 =0 =RollPage =R3_Roll-Paging
```

Example 3-10 Default Settings in the `r3monsap.cfg` File

#Alert #Classes	SAP Sys	SAP Num	Enabled=1 Disabled=0	Object	MsgGroup
AlertClassNull	=ALL	=ALL	=1	=Null	=R3_General
AlertClassStateChange	=ALL	=ALL	=1	=StateChange	=R3_State
AlertClassSAPsysUp	=ALL	=ALL	=1	=SAPsysUp	=R3_State
AlertClassSAPsysDown	=ALL	=ALL	=1	=SAPsysDown	=R3_State
AlertClassSlogId	=ALL	=ALL	=1	=SyslogId	=R3_Syslog
AlertClassSlogFreq	=ALL	=ALL	=1	=SyslogFreq	=R3_Syslog
AlertClassBuf	=ALL	=ALL	=1	=Buffers	=R3_Buffers
AlertClassEnqueue	=ALL	=ALL	=1	=Enqueue	=R3_Enqueue
AlertClassRollpag	=ALL	=ALL	=1	=RollPage	=R3_Roll-Paging
AlertClassTrace	=ALL	=ALL	=1	=Trace	=R3_Trace
AlertClassDpQueue	=ALL	=ALL	=1	=DpQueue	=R3_General
AlertClassPerfDia	=ALL	=ALL	=1	=Dialog	=R3_
AlertClassPerfUpd	=ALL	=ALL	=1	=Update	=R3_
AlertClassPerfBtc	=ALL	=ALL	=1	=Batch	=R3_
AlertClassPerfSpo	=ALL	=ALL	=1	=Spool	=R3_
AlertClassAbapUpd	=ALL	=ALL	=1	=Update	=R3_ABAP-4
AlertClassAbapErr	=ALL	=ALL	=1	=Error	=R3_ABAP-4
AlertClassAbapSql	=ALL	=ALL	=1	=SQL	=R3_ABAP-4
AlertClassDbIndcs	=ALL	=ALL	=1	=Indices	=R3_DB
AlertClassDbFreSp	=ALL	=ALL	=1	=FreeSpace	=R3_DB
AlertClassDbArcSt	=ALL	=ALL	=1	=Archive	=R3_DB
AlertClassDbBckup	=ALL	=ALL	=1	=Backup	=R3_DB
AlertClassSpo	=ALL	=ALL	=1	=Spooler	=R3_General
AlertClassArch	=ALL	=ALL	=1	=Archive	=R3_General

AlertClassOsLoad	=ALL	=ALL	=1	=Load	=OS
AlertClassOsPage	=ALL	=ALL	=1	=Paging	=OS
AlertClassOsSwap	=ALL	=ALL	=1	=Swap	=OS
AlertClassOsFile	=ALL	=ALL	=1	=Filesys	=OS
AlertClassGenP3	=ALL	=ALL	=1	=GenP3	=R3_General
AlertClassGenP4	=ALL	=ALL	=1	=GenP4	=R3_General
AlertClassGenP5	=ALL	=ALL	=1	=GenP5	=R3_General

r3monxmi: The System-log Monitor (via XMI)

The `r3monxmi` monitor reads the SAP R/3 system log (via the SAP transaction `SM21`) and passes the messages to the OVO for Windows Console. Unlike the CCMS Alerts monitors (`r3monsap` and `r3monal`), `r3monxmi` does not require the generation of a syslog alert in the internal SAP R/3 CCMS monitor.

Messages generated by `r3monxmi` include an operator-initiated action which opens the SAP System Log (transaction `SM21`).

To avoid duplication of messages in the OVO for Windows Console, make sure you disable all syslog alerts to the internal SAP R/3 CCMS monitor, not just those in `r3monsap` and `r3monal`. This is particularly important for MS Windows platforms where syslog alerts are also passed to the MS Windows application log, which is monitored by OVO for Windows.

NOTE

If you use the `r3monxmi` monitor, make sure that any SAP user you set up for the SPI for SAP (see the *HP OpenView for Windows SMART Plug-In for SAP Configuration Guide*) must include the authorization profile `SAP_XMI_ALL` (SAP 3.x) or `S_XMI_ALL` (SAP 4.x). Without the correct authorization profile, the monitor is not able to access the SAP syslog directly.

This section contains information about the following topics:

- [“r3monxmi: File Locations” on page 93](#)
- [“r3monxmi: Monitoring Conditions” on page 94](#)
- [“r3monxmi: Environment Variables” on page 93](#)
- [“r3monxmi: Severity Levels” on page 94](#)
- [“r3monxmi: Syslog Message Components” on page 95](#)
- [“r3monxmi: Alert Classes” on page 97](#)
- [“r3monxmi: Syslog Message Components” on page 95](#)

r3monxmi: File Locations

Table 3-13 lists the files used by the r3monxmi monitor.

Table 3-13

r3monxmi Files

File	Description
r3monxmi (.exe)	Executable for the syslog monitor
r3monxmi.cfg	Configuration file for the monitoring of syslog alerts
r3monxmi.his	History file for storing data after each monitor run
r3monxmi.msg	Categories for syslog messages.

r3monxmi: Environment Variables

Table 3-14 lists the environment variables used by the r3monxmi monitor.

Table 3-14

r3monxmi Environment Variables

Environment Variable	Description
SAPOPC_DRIVE	The Windows drive where the OVO for Windows agent is installed.
SAPOPC_HISTORYPATH	History path
SAPOPC_R3MONXMI_CONFIGFILE	Name of the configuration file
SAPOPC_SAPDIR	The Windows drive where SAP R/3 is installed, for example; E:\usr\sap
SAPOPC_TRACEMODE	Trace mode: a = append w = create (default)
SAPOPC_TRACEPATH	Trace path

r3monxmi: Monitoring Conditions

In the `r3monxmi` monitor, the monitoring conditions are defined in two sections:

- Severity values
- Alert classes

For more detailed information about the individual entries in the `r3monpro.cfg` file including keywords and their possible values along with a description of each editable parameter, see [“The Alert-Monitor Configuration Files” on page 56](#).

r3monxmi: Severity Levels

The “Severity Values” section of the `r3monxmi.cfg` file maps syslog severity levels to OVO for Windows severity levels by SAP system ID and SAP number, as shown in [Table 3-15](#).

Table 3-15

Mapping syslog Severity Levels to OVO for Windows

Syslog	OVO
SeverityNull	=UNKNOWN
SeverityNormal (green)	=NORMAL
SeverityWarning (yellow)	=WARNING
SeverityCritical (red)	=CRITICAL

The “Severity Values” section of the `r3monxmi.cfg` file contains the following default values:

Severity Values	SAP System	SAP Number	Enabled=1 Disabled=0	OpCSeverity
SeverityNull	=ALL	=ALL	=1	=UNKNOWN
SeverityNormal	=ALL	=ALL	=0 *	=NORMAL
SeverityWarning	=ALL	=ALL	=1	=WARNING
SeverityCritical	=ALL	=ALL	=1	=CRITICAL

NOTE

The default for `SeverityNormal` marked with an asterisk (*) above is changed to 0 as shown, after installation.

You can edit the severity levels in `r3monxmi` in the following ways:

- **Enable or disable severity levels**

For example, if you want to disable messages for normal conditions, change the `SeverityNormal` line as follows:

```
SeverityNormal =ALL      =ALL =0 =NORMAL
```

- **Change severity-level mapping**

Change how CCMS severity levels map to OVO for Windows severity levels. For example, if you want all `SeverityNull` events to be reported as warnings, change the `SeverityNull` definition, as follows:

```
SeverityNull      =ALL      =ALL =1 =WARNING
```

- **Define mapping exceptions**

Specified SAP system/instances can be mapped in a way that is an exception to the general rule. For example, if you want `SeverityWarning` events that occur on SAP system LP2 to be reported as critical, leave the default settings for ALL systems, and add the following line:

```
SeverityWarning =LP2 =ALL =1 =CRITICAL
```

r3monxmi: Syslog Message Components

The following components of a syslog message are used by the `r3monxmi` monitor:

- **MNo**

A three-character ID that indicates the purpose of the syslog entry. In the `r3monxmi.cfg` file, you can specify the ranges of IDs to be monitored.

SAP versions 4.0 and later use 'MNo' to look up messages in `r3monxmi.msg`. Note that the first two characters of MNo must match the AREA column in the `r3monxmi.msg` file; the third character of MNo must match the SUBID column. In the matching

line the first character of the MONBEW column is then used to calculate the severity of the message. The following mapping rules apply:

- **R**: SeverityCritical
- **Y**: SeverityWarning
- **G**: SeverityNormal
- **W**: SeverityNormal
- **others**: SeverityNull
- **C**

A single-character code, which indicates the type and severity of the logged event and identifies syslog severity values that are used in the `r3monxmi.cfg` file to map to OVO for Windows severity levels. Possible values are:

 - **K**: SeverityCritical caused by an SAP basis problem
 - **S**: SeverityNormal caused by an operation trace
 - **T**: SeverityCritical caused by a transaction problem
 - **W**: SeverityWarning
 - **X**: SeverityNull

NOTE

SAP versions 4.0 and later do *not* use the character code 'C' to lookup messages in `r3monxmi.msg`; instead, they use the character code 'MNo'.

- **Text**

The text of the syslog entry, which is passed to the OVO for Windows message browser by the `r3monxmi` monitor.

For SAP versions earlier than 4.5a, a patch is required to enable the display of the full message text. To apply this patch, add the line “with `tr_term` eq `''`” to the function module `SXMI_XMB_SYSLOG_READ` so that it reads as follows:

```
submit rslg0000 line-size 255
with tr_term eq ''
with tr_date eq from_date
```



```
with tr_time eq from_time
with tr_edate eq to_date
with tr_etime eq to_time
with tr_cpu eq server_name
with tr_pages eq '003'
with nocodevc eq 'X'
with nocotask eq 'X'
with nocomand eq 'X'
with nocotran eq 'X'
with nocoterm eq 'X'
exporting list to memory
and return
```

IMPORTANT

In order to make the required modifications to the SXMI_XMB_SYSLOG_READ module, you must have an SAP R/3 developer license. See your SAP representative for details.

r3monxmi: Alert Classes

In the alert classes section of the `r3monxmi.cfg` file, you can define the syslog events that you want to monitor by specifying ranges of message numbers (syslog IDs). Each line of the `r3monxmi.cfg` file is set up in a particular way. Each entry defines monitoring for a specified range of syslog events. You can specify which syslog events to monitor by enabling and/or disabling ranges of syslog IDs either globally or for specified SAP systems and instances.

In [Example 3-11](#), the syslog events are to be monitored on all SAP Systems and numbers for syslog IDs A00 through MZZ: the syslog events (IDs N00 through ZZZ) are *not* to be monitored on all SAP Systems and numbers. Syslog event monitoring is enabled on SAP System LPO for IDs A00 through ZZZ.

Example 3-11

r3monxmi.cfg File - Configuring Alert Classes

```
#-----
# Alert Classes      SAP      SAP      SyslogId      Enabled=1
#                   System    Number    From    To    Disabled=0
AlerMonSyslog       =ALL     =ALL     =A00    =MZZ    =1
AlerMonSyslog       =ALL     =ALL     =N00    =ZZZ    =0
AlerMonSyslog       =LPO     =01      =A00    =ZZZ    =1
```

NOTE

You must delete all *critical* CCMS alerts in R/3 before you can use this alert monitor with SAP R/3 versions later than version 3.0. The transaction **/nrz08** displays the CCMS alert monitor.

r3status: The SAP R/3 Status Monitor

The `r3status` monitor checks the current status of SAP R/3 and compares it with the last recorded status to determine whether any change in status occurred since the last time the monitor ran. Using the SAP R/3 function module `RFC_SYSTEM_INFO`, the `r3status` monitor provides the following features:

- Reports about local SAP R/3 system-availability
- Recognition and monitoring of each individual SAP R/3 instance
- SAP R/3 availability status reported may be: up, down, hanging (RFC time out).

The `r3status` monitor is of type *timeframe*. It runs every two minutes and compares the current value with the previous value stored in the history file and generates a message if it finds a difference, which it needs to report. For more information about reporting types, see [“Report Types for the Alert-collector Monitors” on page 111](#).

This section contains information about the following topics:

- [“r3status: File Locations” on page 99](#)
- [“r3status: Environment Variables” on page 100](#)
- [“r3status: History File” on page 101](#)
- [“The r3status Configuration File” on page 102](#)
- [“Remote Monitoring with the r3status Monitor” on page 104](#)

r3status: File Locations

[Table 3-16](#) lists the files used by the `r3status` monitor.

Table 3-16

r3status Files

File	Description
<code>r3status(.exe)</code>	Executable for the <code>r3status</code> monitor

Table 3-16 **r3status Files (Continued)**

File	Description
r3status.log	The r3status monitor creates a log/trace file after each run of the monitor. The trace file is stored in the default monitor directory of the OVO for Windows agent: <ul style="list-style-type: none"> UNIX: /usr/OV/bin/OpC/monitor NT: \usr\ov\bin\opc\monitor
r3itosap.cfg	The r3status monitor uses information in the r3itosap.cfg file to determine which SAP instances it is supposed to monitor.
r3status.cfg	The r3status monitor uses information in the r3status.cfg file to determine which, if any, SAP instances it is supposed to monitor on remote SAP servers.
r3monup.his	History file for storing data after each run of the r3status monitor. The r3status monitor uses information in this file to determine whether or not a change of status has occurred. For more information, see “r3status: History File” on page 101 .

r3status: Environment Variables

[Table 3-17](#) lists the environment variables used by the r3status monitor.

Table 3-17 **r3status Environment Variables**

Environment Variable	Description
SAPOPC_RFC_TIMEOUT	set time out value for RFC connections - default is 20 seconds
SAPOPC_HISTORYPATH	History path to the r3monup.his file ^a

Table 3-17

r3status Environment Variables (Continued)

Environment Variable	Description
SAPOPC_R3STATUS_CONFIGFILE	Name of the configuration file, which the r3status monitor uses
SAPOPC_R3ITOSAP_CONFIGFILE	Name of the general configuration file, which contains SAP login information used by the SPI for SAP monitors
SAPOPC_TRACEMODE	Trace mode: a = append w = create (default)
SAPOPC_TRACEPATH	Trace path

a. Default is: <ovagentdir>/tmp

r3status: History File

The first time the r3status monitor runs, it writes its findings to the history file, r3monup.his. The next time the r3status monitor runs, it uses the information in the r3monup.his file to determine whether or not a change of status has occurred since the last time the monitor ran and, as a consequence, which if any message needs to be sent to the OVO for Windows management server.

Note that the r3status monitor does not add entries to the r3monup.his history file each time it runs: it only writes to the file if it discovers that a change of status has taken place. In addition, if a change of status has occurred, r3status overwrites the existing information in the file with the latest available status information, which includes a timestamp indicating when the change of status was discovered.

The information in the r3monup.his history file reflects the last *change* in status of the SAP instances, which you are managing with the SPI for SAP. If the most recent run of the r3status monitor discovers that no change in status has occurred since the last time it ran, it does not update the information in the r3monup.his file. [Example 3-12](#) shows the format and contents of the r3monup.his file.

Example 3-12 Excerpt from the r3monup.his file

```
021028-11:18:29 #-----
021028-11:18:29 #Keyword          SAP      SAP      SAP      State
021028-11:18:29 #                      System  Number  Instance
021028-11:18:29 #
021028-11:18:29 ConfiguredInstance  =DEV    =00     =DVEBMGS00 =UP
021028-11:18:29 ConfiguredInstance  =PKR    =99     =DVEBMGS99 =DOWN
```

The r3status Configuration File

The r3status monitor's configuration file allows you to use the keywords listed below to change the configuration from the default settings to meet the requirements of your particular environment. Where appropriate, possible values for a given keyword are also specified. [Example 3-13 on page 105](#) shows what a complete configuration file looks like for the r3status monitor, which monitors the status of both local and remote SAP Systems. You can use the following keywords in an SPI for SAP r3status configuration file:

- **TraceLevel**

The TraceLevel keyword accepts the following parameters:

- **Hostname:**

=ALL	All hosts being monitored by the SPI for SAP. This is the default setting.
=<SAP_host>	the name of a SAP server, where you want to specify a trace level. Use a new line for each individual host.

- **Trace level:**

=0	Disable. This is the default setting.
=1	Log only error messages
=2	Log all messages
=3	Log only debug messages

- **TraceFile**

The TraceFile keyword accepts the following parameters:

— **Hostname:**

- =ALL All SAP servers being monitored by the SPI for SAP. This is the default setting.
- =<SAP_host> the name of a specific host where tracing is enabled and you want to specify a trace level. Use a new line for each individual host

— **Filename:**

=r3mon<alert_monitor_name>.log, for example; r3monale.log, or r3mondmp.log, etc. This is the default setting. Alternatively, you can specify the name of the file to which you want to write the trace log. For more information about changing the path, see the environment variable SAPOPC_TRACEPATH in [Table 3-17 on page 100](#).

• **HistoryPath[Unix | AIX | WinNT]**

The HistoryPathUnix keyword accepts the following parameters:

— **Hostname:**

- =ALL All hosts being monitored by the SPI for SAP. This is the default setting.
- =<SAP_host> the name of a SAP server, where you want to specify the path to the monitor history file Use a new line for each individual host

— **Path:**

- UNIX: =/var/opt/OV/tmp
- AIX: =/var/lpp/OV/tmp
- WinNT: =default

• **RemoteMonitoring**

The RemoteMonitoring keyword accepts the following parameters:

— **LocalHost**

This is the name of the local OVO for Windows managed node where the SPI for SAP software is installed and running and whose performance agent will be used to remotely monitor the SAP server defined in the parameter “RemoteHost”.

— **RemoteHost**

This is the name of the *remote* SAP server you want to monitor from the host defined in the parameter “LocalHost”. Although the remote host does not have the SPI for SAP software installed and is *not usually* an OVO for Windows managed node, it must appear in the OVO for Windows Console.

For more information, see [“Remote Monitoring with the r3status Monitor” on page 104](#).

Remote Monitoring with the r3status Monitor

The current version of the SPI for SAP includes a feature which allows you to extend the scope of the monitors to remotely monitor the status of SAP on SAP servers (which are *not* OVO for Windows managed nodes) from a host, which *is* already configured as an OVO for Windows managed node and where the SPI for SAP is installed, configured, and running.

To make use of the remote-monitoring feature provided by the SPI for SAP, for example; to monitor a SAP server running on an operating system that is not supported by the SPI for SAP, you need to activate the new **RemoteMonitoring** keyword (by removing the leading hash symbol “#”) in the `r3status.cfg` file. Next, on the same line, you define the name of the local host, which you want to perform the monitoring. Finally, you have to define the name of the remote SAP server, which you want to monitor. [Example 3-13 on page 105](#) shows how a new line is required for each *additional* SAP server, which you want to monitor remotely.

NOTE

You can associate multiple remote SAP servers with one, single local host or you can associate single remote hosts with individual, different local hosts. [Example 3-13 on page 105](#) shows a mixed approach where one *local* host “sap1” is used to monitor two *remote* hosts; “sdsap” and “sapwolf”. A third local host “sap2” remotely monitors the remote host “triosap”.

For more information about the contents of the `r3status` monitor’s configuration file including the keywords and parameters you use to define local and remote server names, see the entry concerning “Remote Monitoring” in [“The r3status Configuration File” on page 102](#).

Example 3-13 **Default r3status Configuration File**

```
#-----
# TraceLevel      hostname      Disable=0   only error messages=1
#                                     info messages=2   debug messages=3
#
TraceLevel        =ALL          =2
#-----
# TraceFile      hostname      filename
#
TraceFile         =ALL          =r3status.log
#-----
# History        hostname      path
# Path
#
HistoryPathUnix   =ALL          =/var/opt/OV/tmp
HistoryPathAIX    =ALL          =/var/lpp/OV/tmp
HistoryPathWinNT  =ALL          =default
#-----
# Remote          Local        Remote
# Monitoring      Host         Host
RemoteMonitoring  =sap1        =sdsap
RemoteMonitoring  =sap1        =sapwolf
RemoteMonitoring  =sap2        =triosap
#-----
```

The SPI for SAP Alert Monitors

r3status: The SAP R/3 Status Monitor

4 **The SPI for SAP Alert-Collector Monitors**

This section describes the alert-collector monitors controlled by `r3moncol` and explains how to configure and use them.

Introducing r3moncol and the Alert-collector Monitors

The SPI for SAP uses the one, single alert collector `r3moncol` to collect alerts from a number of additional SAP R/3 alert monitors. Each of the alert monitors listed in this section takes its name from the nature of the alerts it is designed to monitor. For example, the `r3mondmp` alert-collector monitors ABAP dumps. The tasks that each monitor performs are grouped according to *alert types*. For example, the alert type `IDOC_CURRENT_STATUS` helps the `r3monale` monitor determine the current status of iDOCs in an SAP System. Monitoring parameters are specified at the *alert-type* (rather than *alert-monitor*) level. For example, you could use the parameter `=CHECK_INBOUND` to limit the range of the alert type `IDOC_CURRENT_STATUS` so that it checks the status of inbound iDOCs only.

The following list shows which alert-collectors are available to `r3moncol` and gives a short description of each monitor's scope. For more detailed information about the alert types associated with each alert monitor as well as the parameters you can use to configure them, see the appropriate sections and tables later in this chapter:

- `r3monaco` - [“Monitoring the TEMSE file” on page 217](#)

To save runtime costs, the Temporary Sequential File (TEMSE) monitor has been replaced by a report. See [“Monitoring the TEMSE file” on page 217](#) for more details.

- [“r3monale: The iDOC-Status Monitor” on page 127](#)

The IDOC Status monitor checks the status of the iDOCs present in the SAP R/3 Systems configured in your SAP Landscape. `r3monale` generates an alert when a defined threshold for the number of iDOCs with a given status is exceeded

- [“r3monchg: The SYSTEM CHANGE OPTION Monitor” on page 137](#)

The SYSTEM CHANGE OPTION monitor checks for the occurrence of SAP System Change options. This monitor has version-specific configurations for:

- SAP R/3.1X
- SAP R/3 4.0X, 4.5X SAP

— SAP R/3 4.6X, 6.10, 6.20

- [“r3moncts: The CORRECTION & TRANSPORT SYSTEM Monitor” on page 147](#)

The CORRECTION and TRANSPORT SYSTEM monitor checks the correction and transport system for important transport requests, tasks and objects. It generates an alert according to the specifications you define.

- [“r3mondmp: The ABAP Dump Monitor” on page 160](#)

The ABAP Dump monitor detects ABAP dumps which occur in the SAP System. The cause of the dump can be identified from the details which the message gives and used to determine any corrective action taken.

- [“r3monjob: The JOBREPORT Monitor” on page 163](#)

The JOBREPORT monitor checks for jobs that:

- exceed a specified run time
- do not run as long as they are expected to run
- do not start within a specified time frame
- are aborted

- [“r3monlck: The LOCK_CHECK Monitor” on page 173](#)

The LOCK_CHECK monitor references the SAP R/3 Enqueue process which manages logical locks for SAP R/3 transactions and reports on obsolete locks. An obsolete lock is a lock which is older than the time period you specify.

- [“r3monoms: The OPERATION MODE Monitor” on page 176](#)

The OPERATION MODE monitor detects when:

- a scheduled operation mode switch has occurred later than the time specified
- a scheduled operation mode switch has not occurred at all

- [“r3monrfc: The RFC-destination Monitor” on page 180](#)

The SAP-RFC monitor checks RFC destinations in an SAP environment:

- the status of connections

- the availability of connections

- [“r3monspl: The SPOOLER Monitor” on page 184](#)

The SPOOLER monitor checks:

- the number of spool entries
- the number of erroneous spool requests in a specified range
- spool entries with state ERROR for specified printers

- [“r3montra: The TRANSPORT Monitor” on page 189](#)

The TRANSPORT monitor checks the following parts of the transport system:

- the status of exports and imports
- confirmed and unconfirmed repairs
- performs a ping of the specified system
- checks the TP interface

- [“r3monupd: The UPDATE Monitor” on page 198](#)

The UPDATE-alert monitor detects

- if an update was deactivated
- if update errors have occurred

- [“r3monusr: The USER Monitor” on page 201](#)

The USER monitor specifies the number of users which would trigger an alert, using SAP transaction SM04 as reference

- [“r3monwpa: The WORKPROCESS Monitor” on page 204](#)

The WORKPROCESS monitor performs the following checks on work processes:

- monitors their status and reports any processes that are running in *debug*, *private* or *no-restart* modes
- compares the number of configured work processes with the number of work process actually running
- checks the number of expected work processes waiting and the number of expected work processes running *for each work process type*

Configuring the SPI for SAP Alert-collector Monitors

You can use the alert-collector monitors to define a series of monitoring tasks within SAP R/3, for example; checks on SAP R/3 processing modes, SAP R/3 dumps, or the availability of SAP R/3 work processes. The alert-collector monitors ensure that each defined alert-collector configuration is executed on a regular basis and reports any messages that come back from the called function. This section covers the following topics:

- [“Report Types for the Alert-collector Monitors” on page 111](#)
- [“Polling Rates and Run Locations for the Alert-collector Monitors” on page 112](#)
- [“Alert-collector Monitor Query Conditions” on page 114](#)
- [“Alert-collector Monitor Environment Variables” on page 118](#)
- [“Alert-collector Monitor Command-Line Parameters” on page 118](#)
- [“Remote Monitoring with the Alert-collector Monitors” on page 119](#)

For more information about the contents of the individual Alert-collector Monitor configuration files, see [“The Alert-collector Monitor Configuration Files” on page 122](#).

Report Types for the Alert-collector Monitors

Each of the alert monitors uses one of two reporting types.

- **Time Frame**

Time-frame monitors use a defined time range as their measurement base. For example, the `r3monjob` alert monitor uses a time frame which compares the time from the last monitor run with the configured start date and time of a batch job.

- **Snapshot**

Snapshot monitors use one moment of time as their measurement base. For example, the `r3monlck` (`LOCK_CHECK`) monitor uses the moment the monitor runs to generate an alert that a lock is “old”,

whenever a defined time span has been exceeded. The snapshot type is dynamic and can be run continuously because the alerts can be generated without being confined to a specific time frame.

Polling Rates and Run Locations for the Alert-collector Monitors

The alert monitors have different polling rates and run locations. See [Table 4-1](#) for the polling rate for each alert monitor and See [Table 4-2](#) for the run locations for each alert monitor.

Table 4-1 **Polling Rates of Alert Monitors**

Alert Monitor Name	Polling Rate		
	Days	Hours	Mins
r3monale			10
r3monchg		4	
r3moncts	1		
r3mondmp			2
r3monjob			5
r3monlck		1	
r3monoms			10
r3monspl			30
r3montra	1		
r3monupd		1	
r3monusr			5
r3monwpa			2
r3monaco ^a			15

- a. r3monaco is not a genuine alert collector monitor but has to be assigned to the managed node before setting up the TEMSE report. See [“Monitoring the TEMSE file” on page 217](#)

Table 4-2 shows the run locations by SAP version and server type (central instance and/or application server)

Table 4-2 Run Location(s) for Alert Monitors

Alert Collector Monitor Name	App Server 3.1I	Central Inst 3.1I	App Server 4.x	Central Inst 4.x
r3monale		✓		✓
r3monchg		✓		✓
r3moncts		✓		✓
r3mondmp		✓		✓
r3monjob		✓		✓
r3monlck		✓		✓
r3monoms		✓		✓
r3monspl		✓		✓
r3montra		✓		✓
r3monupd		✓		✓
r3monusr		✓		✓
r3monwpa		✓		✓
r3monaco ^a		✓		✓

- a. r3monaco is not a genuine alert collector monitor. However, it has to be assigned to the managed node in order for data to be passed to a report which monitors the temporary sequential (TEMSE) file consistency.

Alert-collector Monitor History

Unlike the SPI for SAP monitors `r3monal`, `r3mondev`, or `r3monxmi`, the alert-collector monitors controlled by `r3moncol` (such as `r3monale` or `r3mondmp`, etc.) do *not* write history information to a monitor-specific history file. Instead, any information relating to SAP alerts which come to the notice of the SPI for SAP alert-collector monitors is written directly to the SAP database, where it can be found by the alert collector `r3moncol`. At the start of each monitor run, `r3moncol` reads the relevant tables and uses the information to determine which if any events the OVO for Windows management server has already been notified about and whether or not to generate further messages.

Note that in versions up to and including SPI for SAP A.08.x, the alert collector `r3moncol` used shared memory to determine the status of any given SAP instances and wrote the information to the history file, `r3monup.his`. In later versions of the product, the `r3status` monitor is used to provide a more convenient and, by means of a wider range of statuses, a more accurate way to determine the status of the SAP instances being monitored by the SPI for SAP.

Alert-collector Monitor Query Conditions

The data for each alert monitor is split into a number of alert types. For example, the `JOBREPORT` Monitor has four alert types: `JOB_MAX_RUN-TIME`, `JOB_MIN_RUN_TIME`, `START_PASSED` and `JOB_ABORTED`. For each of a given alert monitor's defined alert types you have to:

- specify which SAP R/3 Systems should be checked
- enter selection criteria which defines under what circumstances an alert will be raised. This is described in more detail below.

Parameter Data Types

The conditions which cause an alert to be generated are defined by parameters in the monitoring-conditions section of the configuration files associated with each alert type. There are two general types of parameter data:

- **name**

The parameter *name* describes the attributes of the SAP R/3 System for which you define the monitoring conditions. For example: MAX_RUNTIME and JOBNAME are the names of parameters for the alert type JOB_MAX_RUN_TIME, which is associated with the JOBREPORT Monitor, r3monjob.

- **delimiters**

Parameter *delimiters* are used to specify the “select” options for each parameter. The parameter delimiters define the circumstances under which an alert should be generated. An OVO for Windows message will be sent for each event that matches your specified conditions. There are four types of Parameter Delimiters: SIGN, OPT(ION), LOW and HIGH. (See [Table 4-3](#))

Specifying Query Conditions

The following points apply generally when using parameter delimiters to specify query conditions:

- All possible and reasonable conditions can be used to configure the query condition, within the limitations given below.
- Messages which are excluded by your defined conditions will not appear in the OVO for Windows Console.
- Detailed descriptions of the alert-type configurations for each monitor follow this introductory section.

For each of their alert types, the alert monitors have as a default an example configuration of the parameters. However, this example configuration should not be treated as a default, which is ready to use. As a general rule, you must customize the alert type by editing its parameters. You can find information about when it is possible to use these unedited default values (and when editing is mandatory) in the detailed descriptions of each alert monitor’s alert types which follows this introduction.

Table 4-3

Description of Parameter Delimiters

Parameter Delimiters	Description
SIGN	I: Inclusive E: Exclusive

Table 4-3 **Description of Parameter Delimiters (Continued) (Continued)**

Parameter Delimiters	Description
LOW	Contains a comparison value and can also be used to specify the lower value of a range in conjunction with the operator BT.
HIGH	Contains a numeric comparison value to specify the higher value of a range. This parameter delimiter should only be used when specifying a range in conjunction with the operator BT
OPT	<p>The standard SAP operators NE (Not Equal to), NB (Not Between... and...), and NP (does Not contain Pattern) cannot be used to configure the alert types described in this section. You should only use the following operators:</p> <ul style="list-style-type: none"> • EQ: equal to • BT: between... and • CP: contains pattern • LE: less than or equal to • GE: greater than or equal to • GT: greater than • LT: less than

Parameter Values The *include* and *exclude* parameter values for an alert type entry are interpreted as described below. Parameter values in *different* parameters are always compared using ‘and’: parameter values in the *same* parameter are compared as follows.

- **Include:** parameters are compared using ‘or’
- **Exclude:** parameters are compared using ‘and’

Note that the *include* values are evaluated before the *exclude* values, as shown in the [Table 4-4](#).

Table 4-4 **AND/OR Comparisons using Include and Exclude Conditions for the Same Parameter**

Select Options	Example Configuration of Select Options for JOB_MAX_RUN_TIME	Comparison
1	=JOBNAME =I =CP =ZREP* = =MAX_RUNTIME =I =GT =10 =	OR
2	=JOBNAME =I =CP =SAP* = =MAX_RUNTIME =I =GT =20 =	OR
3	=JOBNAME =E =CP =SAP_ZREP* =	AND

Query Conditions The following rules apply to the use of blocks and line breaks when configuring the alert types for the alert collector monitors:

- Each parameter is configured as a separate block. For example for JOB_MAX_RUN_TIME
 1. =JOBNAME =I =CP =SAP* = is the block for the parameter JOBNAME
 2. =MAX_RUNTIME =I =GT =20 = is the block for the parameter MAX_RUNTIME.
- The symbol '\ ' is used to indicate a line continuation.
- Line breaks should be made in the following locations:
 1. Within each specified configuration between:
 - a. the general alert class configuration (SAP hostname, system, number and client)
 - b. the OVO for Windows configurations (severity level, object)
 - c. the monitoring query conditions (parameter name and the SIGN, OPT, LOW and HIGH parameter delimiters).
 2. Between each separate specified condition for AND comparisons.

Alert-collector Monitor Environment Variables

This section describes the environment variables for all the alert-collector monitors managed by `r3moncol`. The configuration is identical for all alert collectors except that the name of the alert-collector configuration file is monitor specific e.g. `r3monjob`, `r3mondmp`, `r3monlck`, `r3monoms`.

Table 4-5 **Environment Variables for `r3moncol.exe`**

Environment Variable	Description
SAPOPC_TRACEMODE	Trace mode: a = append w = create (default)
SAPOPC_<R3MONNAME>_CONFIGFILE	Configuration-file name ^a
SAPOPC_R3ITOSAP_CONFIGFILE	General SAP R/3 login config. file
SAPOPC_TRACEPATH	Trace path config. file

a. Where `<R3MONNAME>` is the name of the monitor whose configuration file location you want to change. For example;
`SAPOPC_R3MONDMP_CONFIGFILE`

Alert-collector Monitor Command-Line Parameters

The command line parameters for all the alertcollector monitors controlled by the `r3moncol` are described in this section. In the same way as for the environment variables, the configuration is identical for all

alert-collector monitors except that the name of the alert-collector configuration file is monitor specific e.g. `r3monjob.cfg`, `r3mondmp.cfg`, `r3monlck.cfg`, `r3monoms.cfg`.

Table 4-6

r3moncol Command Line Parameters

Parameter	Description ^a
<code>-cfgfile</code>	Name of the monitor's configuration file. For example, <code>-cfgfile <R3MONNAME>.cfg</code>
<code>-trace</code>	The monitor writes an initial trace file <code>writetrace.log</code> , which contains information about the configuration file <code>r3itosap</code> and the monitor-specific config file <code><R3MONNAME>.cfg</code> .

a. Where `<R3MONNAME>` is the name of the monitor whose configuration-file location you want to read. For example;
`r3mondmp`

In the following example, the alert-collector monitor writes an initial trace file `writetrace.log`, which contains information about the general configuration file `r3itosap` and the monitor-specific configuration file `r3monjob.cfg`.

```
r3moncol -cfgfile r3monjob.cfg -trace
```

Remote Monitoring with the Alert-collector Monitors

The current version of the SPI for SAP includes a feature which allows you to extend the scope of the alert-collector monitor to remotely monitor the health of SAP processes on additional SAP servers (which are *not* OVO for Windows managed nodes) from an SAP server, which *is* already configured as an OVO for Windows managed node.

To make use of the remote-monitoring feature provided by the SPI for SAP, for example; to monitor an SAP System running an operating system that is not supported by the SPI for SAP, you need to activate the new **RemoteMonitoring** keyword (by removing the leading hash symbol "#") in the `r3mon<alert_monitor_name>.cfg` file (for example; `r3mondmp.cfg`) and then, on the same line, tell the SPI for SAP alert-collector monitor the name of the local server which you want to perform the monitoring and, finally, the name of the remote server,

which you want to monitor. [Example 4-2 on page 125](#) shows how a new line is required for each *additional* SAP server, which you want to monitor remotely. You use the following keyword parameters to define local and remote server names:

- **LocalHost**

the name of the OVO for Windows managed node where the SPI for SAP is installed and running and whose alert-collector monitor will be used to do the monitoring on the remote host defined in “RemoteHost”

- **RemoteHost**

the name of the *remote* system to be monitored by the system defined in “LocalHost”. The RemoteHost does not have the SPI for SAP installed and is not usually (but could theoretically be) an OVO for Windows managed node.

For more information about the contents of the alert-collector monitor configuration file, see [“The Alert-collector Monitor Configuration Files” on page 122](#).

[Example 4-1 on page 121](#) shows a hypothetical example of how to configure the SPI for SAP on two different OVO for Windows managed nodes (sap1 and sap2) to remotely manage three different SAP servers (ovsdsap1, ovsdsap2, and ovsdsap3) and, in addition, specify different monitoring rules to suit the different roles of the individual SAP servers, for example; production, development, or even test/unused:

- **Production System**

The remote server ovsdsap1 in [Example 4-1](#) is the *production* system, it has the monitor enabled (=1) and is configured to associate the OVO for Windows message severity CRITICAL with alerts generated by the =REQUEST_CREATED alert type.

- **Development System**

The remote server ovsdsap2 in [Example 4-1](#) is the *development* system, it has the monitor enabled (=1) and is configured to associate the OVO for Windows message severity MAJOR with alerts generated by the =REQUEST_CREATED alert type.

- **Test System**

The remote server ovdsap3 in [Example 4-1](#) is the test system whose configuration is unchanged from the default which has the monitor disabled (=0) and associates the OVO for Windows message severity WARNING with alerts generated by the =REQUEST_CREATED alert type.

Example 4-1 Specifying Monitoring Rules for Individual Remote Servers

```
#-----
# Remote      LocalHost      RemoteHost
# Monitoring
RemoteMonitoring =sap1      =ovdsap1
RemoteMonitoring =sap1      =ovdsap2
RemoteMonitoring =sap2      =ovdsap3
#-----
# AlertMonFun  SAP           SAP           SAP           SAP           Alertmonitor  Enable =1/  \
#              Hostname     System        Number        Client        Disable=0  \
#
#   OpC        OpC           OpC           \
# Severity     Object        MsgGroup        \
#
# Alertttype   RFC Parameter
#              =Parameter    =Sign        =Opt         =Low         =High
#              [=Param       =Sign        =Opt         =Low         =High] ...
# Example:
#
AlertMonFun =ovdsap1 =ALL =ALL =ALL =CTS =1\
=CRITICAL =Request   =R3_CTS\
=REQUEST_CREATED =USERNAME =I      =CP      =*      =
AlertMonFun =ovdsap2 =ALL =ALL =ALL =CTS =1\
=MAJOR =Request   =R3_CTS\
=REQUEST_CREATED =USERNAME =I      =CP      =*      =
AlertMonFun =ovdsap3 =ALL =ALL =ALL =CTS =0\
=WARNING =Request   =R3_CTS\
=REQUEST_CREATED =USERNAME =I      =CP      =*      =
```

The Alert-collector Monitor Configuration Files

The keywords listed in this section appear in the Alert-collector Monitors configuration files and can be used to set up the individual monitor to meet the requirements of your particular environment. Where appropriate, possible values for a given keyword are also specified. [Example 4-2 on page 125](#) shows what a complete configuration file looks like for the `r3moncts` monitor, which monitors the correction and transport system for important transport requests, tasks and objects. You can use the following keywords in all SPI for SAP alert-collector monitor configuration file:

- **TraceLevel**

For more information, see [“The SPI for SAP Monitor Configuration File” on page 31](#).

- **TraceFile**

For more information, see [“The SPI for SAP Monitor Configuration File” on page 31](#).

- **HistoryPath[Unix | AIX | WinNT]**

For more information, see [“The SPI for SAP Monitor Configuration File” on page 31](#).

- **AgentHostname**

The `AgentHostname` keyword is not currently used

- **RemoteMonitoring**

For more information, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

- **AlertMonFun**

The `AlertMonFun` keyword *requires* a value for the following parameters:

— **Alerttype:**

=<Alerttype> For more information about the values an alert-collector monitor accepts, see the Alert Types section for a given monitor, for example; “r3monale: The iDOC-Status Monitor” on page 127 refers to the alert type “IDOC_CURRENT_STATUS”.

— **AlertMonitor:**

=<Monitor_Name>
where <Monitor_Name> is the short form of the alert monitor you are configuring, for example; ALE for r3monale, CTS for the r3moncts, and so on

— **Enable/Disable:**

=0 *Disable* the monitor
=1 *Enable* the monitor. This is the default setting.

— **OPC Severity:**

=<OVO_Msg_Severity>
where <OVO_Msg_Severity> is the severity level of the OVO for Windows message you want to map the CCMS alert to, for example: Normal, Warning, Major, Critical.

— **OPC Object:**

=<OpC_Object> where <OpC_Object> is the OVO for Windows object associated with the generated message. These tend to reflect the names of the alert types associated with the alert-collector monitor, for example; Request, task or object for r3moncts. Note that if you change the names of the OVO for Windows objects in the monitor-configuration files (or add new ones), you must ensure that these changes are reflected in the message conditions in order to avoid the generation of unmatched messages.

— **OPC MsgGroup:**

=<OVO_Msg_Group>

where <OVO_Msg_Group> is the name of the OVO for Windows Message Group to which the generated message belongs, for example: R3_CTS, or R3_ABAP-4. The default names all start with “R3_” and reflect the names of the alert monitors to which they correspond, for example; r3moncts or r3mondmp. Note that if you change the names of the OVO for Windows Message Groups in the monitor-configuration files, remember to ensure that the changes are reflected in the message conditions in order to avoid the generation of unmatched messages.

— **RFC Parameter:**

=<RFC_Param>

where *RFC_Param* is the name of the parameter followed by any required Query Conditions, each with the prefix “=”, for example; =CP (for “Contains Pattern”) or EQ for (“Equals”). For more information about Query Conditions, see [“Alert-collector Monitor Query Conditions” on page 114](#). For more information about monitor-specific alert-type parameters, see the appropriate monitor description, for example: [Table 4-21, “Configuration Parameters,” on page 151](#).

— **SAP Client:**

=ALL

All SAP clients being monitored by the SPI for SAP. This is the default setting.

=<SAP_host>

the specific SAP client for which performance monitoring is to be enabled, for example; 099. Use a new line for each individual entry.

— **SAP Hostname:**

=ALL

All SAP hosts will be monitored by the SPI for SAP. This is the default setting.

- =<SAP_host> the host name of a specific SAP server where performance monitoring is to be enabled. Use a new line for each individual entry.
- **SAP Number:**
- =ALL All SAP numbers will be monitored by the SPI for SAP. This is the default setting.
- =<SAP_host> the specific SAP number for which performance monitoring is to be enabled, for example; 00, 99. Use a new line for each individual entry.
- **SAP System:**
- =ALL All SAP Systems will be monitored by the SPI for SAP. This is the default setting.
- =<SAP_host> the SAP SID for which performance monitoring is to be enabled, for example; DEV. Use a new line for each individual entry.

Example 4-2 Example Default Configuration for the CTS Monitor (r3moncts)

```
#-----
# TraceLevel  hostname  Disable=0  only error messages=1  info messages=2  \
#                                     debug messages=3
TraceLevel      =ALL      =0
#-----
# TraceFile   hostname   filename
#
TraceFile       =ALL      =r3moncts.log
#-----
# History     hostname   path
# Path
#
HistoryPathUnix  =ALL      =/var/opt/OV/tmp
HistoryPathAIX   =ALL      =/var/lpp/OV/tmp
HistoryPathWinNT =ALL      =default
#-----
# AgentHostname hostname  aliasname
#
AgentHostname    =ALL      =default
#-----
# Remote      Server      Remotely
# Monitoring  Node        monitored Node
RemoteMonitoring =rum      =ovsdsap1
```

The SPI for SAP Alert-Collector Monitors

The Alert-collector Monitor Configuration Files

```

RemoteMonitoring =whisky      =ovsdsap2
RemoteMonitoring =bacardi     =ovsdsap3
#-----
# AlertMonFun  SAP      SAP      SAP      SAP      Alertmonitor  Enable =1/  \
#              Hostname System   Number   Client              Disable=0  \
#
#   OpC        OpC        OpC        \
#   Severity    Object    MsgGroup    \
#
# Alerttype    RFC Parameter
#              =Parameter    =Sign    =Opt    =Low    =High
#              [=Param      =Sign    =Opt    =Low    =High] ...
# Example:
#
AlertMonFun  =ALL  =ALL  =ALL  =ALL  =CTS  =1  \
=WARNING     =Request  =R3_CTS  \
=REQUEST_CREATED  =USERNAME  =I    =CP    =*    =

```

r3monale: The iDOC-Status Monitor

The iDOC-status alert monitor, `r3monale`, is *time-frame* based and checks the status of existing iDOCs for errors using the transaction `/WE02` as the data source. The monitor is application-server independent and available for global (SAP R/3 System-wide) use.

This section contains information about the following topics:

- [“Type” on page 127](#)
- [“Alert Types” on page 127](#)
- [“File Locations” on page 127](#)
- [“Environment Variables” on page 128](#)
- [“Command-Line Parameters” on page 128](#)
- [“Remote Monitoring” on page 128](#)

Type The monitor is of type *timeframe*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types The iDOC-Status Monitor has the following alert types:

- [“IDOC_CURRENT_STATUS”](#)
defines when an alert will be generated for the actual state of the iDOCs - see [page 129](#)

File Locations The `r3monale` alert monitor uses the files listed in [Table 4-7](#).

Table 4-7 **r3monale Files**

File	Description
<code>r3moncol(.exe)</code>	Collector executable for the iDOC-status monitor
<code>r3monale.cfg</code>	Configuration file for iDOC-status monitor
<code>r3monale.log</code>	Trace file for storing trace data

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The `r3monale` monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert-collector monitors share the same format, the only difference being that the name of the configuration file varies to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command-Line Parameters

The `r3monale` monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command-line parameters for all the alert-collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor for both the `-cfgfile` and `-trace` parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for the `r3monale` alert monitor. [“Alert-collector Monitor Query Conditions” on page 114](#) describes general configuration query rules which apply to all alert collector monitors.

Configuring iDOC-Monitor Alert Types

When configuring the `IDOC_CURRENT_STATUS` alert type for `r3monale`, the iDOC status monitor, remember that at least one of the parameters listed in [Table 4-8](#) *must* be defined. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

IDOC_CURRENT_STATUS

Table 4-8 on page 129 lists the parameters that you can use with IDOC_CURRENT_STATUS. Note that ‘‘ in the Default Value column signifies an empty string.

Table 4-8 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
DOCNUM	IDOC number	= Sign: I, E	‘‘
		= Opt: GE, GT, LE, LT, BT	‘‘
		= Low	‘‘
		= High:	‘‘
DOCTYP	IDOC type	= Sign I	‘‘
		= Opt: CP, EQ	‘‘
		= Low	‘‘
		= High	‘‘
MESCOD	Logical message code	= Sign I	‘‘
		= Opt: CP, EQ	‘‘
		= Low	‘‘
		= High	‘‘
MESFCT	Logical message function	= Sign I	‘‘
		= Opt: CP, EQ	‘‘
		= Low	‘‘
		= High	‘‘

Table 4-8 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
MESTYP ^a	Logical message <i>type</i>	= Sign I	‘ ‘
		= Opt: CP, EQ	‘ ‘
		= Low	‘ ‘
		= High	‘ ‘
RCVPFC	Partner <i>function</i> of receiver	= Sign I	‘ ‘
		= Opt: CP, EQ	‘ ‘
		= Low	‘ ‘
		= High	‘ ‘
RCVPRN	Partner <i>number</i> of receiver	= Sign I	‘ ‘
		= Opt: CP, EQ	‘ ‘
		= Low	‘ ‘
		= High	‘ ‘
RCVPRT	Partner <i>type</i> of receiver	= Sign I	‘ ‘
		= Opt: CP, EQ	‘ ‘
		= Low	‘ ‘
		= High	‘ ‘
SNDPFC	Partner <i>function</i> of sender	= Sign I	‘ ‘
		= Opt: CP, EQ	‘ ‘
		= Low	‘ ‘
		= High	‘ ‘

Table 4-8 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
SNDPRN	Partner <i>number</i> of sender	= Sign I	‘ ‘
		= Opt: CP, EQ	‘ ‘
		= Low	‘ ‘
		= High	‘ ‘
SNDPRT	Partner <i>type</i> of sender	= Sign I	‘ ‘
		= Opt: CP, EQ	‘ ‘
		= Low	‘ ‘
		= High	‘ ‘
STATUS ^b	Status of IDOC	= Sign I, E	‘ ‘
		= Opt: GE, GT, LE, LT, BT	‘ ‘
		= Low	‘ ‘
		= High	‘ ‘

- a. Possible values; ABSENT, MAX_ENTRIES, TIME_LIMIT
- b. Possible values: CHECK_INBOUND, CHECK_OUTBOUND, MAX_ENTRIES

In [Example 4-3](#), the r3monale alert is configured to check the status of inbound iDOCs. An event generating an alert occurs if the number of in-bound iDOCs specified in IDOC_CURRENT_STATUS is greater than (GT) the value 4 (four) defined in MAX_ENTRIES. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Example 4-3 Example IDOC_CURRENT_STATUS Configuration

```
AlertMonFun  =ALL  =ALL  =ALL  =ALL  =ALL  =1  \  
             =WARNING  =ALE  =R3_IDOC_STATUS  \  
             =IDOC_CURRENT_STATUS  =STATUS  =I  =EQ  =CHECK_INBOUND  \  
                                     =MAX_ENTRIES  =I  =GT  =4
```

Checking the iDOC Status

Using the IDOC_CURRENT_STATUS alert type in conjunction with the STATUS parameter allows you to check any one of the different iDOC statuses that are registered in SAP R/3 or a range of statuses defined in a group. [Table 4-9](#) lists all the statuses that the SPI for SAP recognizes.

In addition, the SPI for SAP provides two pre-defined groups that you can use to check for a range of errors relating to incoming or outgoing iDOCs. For example, you can use the values CHECK_INBOUND and CHECK_OUTBOUND to monitor a range of values:

- CHECK_OUTBOUND
monitors iDOCs with status: 02, 04, 05, 25, 26, 29, 30, 32
- CHECK_INBOUND
monitors iDOCs with status: 51, 56, 60, 61, 62, 63, 64, 65, 66, 69

If you want to use the r3monale alert monitor to check for a specific iDOC status, replace the value =CHECK_INBOUND shown in [Example 4-3](#) with the iDOC status number listed in [Table 4-9](#) that corresponds to the iDOC status you want to monitor. For example, to monitor the number of existing iDOCs, use =01. Note that it is not currently possible to define your own ranges similar to the pre-defined ranges CHECK_INBOUND and CHECK_OUTBOUND. Instead, you have to define a separate AlertMonFun entry for *each* additional value, which you want to monitor.

Table 4-9 **Possible iDOC Status**

iDOC Status	Description	Check Inbound	Check Outbound
00	Not used, only for R/2		
01	IDoc created		
02	Error passing data to port		✓
03	Data passed to port OK		
04	Error within control information of EDI subsystem		✓
05	Error during translation		✓
06	Translation OK		

Table 4-9 **Possible iDOC Status (Continued)**

iDOC Status	Description	Check Inbound	Check Outbound
07	Error during syntax check		
08	Syntax check OK		
09	Error during interchange handling		
10	Interchange handling OK		
11	Error during dispatch		
12	Dispatch OK		
13	Retransmission OK		
14	Interchange Acknowledgement positive		
15	Interchange Acknowledgement negative		
16	Functional Acknowledgement positive		
17	Functional Acknowledgement negative		
18	Triggering EDI subsystem OK		
19	Data transfer for test OK		
20	Error triggering EDI subsystem		
21	Error passing data for test		
22	Dispatch OK, acknowledgement still due		
23	Error during retransmission		
24	Control information of EDI subsystem OK		

Table 4-9 **Possible iDOC Status (Continued)**

iDOC Status	Description	Check Inbound	Check Outbound
25	Processing despite syntax error (outbound)		✓
26	Error during syntax check of IDoc (outbound)		✓
27	Error in dispatch level (ALE service)		
28	Not used		
29	Error in ALE service		✓
30	IDoc ready for dispatch (ALE service)		✓
31	Error - no further processing		
32	IDoc was edited		✓
33	Original of an IDoc which was edited		
34	Error in control record of IDoc		
35	IDoc reloaded from archive		
36	Electronic signature not performed (time-out)		
37	IDoc added incorrectly		
38	IDoc archived		
39	IDoc is in the receiving system (ALE service)		
40	Application document not created in receiving system		
41	Application document created in receiving system		

Table 4-9 **Possible iDOC Status (Continued)**

iDOC Status	Description	Check Inbound	Check Outbound
42	IDoc was created by test transaction		
50	IDoc added		
51	Error: Application document not posted	✓	
52	Application document not fully posted		
53	Application document posted		
54	Error during formal application check		
55	Formal application check OK		
56	IDoc with errors added	✓	
57	Test IDoc: Error during application check		
58	IDoc-Copy from an R/2 connection		
59	Not used		
60	Error during syntax check of IDoc (Inbound)	✓	
61	Processing despite syntax error (Inbound)	✓	
62	IDoc passed to application	✓	
63	Error passing IDoc to application	✓	
64	IDoc ready to be transferred to application	✓	
65	Error in ALE service		

Table 4-9 **Possible iDOC Status (Continued)**

iDOC Status	Description	Check Inbound	Check Outbound
66	IDoc is waiting for predecessor IDoc (serialization)		
67	Not used		
68	Error - no further processing		
69	IDoc was edited	✓	
70	Original of an IDoc which was edited		
71	IDoc reloaded from archive		
72	Not used, only for R/2		
73	IDoc archived		
74	IDoc was created by test transaction		

r3monchg: The SYSTEM CHANGE OPTION Monitor

The SYSTEM CHANGE OPTION alert monitor `r3monchg` double-checks the SAP system change options. The alert monitor `r3monchg` references the SAP R/3 transactions **/SE06**.

The `r3monchg` monitor is SAP-version dependent and has three different configurations for:

- SAP R/3 3.X
- SAP R/3 4.0X, 4.5X
- SAP R/3 4.6X.

This section contains information about the following topics:

- [“Type” on page 137](#)
- [“Alert Types” on page 137](#)
- [“File Locations” on page 138](#)
- [“Environment Variables” on page 138](#)
- [“Command Line Parameters” on page 138](#)
- [“Remote Monitoring” on page 138](#)

Type

The `r3monchg` monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The SYSTEM CHANGE OPTION alert monitor has only one alert type:

- **CHANGE_OPT**

monitors and double-checks the SAP System change options and sends out an alert if the option matches the configuration. For more information, see:

- [“CHANGE_OPT \(SAP R/3 3.x\)” on page 139](#)
- [“CHANGE_OPT \(SAP R/3 4.0x/4.5x\)” on page 140](#)

— “CHANGE_OPT (SAP R/3 4.6x)” on page 143

File Locations The r3monchg alert monitor has the files listed in [Table 4-10](#).

Table 4-10 **r3monchg Files**

File	Description
r3moncol (.exe)	Collector executable for the system change option monitor
r3monchg.cfg	Configuration file for system change option monitor.
r3monchg.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables The r3monchg monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command Line Parameters The r3monchg monitor uses the command line parameters described in [Table 4-6 on page 119](#). The command line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

Configuring SYSTEM CHANGE OPTION Monitor Alert Types

The System Change Monitor, `r3monchg`, is SAP version dependent. There are three possible configurations shown in separate tables. Please refer to the table that matches your SAP version.

Note, too, the general rules repeated below concerning the use of exclude and include parameter values: the rules are particularly important for these alert types.

Parameter Values The *include* and *exclude* parameter values for an alert type entry are interpreted as described below. Parameter values in *different* parameters are always compared using ‘and’: parameter values in the *same* parameter are compared as follows.

- **Include:** parameters are compared using ‘or’
- **Exclude:** parameters are compared using ‘and’

Note that the *include* values are evaluated before the *exclude* values, as shown in [Table 4-11](#).

Table 4-11 **AND/OR Comparisons using Include and Exclude Conditions for the Same Parameter**

Select Options	Alert Type: CHANGE_OPT (SAP R/3 4.5x) Example Configuration of Select Options	Comparison
1	=SYSTEM_CHANGE_OPTION =1 =WARNING =SystemChange =R3_Security =NSP_EDTFLAG =I =CP= /0* =	OR
2	=SYSTEM_CHANGE_OPTION =1 =WARNING =SystemChange = =R3_Security = NSP_EDTFLAG =I =EQ =/SAPQUERY/ =	OR
3	=SYSTEM_CHANGE_OPTION =1 =WARNING =SystemChange =R3_Security = NSP_EDTFLAG =E =EQ =/0LOCAL/ =	AND

CHANGE_OPT (SAP R/3 3.x)

An alert is generated when the `EDTFLAG` parameter is set to allow the editing that you are trying to perform.

Example 4-4 Example Default Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL   =SYSTEM_CHANGE_OPTION   =1   \  
=WARNING   =SystemChange   =R3_Security   \  
=CHANGE_OPT =EDTFLAG   =I       =EQ   =   =
```

Note that configuration of the parameter (described in [Table 4-12 on page 140](#)) is optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-12 Configuration Parameters (SAP R/3 3.x)

Parameter Name	Description	Query Conditions	Default Value
EDTFLAG	Flag indicating if an object can be edited.	= Sign: I	I
		= Opt: EQ	EQ
		= Low: N, C, R, ‘‘ N = no change, C = all customer objects R = all objects ‘‘ = only original object‘	‘‘
		= High:	

CHANGE_OPT (SAP R/3 4.0x/4.5x)

An alert is generated when the flag parameters are set to allow the editing you are trying to perform. The configuration of the parameter EDTFLAG is optional. The configuration of the NSP_EDTFLAG is mandatory.

Table 4-13 Configuration Parameters (SAP R/3 4.0x/4.5x)

Parameter Name	Description	Query Conditions	Default Value
EDTFLAG	Flag indicating if an object can be edited for global system changes.	= Sign: I	I
		= Opt: EQ	EQ
		= Low: ON, OFF, PATCH ^a	PATCH
		= High:	

Table 4-13 Configuration Parameters (SAP R/3 4.0x/4.5x) (Continued)

Parameter Name	Description	Query Conditions	Default Value
NSP_EDTFLAG	Flag indicating which specified name space(s) are to be set to ON.	= Sign: I	I
		= Opt: EQ: CP	CP
		= Low ^b	*
		= High:	

- PATCH=set to patch system.
- See the list of name space change options for SAP R/3 4.0X and SAP R/3 R 4.5X in [Table 4-14 on page 142](#) and [Table 4-15 on page 142](#).

In [Example 4-5](#), an event generating an alert occurs when the global system change option is ON or the specified name space is ABAP/4 Query/SAP (/SAPQUERY/). For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Example 4-5 The Default CHANGE_OPT Configuration (SAP R/3 4.0x/4.5x)

```
AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =NSP_EDTFLAG =I =EQ =/SAPQUERY/ =

AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =EDTFLAG =I =EQ =ON =
```

In [Example 4-6](#), an event generating an alert occurs when the global system change option is ON or the system space names are set to ON for Customer Name Range (/OCUST/) or ABAP/4 Query/SAP (/SAPQUERY/).

Example 4-6 Customized CHANGE_OPT Configuration (SAP R/3 4.0x)

```
AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =NSP_EDTFLAG =I =EQ =/OCUST/ =

AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =NSP_EDTFLAG =I =EQ =/SAPQUERY/ =
```

```
AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =EDTFLAG =I =EQ =ON =
```

Table 4-14 **Name Space System Change Options: SAP R/3 4.0x**

ID	Description
/0CUST/	Customer name range
/0LOCAL/	Local objects
/0SAPAPPL/	SAP R/3 application components
/0SAPBAS/	SAP R/3 Basis System
/1BCABA/	ABAP+GUI tools
/1BCDWB/	Development Workbench
/1BCDWBEN/	Enqueue function groups
/SAPQUERY/	ABAP/4 Query/SAP

Table 4-15 **Name-Space System Change Options: SAP R/3 4.5x**

ID	Description
/0CUST/	Customer name range
/0LOCAL/	Local objects
/0SAPAPPL/	SAP R/3 application components
/0SAPBAS/	SAP R/3 Basis System
/1BCABA/	ABAP+GUI tools
/1BCDWB/	Development Workbench
/1BCDWBEN/	Enqueue function groups
/1PAPA/	Personnel administration
/1PAPAXX/	Personnel administration, general

Table 4-15 Name-Space System Change Options: SAP R/3 4.5x (Continued)

ID	Description
/1PSIS/	Project Information System - Logical database PSJ
/1SAP1/	General SAP generation namespace
/BI0/	Business Information Warehouse: SAP namespace
/BIC/	Business Information Warehouse: 1 - Customer namespace
/SAPQUERY	ABAP/4 Query/SAP
/SAPTRAIN/	SAP training

CHANGE_OPT (SAP R/3 4.6x)

An alert is generated when the flag parameters are set to allow the editing you are trying to perform.

The configuration of all parameters is mandatory. Multiple parameter entries on a single line are *not* allowed. Rather, the different configurations should be separated on to different lines. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-16 Configuration Parameters (SAP R/3 4.6X)

Parameter Name	Description	Query Conditions	Default Value
EDTFLAG	Flag indicating if an object can be edited.	= Sign: I	I
		= Opt: EQ	EQ
		= Low: ON, OFF, PATCH a	PATCH
		= High:	

Table 4-16 Configuration Parameters (SAP R/3 4.6X) (Continued)

Parameter Name	Description	Query Conditions	Default Value
NSP_EDTFLAG	Flag indicating which specified name space(s) are to be set to ON.	= Sign: I	I
		= Opt: EQ:CP	CP
		= Low ^b	*
		= High:	
SWC_EDTFLAG	Flag indicating which specified software components are to be set to ON.	= Sign: I	I
		= Opt: EQ, CP	CP
		= Low: <specified software component> ^b	*
		= High:	

- a. PATCH=set to patch system
b. See list of name space change options for SAP R/3 4.6. X in [Table 4-18](#)

In [Example 4-7](#), an event generating an alert occurs when the global system change is OFF or the specified name space is Local Objects (/0LOCAL/), or the specified software component is Local Developments (no automatic transport).

Example 4-7 The Default CHANGE_OPT (SAP R/3 4.6x) Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1\
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =NSP_EDTFLAG =I =EQ =/0LOCAL/ =

AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1\
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =SWC_EDTFLAG =I =EQ = LOCAL =

AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1\
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =EDTFLAG =I =EQ =OFF =
```


Example 4-8 **The Customized CHANGE_OPT (SAP R/3 4.6x) Configuration**

```
AlertMonFun =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING    =SystemChange =R3_Security \
=CHANGE_OPT =NSP_EDTFLAG  =I      =EQ  =/SAPQUERY/      =

AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING    =SystemChange =R3_Security \
=CHANGE_OPT          =SWC_EDTFLAG  =I      =EQ  = SAP_HR =

AlertMonFun =ALL =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING    =SystemChange =R3_Security \
=CHANGE_OPT =EDTFLAG  =I      =EQ  =OFF  =
```

In [Example 4-8](#), an event generating an alert occurs when the global change option is OFF or the system space change option ABAP query/SAP is ON, or the software component change option for Human Resources is ON. For more information about the change options for Name System and software components, see [Table 4-17](#) and [Table 4-18](#).

Table 4-17 Software Components Change Options for SAP R/3 4.6x

Technical ID	Description
HOME	Customer developments
LOCAL	Local developments (no automatic transport)
SAP_ABA	Cross-Application Component
SAP_APPL	Logistics and Accounting
SAP_BASIS	SAP Basis Component
SAP_HR	Human Resources

Table 4-18 Name System Change Options for SAP R/3 4.6x

Technical ID	Description
/0CUST/	Customer name range
/0SAP/	General SAP name range
/1BCABA/	ABAP & GUI tools
/1BCDWB/	Development Workbench

Table 4-18 **Name System Change Options for SAP R/3 4.6x (Continued)**

Technical ID	Description
/1BCDWBEN/	Enqueue function groups
/1COPA/	Generated objects in CO-PA
/1ISRWP/	IS-R merchandise and assortment controlling
/1ISU/	Generation namespace for CIC (Customer Interaction Center)
/1PAPA/	Personnel administration
/1PAPAXX/	Personnel administration - general
/1PSIS/	Project Information System - Logical database PSJ
/1PYXXFO/	PY-XX Form tool: Generated objects
/1SAP1/	General SAP generation namespace
/1SDBF12L/	Generation of pricing report
/BI0/	Business Information Warehouse: SAP namespace
/BIC/	Business Information Warehouse: Customer namespace
/SAPQUERY/	ABAP query/SAP
/SAPRRR/	Ready-to-Run R/3
/SAPSMOSS/	Interface: R/3 messages to the SAP Online Service Sy
/SAPTRAIN/	SAP training

r3moncts: The CORRECTION & TRANSPORT SYSTEM Monitor

The CTS alert monitor `r3moncts` identifies and monitors the Correction and Transport System for important transport requests, tasks and objects. Data collection is application-server independent.

The alert monitor `r3moncts` references:

- transport requests and object lists created using SAP R/3 transaction **/SE01**
- tasks created using SAP R/3 transaction **/SE09**

This section contains information about the following topics:

- [“Type” on page 147](#)
- [“Alert Types” on page 147](#)
- [“File Locations” on page 148](#)
- [“Environment Variables” on page 148](#)
- [“Command Line Parameters” on page 148](#)
- [“Remote Monitoring” on page 149](#)

Type

The monitor is of type *timeframe*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The CTS monitor has the following alert types:

- [“REQUEST_CREATED”](#)
Defines when an alert will be generated for a new request.
- [“REQUEST_RELEASED”](#)
Defines when an alert will be generated for a new request which has been released.
- [“TASK_CREATED”](#)
Defines the when an alert will be generated for a new task.

- **“TASK_RELEASED”**
Defines when an alert will be generated for a new task which has been released.
- **“OBJECT_USED”**
Defines which objects when used by a task or a request will generate an alert.
- **“OBJECT_RELEASED”**
Defines when an alert will be generated when the request or task which holds this object is released.

File Locations

The r3moncts monitor has the files listed in [Table 4-19](#).

Table 4-19

r3moncts Files

File	Description
r3moncol(.exe)	Collector executable for the CTS monitor
r3moncts.cfg	Configuration file for the CTS monitor.
r3moncts.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The r3moncts monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command Line Parameters

The r3moncts monitor uses the command line parameters described in [Table 4-6 on page 119](#). The command line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert-collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

Configuring CTS Monitor Alert Types

You should bear in mind the following the rules when configuring the alert-type parameters for the CTS monitor, `r3moncts`:

- By default, *all* data is selected for each parameter.
- Data can be restricted by specifying some or all of the parameters for the alert type.
- If any parameter values are specified only the named parameters are taken into account i.e the default value ALL is overridden for the unspecified parameters.

The parameter `TRFUNCTION` is used to configure the `REQUEST_CREATED`, `REQUEST_RELEASED`, `TASK_CREATED` and `TASK_RELEASED` alert types. `TRFUNCTION` has request functions which can be specified using the letter codes specified in [Table 4-20](#).

Table 4-20

TRFUNCTION Request Functions

Letter Code	Function Description
A	Request: Unclassified request becomes K, L or W with first object
C	Transport with change authorization
D	Patch
K	Request: Change request with destination consolidation layer

Table 4-20 **TRFUNCTION Request Functions (Continued)**

Letter Code	Function Description
L	Request: Local request without transport
R	Task: Repair
S	Task: Development/correction
T	Request: Transport without originals
U	Dummy
W	Request: Customizing request with cons. layer destination
X	Task: Unclassified task becomes S or R with first object
Z	(task without request) SE09 memory usage

NOTE

In the descriptions of the use of this parameter for each of the CTS alert types, only the letter code is shown. If you do not know what these letter codes represent, please consult [Table 4-20](#).

REQUEST_CREATED

An alert is generated if a new request was created within the last specified time frame. The configuration of any of these parameters is optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-21 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRFUNCTION	The request function.	= Sign: I, E	I
		= Opt: CP, EQ	CP
		= Low: A, K,L,W,C,T, U, D ^a	*
		= High:	
TARGET	The target system for which this request was created. Note: this must be a SID	= Sign I, E	
		= Opt: EQ, CP	
		= Low: <name of system>	
		= High	
USERNAME	The login name of the SAP R/3 user who created the request.	= Sign I	
		= Opt: EQ, CP	
		= Low: <username who created this request>	
		= High	

a. Only the listed functions can be specified (* means all).

In [Example 4-9](#), an event generating an alert occurs if a new request was created within the last time frame

Example 4-9 The Default REQUEST_CREATED Configuration

```
AlertMonFun  =ALL  =ALL  =ALL  =ALL  =CTS  =1\
=WARNING    =Request  =R3_CTS\
=REQUEST_CREATED  =USERNAME  =I      =CP      =*      =
```

REQUEST_RELEASED

An alert is generated if a new request is released within in the last time frame. The configuration of the parameters below is optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-22 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRKORR	Request ID	= Sign: I, E	
		= Opt: EQ	
		= Low: <Request ID>	
		= High:	
TRFUNCTION	The request function.	= Sign: I, E	
		= Opt: EQ	
		= Low: K,L, W,C,T, U, D. ^a	
		= High:	
TARGET	The target system for which this request was created. This must be a SID	= Sign I, E	I
		= Opt: EQ, CP	CP
		= Low: <name of system>	*
		= High	
USERNAME	The login name of the SAP R/3 user who created the request.	= Sign I	
		= Opt: EQ,CP	
		= Low: <username who created this request>	
		= High	

Table 4-22 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
CUSTOMIZING	Customizing Requests	= Sign I,E	
		= Opt: EQ	
		= Low ^b	
		= High	
WORKBENCH	Workbench Requests	= Sign I, E	
		= Opt: EQ	
		= Low ^b	
		= High	

- a. Only the listed functions can be specified (* means all).
b. Any entry other than 'X' will be treated as space.

In [Example 4-10](#), an event generating an alert occurs if any *customizing* request was released in the last time frame.

Example 4-10 The Default REQUEST_RELEASED Configuration

```
AlertMonFun    =ALL    =ALL =ALL =ALL =CTS    =1\
               =WARNING =Request    =R3_CTS\
               =REQUEST_RELEASED =CUSTOMIZING =I =EQ =X
```

TASK_CREATED

An alert is generated if a new task was *created* within the last specified time frame. The configuration of any of these parameters is optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-23 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRFUNCTION	The request function.	= Sign: I, E	I
		= Opt: CP, EQ	CP
		= Low: X, S, R, Z ^a	*
		= High:	
USERNAME	The login name of the SAP R/3 user who created the request.	= Sign: I	
		= Opt: EQ, CP	
		= Low:<username who created this request>	
		= High:	

a. Only the listed functions can be specified (* means all).

In [Example 4-11](#), an event generating an alert occurs if a new task was *created* within the last specified time frame.

Example 4-11 The Default TASK_CREATED Configuration

```
AlertMonFun      =ALL      =ALL =ALL  =ALL  =CTS      =1      \
  =WARNING      =Task    =R3_CTS      \
  =TASK_CREATED      =TRFUNCTION      =I      =CP      =*      =
```

TASK_RELEASED

An alert is generated if a new task was released within the last time frame. The configuration of the parameters below is optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-24 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRKORR	Request ID	= Sign: I, E	
		= Opt: EQ	
		= Low: <Request ID>	
		= High:	
TRFUNCTION	The request function.	= Sign: I, E	I
		= Opt: CP, EQ	CP
		= Low: R, S, Z ^a	*
		= High:	
USERNAME	The login name of the SAP R/3 user who created the request.	= Sign: I	
		= Opt: EQ, CP	
		= Low: <username who created this request>	
		= High	

a. Only the listed functions can be specified (* means all).

In [Example 4-12](#), an event generating an alert occurs if any new task was *released* in the last time frame

Example 4-12 The Default TASK_RELEASED Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =CTS =1\
           =WARNING =Task =R3_CTS\
           =TASK_RELEASED =TRFUNCTION =I =CP =* =
```

OBJECT_USED

An alert is generated if the object matching the defined configuration is used by a task or by a request within the last time frame.

The configuration of the parameters below is optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-25 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
PGMID	Program ID	= Sign: I, E	
		= Opt: EQ, CP	
		= Low: <Program ID>	
		= High:	
OBJECT	Object type of element	= Sign I, E	
		= Opt: EQ, CP	
		= Low: <Object type>	
		= High	
OBJ_NAME	Object Name in object directory	= Sign I, E	I
		= Opt: EQ, CP	CP
		= Low: <Object name>	*
		= High	
OBJ_FUNC	Special function for an object entry, e.g. D = Delete or M = delete+recreate.	= Sign I, E	
		= Opt: EQ, CP	
		= Low	
		= High	

Table 4-25 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
IN_REQUEST	Alert generated if object container is a request	= Sign I,E	
		= Opt: EQ	
		= Low	
		= High	
IN_TASK	Alert generated if object container is a task.	= Sign I, E	
		= Opt: EQ	
		= Low	
		= High	

In [Example 4-13](#), an event generating an alert occurs if any object with Object Type "LIMU" is used by a task or a request.

Example 4-13 The Default OBJECT_USED Configuration

```
AlertMonFun  =ALL  =SD1  =ALL  =ALL  =CTS  =1\
              =WARNING  =Object  =R3_CTS\
              =OBJECT_USED  =PGMID  =I      =EQ  =LIMU  =
```

OBJECT_RELEASED

An alert is generated if a request or task is released which holds the specified object. The configuration of the parameters below is optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-26 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRKORR	Request ID	= Sign: I, E	
		= Opt: EQ, CP	
		= Low: <Request ID>	
		= High:	
PGMID	Program ID	= Sign: I, E	
		= Opt: EQ, CP	
		= Low: <Program ID>	
		= High:	
OBJECT	Object type of element	= Sign I, E	
		= Opt: EQ, CP	
		= Low: <Object type>	
		= High	
OBJECT_NAME	Object Name in object directory	= Sign I	I
		= Opt: EQ, CP	CP
		= Low: <Object name>	*
		= High	

Table 4-26 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
IN_REQUEST	Alert generated if object container is a request	= Sign I,E	
		= Opt: EQ	
		= Low ^a	
		= High	
IN_TASK	Alert generated if object container is a task.	= Sign I, E	
		= Opt: EQ	
		= Low ^a	
		= High	

a. Any entry other than 'X' will be treated as space.

In [Example 4-14](#), an event generating an alert occurs if any object is released by a task.

Example 4-14 The Default OBJECT_RELEASED Configuration

```
AlertMonFun =ALL =ALL =AL =ALL =CTS =1\
=WARNING =Object =R3_CTS\
=IN_TASK =I =EQ =X =
```

r3mondmp: The ABAP Dump Monitor

The ABAP DUMP alert monitor, `r3mondmp`, reports ABAP dumps in the SAP R/3 system which have occurred within the last, defined, time frame. The check is performed once per monitor run for all application servers.

Dumps are usually runtime errors and so they cannot always be detected by a static syntax check. They can occur for many reasons and may indicate serious problems. No dumps should occur on a production system.

Here are two examples of actions which cause dumps to occur:

- division by zero
- a called function model is not activated

User action by the system administrator is generally required after a dump has occurred in order to resolve the problem. Consequently, the messages generated by this alert monitor include an operator-initiated action that calls an ABAP program to display details of the dump.

The alert monitor `r3mondmp` references the SAP R/3 transaction **/ST22**.

This section contains information about the following topics:

- [“Type” on page 160](#)
- [“Alert Types” on page 160](#)
- [“File Locations” on page 161](#)
- [“Environment Variables” on page 161](#)
- [“Command Line Parameters” on page 161](#)
- [“Remote Monitoring” on page 161](#)

Type

The monitor is of type *timeframe*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The ABAP DUMP monitor has the following alert types:

- [“ABAP4_ERROR_EXIST”](#)

One alert is generated for each ABAP dump.

File Locations

The r3mondmp monitor has the files listed in [Table 4-27](#).

Table 4-27

r3mondmp Files

File	Description
r3moncol (.exe)	Collector executable for ABAP DUMP monitor
r3mondmp.cfg	Configuration file for monitored application servers.
r3mondmp.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The r3mondmp monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command Line Parameters

The r3mondmp monitor uses the command line parameters described in [Table 4-6 on page 119](#). The command line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

Configuring ABAP DUMP Monitor Alert Types

No parameters are used in the configuration of `r3mondmp`, the ABAP DUMP monitor: you do not need to edit the configuration file.

ABAP4_ERROR_EXIST

An alert is generated for each dump that occurred in the last time frame. [Example 4-15](#) shows how you can use `=MAX_ENTRIES` to count the number of dumps that have to occur before the SPI for SAP generates a message. In addition, you can specify a period of time in hours (`=TIME_LIMIT`) within which the defined number of dumps must occur. In this example, the SPI for SAP generates a message if ten dumps occur within twenty four hours.

Example 4-15

The Default ABAP4_ERROR_EXIST Configuration

```
AlertMonFun      =ALL  =ALL  =ALL  =ALL  =ABAP4  =1\  
=WARNING        =ABAP_Dump  =R3_ABAP-4\  
=ABAP4_ERROR_EXIST  
  
# New feature in SPI for SAP version 8.0  
#AlertMonFun     =ALL  =ALL  =ALL  =ALL  =ABAP4  =1  \  
    =WARNING     =ABAP_Dump  =R3_ABAP-4  =ABAP4_ERROR_EXIST\  
    =MAX_ENTRIES  =I        =GT        =10    =    \  
    =TIME_LIMIT   =I        =GT        =24    =
```

r3monjob: The JOBREPORT Monitor

The `r3monjob` alert monitor identifies and reports on batch jobs for the following conditions:

- A batch job's run time is either less than or has exceeded a specified limit.
- A specified period of time passes between a batch job's scheduled and actual start time (and date).
- A batch job has aborted.

The alert monitor `r3monjob` references:

- Reports created using SAP R/3 transaction `/SM36` or `/SM38`
- Job details including ID number using SAP R/3 transaction `/SM37`

Messages generated by this alert monitor include an operator-initiated action that displays the list of current SAP batch jobs.

This section contains information about the following topics:

- [“Type” on page 163](#)
- [“Alert Types” on page 163](#)
- [“First Time Monitoring” on page 164](#)
- [“Performance Aspects” on page 164](#)
- [“File Locations” on page 165](#)
- [“Environment Variables” on page 165](#)
- [“Command-Line Parameters” on page 165](#)
- [“Remote Monitoring” on page 166](#)

Type

The monitor is of type *timeframe*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The JOBREPORT monitor has the following alert types. Note that if you want to use the `r3monjob` monitor, you *must* configure the alert types listed below:

- “JOB_MAX_RUN_TIME”
defines the maximum allowed run time. Alerts are triggered for jobs which exceed the maximum time, specified in minutes.
- “JOB_MIN_RUN_TIME”
defines the minimum allowed run time. Alerts are triggered for jobs which did not run for at least as long as the time, specified in minutes.
- “START_PASSED”
is the maximum allowed delay between scheduled and actual start time. Alerts are triggered for jobs which have not started within the time, specified in minutes.
- “JOB_ABORTED”
An alert is triggered whenever the jobs specified in its configuration fail to complete successfully.

First Time Monitoring

When monitoring batch job alerts for a particular alert type for the first time, the JOBREPORT Monitor, r3monjob checks for:

- jobs which are not yet scheduled to run
- jobs which ended within the previous two days
- jobs which are still running

Performance Aspects

On a production system the table `tbtco` is usually very big. In order to speed up the database selection you should specify the job names in as much detail as possible. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

The runtime cost of a job selection grows in the order shown in the [Table 4-28](#).

Table 4-28

Order of Runtime Cost of Job Selection Criteria

Specified Jobname	Sign	Option	Selection
JOBNAME	I	EQ	Z5_CRITICAL_JOB_1> select via index

Table 4-28 **Order of Runtime Cost of Job Selection Criteria (Continued)**

Specified Jobname	Sign	Option	Selection
JOBNAME	I	CP	Z5_CRITICAL_JOB*> select via index
JOBNAME	E	CP	Z5_CRITICAL_JOB*> sequential scan

File Locations The r3monjob monitor has the files listed in [Table 4-29](#)

Table 4-29 **r3monjob Files**

File	Description
r3moncol(.exe)	Collector executable for the batch job monitor
r3monjob.cfg	Configuration file for monitored jobs and job conditions.
r3monjob.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables The r3monjob monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command-Line Parameters The r3monjob monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors refer to “[Alert-collector Monitor Query Conditions.](#)” in the introduction to this chapter.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see “[Remote Monitoring with the Alert-collector Monitors](#)” on page 119.

Configuring JOBREPORT Monitor Alert Types

You can configure `r3monjob`, the JOBREPORT monitor, for each of the listed alert types for a specific job, a combination of jobs, or for *all* jobs. You can also define exceptions for jobs that need different monitoring conditions. For more detailed information, see the alert-type tables which give the parameters and configuration for each alert type. Also, please note the general rules repeated below for using `exclude` and `include` parameter values which are of particular importance for these alert types.

IMPORTANT

Try to avoid using select option CP with the JOBNAM parameter: CP slows down the selection process. If you do use CP, try to limit its scope, for example; instead of specifying CP *, specify CP SAP*.

Parameter Values

The *include* and *exclude* parameter values for an alert type entry are interpreted as described below. Parameter values in *different* parameters are always compared using ‘and’: parameter values in the *same* parameter are compared as follows.

- **Include:** parameters are compared using ‘or’
- **Exclude:** parameters are compared using ‘and’

First the *include* values are evaluated; then the *exclude* values are evaluated, as shown in [Table 4-30](#).

Table 4-30 **AND/OR Comparisons using Include and Exclude Conditions for the Same Parameter**

Select Options	AlertType:JOB_MAX_RUN_TIME Example Configuration of Select Options	Comparison
1	=JOBNAME =I =CP =ZREP* = =MAX_RUNTIME =I =GT =10 =	OR
2	=JOBNAME =I =CP =SAP* = =MAX_RUNTIME =I =GT =20 =	OR
3	=JOBNAME =E =CP =SAP_ZREP* =	AND

JOB_MAX_RUN_TIME

An alert is generated when the configured parameter MAX_RUNTIME is exceeded.

The configuration of any of the parameters below is optional. If both parameters are omitted, all jobs running in the specified time frame are reported. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-31 **Configuration Parameters**

Parameter Name	Description	Query Conditions	Default Value
JOBNAME	Name of the jobs to be monitored	= Sign: I, E	I
		= Opt: EQ, CP, BT	CP
		= Low <Name of job>	*
		= High ^a	

Table 4-31 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
MAX_RUNTIME	Job run time in minutes which, if exceeded, generates an alert.	= Sign I, E	I
		= Opt: EQ, GE, GT, BT	GT
		= Low ^b	5
		= High ^a	

- a. Only for use with a range
- b. This parameter must be specified as a number. Otherwise the monitor ends with a dump.

The following examples illustrates both the default and a customized configuration for the JOB_MAX_RUN_TIME alert type.

In [Example 4-16](#), an event generating an alert occurs if any report named `<jobname>*` has a runtime exceeding five minutes

Example 4-16 The Default JOB_MAX_RUN_TIME Configuration

```
AlertMonFun  =ALL =ALL =ALL =ALL =JOBREPORT =1 \
=WARNING    =MaxRunTime  =R3_Jobs\
=JOB_MAX_RUN_TIME =JOBNAME =I =CP  =<jobname>*  =\
=MAX_RUNTIME   =I =GT   =5  =
```

In [Example 4-17](#), an event generating an alert occurs if all reports named SAP*, except reports SAPZ*, have a runtime exceeding ten minutes

Example 4-17 A Customized JOB_MAX_RUN_TIME Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =JOBREPORT =1\
=WARNING    =MaxRunTime  =R3_Jobs \
=JOB_MAX_RUN_TIME =JOBNAME =I =CP =SAP*  = \
=MAX_RUNTIME   =I =GT   =10  =

AlertMonFun =ALL =ALL =ALL =ALL =JOBREPORT =1\
=WARNING    =MaxRunTime  =R3_Jobs \
=JOB_MAX_RUN_TIME =JOBNAME =E =CP =SAPZ*  = \
=MAX_RUNTIME   =I =GT   =10  =
```


JOB_MIN_RUN_TIME

An alert is generated when jobs are not running for as long as the time specified in the parameter MIN_RUNTIME. The configuration of any of the parameters below is optional. If both parameters are omitted, all jobs running in the specified time frame are reported. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-32 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
JOBNAME	Name of the jobs to be monitored	= Sign: I, E	I
		= Opt: EQ, CP, BT	CP
		= Low <Name of job>	*
		= High: ^a	
MIN_RUNTIME	This defines the minimum allowed run time Alerts are triggered for jobs which did not run for at least as long as the time specified (in minutes).	= Sign I, E	I
		= Opt: EQ,LE, LT, BT	LT
		=Low <Min. value in minutes> ^b	1
		= High	

- Only for use with a range
- This parameter must be specified as a number, otherwise the monitor ends with a dump.

The following examples illustrates both the default and a customized configuration for the JOB_MIN_RUN_TIME alert type.

In [Example 4-18](#), an event generating an alert occurs if any report named <jobname>* has a runtime of less than one minute.

Example 4-18 The Default JOB_MIN_RUN_TIME Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =JOBREPORT =1 \
=WARNING      =MinRunTime =R3_Jobs\
=JOB_MIN_RUN_TIME =JOBNAME      =I =CP =<jobname>* = \
=MIN_RUNTIME =I =LT =1 =
```

In [Example 4-19](#), an event generating an alert occurs if all reports named SAP*, except reports SAPZ*, have a runtime of less than two minutes

Example 4-19 Customized JOB_MIN_RUN_TIME Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =JOBREPORT =1 \
=WARNING      =MinRunTime =R3_Jobs \
=JOB_MIN_RUN_TIME =JOBNAME      =I =CP =SAP* = \
=MIN_RUNTIME =I =LT =2 =

AlertMonFun =ALL =ALL =ALL =ALL =JOBREPORT =1 \
=WARNING      =MinRunTime =R3_Jobs \
=JOB_MIN_RUN_TIME =JOBNAME      =E =CP =SAPZ* = \
=MIN_RUNTIME =I =LT =2 =
```

START_PASSED

An alert is generated if the specified jobs are not started within the configured TIME_SPAN after the scheduled start time. If a job is scheduled but does not have a start time, it cannot be monitored until and unless a start time has been assigned and is visible in the SAP database. SAP associates a start time with a job only when the job assumes a particular status. The following SAP job statuses have a start time and, consequently, can be monitored by r3monjob: Released, Ready, Active, Finished, and Canceled.

The configuration of any of the parameters below is optional. If both parameters are omitted all jobs running in the specified time frame are reported. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3](#)

on page 115.

Table 4-33 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
JOBNAME	Name of the jobs to be monitored	= Sign: I, E	I
		= Opt: EQ, CP, BT	CP
		= Low <Name of job>	*
		= High: ^a	
TIME_SPAN	The job run time in minutes that specifies when an alert should be raised. Note that it is not necessary to use a time range. You can specify a particular time instead.	= Sign I, E	I
		= Opt: EQ, LT, LE, BT	LT
		=Low <low_value_of_range_in_minutes_past_scheduled_start_time> ^b	1
		=High <high_value_of_range_in_minutes_past_scheduled_start_time>	

- a. Only for use with a range
- b. This parameter must be specified as a number. Otherwise the monitor ends with a dump

In [Example 4-20](#), an event generating an alert occurs if any report named <jobname>* is not started more than one minute after the scheduled start time.

Example 4-20 The Default START_PASSED Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =JOBREPORT =1\  
=WARNING =StartPassed =R3_Jobs \  
=START_PASSED =JOBNAME =I =CP =<jobname>* =\  
=TIME_SPAN =I =GT =1 =
```

JOB_ABORTED

An alert is generated when a job is aborted. The configuration of the parameter below is optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-34 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
JOBNAME	Name of the jobs to be monitored	= Sign: I, E	I
		= Opt: EQ, CP, BT	CP
		= Low <Name of job>	*
		= High ^a	

a. Only for use when specifying a range

In [Example 4-21](#), an event generating an alert occurs if any report named <jobname>* is aborted

Example 4-21 The Default JOB_ABORTED Configuration

```
AlertMonFun    =ALL =ALL =ALL =ALL =JOBREPORT =1\  
=WARNING      =Aborted      =R3_Jobs \  
=JOB_ABORTED  =JOBNAME      =I  =CP= <jobname>*
```

In [Example 4-22](#), an event generating an alert occurs if jobs named SAP_REORG_ABAPDUMPS or ITOTEST are aborted.

Example 4-22 A Customized JOB_ABORTED Configuration

```
AlertMonFun    =ALL =ALL =ALL =ALL =JOBREPORT =1\  
=WARNING      =Aborted =R3_Jobs \  
=JOB_ABORTED  =JOBNAME  =I =EQ =SAP_REORG_ABAPDUMPS =  
  
AlertMonFun    =ALL =ALL =ALL =ALL =JOBREPORT          =1 \  
=WARNING      =Aborted  =R3_Jobs\  
=JOB_ABORTED  =JOBNAME  =I  =EQ  =ITOTEST =
```

r3monlck: The LOCK_CHECK Monitor

The LOCK_CHECK alert-collector monitor references the Enqueue process which manages logical locks for SAP R/3 transactions and reports on obsolete locks. Obsolete locks are defined as locks which are older than the time period you specify. The check is performed once per monitor run for all application servers.

An object which is locked cannot be changed by anyone other than the user associated with it and can cause severe problems. The operator can check the locks set for a specific instance in **/SM12**. Here are two examples of actions which cause locks to occur

- Users switching off their computers without first logging off the R/3 system, (this is the most common cause).
- As a result of entire instances failing.

The alert monitor r3monlck references the SAP R/3 transaction **/SM12**.

Messages generated by this alert monitor include an operator-initiated action that calls the **/SM12** Locks Overview module. The operator can then check the locks set for a specific instance in **/SM12**.

This section contains information about the following topics:

- [“Type” on page 173](#)
- [“Alert Types” on page 173](#)
- [“File Locations” on page 174](#)
- [“Environment Variables” on page 174](#)
- [“Command-Line Parameters” on page 174](#)
- [“Remote Monitoring” on page 174](#)

Type

The r3monlck monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The LOCK_CHECK monitor has only one alert type:

- **“OLD_LOCKS”**

Specifies when the lock is to be defined as “old”, using the time period you specify in the parameter LOCK_TIME.

File Locations The r3monlck monitor has the files listed in [Table 4-35](#).

Table 4-35 r3monlck Files

File	Description
r3moncol(.exe)	Collector executable for the lock_check monitor
r3monlck.cfg	Configuration file for the lock_check monitor.
r3monlck.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables The r3monlck monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command-Line Parameters The r3monlck monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command-line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

OLD_LOCKS

An alert is generated if the time span for the parameter LOCK_TIME is exceeded, i.e the lock is defined as “old”.

The configuration of the parameter below is mandatory. Note that you can have more than one configuration in the .cfg file. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-36 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
LOCK_TIME	The time span (in hours) after which a lock is considered old	= Sign: I,E	I
		= Opt: EQ, GT, GE, LE, LT, BT	GT
		= Low: <time in hours> ^a	
		= High: ^b	

- a. This parameter must be specified, otherwise the monitor ends with a dump.
- b. Only for use when specifying a range

In [Example 4-23](#), an event generating an alert occurs if any lock exceeds a time span of 24 hours.

Example 4-23 The Default OLD_LOCKS Configuration

```
AlertMonFun  =ALL =ALL =ALL  =ALL =LOCK_CHECK =1\  
=WARNING    =Enqueue =R3_Enqueue\  
=OLD_LOCKS  =LOCK_TIME =I      =GT  =24  =
```

r3monoms: The OPERATION MODE Monitor

The OPERATION MODE alert monitor `r3monoms` checks each application server for the following conditions:

- A scheduled operation mode occurs later than the time specified
- A scheduled operation mode switch has not occurred at all

The alert monitor `r3monoms` references:

- scheduled operation modes in SAP R/3 transaction **/SM63**
- configuration modes in SAP R/3 transaction **/RZ04**

Operation-mode switch failures influence the performance of the SAP R/3 system and can cause problems. Operation-mode switches might occur for a number of reasons, for example; work processes that must be switched are still occupied in a process while the operation-mode switch is running. The system administrator usually needs to intervene to fix the problem, for example; by forcing and testing the operation mode's state.

NOTE

If an operations-mode switch generated an alarm because it was not activated in time, but then successfully occurred later without any intervention, a message is sent stating that the switch, although late, has now gone ahead as planned.

This section contains information about the following topics:

- [“Type” on page 177](#)
- [“Alert Types” on page 177](#)
- [“File Locations” on page 177](#)
- [“Environment Variables” on page 177](#)
- [“Command-Line Parameters” on page 177](#)
- [“Remote Monitoring” on page 178](#)

Type The r3monoms monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types The alert monitor OPERATION MODE has only one alert type:

- [“OM_SWITCH_OVERDUE”](#)
This defines when an operation mode switch is overdue.

File Locations The r3monoms monitor has the files listed in [Table 4-37](#)

Table 4-37 **r3monoms Files**

File	Description
r3moncol(.exe)	Collector executable for the operation mode monitor
r3monoms.cfg	Configuration file for the operation mode monitor.
r3monoms.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables The r3monoms monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command-Line Parameters The r3monoms monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command-line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

OM_SWITCH_OVERDUE

An alert is generated when the operation mode switch is not triggered within the defined period of time.

The configuration of the parameters in [Table 4-38 on page 179](#) is optional. By default, an alert is triggered if an Operation-Mode switch is more than three minutes late.

The APSERVER parameter allows you to set the application-server-dependent monitors, r3monwpa, r3monusr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where *<hostname>* is the name of the application server to be monitored as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER  =I =CP =<hostname>_<SID>_<Instance_Number>
```

It is also recommended that you explicitly define the host name of the SAP R/3 Central Instance whose application server(s) you want to specify with APSERVER, as illustrated in the [Example 4-24](#).

Example 4-24 Specifying an Application Server

```
AlertMonFun  =<Centr_Instance_hostname> =ALL =ALL =ALL =OM =1 \  
=WARNING    =OperationMode =R3_WP    \  
=OM_SWITCH_OVERDUE =OVERDUE_TIME  =I  =GT  =15    = \  
              =APSERVER  =I =CP =hpdev01_MP3_00
```

For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-38 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	specifies an application server to be monitored	= Sign: I, E	
		= Opt: CP	
		= Low	
		= High	
OVERDUE_TIME	The time in minutes, after which a scheduled mode switch is considered overdue.	= Sign: I, E	I
		= Opt: GT, GE, LE, LT, BT	GT
		= Low <time in minutes> ^a	3
		= High ^b	

- a. This query condition must be specified, otherwise no check is performed.
b. Only for use when specifying a range.

In [Example 4-25](#), an event generating an alert occurs if a scheduled operation mode switch is more than three minutes late.

Example 4-25 The Default OM_SWITCH_OVERDUE Configuration

```
AlertMonFun  =ALL =ALL =ALL  =ALL=OM  =1\
=WARNING    =OperationMode  =R3_WP\
=OM_SWITCH_OVERDUE  =OVERDUE_TIME  =I    =GT  =3  =
```

r3monrfc: The RFC-destination Monitor

The RFC-destination monitor `r3monrfc` is application-server independent and checks RFC destinations in an SAP environment. SAP uses RFC destinations to remotely execute function modules, which reside on other SAP Systems. The alert-collector monitor, `r3monrfc`, references the RFC destinations, which you can display, create, and maintain by means of the SAP R/3 transaction `/NSM59`.

This section contains information about the following topics:

- [“Type” on page 180](#)
- [“Alert Types” on page 180](#)
- [“File Locations” on page 180](#)
- [“Environment Variables” on page 181](#)
- [“Command-Line Parameters” on page 181](#)
- [“Remote Monitoring” on page 181](#)

Type The `r3monrfc` monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types The RFC-destination alert monitor has the following alert type, which uses a snapshot report type:

- **“CHECK”**
Defines alert conditions for failed SAP-RFC connections

File Locations The `r3monrfc` monitor has the files listed in [Table 4-45](#).

Table 4-39 **r3monrfc Files**

File	Description
<code>r3moncol(.exe)</code>	Collector executable for the SAP-RFC monitor
<code>r3monrfc.cfg</code>	Configuration file for the SAP-RFC monitor.
<code>r3monrfc.log</code>	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The `r3monrfc` monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command-Line Parameters

The `r3monrfc` monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command-line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the `-cfgfile` and `-trace` parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

Configuring RFC-destination Alert Types

The parameters `CONNECTION_TYPE` and `NAME` must be configured for all alert types for `r3monrfc`, the RFC-destination monitor. Note the general rules below on exclude and include parameters for `r3monrfc`.

Parameter Values

The *include* and *exclude* parameter values for an alert-type entry are interpreted in the manner described below. Parameter values in *different* parameters are always compared using ‘and’: parameter values in the *same* parameter are compared as follows.

- **Include:** parameters are compared using ‘or’
- **Exclude:** parameters are compared using ‘and’

First the include, then the exclude values are evaluated.

CHECK

CHECK is a snapshot alert type for `r3monrfc`, the SPI for SAP's RFC-destination monitor. Snapshot alert types take a picture of the SAP System at the moment the monitor runs. An alert is generated if the specified Alert Threshold is exceeded for the number of reconnect errors to the target system.

The parameter CHECK must be configured. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-40 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
CONNECTION_TYPE	Type of SAP RFC connection to be monitored. Type 1= App. Server, Type 3= R/3 System, Type M= CMC, Type T =TCP/IP, etc.	= Sign I, E	I
		= Opt: EQ	EQ
		= Low ^a	4
		= High	
NAME	Name you assigned to the SAP-RFC connection as shown in the transaction /NSM59.	= Sign: I, E	I
		= Opt: EQ, CP	EQ
		= Low: <SID>	''
		= High:	

- a. The parameter must be specified as a number, otherwise the monitor ends with a dump.

Example 4-26 The Default Check-RFC_DESTINATION Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =RFC_DESTINATION =1 \
=WARNING =RFC_Destinations =R3_RFC \
=CHECK =CONNECTION_TYPE =I =EQ =3 =
```

In [Example 4-26](#), an event generating an alert occurs whenever the RFC_DESTINATION test fails for any *one* of the type 3 SAP-RFC destinations.

Example 4-27 An Example Check-RFC_DESTINATION Configuration

```
AlertMonFun  =ALL  =ALL  =ALL  =ALL  =RFC_DESTINATION  =1  \  
             =WARNING  =RFC_Destinations  =R3_RFC  \  
             =CHECK  =NAME  =I  =CP  =OV_C01_099  =
```

In [Example 4-27](#), an event generating an alert occurs whenever RFC_DESTINATION test fails for the single SAP-RFC destination named OV_C01_099.

r3monspl: The SPOOLER Monitor

The SPOOLER alert monitor `r3monspl` is application-server independent and monitors spooler entries for the following conditions:

- The number of spool requests which would generate an alert
- The number of error-generating spool requests that would generate an alert.
- If a specified printer has received erroneous spool requests.

The alert monitor `r3monspl` references output tasks in SAP R/3 transaction `/SP01` and report sources in SAP R/3 transaction `/SE38`.

This section contains information about the following topics:

- [“Type” on page 184](#)
- [“Alert Types” on page 184](#)
- [“File Locations” on page 185](#)
- [“Environment Variables” on page 185](#)
- [“Command Line Parameters” on page 185](#)
- [“Remote Monitoring” on page 185](#)

Type

The `r3monspl` monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The SPOOLER alert monitor has the following alert types:

- [“SPOOL_ENTRIES_RANGE”](#)
This defines the number of spool requests which, if exceeded, would cause an alert.
- [“SPOOL_ERROR_RANGE”](#)
This defines the number of error-generating spool requests which, if exceeded, would cause an alert.
- [“PRINT_ERROR_EXISTS”](#)

This specifies the name(s) of printers for which an alert would be generated if a spool error exists.

File Locations

The r3monspl monitor uses the files listed in [Table 4-41](#).

Table 4-41

r3monspl Files

File	Description
r3moncol(.exe)	Collector executable for the spooler monitor
r3monspl.cfg	Configuration file for the spooler monitor.
r3monspl.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The r3monspl monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command Line Parameters

The r3monspl monitor uses the command line parameters described in [Table 4-6 on page 119](#). The command line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

Configuring SPOOLER Monitor Alert Types

You can configure r3monspl, the SPOOLER monitor, for each of the alert types and then define exceptions for different monitoring conditions. For more detailed information, see the alert-type tables which give the parameters and configuration for each alert type.

SPOOL_ENTRIES_RANGE

An alert is generated if the number of spool entries exceeds the range specified. The configuration of the RANGE parameter is mandatory. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-42 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
RANGE	The number of spool entries outside of which an alert will be generated. Note that, despite its name, this parameter does not need to be specified as a select- option range.	= Sign: I, E	I
		= Opt: EQ, GT, GE, LE, LT, BT	GT
		= Low ^a	50
		= High	

a. This parameter must be specified as a number, otherwise the monitor ends with a dump.

In [Example 4-28](#), an event generating an alert occurs if there are more than 50 spooler entries.

Example 4-28 The Default SPOOL_ENTRIES_RANGE Configuration

```
AlertMonFun  =ALL  =ALL  =ALL  =ALL  =SPOOLER  =1\  
=CRITICAL    =Spool  =R3_Spooler \  
=SPOOL_ENTRIES_RANGE  =RANGE  =I  =GT  =50  =
```

SPOOL_ERROR_RANGE

An alert is generated if the number of erroneous spool requests exceeds the range specified. The configuration of the RANGE parameter is mandatory. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-43 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
RANGE	The number of erroneous spool requests outside of which an alert will be generated. Note that, despite its name, this parameter does not need to be specified as a select option range.	= Sign: I, E	I
		= Opt: EQ, GT, GE,LE, LT, BT	GT
		= Low ^a	50
		= High	

a. This parameter must be specified as a number, otherwise the monitor ends with a dump.

In [Example 4-29](#), an event generating an alert occurs if there are more than 50 erroneous spool requests.

Example 4-29 The Default SPOOL_ERROR_RANGE Configuration

```
AlertMonFun  =ALL =ALL =ALL =ALL  =SPOOLER  =1\  
=CRITICAL  =Spool  =R3_Spooler \  
=SPOOL_ERROR_RANGE  =RANGE  =I  =GT  =50      =
```

PRINT_ERROR_EXISTS

An alert is generated if a spool error exists for a specified printer. The configuration of the PRINTER parameters is mandatory. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-44 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
PRINTER	The printer(s) which should be checked for spool entries of state error.	= Sign: I, E	I
		= Opt:	CP
		= Low	*
		= High:	

In [Example 4-30](#), an alert is generated when any printer has a spool entry-state error.

Example 4-30 The Default PRINT_ERROR_EXISTS Configuration

```
AlertMonFun  =ALL  =ALL  =ALL  =ALL  =SPOOLER  =1\
=WARNING    =Spool  =R3_Spooler \
=PRINT_ERROR_EXISTS =PRINTER    =I    =CP          =*    =
```

r3montra: The TRANSPORT Monitor

The TRANSPORT monitor `r3montra` is application-server independent and is used to check the following parts of the transport system:

- successful and failed exports and imports for the monitored system
- confirmed and unconfirmed repairs in the monitored system.
- connections using a connection test (PING) to the configured systems
- TP-Tests of the configured systems.

The alert monitor `r3montra` references transport routes in SAP R/3 transactions **/STMS** and **/SE01**.

This section contains information about the following topics:

- [“Type” on page 189](#)
- [“Alert Types” on page 189](#)
- [“File Locations” on page 190](#)
- [“Environment Variables” on page 190](#)
- [“Command-Line Parameters” on page 190](#)
- [“Remote Monitoring” on page 190](#)

Type

The `r3montra` monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The TRANSPORT alert monitor has the following alert types, which use a mixture of snapshot and time-frame report types:

- [“TRANS”](#)
defines alert conditions for successful and failed transport exports and imports.
- [“REPAIR”](#)
defines alert conditions for confirmed and unconfirmed repairs.
- [“RFCCONNECT”](#)

defines alert conditions for the RFC connections between the systems.

- **“TPTEST”**
defines alert conditions concerning the TP interface with the database. It includes a connection test (PING), a TP call to the connected database, a check of the TP interface (version, transport directory, TPPARAM path, a file check and a TPLOG check).

File Locations

The r3montra monitor has the files listed in [Table 4-45](#).

Table 4-45

r3montra Files

File	Description
r3moncol(.exe)	Collector executable for the transport monitor
r3montra.cfg	Configuration file for the transport monitor.
r3montra.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The r3montra monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command-Line Parameters

The r3montra monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command-line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

Configuring TRANSPORT Alert Types

The parameter ALERT_THRESHOLD must be configured for all alert types for r3montra, the Transport monitor. All other parameters are optional. Note the general rules below on exclude and include parameters for r3montra.

Parameter Values

The *include* and *exclude* parameter values for an alert-type entry are interpreted in the manner described below. Parameter values in *different* parameters are always compared using ‘and’: parameter values in the *same* parameter are compared as follows.

- **Include:** parameters are compared using ‘or’
- **Exclude:** parameters are compared using ‘and’

First the include, then the exclude values are evaluated.

TRANS

TRANS is a time-frame based alert type for r3montra, the SPI for SAP’s Transport Monitor. An alert is generated if the specified threshold is exceeded for failed or successful transport imports and exports. Note that

the parameter ALERT_THRESHOLD *must* be configured. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-46 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
ALERT_THRESHOLD	Number of allowed transport states above which an alert is generated	= Sign I, E	I
		= Opt: GT, GE, LT, LE	GT
		= Low ^a	4
		= High	
E_SUCCESS	Filtering option to include all <i>successfully</i> exported transports	= Sign: I, E	I
		= Opt: EQ	EQ
		= Low ^b	X
		= High:	
E_FAILURE	Filtering option to include all failed <i>exported</i> transports	= Sign: I, E	I
		= Opt: EQ	EQ
		= Low ^b	X
		= High:	
I_SUCCESS	Filtering option to include all <i>successfully</i> imported transports	= Sign: I, E	I
		= Opt: EQ	EQ
		= Low ^b	X
		= High:	
I_FAILURE	Filtering option to include all <i>failed</i> imported transports	= Sign: I, E	I
		= Opt: EQ	EQ
		= Low ^b	X
		= High:	

Table 4-46 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
USERNAME	The login name of the SAP R/3 user ^c	= Sign I, E	I
		= Opt: EQ,CP	EQ
		= Low: <username>	''
		= High	

- a. Specify as a number, otherwise the monitor ends with a dump
- b. Any entry other than the default is treated as space.
- c. Since requests/tasks are user dependent, you can use it to restrict data.

Example 4-31 The Default TRANS Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =TRANSPORT =1\  
=WARNING =Trans =R3_Transport\  
=TRANS =I_FAILURE =I =EQ =X =\  
=ALERT_THRESHOLD =I =GT =4 =  
  
AlertMonFun =ALL =ALL =ALL =ALL =TRANSPORT =1\  
=WARNING =Trans =R3_Transport\  
=TRANS =I_SUCCESS =I =EQ =X =\  
=ALERT_THRESHOLD =I =GT =4 =  
  
AlertMonFun =ALL =ALL =ALL =ALL =TRANSPORT =1\  
=WARNING =Trans =R3_Transport\  
=TRANS =E_FAILURE =I =EQ =X =\  
=ALERT_THRESHOLD =I =GT =4 =  
  
AlertMonFun =ALL =ALL =ALL =ALL =TRANSPORT =1\  
=WARNING =Trans =R3_Transport\  
=TRANS =E_SUCCESS =I =EQ =X =\  
= ALERT_THRESHOLD = I = GT = 4 =
```

In [Example 4-31](#), an event generating an alert occurs if users exceed the alert threshold of four (4) for successful or unsuccessful imported or exported transports.

REPAIR

REPAIR is a time-frame based alert type for r3montra, the SPI for SAP's Transport Monitor. An alert is generated if the specified alert threshold is exceeded for confirmed and/or unconfirmed repairs. Note that the parameter ALERT_THRESHOLD *must* be configured. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-47 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
R_CONFIRM	Filtering option to include all confirmed repairs.	= Sign: I, E	I
		= Opt: EQ	EQ
		= Low ^a	X
		= High	
R_UNCONFIR	Filtering option to include all unconfirmed repairs.	= Sign: I, E	I
		= Opt:	EQ
		= Low ^a	X
		= High	
USERNAME	The login name of the SAP R/3 user ^b	= Sign I, E	I
		= Opt: EQ,CP	EQ
		= Low: <username>	''
		= High	
ALERT_THRESHOLD	Number of allowed repair states above which an alert is generated	= Sign I, E	I
		= Opt: GT, GE, LT, LE	GT
		= Low ^c	4
		= High	

a. Any entry other than the default is treated as space

b. Since requests/tasks are user dependent, you can use it to restrict the data.

c. Specify the parameter as a number or the monitor ends with a dump

RFCONNECT

RFCONNECT is a snapshot alert type for r3montra, the SPI for SAP's Transport Monitor. Snapshot alert types take a picture of the System at the moment the monitor runs. An alert is generated if the specified Alert Threshold is exceeded for the number of reconnect errors to the target system.

The parameter ALERT_THRESHOLD must be configured. All other parameters are optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-48 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
ALERT_THRESHOLD	Number of repair states above which an alert is generated	= Sign I, E	I
		= Opt: GT, GE, LT, LE	GT
		= Low ^a	4
		= High	
CHECKSYSTEM	System ID of the systems which have to be tested and/or monitored.	= Sign: I, E	I
		= Opt: EQ, CP	EQ
		= Low: <SID>	''
		= High:	

a. The parameter must be specified as a number, otherwise the monitor ends with a dump.

Example 4-32 The Default RFCONNECT Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =TRANSPORT =1\  
=WARNING =RfcConnect =R3_Transport\  
=RFCONNECT =CHECKSYSTEM =I =CP =* =\  
=ALERT_THRESHOLD =I =GT =4 =
```

In [Example 4-32](#), an event generating an alert occurs if the alert threshold of four reconnect errors is exceeded for the specified target system.

TPTEST

TPTEST is a snapshot alert type for r3montra, the SPI for SAP's Transport Monitor. Snapshot alert types take a picture of the System at the moment the monitor runs. An alert is generated if the specified Alert Threshold is exceeded for the number of TPTEST errors to the target system. Note that the parameter ALERT_THRESHOLD *must* be configured. All other parameters are optional. For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-49 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
ALERT_THRESHOLD	Number of TPTEST errors above which an alert is generated	= Sign I, E	I
		= Opt: GT, GE, LT, LE	GT
		= Low ^a	4
		= High	
CHECKSYSTEM	System ID of the systems which have to be tested and/or monitored.	= Sign: I, E	I
		= Opt: EQ, CP	EQ
		= Low: <SID>	''
		= High:	

- a. The parameter must be specified as a number, otherwise the monitor ends with a dump.

Example 4-33 The Default TPTEST Configuration

```
AlertMonFun  =ALL  =ALL  =ALL  =ALL  =TRANSPORT =1\
=WARNING    =TpTest      =R3_Transport\
=TPTEST     =CHECKSYSTEM  =I    =EQ  =<SID>  =\
=ALERT_THRESHOLD =I  =GT  =4  =
```

In [Example 4-33](#), an event generating an alert occurs if exceed the alert threshold of four TPTEST errors is exceeded for the specified target system.

r3monupd: The UPDATE Monitor

The UPDATE alert monitor identifies and reports the following update conditions:

- the update process is *inactive*
- update-process errors

Active updates can be deactivated by the user or by the system. This is a critical problem and the system log /**SM13** must be checked for problems. Update errors discovered are returned as an annotation and a check must be made of the system log.

The alert monitor r3monupd references update errors and update status in SAP R/3 transaction /**SM13**.

This section contains information about the following topics:

- [“Type” on page 198](#)
- [“Alert Types” on page 198](#)
- [“File Locations” on page 199](#)
- [“Environment Variables” on page 199](#)
- [“Command-Line Parameters” on page 199](#)
- [“Remote Monitoring” on page 199](#)

Type

The r3monupd monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The UPDATE monitor has the following alert types.

- [“UPDATE_ACTIVE”](#)
This is used to get information about the status of update processes and sends an alert if a process is not active.
- [“UPDATE_ERRORS_EXIST”](#)
This is used to get information on update processes which have errors.

File Locations

The r3monupd monitor has the files listed in [Table 4-50](#).

Table 4-50

r3monupd Files

File	Description
r3moncol (.exe)	Collector executable for the update monitor
r3monupd.cfg	Configuration file for the update monitor.
r3monupd.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The r3monupd monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command-Line Parameters

The r3monupd monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command-line parameters for all the alert collector monitors share the same format: the only difference is that the name of the configuration file must vary to match each specific monitor for both the -cfgfile and -trace parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

Configuring UPDATE Monitor Alert Types

No parameters are used to configure alert types for r3monupd, the SPI for SAP's UPDATE Monitor. You do not need to edit or customize the configuration file.

UPDATE_ACTIVE

UPDATE_ACTIVE is an alert type for r3monupd, the SPI for SAP's Update Monitor. If the UPDATE task is inactive, an alert is generated. The following example illustrates the default configuration for the UPDATE_ACTIVE alert type.

Example 4-34 The Default UPDATE_ACTIVE Configuration

```
AlertMonFun      =ALL =ALL =ALL =ALL =UPDATE      =1\  
=CRITICAL        =UpdActive          =R3_Update    =UPDATE_ACTIVE
```

In [Example 4-34](#), an event generating an alert occurs if any update is deactivated.

UPDATE_ERRORS_EXIST

UPDATE_ERRORS_EXIST is an alert type for r3monupd, the SPI for SAP's Update Monitor. An alert is generated if any update errors exist. The following example illustrates the default configuration for the UPDATE_ERRORS_EXIST alert type.

Example 4-35 The Default UPDATE_ERRORS_EXIST Configuration

```
AlertMonFun      =ALL =ALL =ALL =ALL =UPDATE =1\  
=CRITICAL        =UpdError    =R3_Update    =UPDATE_ERRORS_EXIST
```

In [Example 4-35](#), an event generating an alert occurs if any update error occurs.

r3monusr: The USER Monitor

The USER alert monitor `r3monusr` identifies and reports the number of logged-in users. The check is performed for each application server. A very high number of users could indicate that performance problems might occur. The alert can then be used to decide whether it is necessary to ask or even force users to log out.

The alert monitor `r3monusr` references the SAP R/3 transaction **/SM04**.

This section contains information about the following topics:

- [“Type” on page 201](#)
- [“Alert Types” on page 201](#)
- [“File Locations” on page 201](#)
- [“Environment Variables” on page 202](#)
- [“Command-Line Parameters” on page 202](#)
- [“Remote Monitoring” on page 202](#)

Type The `r3monusr` monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types The USER monitor has only one alert type:

- [“USER_LOGGEDIN_MAX”](#)

This is used to define the maximum number of logged in users.

File Locations The `r3monusr` monitor has the files listed in [Table 4-51](#).

Table 4-51 **r3monusr Files**

File	Description
<code>r3moncol(.exe)</code>	Collector executable for the user monitor
<code>r3monusr.cfg</code>	Configuration file for the user monitor.
<code>r3monusr.log</code>	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The `r3monusr` monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

Command-Line Parameters

The `r3monusr` monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command-line parameters for all the alert collector monitors share the same format: the only difference is that the name of the configuration file must vary to match each specific monitor for both the `-cfgfile` and `-trace` parameters as indicated in [Table 4-6 on page 119](#).

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

USER_LOGGEDIN_MAX

`USER_LOGGEDIN_MAX` is an alert type for `r3monusr`, the SPI for SAP’s User Monitor. An alert is generated if the maximum number of users specified is exceeded. The configuration of the parameter `MAX` is mandatory.

The `APSERVER` parameter allows you to set the application-server-dependent monitors, `r3monwpa`, `r3monusr`, and `r3monoms` to monitor a specific application server. You need to configure `APSERVER` in the following manner, where `<hostname>` is the name of the application server to be monitored as it appears in the list of application servers displayed in transaction **SM51**:

```
=APSERVER  =I  =CP  =<hostname>_<SID>_<Instance_Number>
```

We also recommend that you explicitly define the host name of the SAP R/3 Central Instance whose application server(s) you want to specify with `APSERVER`, as illustrated in the [Example 4-36](#).

Example 4-36 Specifying an Application Server

```
AlertMonFun =<Central_Inst_Hostname> =ALL =ALL =ALL =USER =1 \
=WARNING =Login =R3_WP \
=USER_LOGGEDIN_MAX =MAX =I =GT =30 = \
=APSERVER =I =CP =hpdev01_MP3_00
```

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#). For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-52 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	specifies an application server to be monitored	= Sign: I, E	
		= Opt: CP	
		= Low	
		= High	
MAX	The number of logged in users before an alert is generated. ^a	= Sign: I, E	I
		= Opt: GT, GE	GT
		= Low	5
		= High:	

a. The parameter value must be specified as a number, otherwise the monitor ends with a dump.

Example 4-37 The Default USER_LOGGEDIN_MAX Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =USER =1\
=WARNING =Login =R3_User\
=USER_LOGGEDIN_MAX =MAX =I =GT =30 =
```

In [Example 4-37](#), an event generating an alert occurs if the number of users logged in exceeds thirty.

r3monwpa: The WORKPROCESS Monitor

The WORKPROCESS alert monitor `r3monwpa` reports the following conditions for each application server:

- checks the number of *running* work processes for each work-process type
- checks the number of *waiting* work processes for each work-process type
- compares the number of *active* work processes with the number of *configured* work processes (of the same work process type) in the profile of the current operation mode.
- checks the status of the work processes, as follows:
 - **D (Debug)**
No processes run on live systems
 - **P (Private)**
Processes run using maximum available system resources.
 - **R (No Restart)**
Failed processes do not restart, which means that dependent jobs also fail.

The alert monitor `r3monwpa` references the SAP R/3 transaction `/SM50`.

This section contains information about the following topics:

- [“Type” on page 204](#)
- [“Alert Types” on page 205](#)
- [“File Locations” on page 205](#)
- [“Environment Variables” on page 205](#)
- [“Command-Line Parameters” on page 206](#)
- [“Remote Monitoring” on page 206](#)

Type

The `r3monwpa` monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see [“Report Types for the Alert-collector Monitors” on page 111](#).

Alert Types

The WORKPROCESS alert monitor has the following alert types.

- **“WP_AVAILABLE”**
This defines alert conditions for the number of expected work processes running.
- **“WP_IDLE”**
This defines alert conditions for the number of idle work processes waiting.
- **“WP_CHECK_CONFIGURED”**
This defines alert conditions for comparing the actual number of running work processes with the number of configured work processes in the profile of the current operation mode. Comparison is only made between two WPs of the same WP type.
- **“WP_STATUS”**
This defines alert conditions for WPs in a problematic state, such as DEBUG, PRIVATE or RESTARTNO.

File Locations

The r3monwpa monitor has the files listed in [Table 4-53](#).

Table 4-53

r3monwpa Files

File	Description
r3moncol(.exe)	Collector executable for the WorkProcess monitor
r3monwpa.cfg	Configuration file for the WorkProcess monitor.
r3monwpa.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see [“Alert-collector Monitor History” on page 114](#).

Environment Variables

The r3monwpa monitor uses the environment variables described in [Table 4-5 on page 118](#). The environment variables for all the alert collector monitors share the same format: the only difference is that the name of the configuration file must vary to match each specific monitor as indicated in [Table 4-5 on page 118](#).

**Command-Line
Parameters**

The `r3monwpa` monitor uses the command-line parameters described in [Table 4-6 on page 119](#). The command-line parameters for all the alert collector monitors share the same format, the only differences being that the name of the configuration file must vary to match each specific monitor for both the `-cfgfile` and `-trace` parameters as indicated in [Table 4-6 on page 119](#)

**Remote
Monitoring**

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see [“Remote Monitoring with the Alert-collector Monitors” on page 119](#).

NOTE

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#).

Configuring WORKPROCESS Alert Types

This section helps you to configure Alert Types for `r3monwpa`, the SPI for SAP’s Work-process Monitor. Please note the general rules repeated below on using *exclude* and *include* parameter values which are of particular importance for these alert types.

Parameter Values

The *include* and *exclude* parameter values for an alert type entry are interpreted as described below. Parameter values in *different* parameters are always compared using ‘and’: parameter values in the *same* parameter are compared as follows.

- **Include:** parameters are compared using ‘or’
- **Exclude:** parameters are compared using ‘and’

First the include values are evaluated; then the exclude values are evaluated, as shown in the [Table 4-54](#).

Table 4-54 AND/OR Comparisons using Include and Exclude Conditions for the Same Parameter

Select Options	AlertType:WP_AVAILABLE Example Configuration of Select Options	Comparison
1	= DIA =I =BT =50 =100 =OPMODE =I =CP =DAY	OR
2	= DIA =I =GT =5 =OPMODE =I =CP =NIGHT	OR
3	= DIA = E =LT =60	AND

WP_AVAILABLE

WP_AVAILABLE is an Alert Type for r3monwpa, the SPI for SAP's Work-process Monitor. An alert is generated when the number of running work processes for each, selected work-process type is outside the specified maximum (or minimum) threshold.

The configuration of the parameters listed for the WP_AVAILABLE Alert Type is mandatory. All threshold parameters must be specified as a number otherwise the monitor ends with a dump.

The APSERVER parameter allows you to set the application-server-dependent monitors, r3monwpa, r3monusr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where *<hostname>* is the name of the application server to be monitored as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER =I =CP =<hostname>_<SID>_<Instance_Number>
```

We also recommend that you explicitly define the host name of the SAP R/3 Central Instance whose application server(s) you want to specify with APSERVER, as illustrated in the [Example 4-38](#).

Example 4-38 Specifying an Application Server

```
AlertMonFun =<Centr_Instance_Hostname> =ALL =ALL =ALL =WP =1 \
=WARNING =Availability =R3_WP \
=WP_AVAILABLE =DIA =I =GT =50 = \
=APSERVER =I =CP =hpdev01_MP3_00
```

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#). For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-55 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	specifies an application server to be monitored	= Sign: I, E	
		= Opt: CP	
		= Low <time in minutes>	
		= High	
BTC	Threshold for BTC WPs	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low: <number>.	
		= High:	
DIA	Threshold for DIALOG WPs	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low: <number>.	
		= High:	

Table 4-55 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
ENQ	Threshold for ENQ WPs	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low: <number>.	
		= High:	
OPMODE	Defines the operation mode for this parameter ^a	= Sign I, E	I
		= Opt: CP, EQ	EQ
		= Low: <operation_mode>	<i>current</i>
		= High	
SPO	Threshold for SPO WPs	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low: <number>.	
		= High:	
UPD	Threshold for UPD WPs	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low <number>	
		= High	

Table 4-55 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
UP2	Threshold for UP2 WPs	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low <number>	
		= High	

a. A critical alert is generated if a non-existent mode is specified.

In [Example 4-39](#), an event generating an alert occurs if the number of available Dialog work processes is less than fifty.

Example 4-39 The Default WP_AVAILABLE Configuration

```
AlertMonFun    =ALL    =ALL    =ALL    =ALL    =WP    =1\
=WARNING      =Availability    =R3_WP\
=WP_AVAILABLE    =DIA    =I    =LT    =50    =
```

WP_IDLE

WP_IDLE is an Alert Type for r3monwpa, the SPI for SAP's Work-process Monitor. An alert is generated when the number of waiting work processes for each, selected work-process type is outside of the specified max (or min) threshold.

The configuration of the parameters for the WP_IDLE Alert Type is mandatory. All threshold parameters must be specified as a number otherwise the monitor ends with a dump.

The APSEVER parameter allows you to set the application-server-dependent monitors, r3monwpa, r3monusr, and r3monoms to monitor a specific application server. You need to configure APSEVER in the following manner, where <hostname> is the name of the application server to be monitored as it appears in the list of application servers displayed in transaction SM51:

```
=APSEVER    =I    =CP    =<hostname>_<SID>_<Instance_Number>
```

We also recommend that you explicitly define the host name of the SAP R/3 Central Instance whose application server(s) you want to specify with APSERVER, as illustrated in the [Example 4-40](#).

Example 4-40 Specifying an Application Server

```
AlertMonFun =<Centr_Instance_Hostname> =ALL =ALL =ALL =WP =1 \
=WARNING =Idle =R3_WP \
=WP_IDLE =BTC =I =GT =20 = \
=APSERVER =I =CP =hpdev01_MP3_00
```

If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#). For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-56 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	specifies an application server to be monitored	= Sign: I, E	
		= Opt: CP	
		= Low	
		= High	
BTC	Threshold for BTC work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low <number>	
		= High	
DIA	Threshold for DIALOG work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low <number>	
		= High:	

Table 4-56 Configuration Parameters (Continued)

Parameter Name	Description	Query Conditions	Default Value
ENQ	Threshold for ENQ work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low	
		= High	
OPMODE	Defines the operation mode for this parameter. ^a	= Sign I, E	I
		= Opt: CP, EQ	EQ
		= Low: <operation mode>	<current >
		= High	
SPO	Threshold for SPO work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low <number>	
		= High	
UPD	Threshold for UPD work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low <number>	
		= High	
UP2	Threshold for UP2 work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low<number>	
		= High	

a. If a non-existent mode is specified, a critical alert is generated.

In [Example 4-41](#), an event generating an alert occurs if the number of idle Dialog work processes is less than ten.

Example 4-41 The Default WP_IDLE Configuration

```
AlertMonFun    =ALL =ALL =ALL  =ALL =WP =1\  
=WARNING      =Idle  =R3_WP\  
=WP_IDLE      =DIA  =I   =LT =10  =
```

WP_CHECK_CONFIGURED

WP_CHECK_CONFIGURED is an Alert Type for r3monwpa, the SPI for SAP's Work-process Monitor. The WP_CHECK_CONFIGURED Alert Type makes a comparison between the actual number of running work processes and the number of configured work processes in the profile of the current operation mode. Note that comparison is only made between two WPs of the same type (DIA, BTC etc.).

The APSERVER parameter allows you to set the application-server-dependent monitors, r3monwpa, r3monusr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where *<hostname>* is the name of the application server to be monitored as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER      =I  =CP  =<hostname>_<SID>_<Instance_Number>
```

We also recommend that you explicitly define the host name of the SAP R/3 Central Instance whose application server(s) you want to specify with APSERVER, as illustrated in the [Example 4-42](#).

Example 4-42 Specifying an Application Server

```
AlertMonFun    =<Centr_Instance_Hostname> =ALL =ALL =ALL =WP =1 \  
=WARNING      =Check  =R3_WP    \  
=WP_CHECK_CONFIGURED \  
                =APSERVER  =I  =CP  =hpdev01_MP3_00
```

If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#). For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-57 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	specifies an application server to be monitored	= Sign: I, E	
		= Opt: CP	
		= Low	
		= High	

In [Example 4-43](#), an alert is generated when the number of running work processes does not match the number of configured work processes for a given workprocess type.

Example 4-43 Default WP_CHECK_CONFIGURED Configuration

```
AlertMonFun =ALL  =ALL  =ALL  =ALL  =WP =1 \
=WARNING  =Check  =R3_WP\
=WP_CHECK_CONFIGURED  \
                    =APSERVER  =I  =CP  =ALL
```

WP_STATUS

WP_STATUS is an Alert Type for r3monwpa, the SPI for SAP's Work-process Monitor. An alert is generated when the comparison between the number of running work processes and the number of configured work processes does not match the conditions defined in the parameters below. The configuration of the parameter below is optional.

The APSERVER parameter allows you to set the application-server-dependent monitors, r3monwpa, r3monusr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where *<hostname>* is the name of the application server to be monitored as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER  =I  =CP  =<hostname>_<SID>_<Instance_Number>
```

We also recommend that you explicitly define the host name of the SAP R/3 Central Instance whose application server(s) you want to specify with APSERVER, as illustrated in the [Example 4-44](#).

Example 4-44 Specifying an Application Server

```
AlertMonFun =<Centr_Instance_Hostname> =ALL =ALL =ALL =WP =1 \
=WARNING  =WP_Status  =R3_WP  \
=WP_STATUS =STATUS    =I  =GT  =30  = \
          =APSERVER  =I  =CP  =hpdev01_MP3_00
```

If you are unsure about the general configuration query rules which apply to all alert collector monitors, see [“Alert-collector Monitor Query Conditions” on page 114](#). For more information about the meaning of the Query Conditions in the alert-collector monitor configuration files, see [Table 4-3 on page 115](#).

Table 4-58 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	specifies an application server to be monitored	= Sign: I, E	
		= Opt: CP	
		= Low	
		= High	
STATUS ^a	The status which is monitored.	= Sign: I, E	
		= Opt:	
		= Low D =Debug, P = Private, R= Restart no alert.	
		= High	

a. Possible additional values; MAX_ENTRIES

In [Example 4-45](#), an event generating an alert occurs if the status of a running workprocess is *critical*. [Example 4-45](#) also shows how you can use `=MAX_ENTRIES` to define the number of work processes with a defined status that have to exist before the SPI for SAP generates a message.

Example 4-45 The Default WP_STATUS Configuration

```
AlertMonFun      =ALL =ALL =ALL  =ALL =WP      =1\
                  =CRITICAL   =WP_Status  =R3_WP\
                  =WP_STATUS    =STATUS =I   =CP   =*    =
# New feature in SPI for SAP Version 8.0
```


Monitoring the TEMSE file

To save runtime costs, the consistency of SAP's Temporary Sequential file (TEMSE) is monitored not by means of one of the SPI for SAP alert monitors, but rather by means of a report you set up in SAP. However, you still need to assign the SPI for SAP `r3monaco` monitor to the managed nodes.

This section contains information about the following topics:

- [“Type” on page 217](#)
- [“Report Description” on page 217](#)
- [“Running the TemSe Monitor” on page 217](#)

Type	The TEMSE monitor is of type <i>snapshot</i> . One monitor run gathers only one value set. For more information, see “Report Types for the Alert-collector Monitors” on page 111 .
Report Description	The TEMSE report references the SAP R/3 transaction /SP12 . Any inconsistency found in the TEMSE database is serious, and the cause of the inconsistency, for example a disk failure, must be corrected using the system log in /SP12 .
Running the TemSe Monitor	<p>To run the TemSe monitor, you need to set up a job in SAP R/3 with the report named ZHPSPIT1, as follows:</p> <ol style="list-style-type: none">1. Login to SAP R/32. Set up a job using the following transaction: /sm363. Specify:<ul style="list-style-type: none">• the date on which the report should start• the frequency with which the report should run

5 Understanding Message Flow

This section describes how to use OVO for Windows functionality and CCMS to control the flow of messages between SAP R/3 and OVO for Windows.

In this Section

The information in this section describes how to control message flow between SAP R/3 and OVO for Windows and includes the following topics:

- [“OVO Message Customization” on page 221](#)
Customizing the SPI for SAP OVO for Windows message policy conditions.
- [“Customizing CCMS Message Flow by Central OVO Configuration” on page 224](#)
Changing the conditions for alert generation in the SAP R/3 CCMS alert monitor.
- [“Customizing CCMS Message Flow in SAP R/3” on page 233](#)
Using SAP R/3 features to control whether or not CCMS alert monitors generate specific messages.
- [“SAP Solution-Manager Integration” on page 239](#)
Use the `r3ovo2ccms` command to write OVO for Windows messages directly into the CCMS tree, where they can be viewed and used by the SAP Solution Manager in the same way as any other SAP message alert. You can also use `r3monal` to forward messages from directly from CCMS to OVO for Windows.

NOTE

The methods for setting thresholds in the CCMS monitor do not apply if you are using the new CCMS monitoring architecture, where thresholds can be set globally within SAP R/3.

For details on the procedures outlined in these sections, refer to your SAP R/3 documentation and to the manuals supplied with OVO for Windows.

OVO Message Customization

With the aid of standard OVO for Windows functionality, you can:

- **Set up message filters**
use message filters to set up views that show you only messages which fit specified criteria, for example, only critical messages. For more information, see [“Setting Up the Message Filters” on page 221](#).
- **Change severity levels**
change the severity level of messages. For more information, see [“Changing the Message Severity” on page 223](#).
- **Suppress messages**
suppress specific messages by setting a suppress condition in the `opcmsg` template. For more information, see *HP OpenView Smart Plug-in for SAP Configuration Guide*.

NOTE

The SPI for SAP provides its own `opcmsg` template in addition to the standard `opcmsg` template. In order to avoid message duplication, you need to suppress *all* messages from the SAP application in the standard `opcmsg` template. For more information, see the *HP OpenView Smart Plug-in for SAP Configuration Guide*.

Setting Up the Message Filters

By default, the OVO for Windows Console displays *active* messages generated on your managed nodes. However, you can modify the number and type of messages that are displayed so that only the most important messages appear. For example, messages can be filtered by any one or combination of the following criteria:


- **Application:**
Filter messages according to the application message attribute
- **Message text:**
Filter messages containing specific text

- **Object:**
Filter messages according to the object message attribute
- **Ownership:**
Filter messages according to message ownership
- **Severity:**
Filter messages according to the selected severity
- **Time:**
Filter messages created at/before/since particular dates and times
- **Unmatched:**
Filter messages that either do or do not match any of the message conditions or suppressed conditions defined in the policies deployed on the managed nodes.

Using message filters, you can set up simple or complex views which select specific messages to be displayed. For example, if you want to display messages with a severity level of critical, you can define a filter that prevents messages of all other severity levels from being displayed.

Figure 5-1

Applying Message Filters

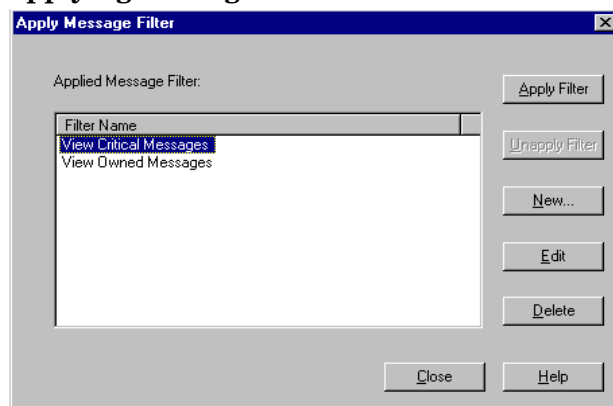

To define your customized message filter:

1. Select the managed node

In the OVO for Windows Console, locate and right click the managed node whose messages you want to filter, and select the following option from the menu that pops up:

View > All Tasks > Message Filter

2. Create a new message filter

In the Apply Message Filter window which appears, click **New...**
The Filter Properties window appears.

3. Define the new message filter

Use the Filter Properties window to define the filtering patterns to be used. For example, if you want to filter the messages to be displayed on the basis of message severity, use the Severity field in the General property sheet.

Click **OK** to save your filtering pattern(s).

4. Save and apply the filter

In the Apply Message Filter window, click **Apply Filter**, and then click **Close**.

Changing the Message Severity

To change the severity of specific SAP R/3-generated messages in the message browser:

1. Log on to OVO for Windows as administrator.
2. In the details pane, locate and right-click the message whose severity attribute you want to change, and select the following option from the menu which pops up:

Change Severity >

3. Select the severity level you want from the pop-up menu, for example, Major. The message severity is immediately updated in the active-messages browser.

NOTE

The user who changes a message's severity automatically becomes the message's owner: message ownership is indicated by a flag in the **S** column in the OVO for Windows message browser.

Customizing CCMS Message Flow by Central OVO Configuration

NOTE

The information in this section applies only to SAP R/3 3.1x. Do not use this method of threshold setting if you are using CCMS version 4.x and later.

OVO for Windows allows you to customize CCMS message flow centrally by modifying the contents of the threshold-configuration file, `r3itothr.cfg`. You use the config-file policy editor installed as part of the SPI for SAP to open and edit the `r3itothr.cfg` file. In this way, you can set thresholds for the following alerts, each of which is described in detail in the sections that follow:

To configure the SAP CCMS thresholds in the threshold-configuration file, `r3itothr.cfg`:

1. Locate the `r3itothr.cfg` configuration file

In the OVO for Windows Console, browse to the `r3itothr.cfg` configuration file, which you can find in the following location:

Policy Management > Policy Tools > SPI for SAP

Use the config-file policy editor to display the contents of the `r3itothr.cfg` file, which enables you to set the following thresholds:

- [“Thresholds for Performance Alerts” on page 225](#)
- [“Thresholds for Syslog Alerts” on page 226](#)
- [“Thresholds for Buffer Alerts” on page 228](#)
- [“Thresholds for Other Alerts” on page 229](#)
- [“Thresholds for Oracle Databases” on page 230](#)
- [“Thresholds for Informix Databases” on page 232](#)

2. Modify the thresholds as required for your environment.

NOTE

Network thresholds and operating-system thresholds are not supported by the SPI for SAP.

3. Apply the new thresholds on a specific SAP R/3 system

- a. In the In the OVO for Windows Console, locate and expand the SAP R/3 Admin tools group:
Tools > SPI for SAP > SAP R/3 Admin
- b. In the details pane, right click the Write SAP Thresholds tool and launch the tool from the menu which pops up, as follows:
All Tasks > Launch Tool...
- c. In the Launch Tool window, select the SAP R/3 managed node(s) where you want to apply the new thresholds and click **Launch...**


Thresholds for Performance Alerts

You can set thresholds for performance alerts in the following section of the r3itothr.cfg file:

```
#=====
# Performance Alert Thresholds
#=====
#           SAP      Resp[ms]  Resp[ms]  RunTime   Wait[ms]   Wait[ms]
#           Server    Yellow    Red       [ms]      Yellow     Red
AlertThrPerfDia =ALL    =1000    =2000    =10000    =500       =1500
AlertThrPerfUpd =ALL    =1000    =2000    =10000    =500       =1500
AlertThrPerfBtc =ALL    =10000   =20000   =20000    =10000     =20000
AlertThrPerfSpo =ALL    =2500    =5000    =10000    =1000      =2000
#=====
```

In CCMS, the sample settings of the configuration file section shown above would result in the settings shown in [Figure 5-2](#).

Figure 5-2

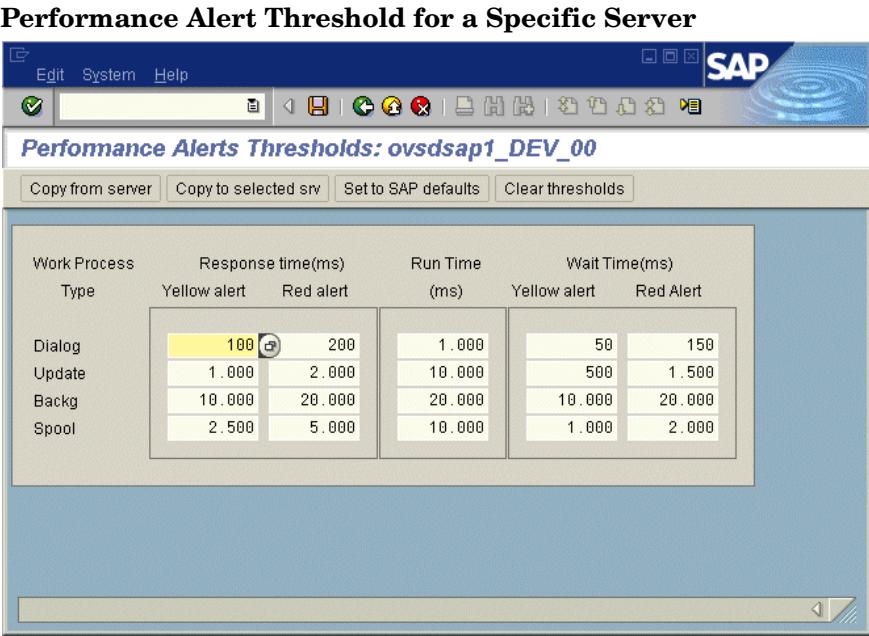


Thresholds for Syslog Alerts

You can set the frequency for syslog alerts in the following section of the `r3itotthr.cfg` file:

```
#####  
# Syslog Alert Thresholds  
#####  
  
#  
# Frequency          SAP          Max number   Max number  
#                   Server        of syslogs   of syslogs per hour  
AlertThrSlogFreq    =ALL          =1000        =100  
#####
```

In CCMS, the sample settings of the configuration file section shown above would result in the SAP settings shown in [Figure 5-3](#).

Figure 5-3

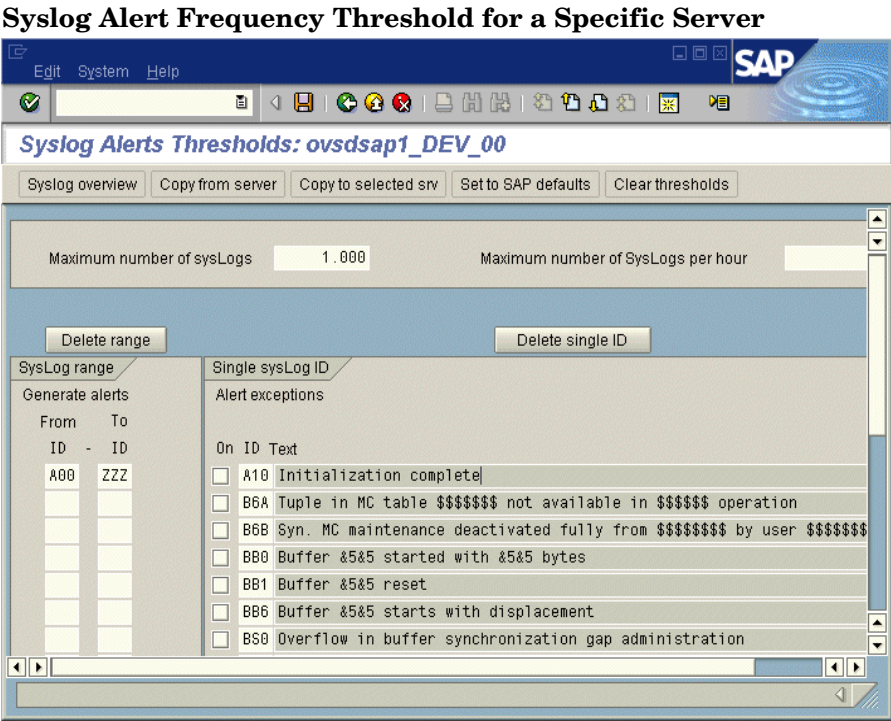


Ranges for Syslog Alerts You can set ranges for syslog alerts in the following section of the r3itothr.cfg file:

```
#=====
# Delete Ranges      SAP      From      To      Mode
#                   Server    Syslog ID  Syslog ID  Add/Del
AlertThrSlogRange    =ALL     =A00      =ZZZ      =ADD
#=====
# Single ID          SAP      Syslog ID  Mode
#                   Server    Add/Del
AlertThrSlogId       =ALL     =A00      =ADD
#=====
```

In CCMS, the sample settings of the configuration file section shown above would result in the SAP settings shown in [Figure 5-4](#).

Figure 5-4 Syslog Alert Threshold Ranges for a Specific Server

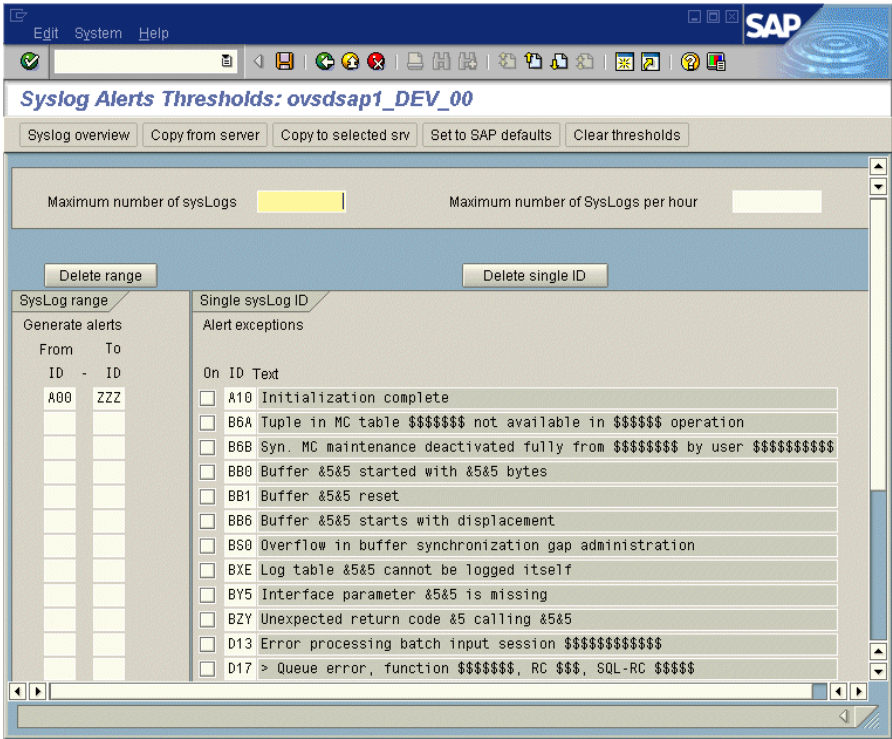

Thresholds for Buffer Alerts


You can set thresholds for buffer alerts in the following section of the r3itohr.cfg file:

```
#####
# Buffers Alert Thresholds
#####
#           SAP           Hitratio% Hitratio% Directory Space
#           Server        Yellow    Red      Used %    Used %
AlertThrBufNTABTable =ALL      =95      =85      =95      =95
AlertThrBufNTABField =ALL      =95      =85      =95      =95
AlertThrBufNTABShort =ALL      =95      =85      =95      =95
AlertThrBufNTABInit  =ALL      =95      =85      =95      =95
AlertThrBufProgram   =ALL      =95      =85      =95      =95
AlertThrBufCUA       =ALL      =95      =85      =95      =95
```

```
AlertThrBufScreen      =ALL          =95          =85          =95          =95
AlertThrBufTablesGen  =ALL          =95          =85          =95          =95
AlertThrBufTablesSin   =ALL          =75          =50          =95          =95
```

In CCMS, the sample settings of the configuration file section shown above would result in the SAP settings shown in [Figure 5-5](#).

Figure 5-5 Buffer Alert Threshold for a Specific Server

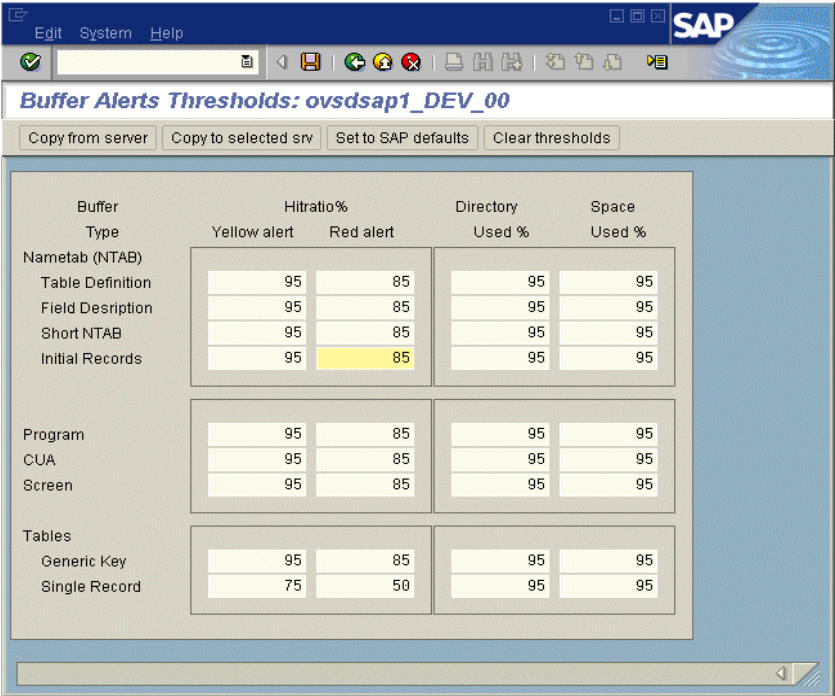


Thresholds for Other Alerts

You can set thresholds for other alerts in the following section of the r3itothr.cfg file:

```
=====
# Others Alert Thresholds
#=====
#          SAP      Rollfile  Pagefile  EnqDir   EnqEntry  DispQueue
#          Server    Used %    Used %    Used %   Used %    Used %
AlertThrOthers =ALL    =91      =92      =93      =94      =95
=====
```

In CCMS, the sample settings of the configuration file section shown above would result in the SAP settings shown in [Figure 5-6](#).

Figure 5-6 Other Alert Threshold for a Specific Server

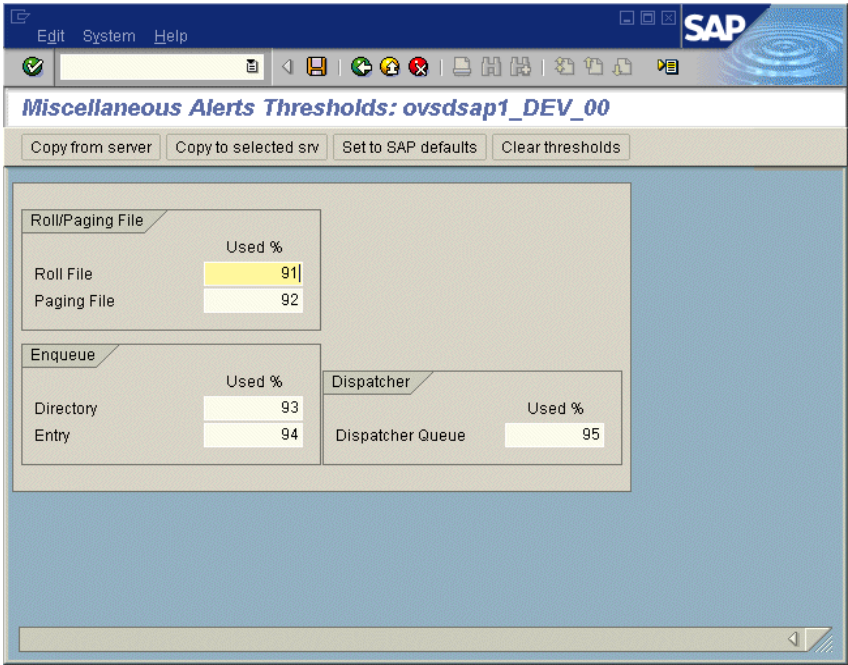

Thresholds for Oracle Databases

You can set thresholds for Oracle database alerts in the following section of the `r3itothr.cfg` file:

```
#=====
# ORACLE Database Alert Thresholds
#=====
# General          SAP          SAP Database
#                  Server        Server
AlertThrOraDB      =hpbbcpo5_LPO_00 =hpbbcpo5
#-
# General          SAP          Alert Monitor      CPU Usage
#                  Server        Interval [10secs]  by session
AlertThrOraGen     =hpbbcpo5_LPO_00 =1              =5
#-
# Data            SAP          Quality  Busy   Busy   Physical Phys.  Phys.Read
#                  Server        %       Wait  Wait[ms] Reads  Writes Time[ms]
```




```
AlertThrOraData      =hpbbcpo5_LPO_00  =80      =350    =350    =350    =350    =350
#-
# Calls              SAP                User      User      Recursive
#                    Server              Calls    Rollbacks Calls
AlertThrOraCall      =hpbbcpo5_LPO_00  =350      =350      =350
#-
# Calls              SAP                Long      Rows
#                    Server              Tables   Gotten
AlertThrOraScan      =hpbbcpo5_LPO_00  =350      =350
#-
# Sorts              SAP                Sort      Sort      Sort
#                    Server              Memory   Disk      Rows
AlertThrOraSort      =hpbbcpo5_LPO_00  =1000     =100      =1000
#-
# Calls              SAP                Remaining Using     Backup Age  Auto log
#                    Server              Space[kb] BrBackup allowed[days] save [kb]
AlertThrOraArch      =hpbbcpo5_LPO_00  =350      =1        =10       =5000
=====
```

In CCMS, the sample settings of the configuration file section shown above would result in the SAP settings shown in [Figure 5-7](#).

Figure 5-7

Alerts for an Oracle Database

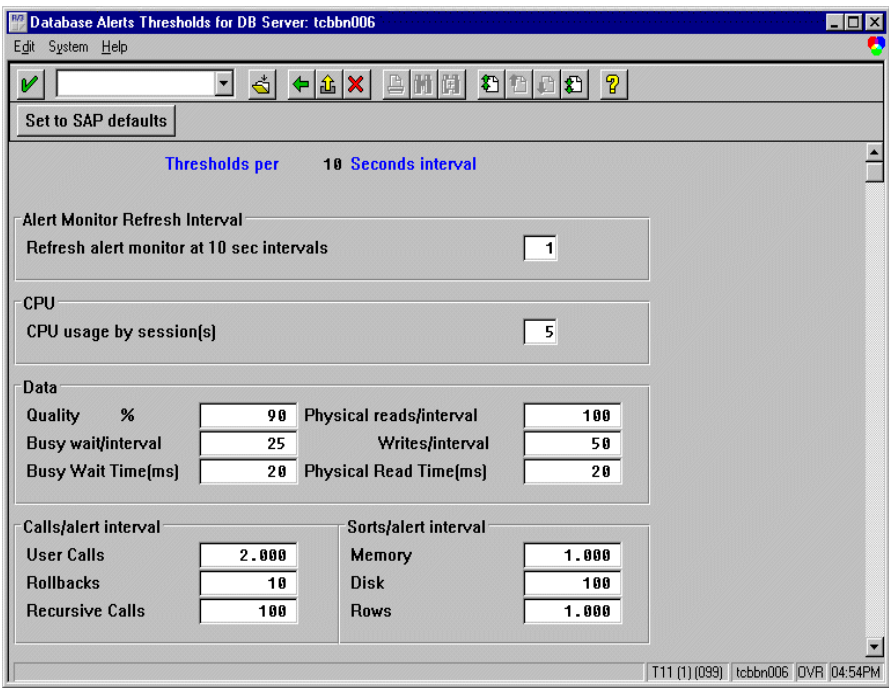

Thresholds for Informix Databases

You can set thresholds for Informix database alerts in the following section of the `r3itothr.cfg` file:

```
=====
# INFORMIX Database Alert Thresholds
#=====
# DB          SAP          SAP Database
#            Server       Server
AlertThrInfDB =hpbbcpo5_LPO_00 =hpbbcpo5
#-
# Data        SAP          AlertMon  Read      Reads    Write     Writes
#            Server       Interval  Quality[%]
AlertThrInfData =hpbbcpo5_LPO_00 =0        =95        =1000    =85        =2000
#-
# Calls       SAP          Disk      Seq.      Roll-    Long      Locks[%]  Locks[%]
#            Server       Reads     Scans     backs   Waits[ms] Yellow     Red
AlertThrInfActiv =hpbbcpo5_LPO_00 =350      =350      =10      =1000     =50        =60
#-
# Calls       SAP          Locked[s] Locked[s] Lockwait[s] Lockwait[s]
#=====
```

Customizing CCMS Message Flow in SAP R/3

SAP R/3 CCMS provides a range of features enabling you to allow or prevent the inclusion of specific messages in its alert monitor. This section includes information about the following topics:

- [“Disabling Messages” on page 233](#)
- [“Setting Thresholds for SAP R/3 CCMS Alert Monitor Messages” on page 235](#)
- [“Setting Up Messages for Inclusion in the SAP R/3 System Log File” on page 236](#)
- [“Obtaining a Message ID from the SAP R/3 Syslog File” on page 236](#)
- [“Configuring the System Log Filter for Alert Generation” on page 237](#)

Disabling Messages

To disable messages in SAP R/3:

1. Select the following items from the SAP R/3 menu bar:

**Tools -> Administration > Computing Center >
Management System > Control > Control Panel**

NOTE


Alternatively, you can enter the following transaction code into the SAP R/3 command field: **/nrz03**

2. Select your SAP R/3 instance.
3. Select the following menu items from the SAP R/3 menu bar:

Monitoring > Alert-Details

4. Click **Roll/Paging** in the Type column.

Figure 5-8 Alert State window

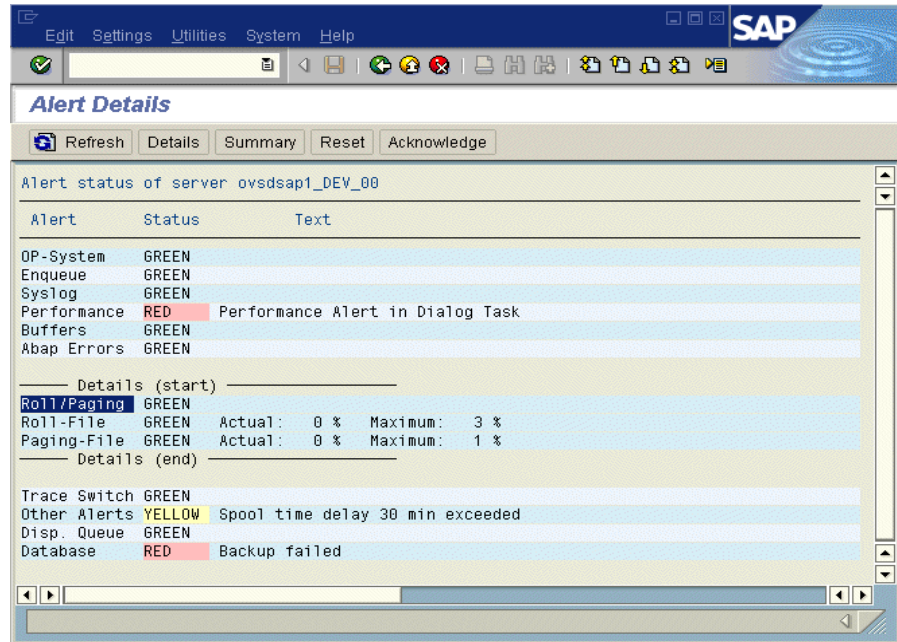

5. Proceed as follows to disable, for example, Roll/Paging alerts:
 - a. Click **Roll/Paging**
 - b. From the R/3 menu bar, select the following menu items:
Settings > Disable
The selected item and the suppressed message type are now marked disabled in the OVO for Windows Console.
6. Return to the CCMS Control Station window and save your settings.
7. Check the OVO for Windows Console. You should not receive any more Roll/Paging messages.

NOTE

Since disabling messages will result in inconsistencies with the settings previously defined in the SPI for SAP configuration file, you must only perform this operation if you do *not* want to have a central configuration.

Setting Thresholds for SAP R/3 CCMS Alert Monitor Messages

To set thresholds for SAP R/3 CCMS alert monitor messages:

1. Select the following items from the SAP R/3 menu bar:

**Tools > Administration > Computing Center >
Management System > Control > Control panel**

2. Select the SAP R/3 instance (under **Server name**) for which you want to define a performance limit value.

3. Click **Alert details**

4. From the SAP R/3 menu bar, select the following menu items:

Settings -> Threshold values

The Alert Thresholds window is displayed.

5. Click **Performance** to display the Performance Alerts Thresholds window

6. Edit the time threshold values as appropriate

7. To save your new thresholds, select the following items from the SAP R/3 menu bar:

Edit > Save


When the limit you just defined is reached, you will receive a warning or a critical Dialog Performance message (similar to [Figure 5-9](#)).

NOTE

This example assumes that you want to set a specific performance limit that will trigger a related dialog-performance message.

To initialize your SAP R/3 CCMS before you have empirical data for thresholds, it may be a good idea to apply the SAP defaults by clicking **Set to SAP defaults** in the Alert Thresholds window.

Figure 5-9

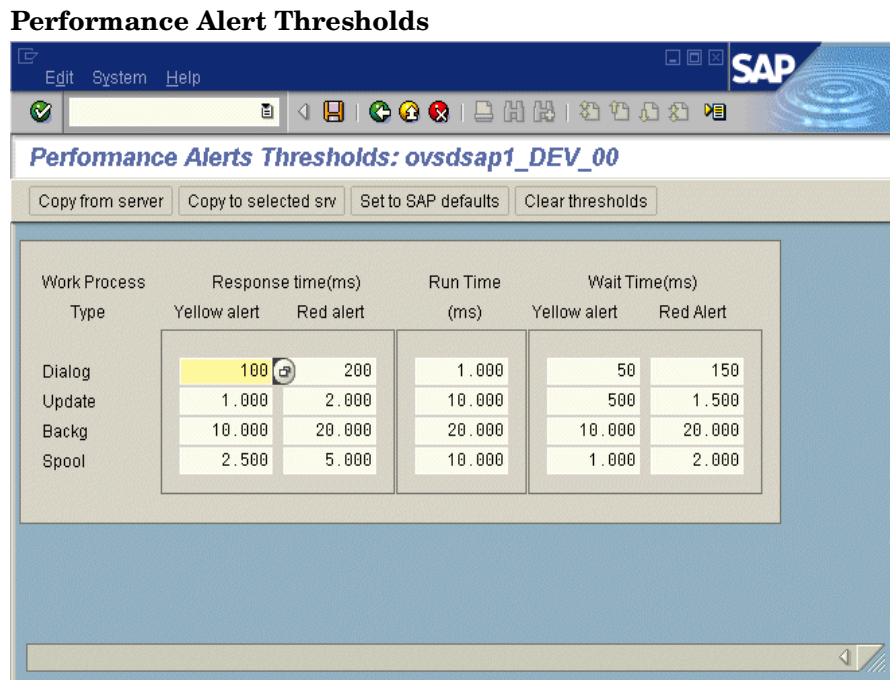

Setting Up Messages for Inclusion in the SAP R/3 System Log File

Any messages recorded in the SAP R/3 system log file can be defined to trigger an alert in CCMS. This alert can be picked up by the R/3 collector from the shared-memory segment and used to display an associated message in the OVO for Windows Console with instructions for any appropriate actions, which are required.

To set up messages for inclusion in the SAP R/3 system log file, perform each of the following procedures in sequence:

- [“Obtaining a Message ID from the SAP R/3 Syslog File” on page 236](#)
- [“Configuring the System Log Filter for Alert Generation” on page 237](#)

Obtaining a Message ID from the SAP R/3 Syslog File

To obtain the message ID of a critical message:

1. Select the following menu items from the SAP R/3 menu bar to read the system log file:

Tools > Administration > Monitoring > System Log

NOTE

Alternatively, you can enter the following transaction code into the SAP R/3 command field: **/nsm21**

SAP R/3 displays the Local Analysis window.

It may be a good idea to select appropriate time restrictions in order to limit the contents of the `syslog` file to the currently relevant entries.

2. Click **Refresh SysLog** to display the system log file of your SAP R/3 system.
3. Double-click the message that you want to use to trigger an alert. The system displays a Message Details window.
4. Look for and make note of the message ID.

To display the ID numbers of all SAP R/3 syslog messages, enter the transaction code **/nse92** into the SAP R/3 command field and click **List all numbers**.

Configuring the System Log Filter for Alert Generation

1. Select the following menu items from the SAP R/3 menu bar:

Tools > Administration > Computing center > Management System > Control > Control panel

The system displays the CCMS control station panel.

2. Select your SAP R/3 instance.
3. Click **Alert details**.
4. Select the following menu items from the SAP R/3 menu bar:

Settings > Threshold values


5. Click **Syslog**. The SAP system displays the Syslog Alert Thresholds window.

In the Syslog Alerts window shown, you can see that all messages—ranging from A00 through ZZZ—are *enabled*. This implies that these messages are able to generate an alert if they occur in the Syslog. All Single Syslog ID messages (shown on the right) are *disabled*. If you want to enable any of these currently disabled messages, simply click **OK** to the left of the message ID field (for instance, BB1).

- To save your new settings, select the following items from the SAP R/3 menu bar:

Edit > Save

Figure 5-10 Syslog Alert Thresholds

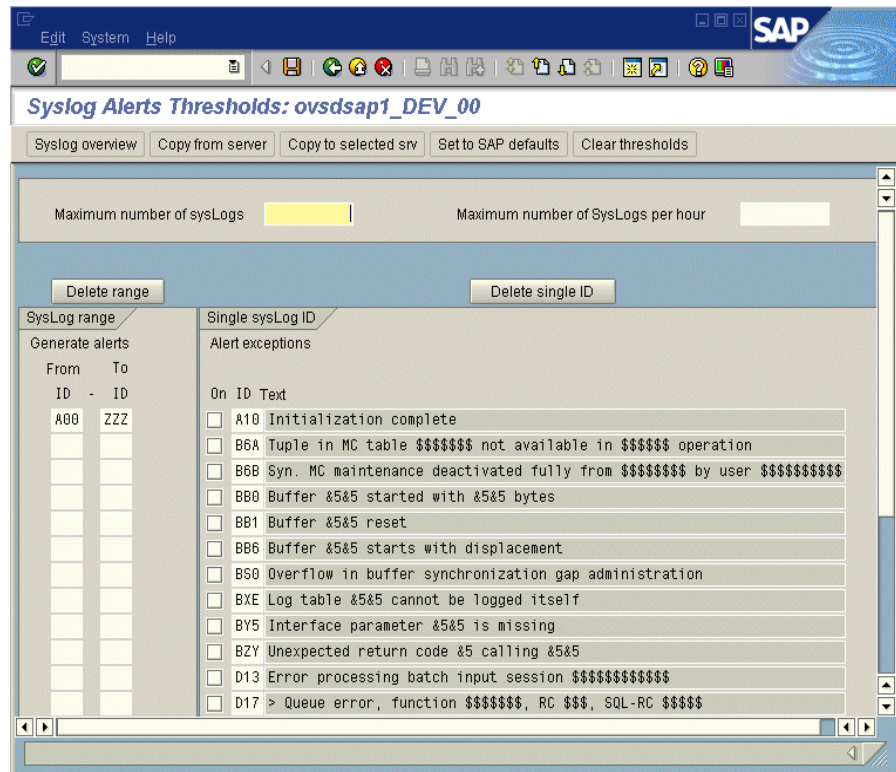

SAP Solution-Manager Integration

The information in this section explains how the you can set up the SPI for SAP's to enable bi-directional communication between the SAP Solution Manager and OVO for Windows. With the SPI for SAP's Solution-Manager integration, you can configure the SPI for SAP to inform OVO for Windows when a Solution Manager business process fails; you can also set up the SPI for SAP in such a way as to enable it to populate the CCMS tree with OpenView managed objects, for example; by means of an automatic or operator-initiated action attached to a message condition in a policy. The information in this section is split into the following topics:

- [“Pre-requisites” on page 239](#)
- [“Integration Overview” on page 240](#)
- [“Sending Messages from SAP to OVO” on page 241](#)
- [“Sending Messages from OVO to SAP” on page 243](#)
- [“The r3ovo2ccms Command” on page 246](#)

Pre-requisites

If you want to take advantage of the SPI for SAP's Solution-manager integration, please note that the target system, that is; the SAP server to which the SPI for SAP writes the CCMS alerts, must meet the following pre-requisites:

- Satellite Systems that are monitored by the Solution Manager must have SAP Version 4.6 or higher
- The BC-XMW interface is supported for Releases 6.10 and 6.20 of the SAP_BASIS package.
 - Release 6.20: support package 29 is required for full support of the BC-XMW interface. According to SAP, earlier SP levels will work, but the XMW interface designation will not be recognized. SAP recommends using the XAL interface instead.

- For Release 6.10, support package 38 is required for full support of the interface. According to SAP, earlier support package levels will work, but the XMW interface designation will not be recognized. SAP recommends using the XAL interface instead.
- Have a look at SAP notes 645353 and 608384, too.

Integration Overview

The SPI for SAP's Solution-manager integration uses the CCMS XMW and XAL interfaces to improve communication between SAP and OVO for Windows. Using the CCMS interfaces, the SPI for SAP ensures that the power of both SAP and OVO for Windows can be used to enhance and improve the information available to system administrators in both areas.


Figure 5-11

Choosing CCMS Alerts to Monitor

Solution Manager
business processes

Process Steps

Business-process
Alerts...

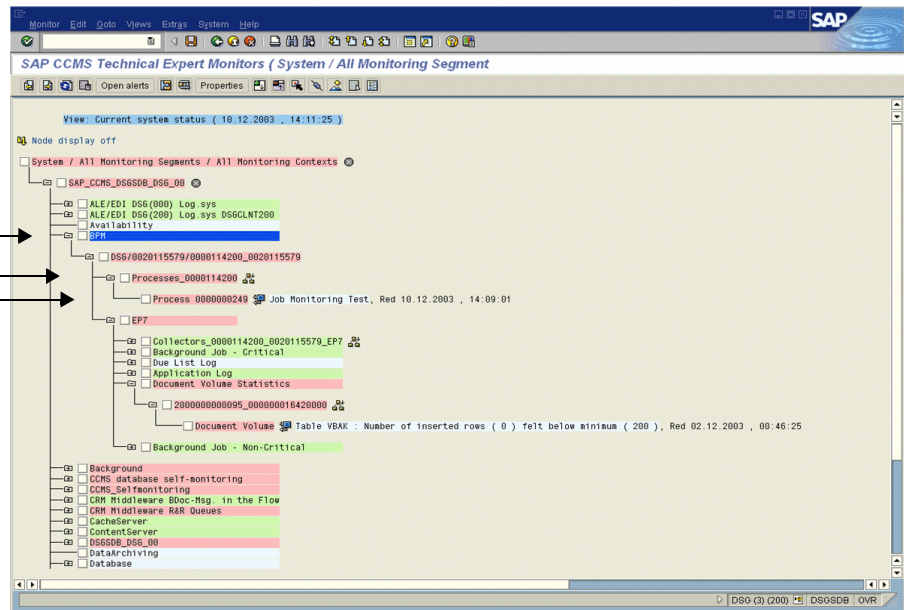

For example, you can now configure the SPI for SAP to write directly to CCMS and populate the CCMS tree with messages and alerts, which are discovered by OVO for Windows and relate to problems not normally of particular interest to SAP, such as hardware and network performance. Conversely, [Figure 5-11 on page 240](#) shows how you can use the Solution-manager integration to monitor specific CCMS alerts and, by

linking the generated OVO for Windows messages to a defined service ID, watch the impact on specific services. In this way, you can not only ensure that OVO for Windows knows as soon as a Solution-manager business process fails but also that the status of the service associated with the business process you are monitoring is immediately reflected in the service map in the OpenView Navigator.

To summarize how the SPI for SAP's Solution-manager integration enhances communication in both directions between SAP and OVO for Windows:

- **SAP -> OVO for Windows**

By defining message conditions for `r3monal`, the SPI for SAP's CCMS Alert Monitor, you can keep an eye on specific CCMS alerts, for example; the alerts you have assigned to Business Processes. For more information about setting up `r3monal`, the CCMS Alert Monitor, see [“Sending Messages from SAP to OVO” on page 241](#).

- **OVO for Windows -> SAP**

You can attach an action to an OVO for Windows message condition, which calls the `r3ovo2ccms` command and uses it to populate the CCMS tree with messages and objects monitored by OVO for Windows. For more information about using the `r3ovo2ccms` command, see [“The `r3ovo2ccms` Command” on page 246](#).

Sending Messages from SAP to OVO

By defining message conditions for `r3monal`, the SPI for SAP's CCMS Alert Monitor, you can keep an eye on specific alerts in the CCMS tree. When the message condition for the specified CCMS alert matches, you can associate the OVO for Windows message that is generated with a known Service ID and, in this way, link the message directly to a service in the OVO for Windows service tree. For more information about setting up `r3monal`, the CCMS Alert Monitor, see [“`r3monal`: Introducing the CCMS 4.x Alert Monitor” on page 58](#).

To set up communication between the SAP Solution Manager and OVO for Windows, you need to carry out the following high-level steps:

1. In SAP, open up the CCMS alert tree for the Solution-manager business process which you want to monitor.
2. Expand the CCMS alert tree and browse to the alerts associated with individual steps in the selected business process.

NOTE

If CCMS alerts are not already assigned to individual steps in the business process you want to monitor, you will have to use SAP to locate the CCMS monitor which generates the alerts you require (transaction RZ20) and then assign the alert(s) to the business-process step.

3. Assign the desired CCMS alert(s) to the step in the business process, which you want to link to service objects in OVO for Windows
4. Set up a message condition for the SPI for SAP's CCMS alert monitor, `r3mona1`: the message condition should monitor the alerts you have assigned to the individual steps in the Solution-manager business-process. If you want to link the OVO for Windows messages to services in OVO for Windows, you will need to assign a service ID at this point, too. The service ID must match the service name defined in the service-configuration file and take the following form:

`SAP_SPI:<SID>:<service_instance_name>`

5. Remember to (re)deploy the `r3mona1` policy with the new (or modified) conditions.

Figure 5-12

Linking Messages to Service IDs

The screenshot shows the 'Outgoing Message' dialog box with the 'Message attributes' tab selected. The 'Service ID' field contains the text 'SAP_SPI:<sid>:<inst>'. Below it, the 'hosted on' field contains '<\$MSG_NODE_NAME>'. The 'Message Key' field is empty. The 'Message Type' field is empty. The 'Message Group' field contains '<\$MSG_GRP> (Event Message Group)'. The 'Application' field contains 'R/3 <sid> <inst>'. The 'Object' field contains '<\$MSG_OBJECT> (Event Object)'. The 'Node' field contains '<\$MSG_NODE_NAME> (Local Node)'. The 'Severity' field contains '<\$MSG_SEV> (Event Severity)'. The 'Message Text' field contains 'ABAP-4 Dump occurred on system host=<machine> SID=<sid>'. The 'OK' button is highlighted with a mouse cursor.

Sending Messages from OVO to SAP

The first and most important thing you need to do is to inform OVO for Windows which of the incoming OVO for Windows messages it should forward to SAP and write into the CCMS tree. The message-forwarding task is triggered by means of an action attached to the rule in the SPI for SAP policy, which generates the original message. The action you configure can be either automatic or operator-initiated. For more information about the command you use and the parameters and options that are allowed, see [“The r3ovo2ccms Command” on page 246](#).


To set up an automatic action in an OVO for Windows policy, follow the instructions below. Note that the names and titles of the windows, tabs, and property sheets can sometimes vary according to the type of policy you select. The example described here uses a performance-threshold policy.

1. In the Console tree, locate and double click the policy which generates the OVO for Windows message you want to forward to SAP and write into the CCMS tree. In this example, we have chosen a performance monitor monitoring CPU load on the SAP server.
2. In the Measurement-threshold window which appears, click the **Threshold Levels** tab.
3. In the Threshold-levels tab, locate and double click the rule which generates the message you want to forward to SAP. Note that not all messages need to be forwarded. For example; the rule which generates a critical message is probably of more interest than the rules which generate messages with severity “warning” or “normal”.
4. In the Threshold-level window which appears, click the **Start Actions** tab.
5. In the Start Actions window, click the **Automatic Action** button.
6. In the Automatic Action window which appears, enter the `r3ovo2ccms` command in the command box along with the parameters and options you need to perform the desired action, including the location in the CCMS tree, where you want the message to appear. If the location you specify in the CCMS tree does not already exist, it is created for you when the message is forwarded to SAP. The default name for the root OpenView monitor tree is ZSAPSPI. Note that provided you do not alter the default settings,

you do not need to supply an absolute path with the command. For more information about the `r3ovo2ccms` command, see [“The r3ovo2ccms Command” on page 246](#).

The Node text box defines the name of the node where the policy you are modifying is deployed and the `r3ovo2ccms` command runs. If you use the `$MSG_NODE_NAME` variable in conjunction with the `-host` option in the Command text box, the SPI for SAP assumes the name of the node associated with the original message. Assuming the RemoteMonitoring feature is enabled, this is true even for nodes, which the SPI for SAP is monitoring remotely.

Figure 5-13 Configuring an Automatic Action

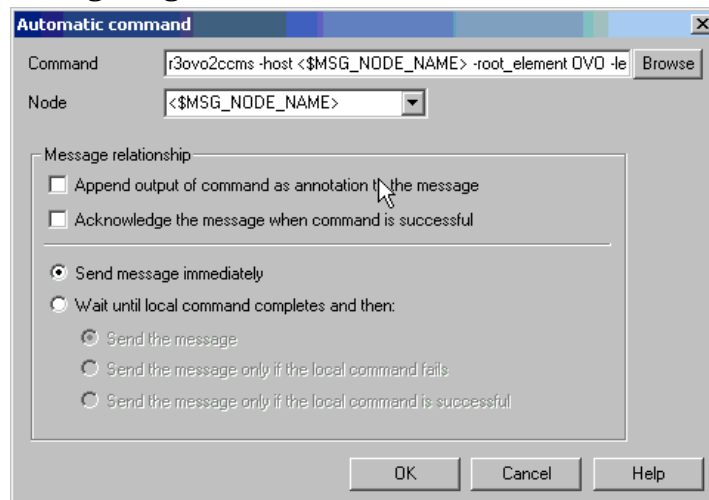


7. The CCMS alert (Monitor-tree element or MTE) that `r3ovo2ccms` writes to the CCMS monitor tree must be assigned to a specific step in the business process, for example; “Create Invoice”, which you have defined in SAP Solution Manager.
 - a. In SAP, browse to the following transaction:
Change Mode: Setup Business Process Monitoring
 - b. Select the process step to which you want to assign the OpenView alert
 - c. Manually enter the name of the OpenView CCMS monitor, which you want to assign to the business-process step.

NOTE

The name of the monitor element that you enter must match the entry created by the `r3ovo2ccms` command, as it appears in the CCMS monitor tree. You do *not* need to include either the monitor context (ZSAPSPI) or the name of the CCMS Monitor Set, to which the monitor belongs, for example; OpenView.

Figure 5-14 Assigning CCMS MTEs to Business Process Steps

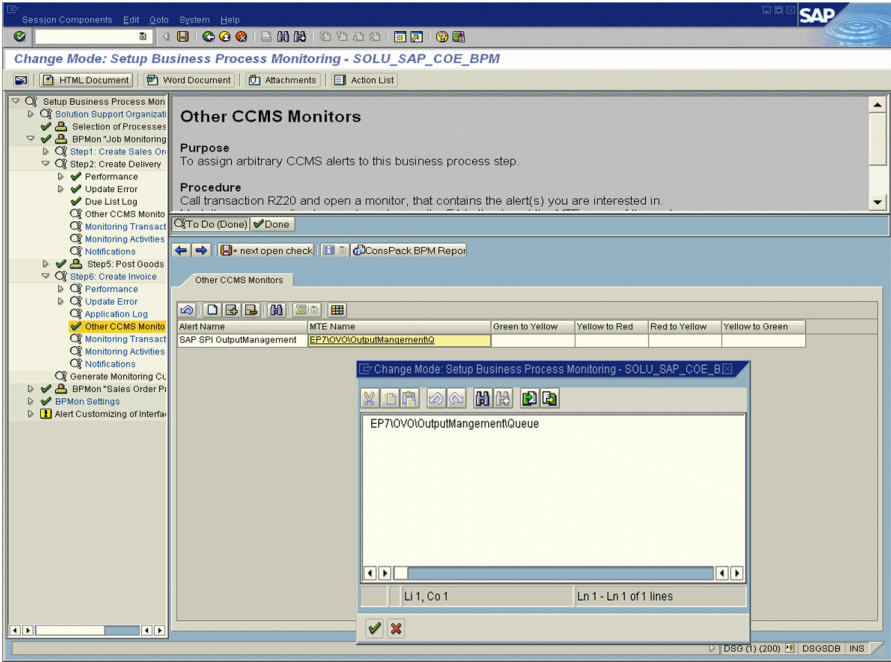

8. Next, you need to create a CCMS monitor set, for example; OpenView, and generate a CCMS monitor, for example; SAPSPI, to host the OpenView alerts sent by the `r3ovo2ccms` command and make them visible to SAP users.

Then you can select the new monitor and, using the Change button, display a list of the CCMS alerts and alert groups, which you want to associate with the new monitor (SAPSPI) in order to make them visible to the Solution Manager. Scroll down the list of contexts displayed and select “ZSAPSPI”.

NOTE

The context ZSAPSPI is only visible for selection in the list of contexts displayed after the first OVO for Windows message sent by the `r3ovo2ccms` command appears in the CCMS tree.

The `r3ovo2ccms` Command

The mechanism which the SPI for SAP uses to forward OVO for Windows messages to SAP and write them directly into the CCMS tree is the `r3ovo2ccms` command, which is installed into the default OVO for Windows actions directory on the OVO for Windows managed node.

You can use the `r3ovo2ccms` command directly on the command line or start it either automatically (as an automatic action) or manually (as an operator-initiated action). If you want to use the `r3ovo2ccms` command in a configured action, you need to modify each policy which generates an OVO for Windows message that you want to forward to CCMS. The SPI for SAP uses the configured action to forward the OVO for Windows message to SAP, where it will appear in the CCMS tree in the location defined by the parameters and options you specify.

The `r3ovo2ccms` command accepts the following parameters and parameter options, which are displayed in the command shell if no parameters are specified:

```
r3ovo2ccms -level1_element <level1_element>
-level2_element <level2_element> -text <text> -host
<SAP_hostname> [-root_element <root element>] [-sid
<SID>] [-number <SAP_instance_number>] [-severity
<NORMAL|WARNING|CRITICAL>]
```

**Command
Parameters**

The `r3ovo2ccms` command accepts the following command parameters:

`-level1_element <level1_element>`

This parameter identifies first-level branch in the CCMS tree structure

`-level2_element <level2_element>`

This parameter identifies the second-level branch in the CCMS tree structure

`-text <text>`

Descriptive text explaining the event/problem in more details.

`-host <SAP_hostname>`

The name of the SAP System on which the event/problem was originally detected by OVO for Windows.

Parameter Options The following options can be used with the `r3ovo2ccms` command parameters:

`-root_element <root_element>`

The name of the root element of the branch of the CCMS tree into which you want to insert the message. The default value is "ZSAPSPI".

`-sid <SID>`

The System ID (SID) of the SAP System, where the original event/problem was detected when found by OVO for Windows.

`-number <SAP_instance_number>`

The instance number of the SAP System, where the original event/problem was detected by OVO for Windows.

`-severity <NORMAL|WARNING|CRITICAL>`

The severity of the CCMS alert message. The default value is "CRITICAL"

Examples The following example shows how you can use the `r3ovo2ccms` command to forward to SAP an OVO for Windows message relating to a problem with CPU load on the SAP server "mezcal" and write it directly into a defined location in the CCMS tree. You can configure the OVO for Windows policy which generates the message to execute the command either automatically by means of an automatic action or manually by means of an operator-initiated action.

Example 5-1 Writing OVO for Windows Messages into the CCMS Tree

```
r3ovo2ccms -root_element OVO -level1_element Performance
-level2_element CPU -text "CPU load: bottleneck situation
90%" -host mezcal
```

In the example above, the OVO for Windows message will appear in the **OVO > Performance > CPU** branch of the SAP CCMS tree when a critical problem with the CPU load occurs and is reported by the SPI for SAP. The problem to which the message relates was originally reported on the SAP server, “mezcal”.

6

The SPI for SAP Performance Monitors

This section describes in detail how to install, set up, and use the SPI for SAP performance-monitor and its features.

In this Section

The information in this section describes how to install and configure the SPI for SAP performance subagent (SAP/Performance subagent). It also provides information about how to put the performance monitors included in the SAP/Performance subagent to best use and supplement the information collected by the SPI for SAP performance monitors with information supplied by the OpenView Performance Agent (formerly MeasureWare). The section includes the following topics:


- [“Performance Monitors Overview” on page 251](#)
- [“Upgrading the SAP/Performance Subagent” on page 253](#)
- [“Installing the SAP/Performance Subagent” on page 259](#)
- [“Locating the SAP/Performance Subagent Files” on page 261](#)
- [“Configuring the SAP/Performance Subagent” on page 264](#)
- [“The r3perfagent.cfg Configuration File” on page 273](#)
- [“Managing the SAP/Performance Subagent” on page 278](#)
- [“The SPI for SAP Performance Monitors” on page 281](#)
- [“De-installing the SAP/Performance Subagent” on page 309](#)

Performance Monitors Overview

The SPI for SAP performance subagent (SAP/Performance subagent) uses a selection of performance monitors to collect SAP R/3 performance data and store them either in the OVO Embedded Performance Component (CODA) or the Performance Agent (Unix/NT). Performance Manager can then be used to centrally monitor, manage and correlate these data, together with data collected by any other application, database, system and network Performance Agent. The data can then be used to compare trends between SAP business transactions and other system metrics. This section provides information about the following topics:

- Performance Monitoring with the SPI for SAP
- How to use OVO for Windows to install the SAP/Performance subagent
- The Performance Monitors and how to configure them

Figure 6-1 Performance Data displayed in the Performance Manager

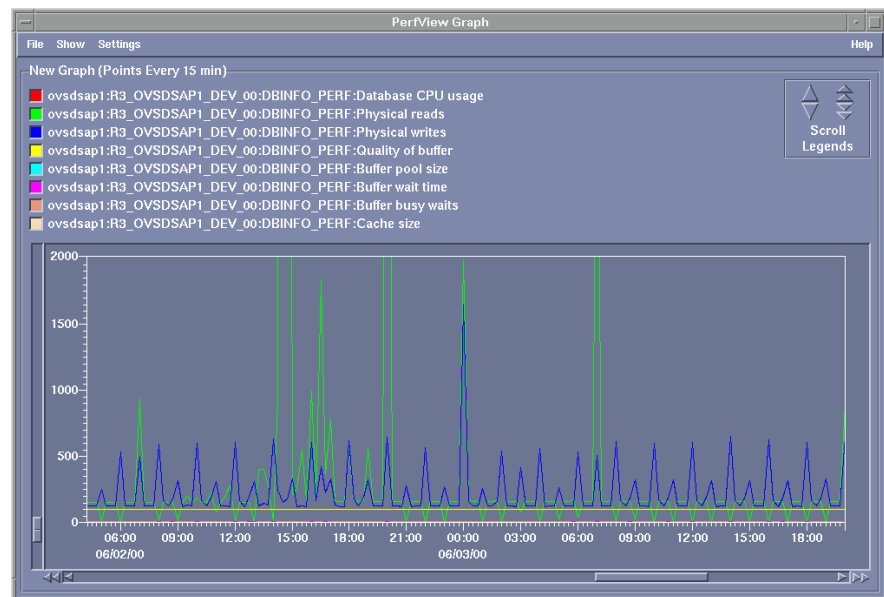

Implemented ABAP-function modules inside SAP R/3 are accessed via an RFC-call. The Performance Monitors gather a snapshot of SAP runtime performance data.

The SPI for SAP SAP/Performance subagent can collect more than 70 metrics in *addition* to those collected by the R/3 Performance Alert Monitor (**/rz03**), which is part of the SAP R/3 CCMS subsystem.

The new Performance Agent can be configured to specify which SAP/Performance subagent monitors should be run on specified SAP R/3 instances and how frequently. For more information, see [“Configuring the SAP/Performance Subagent” on page 264](#).

The Performance Agent runs under NT as a service and under Unix as a daemon (background) process that runs independently of the OVO for Windows agent processes. To start or stop the SAP/Performance subagent processes, use the appropriate OVO for Windows tool in the SPI for SAP tools group in the OVO for Windows Console. For more information, see [“Managing the SAP/Performance Subagent” on page 278](#).

Upgrading the SAP/Performance Subagent

You cannot use the data sources you defined in the previous version of the SAP/Performance subagent with the latest version of the SPI for SAP SAP/Performance subagent. However, the *data* already collected by the old Performance Agents can still be used in the generation of Service Reports.

Note, too, that if you want to upgrade the SAP/Performance subagent, you cannot do it in isolation. To upgrade the SAP/Performance subagent, you will have to perform the following high-level steps:

- 1. Remove the existing SAP/Performance subagent**

For more information about de-installing the SAP/Performance subagent, see [“De-installing the SAP/Performance Subagent” on page 309](#).

- 2. Remove existing SAP/Performance subagent data and data sources**

For more information, see [“Migrating the SAP/Performance subagent with the OpenView Performance Agent” on page 254](#) or [“Upgrading the SAP/Performance subagent with CODA” on page 256](#)

- 3. Upgrade the SPI for SAP**

For more information, see *HP OpenView Smart Plug-in for SAP Installation Guide*.

- 4. Install the new SAP/Performance subagent**

For more information about installing the SAP/Performance subagent, see [“Installing the SAP/Performance Subagent” on page 259](#).

- 5. Configure the new SAP/Performance subagent**

For more information about installing the SAP/Performance subagent, see [“Configuring the SAP/Performance Subagent” on page 264](#).

- 6. Upgrade the SPI for SAP/OV Reporter Integration**

For more information about upgrading the SPI for SAP Reporter integration, see [“Upgrading the SPI for SAP Reports” on page 363](#).

Migrating the SAP/Performance subagent with the OpenView Performance Agent

If you are using the OpenView Performance Agent (MWA) as your performance data source and want to upgrade the SAP/Performance subagent from the previous to the most recent version, it is extremely important that you remove cleanly and completely the data and data sources associated with the old version of the SAP/Performance subagent before you start the installation of the new version, as follows:

1. Stop the Performance Agent

On the node where the upgrade is to be done, stop the Performance Agent:

- AIX: `/usr/lpp/perf/bin/mwa stop`
- HP-UX/Solaris: `/opt/perf/bin/mwa stop`
- MS Windows: `mwacmd stop`

2. Remove the old SAP/Performance subagent

Remove the old version of the SPI for SAP SAP/Performance subagent from the managed node as described in [“De-installing the SAP/Performance Subagent” on page 309](#).


3. Clean up datasources

Remove all existing SAP/Performance subagent performance data sources from the managed nodes as follows:

- a. On the OVO for Windows managed node locate and, using your favorite text editor, open the following file, whose location differs according to operating system:
 - AIX: `/usr/lpp/perf/data/perflbd.rc`
 - HP-UX & Solaris: `/var/opt/perf/data/perflbd.rc`
 - MS Windows: `C:\rpmttools\data\perflbd.mwc`

- b. Remove by hand any entries relating to the SAP/Performance subagent present in the `perflbd` file, as illustrated in [Figure 6-2 on page 255](#). Entries in the `perflbd` file relating to the SAP/Performance subagent typically start with the string: `DATASOURCE=R3_*`.

Figure 6-2 Cleaning up the `perflbd` file

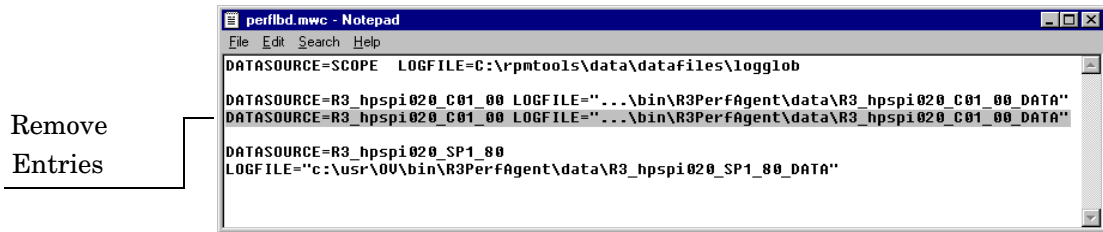

- c. Remove by hand the data-source files from the following directories:
 - AIX: `/var/lpp/OV/bin/R3PerfAgent/data`
 - HP-UX/Solaris: `/usr/OV/bin/r3perfant/data`
 - MS Windows: `C:\...\bin\r3perfant\data`

4. Remove the old version of the SPI for SAP

If you have not already done so, remove the old version of the SPI for SAP from the management server. For more information see the section “Deinstalling the SPI for SAP” in the *HP OpenView ServiceNavigator Concepts and Configuration Guide*.

5. Install the new version of the SPI for SAP

Install the new version of the SPI for SAP on the OVO for Windows management server. For more information, see the section “Installing the SPI for SAP” in the *HP OpenView Smart Plug-in for SAP Configuration Guide*.

6. Install the new SAP/Performance subagent

Install the new version of the SPI for SAP SAP/Performance subagent as described in “[Installing the SAP/Performance Subagent](#)” on page 259.

7. Configure the new SAP/Performance subagent

Configure the SPI for SAP SAP/Performance subagent. For more information, see [“Configuring the SAP/Performance Subagent” on page 264](#).

Note that after finishing the migration described here, you do not need to execute steps 1 and 2 specified in [“Configuring the SAP/Performance Subagent” on page 264](#). You can proceed directly to step 3 and adapt the configuration file before starting the SAP/Performance subagent in steps 4 and 5.

Upgrading the SAP/Performance subagent with CODA

If you are using the OVO Embedded Performance Component (CODA) as your performance data source and want to upgrade the SAP/Performance subagent from the previous to the most recent version, it is extremely important that you remove cleanly and completely the data and data sources associated with the old version of the SAP/Performance subagent before you start the installation of the new version, as follows:

1. Remove the old SPI for SAP SAP/Performance subagent

Remove the old version of the SPI for SAP SAP/Performance subagent from the managed node as described in [“De-installing the SAP/Performance Subagent” on page 309](#).

2. Clean up SAP/Performance subagent datasources

Check for (and delete) entries relating to the old SAP/Performance subagent present in the `ddflbd` file. Note that the location of the `ddflbd` file and the file extension differ according to platform, namely:

- AIX: `/var/lpp/OV/conf/dsi2ddf/ddflbd.rc`
- HP-UX/Solaris: `/var/opt/OV/conf/dsi2ddf/ddflbd.rc`
- MS Windows: `%OvAgentDir%\conf\dsi2ddf\ddflbd.mwc`

Entries in the `ddflbd` file relating to the SAP/Performance subagent typically start with the following string: `DATASOURCE=R3_*` as illustrated in [Figure 6-3 on page 258](#). The value of `LOGFILE=` defined for the SAP/Performance subagent entries is important: you use it

(including the complete path) as an argument with the command-line utility `ddfutil -rm all` to remove the entries one by one, as follows:

```
# ddfutil \  
c:\usr\ov\bin\r3perfagent\data\R3_MARTI_WA4_00_DATA \  
-rm all
```

Once you have removed from the `ddf1bd` file all the entries you can find relating to the SAP/Performance subagent, you can check that the entries have been successfully removed by closing the `ddf1bd` file and opening it again.

3. Remove the old version of the SPI for SAP

If you have not already done so, remove the old version of the SPI for SAP from the management server. For more information see the section “De installing the SPI for SAP” in the *HP OpenView Smart Plug-in for SAP Configuration Guide*.

4. Install the new version of the SPI for SAP

Install the new version of the SPI for SAP on the OVO for Windows management server. For more information, see the section “Installing the SPI for SAP” in the *HP OpenView Smart Plug-in for SAP Configuration Guide*.

5. Install the new SPI for SAP SAP/Performance subagent


Install the new version of the SAP/Performance subagent as described in [“Installing the SAP/Performance Subagent” on page 259](#).

6. Configure the new SPI for SAP SAP/Performance subagent

Configure the SAP/Performance subagent. For more information, see [“Configuring the SAP/Performance Subagent” on page 264](#).

Note that after finishing the migration described here, you do not need to execute steps 1 and 2 specified in [“Configuring the SAP/Performance Subagent” on page 264](#). You can proceed directly to step 3 and adapt the configuration file before starting the SAP/Performance subagent in steps 4 and 5.

Figure 6-3 **Cleaning up the ddflbd.mvc File**

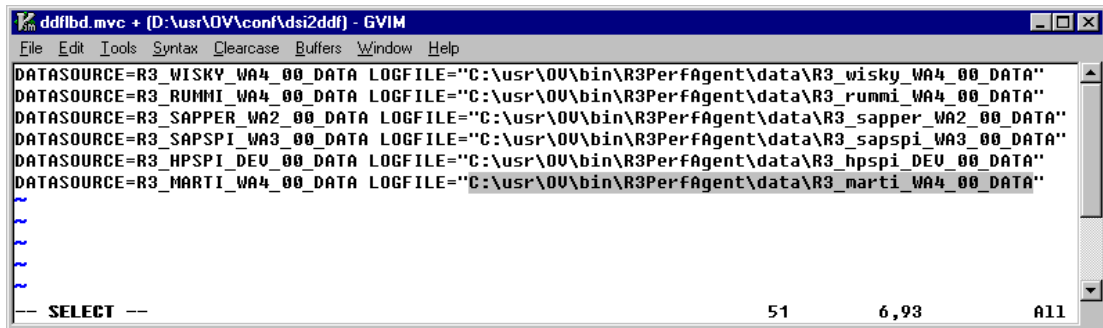

```
ddflbd.mvc + (D:\usr\OV\conf\dsi2ddf) - GVIM
File Edit Tools Syntax Clearcase Buffers Window Help
DATASOURCE=R3_WISKY_WA4_00_DATA LOGFILE="C:\usr\OV\bin\R3PerfAgent\data\R3_wisky_WA4_00_DATA"
DATASOURCE=R3_RUMMI_WA4_00_DATA LOGFILE="C:\usr\OV\bin\R3PerfAgent\data\R3_rummi_WA4_00_DATA"
DATASOURCE=R3_SAPPER_WA2_00_DATA LOGFILE="C:\usr\OV\bin\R3PerfAgent\data\R3_sapper_WA2_00_DATA"
DATASOURCE=R3_SAPSPI_WA3_00_DATA LOGFILE="C:\usr\OV\bin\R3PerfAgent\data\R3_sapspi_WA3_00_DATA"
DATASOURCE=R3_HPSPI_DEV_00_DATA LOGFILE="C:\usr\OV\bin\R3PerfAgent\data\R3_hpspi_DEV_00_DATA"
~
~
~
~
-- SELECT --                               51           6,93           All
```

Installing the SAP/Performance Subagent

This section describes how to use the OVO for Windows GUI to install the SPI for SAP functionality for the performance sub-agent on the SAP servers you want to manage with OVO for Windows and the SPI for SAP. Note that the instructions in this section assume that:

- the OVO for Windows Enterprise Message/Action Agent is already installed and running on the SAP R/3 servers, which you want to manage with OVO for Windows.
- either the OpenView Performance Agent or the OVO Embedded Performance Component (CODA) is installed and running on the selected SAP servers.

For information about which versions of the Performance Agent are compatible with the SPI for SAP B.08.70, see the *HP OpenView Smart Plug-in for SAP Software Release Notes*.

To install the SPI for SAP functionality for either the Performance Agent or the OVO Embedded Performance Component on the SAP servers (OVO for Windows managed nodes), follow the instructions below.

To install the SAP/Performance package on the OVO for Windows managed nodes, you need to perform the following steps:

1. Deploy the Performance-Monitor Instrumentation:

- a. From the OVO for Windows Console, select and right-click the node(s) where you want to deploy the instrumentation.
- b. Browse to the following menu option:
All tasks > Deploy instrumentation
- c. In the Deploy Instrumentation window, select the following items:
 - **SPI Data Collector**
 - **SPI for SAP Performance Package**
- d. Select **OK**

2. Install the Performance-Monitor Package:

- a. In the OVO for Windows Console, browse to the following tools folder:

Tools > SPI for SAP > SAP R/3 Admin

- b. Select and right click the Performance Package tool which corresponds to the operating system for the SAP System environment you want to monitor. The choices are:
 - **Install Performance Package (UN*X)**
 - **Install Performance Package (Windows)**
- c. Start the Install Performance Package tool for the appropriate operation system using the following option in the menu, which pops up:

All tasks > Launch Tool...

- d. In the window which pops up, select the SAP managed node(s) where you want to start the Performance Package installation. Remember to ensure that the nodes you select correspond to the operating system of the chosen tool, for example; UNIX or Microsoft Windows.
- e. Click **Launch...** to start the installation.

Locating the SAP/Performance Subagent Files

This section lists the files installed as part of the SAP/Performance subagent package for the following platforms:

- [“SAP/Performance Subagent Files: AIX”](#)
- [“SAP/Performance Subagent Files: HP-UX/Solaris”](#)
- [“SAP/Performance Subagent Files: MS Windows”](#)

SAP/Performance Subagent Files: AIX

This section lists the files installed as part of the SAP/Performance subagent package for AIX:

- Binaries: `/var/lpp/OV/bin/R3PerfAgent/bin/`
 - `r3perfconfig`
Performance-Monitor configuration tool
 - `r3perfagent`
Performance-Monitor Agent
- Configuration files: `/var/lpp/OV/conf/SAP_SPI/[global|local]`
 - `r3perfagent.cfg`
Configuration file for the various performance monitors
- Dsilogfiles: `/var/lpp/OV/bin/R3PerfAgent/data`
 - `R3_<HOSTNAME>_<SID>_...`
On installation, this directory is empty. It is used by the Performance Agent to store the dsilogfiles compiled by `r3perfconfig/compdsifile.sh`
- Templates: `/var/lpp/OV/bin/R3PerfAgent/template`
 - `R3statistics.<PERF-MONITOR>`
Files used to compile the dsilog files
 - `Parm.UX`
Parameter-file template.

SAP/Performance Subagent Files: HP-UX/Solaris

This section lists the files installed as part of the SAP/Performance subagent package for HP-UX and Solaris:

- **Binaries:** `/var/opt/OV/bin/R3PerfAgent/bin`
 - `r3perfconfig`
Performance-Monitor configuration tool
 - `r3perfagent`
Performance-Monitor Agent
- **Configuration files:** `/var/opt/OV/conf/SAP_SPI/[global |local]`
 - `r3perfagent.cfg`
Configuration file for the performance monitors if you use the Distribute Local Config application in the SAP R/3 Admin Local Application group.

If you use the Actions: Agents > Install/Update S/W & Config...

`/var/opt/OV/bin/OpC/monitor`
- **dsilog files:** `/var/opt/OV/bin/R3PerfAgent/data`
 - `R3_<HOSTNAME>_<SID>_...`
On installation, this directory is empty. It is used by the Performance Agent to store the dsilogfiles compiled by `r3perfconfig`.
- **Templates:** `/var/opt/OV/bin/R3PerfAgent/template`
 - `R3statistics.<PERF-MONITOR>`
Files used to compile the dsilogfiles
 - `parm.UX`
Parameter-file template.

SAP/Performance Subagent Files: MS Windows

This section lists the files installed as part of the SAP/Performance subagent package for MS Windows:

- **Binaries:** %OAgentDir%\bin\SAP_SPI\r3perfagent\bin
 - r3perfconfig
Performance-Monitor configuration tool
 - r3perfagent
Performance-Monitor Agent
 - r3perfagent_service
Starts the Performance-Monitor Agent as a service under MS Windows
- **Configuration files:** %OAgentDir%\conf\SAP_SI\global
 - r3perfagent.cfg
Configuration file for the various performance monitors. Note that this directory is created *after* the first SPI for SAP performance sub-agent policies have been deployed
- **Dsilogfiles:** %OAgentDir%\bin\SAP_SPI\R3PerfAgent\bin\data
 - R3_<HOSTNAME>_<SID>_...
On installation, this directory is empty. It is used by the Performance Agent to store the dsilog files compiled by r3perfconfig.bat and compdsifile.bat
- **Templates:** %OAgentDir%\bin\SAP_SPI\R3PerfAgent\template
 - R3statistics.<PERF-MONITOR>
Files used to compile the dsilogfiles
 - parm.UX
Parameter-file template.

Configuring the SAP/Performance Subagent

The information in this section takes you through the process of setting up and configuring the SAP/Performance Agent, and covers the following topics:

- [“Selecting the Performance-data Source” on page 264](#)
- [“To Configure the SAP/Performance Subagent” on page 266](#)
- [“Remote Performance Monitoring” on page 269](#)
- [“The Performance-Monitor Scheduler” on page 271](#)

Selecting the Performance-data Source

If you prefer to use the Performance Agent (formerly HP OpenView MeasureWare) as the source for performance data for newly installed OpenView products rather than the OVO Embedded Performance Component (CODA), for example; to be able to feed the data into the Performance Manager (formerly PerfView), you can set up a small text file, `nocoda.opt`, which instructs the SPI for SAP to ignore the Windows default data source, the OVO Embedded Performance Component, and switch to the Performance Agent. Once configured, you must place the `nocoda.opt` file in the following location on each managed node, whose performance-data source you want to change:

```
\Program Files\HP  
OpenView\{790C06B4-844E-11D2-972B-080009EF8C2A}\conf\dsi2ddf  
\nocoda.opt
```

To change the performance-data source:

1. Open the `nocoda.opt` file

Open the (or create a new) `nocoda.opt` file in a text editor and manually enter the appropriate information using the format and syntax illustrated in [Example 6-1 on page 265](#).

2. Specify a generic data source

To designate the Performance Agent (MeasureWare) as the agent for all data sources on the managed node, enter (or activate) the key word `ALL` at the top of the `nocoda.opt` file.

NOTE

Using the ALL keyword in the `nocoda.opt` file to enable all SAP R/3 and SAP ITS instances on the managed node as data sources for the Performance Agent overrides any references to explicit data sources, which are still present in the `nocoda.opt` file.

3. Specify individual data sources

To designate the Performance Agent (MeasureWare) as the data source tied to a specific SAP R/3 (or SAP R/3 ITS) instance, remove (or disable) the key word ALL at the top of the `nocoda.opt` file and include a reference to each SAP (and/or SAP ITS) instance on a separate line of the `nocoda.opt` file, as illustrated in [Example 6-1](#), using the following format:

```
R3ITS_<Virtual_SAPITS_Instance_Name>_  
<SAPITS_Hostname>_DATA
```

NOTE

Any SAP R/3 and SAP ITS instances on the managed node which are not explicitly listed in the `nocoda.opt` file, will continue to use the default data source, namely; the OVO Embedded Performance Component (CODA).

4. Save the changes to the `nocoda.opt` file

Save the changes to the `nocoda.opt` file

5. Restart the OVO for Windows agent

Restart the OVO for Windows agent on the managed node where the `nocoda.opt` file has been modified

Example 6-1

An Example of the `nocoda.opt` File

```
#####  
# Add to (or modify) the contents of this file to change the  
# data-source from the default CODA to the Performance Agent  
#####  
# All hosts:  
# ALL  
# SAP R/3 hosts/instances:  
R3_ovsdsap_DEV_00_DATA
```

```
# SAP R/3 ITS hosts/instances:
R3ITS_SP6_00_ovspi_DATA
```

To Configure the SAP/Performance Subagent

You need to complete the following steps to configure the SAP/Performance subagent:

1. Start the SAP/Performance subagent configuration

On the node where you installed the SAP/Performance subagent, switch to the appropriate directory and enter the following command to run the SAP/Performance Subagent configuration scripts:

- MS Windows: **r3perfconfig**
- UN*X: **./r3perfconfig**

Follow the instructions which appear on screen. The script lists the SIDs that it finds together with an associated number and prompts you to choose one of the associated numbers to indicate which SAP R/3 instance you want to configure. For example:

Installed SAP Instances:

	SID	SapNr	HostName

(0)	AST	0	sapper
(1)	DEV	1	ovsdsap1

Choose:

(x) to configure shown system
888 to manually configure a SAP system
999 to quit

Enter the appropriate identification number, for example; **0** for AST. If you choose **888** to configure a SAP SID from scratch, you are required to answer a series of questions concerning the SAP SID you want to configure. When you are finished, the `dsilog` files are then compiled and the data source is added to the file:

- MS Windows: `perflbd.mwc`
- UN*X: `perflbd.rc`

On completion, the script prompts you to restart the Performance Agent. However, it makes sense to update the `parm.mwc` file as described in step 2 before you start the Performance Agent.

2. Update the Performance-agent parameter file

IMPORTANT

This step does not apply to the OVO Embedded Performance Component.

If you are using the Performance Agent, append the template file `parm.NT` (or `Parm.UX`, depending on the installed operating system on the managed node) to the `parm` file of the Performance Agent, as follows:

- UN*X: `cat parm.UX >> parm`

In UN*X, the `parm` file is located in: `/var/opt/perf/parm`

- MS Windows: `type parm.NT >> parm.mwc`

The `parm` file is located in the following directory in MS Windows:

`<drive_letter>\rpmtools\data\parm.mwc`

NOTE

You can represent several SAP R/3 instances in the `parm` file by using the asterisk (*) wild card.

3. Configure the performance monitors

Configure the monitors in the `r3perfagent.cfg` file. If you do not do this, all monitors will run with the default settings as illustrated in the following example. There are two possible configurations:

- **Global:** `global_r3perfagent.cfg`

Global SAP/Performance subagent settings for *all* SAP R/3 managed nodes

- **Local:** `local_r3perfagent.cfg`

Local SAP/Performance subagent settings for *individual* SAP R/3 managed nodes.

To open the `r3perfagent.cfg` file with the policy-type editor, double click the `global_r3perfagent.cfg` file, which resides in the Policy Group:

Policy Management > Policy Groups > SPI for SAP

NOTE

The settings in the *global* configuration files are used for all nodes which do not have *local* configuration settings. Where both files are present, local settings override global ones.

The default configuration is:

- All performance monitors are enabled for all SAP host names, systems, numbers and clients.
- The default polling intervals are set for each performance monitor in minutes.
- Hold Connections is disabled.

Change any values as required and save the file. You will have to restart the Performance Agents to upload the latest configurations.

4. Deploy the policies

To deploy the new or modified policies to the managed nodes, right-click the new or modified policies and use the following option from the menu which appears:

All Tasks > Deploy on...

5. Start the Performance Agent

Start the Performance Agent on the managed node by entering the following command in a shell:

- UNIX: `mma start`
- MS Windows: `mmacmd start`

6. Start the SAP/Performance subagent

On the managed node, switch to the directory in which the `r3perfagent` command resides and start the SAP/Performance subagent by entering the following command in a shell:

- UN*X: `./r3perfagent [stop | start]`
- MS Windows: `r3perfagent_service [-e | -s]`

Or, alternatively, in the OVO for Windows GUI, use the following SPI for SAP tool:

- UN*X: **Tools > SPI for SAP > SAP R/3 UN*X > PerfAgt START**
- MS Windows: **Tools > SPI for SAP > SAP R/3 NT > PerfAgt START**

Remote Performance Monitoring

The current version of the SPI for SAP includes a feature which allows you to extend the scope of the performance monitor to remotely monitor the health of an additional SAP server (which is *not* a managed node) from an SAP server, which *is* already configured as an OVO for Windows managed node.

NOTE

Although the remote host is not an OVO for Windows managed node, it must nonetheless be present in the OVO for Windows Node list. If you do not add the remote host to the OVO for Windows Node list, OVO for Windows cannot resolve the host name associated with the remote host and, as a consequence, any messages from the remote host will not appear in the OVO for Windows Console.

To make use of the remote-monitoring feature provided by the SPI for SAP, for example; to collect SAP performance metrics from a SAP System running an operating system that is not supported by the SPI for SAP, you need to manually add (with `r3perfconfig`) an additional datasource for the system you plan to monitor remotely and then activate the new RemoteMonitoring keyword (by removing the leading hash symbol “#”) in the `r3perfagent.cfg` file. On the same line in the `r3perfagent.cfg` file, tell the SPI for SAP performance agent the name of the local server which you want to perform the monitoring and, in addition, the name of the remote server, which you want to monitor. As illustrated in [Example 6-2 on page 270](#), a new line is required for each *additional* server that you want to monitor remotely.

Note that the performance-monitoring conditions defined in the *Perfmon* section at the end of the *r3perfagent.cfg* file apply by default to all SAP instances running on all the servers listed in the configuration file, that is; all SAP instances running on both the local and remote servers defined in the RemoteMonitoring section. For more information about the keywords and parameters used to define remote monitoring in the *r3perfagent.cfg* file, see [“The r3perfagent.cfg Configuration File” on page 273](#).

Example 6-2 Specifying Remotely Monitored Hosts in the r3perfagent.cfg File

```
#-----
# TraceLevel  hostname  only error messages=1 info messages=2
# debug messages=3 Disable=0
TraceLevel      =ALL      =0
#-----
# TraceFile      hostname      filename
#
TraceFile        =ALL      =r3perfmon.log
#-----
# AgentHostname  hostname      aliasname
#
AgentHostname    =ALL      =default
#-----
# Remote          LocalHost      RemoteHost
# Monitoring

RemoteMonitoring =sapwolf2 =sapprod1
RemoteMonitoring =sapwolf3 =sapprod2
RemoteMonitoring =sapper   =sapprod3
#-----
# PerfMon  SAP      SAP      SAP      SAP      RFC FUNCTION  Enable=1  Polling  Hold
#           Host      System  Number  Client      Disable=0 Interval Connection
#                                           En/Disable
# SAP SID -----
# These Performance Monitors collect SID related Metrics and should therefore
# run only once per SID (either on the Central Instance, or on ONE AppServer)
PerfMon  =ALL  =ALL  =ALL  =ALL  =DBINFO_PERF  =1  =15  =0
PerfMon  =ALL  =ALL  =ALL  =ALL  =JOBREP_PERF  =1  =60  =0
PerfMon  =ALL  =ALL  =ALL  =ALL  =UPDATE_PERF  =1  =1  =0
PerfMon  =ALL  =ALL  =ALL  =ALL  =SPOOL_PERF  =1  =20  =0
PerfMon  =ALL  =ALL  =ALL  =ALL  =DOCSTAT_PERF  =1  =60  =0
# SAP AppServer -----
# These Performance Monitors collect AppServer related Metrics and should
# therefore run on each AppServer of interest.
PerfMon  =ALL  =ALL  =ALL  =ALL  =WP_PERF  =1  =15  =0
PerfMon  =ALL  =ALL  =ALL  =ALL  =STATRECS_PERF  =1  =1  =0
PerfMon  =ALL  =ALL  =ALL  =ALL  =WLSUM_PERF  =1  =60  =0
PerfMon  =ALL  =ALL  =ALL  =ALL  =USER_PERF  =1  =5  =0
```

PerfMon	=ALL	=ALL	=ALL	=ALL	=SAPBUFFER_PERF	=1	=15	=0
PerfMon	=ALL	=ALL	=ALL	=ALL	=SAPMEMORY_PERF	=1	=15	=0
PerfMon	=ALL	=ALL	=ALL	=ALL	=ICMSTAT_PERF	=1	=15	=0

The Performance-Monitor Scheduler

The Performance Agent uses an internal scheduler to ensure that the performance monitors run according to the desired schedule. The scheduler keeps track of time and the number of runs that have been completed and uses this information to ensure that the Performance Monitors run at the correct time and collect the appropriate performance-related data.

If the Performance Agent encounters any problems during its run and cannot complete its task before the start of the next scheduled run, it does not stop and leave tasks incomplete: the Performance Agent continues to run until it has completed its task. However, the scheduler tracks the progress of the Performance Agent and tries to synchronize the run schedules so that the time lost can be regained without affecting the collection of the performance data.

If the Performance-agent Scheduler falls ten minutes behind schedule, it sends a message to the OVO for Windows management server with the warning that the Scheduler is out of synchronization. If the Performance-agent Scheduler falls thirteen minutes behind schedule, it resets ignoring all outstanding jobs. For more information about the keywords you can use to control the Performance-agent Scheduler and the messages it generates, see [“The r3perfagent.cfg Configuration File” on page 273](#).

The performance monitor has problems with synchronization if it is not able to complete all its scheduled tasks in the allowed time between each monitor run. To troubleshoot scheduler-synchronization problems:

1. Check the Polling Interval

Check that the polling interval for the individual r3perfagent monitors has not been changed in the r3perfagent.cfg file to a value that is too small. You can define the polling interval for individual monitors in the “Polling Interval” column of the r3perfagent.cfg file, as shown in [Example 6-2 on page 270](#). The default polling intervals for the performance monitors are, with one or two exceptions, between 15 and 60 minutes.

For example, if the polling interval of *all* the performance monitors has been reduced to one (1) minute, the Performance Monitor scheduler tries to start *all* the performance monitors *each* time it runs. If there are ten monitors and each monitor takes ten seconds to respond, then the scheduler will already be out of synchronization by the time the scheduler starts its second run. You will have to increase the polling interval for the various performance monitors accordingly.

2. Disable Remote Monitoring

If you have enabled remote monitoring for the `r3perfagent` Performance Monitor, network problems could mean that requests for information from the remote server are not being answered in a timely fashion. Try disabling remote monitoring for a short while to test whether or not this is the reason the `r3perfagent` Performance Monitor is having problems. You can do this for one individual remote host, or all remote hosts (if there are more than one). For more information about remote monitoring with the SPI for SAP Performance Monitor, see [“Remote Performance Monitoring” on page 269](#).

The r3perfagent.cfg Configuration File

The SPI for SAP provides a default configuration for the r3perfagent monitor, which is designed to work without modification immediately after installation. However, if you want to set up the r3perfagent monitor for your particular SAP environment, you can modify the r3perfagent.cfg file by enabling or disabling the keywords in the following list and, where necessary, setting or modifying the appropriate parameters:

- **TraceLevel**

The TraceLevel keyword accepts the following parameters:

- **Hostname:**

- | | |
|-------------|---|
| =ALL | All hosts being monitored by the SPI for SAP. This is the default setting. |
| =<SAP_host> | The name of a SAP server, where you want to specify a trace level. Use a new line for each individual host. |

- **Trace level:**

- | | |
|----|---------------------------------------|
| =0 | Disable. This is the default setting. |
| =1 | Log only error messages |
| =2 | Log all messages |
| =3 | Log only debug messages |

- **TraceFile**

The TraceFile keyword accepts the following parameters:

- **Hostname:**

- | | |
|-------------|--|
| =ALL | All SAP servers being monitored by the SPI for SAP. This is the default setting. |
| =<SAP_host> | The name of a specific host where tracing is enabled and you want to specify a trace level |

— **Filename:**

=r3perfmon.log - which is the default setting or, alternatively, the name of the file to which you want to write the trace log and, if necessary, the path. The path can be either absolute or relative to the working directory, which is the location where the SPI for SAP performance agent executable resides, for example:

/var/opt/OV/bin/R3PerfAgent/bin. For more information about the location of the r3perfagent binaries, see [“Locating the SAP/Performance Subagent Files” on page 261](#).

- **AgentHostname**

The AgentHostname keyword is not currently used

- **SyncBack**

The SyncBack keyword accepts the following parameters:

— **SyncBack Threshold**

=<n> mins	The difference in minutes between defined and actual schedules. If the SyncBack threshold is reached, for example; when the scheduler is “n” minutes behind schedule, the scheduler restarts in order to return to the defined schedule. The SyncBack Threshold should be <i>higher</i> than the Message Threshold value set in association with the BehindSyncMessage keyword so that you receive a message warning about schedule problems <i>before</i> the scheduler restarts.
-----------	--

— **Enable/Disable**

=0	Disable the scheduler synchronization
=1	Enable the scheduler synchronization. This is the default setting.

- **BehindSyncMessage**

The BehindSyncMessage keyword accepts the following parameters:

— **Enable/Disable**

=0	Disable the sending of a behind-schedule message
----	--

- =1 Enable the sending of a behind-schedule message. This is the default setting.
- **OpC Severity**
 - =WARNING The severity of the behind-schedule message sent. This is the default value.
- **OpC Object**
 - =r3perfactent The OVO for Windows object to associate with the behind-schedule message. This is the default value.
- **OpC MsgGroup**
 - =R3_General The OVO for Windows message group to which the behind-schedule message belongs. This is the default value.
- **Message Threshold**
 - =<n> mins The elapsed time in minutes before a behind-schedule message is sent to the OVO for Windows managment server. The Message-Threshold value should be *less* than the SyncBack Threshold value set in association with the SyncBack keyword so that you receive a message warning about schedule problems *before* the scheduler restarts.

- **RemoteMonitoring**

The RemoteMonitoring keyword accepts the following parameters:

- **LocalHost**

This is the name of the host where the SPI for SAP software is installed and running and whose performance agent will be used to remotely monitor the SAP server defined in “Remotely Monitored Node”.
- **RemoteHost**

This is the name of the *remote* SAP server you want to monitor from the SAP server defined in “Server Node”. Although the remote host does not have the SPI for SAP software installed and is *not usually* an OVO for Windows managed node, it must appear in the OVO for Windows Node list.

For more information, see [“Remote Performance Monitoring” on page 269](#).

- **Perfmon**

The Perfmon keyword *requires* a value for the following parameters:

- **SAP Hostname:**

- =ALL All SAP hosts will be monitored by the SPI for SAP. This is the default setting.
- =<SAP_host> The host name of a specific SAP server where performance monitoring is to be enabled. Use a new line for each individual host

- **SAP System:**

- =ALL All SAP Systems will be monitored by the SPI for SAP. This is the default setting.
- =<SAP_host> The SAP SID for which performance monitoring is to be enabled, for example; DEV. Use a new line for each individual SID.

- **SAP Number:**

- =ALL All SAP numbers will be monitored by the SPI for SAP. This is the default setting.
- =<SAP_host> The specific SAP number for which performance monitoring is to be enabled, for example; 00, 99. Use a new line for each new SAP number.

- **SAP Client:**

- =ALL All SAP clients being monitored by the SPI for SAP. This is the default setting.
- =<SAP_host> The specific SAP client for which performance monitoring is to be enabled, for example; 099 . Use a new line for each new SAP client.

— **RFC FUNCTION:**

=<*metricname*>_PERF, where *metricname* refers to the specific metric list you want the performance monitor to use, for example; DBINFO_PERF or SAPMEMORY_PERF. For more information about the possible values you can use, see [“The SPI for SAP Performance Monitors” on page 281](#).

— **Enable/Disable**

=0 Disable the performance monitor

=1 Enable the performance monitor. This is the default setting.

— **Polling Interval**

=*nn* *nn* is the time in minutes between each run of the performance monitor

— **Hold Connection**

=0 *Disable*: close the RFC connection after the call has completed. This is the default setting.

=1 *Enable*: keep the RFC connection open after the call has completed

Managing the SAP/Performance Subagent

The SPI for SAP SAP/Performance subagent can be controlled using command-line options, which differ according to the platform and operating system. The SPI for SAP SAP/Performance subagent can be managed either by using command-line options or the tools that are installed by the SPI for SAP. For more information, see:

- [“SAP/Performance agent Command Line Syntax” on page 278](#)
- [“SAP Logins for the SAP/Performance agent” on page 279](#)
- [“SAP/Performance agent Tools” on page 280](#)

SAP/Performance agent Command Line Syntax

The following options can be used with the `r3perfagent` command on UNIX managed nodes to control the SPI for SAP SAP/Performance subagent from the command line:

- **`r3perfagent start`**
- **`r3perfagent stop`**
- **`r3perfagent status`**

The following syntax can be used with the `r3perfagent` command on MS Windows managed nodes to control the SPI for SAP SAP/Performance subagent from the command line:

- **`r3perfagent_service -i`**
registers the service
- **`r3perfagent_service -u`**
deregisters the service
- **`r3perfagent_service -s`**
starts the service
- **`r3perfagent_service -e`**
stops the service

The services can also be controlled from the `Services` option in the MS Windows Control Panel.

SAP Logins for the SAP/Performance agent

The SPI for SAP SAP/Performance subagent require access to SAP in order to be able to collect SAP-related metrics, which are then used to generate reports and graphs. You define the SAP login for the SAP/Performance subagent during the installation and configuration of the SPI for SAP and the combination of SAP user-name and password must be copied to the central SPI for SAP configuration file, `r3itosap.cfg`, where it is referenced by the SPI for SAP monitors and agents.

This is particularly important for the SPI for SAP's SAP/Performance subagent, which reads the SAP log-in information in the `r3itosap.cfg` *once only*, on startup, and will not start if it cannot log in to SAP. The SPI for SAP SAP/Performance subagent attempts to log in to SAP and, if it fails, sends a message to OVO for Windows indicating that it was unable to start as a result of authorization problems.

NOTE

Note that SAP has a security mechanism which blocks further logins from a user who has tried (and failed) to login to SAP a given number of times. This number of failed logins could quickly be reached by the SAP/Performance subagent if the SAP username/password for the SPI for SAP is changed in SAP but the changes to the SAP log-in details are not updated in the `r3itosap.cfg` file.

If you change the SAP user name/password which the SPI for SAP uses to log in to SAP, you need to make sure that the changes are reflected in the `r3itosap.cfg` and, in addition, that the SPI for SAP components which use the information in the `r3itosap.cfg` are restarted in order to make them aware of the changes.

Best of all, stop the SPI for SAP SAP/Performance agent *before* you change the SAP user/password which the SPI for SAP needs for access to SAP, as follows:

1. Stop the SAP/Performance agent

Stop the SAP/Performance agent on all OVO for Windows managed nodes where it is installed and running. On each managed node, enter:

```
r3perfagent stop
```

2. Login to SAP

Login to SAP as the administrator and change the user/password which SPI for SAP uses to log in to SAP, as required.

Note that SAP requires the password for DIALOG users to be changed more frequently than other types of SAP users.

3. Update the configuration file

Update the SPI for SAP configuration file, `r3itosap.cfg`, with the changes you have made to the SAP user and password.

4. Restart the SAP/Performance agent

Restart the SPI for SAP SAP/Performance agent on each of the OVO for Windows managed nodes where the SAP/Performance agent is running. On each managed node, enter:

r3perfagent start

NOTE

The SPI for SAP cannot collect performance metrics during the period when the SAP/Performance agent is not running.

SAP/Performance agent Tools

Table 6-1 shows which OVO for Windows tools are available for the SAP/Performance subagent in the appropriate SPI for SAP tool group—SAP R/3 NT or SAP R/3 UN*X.

Table 6-1 Performance Agent Tools

Tool Name	SAP R/3 NT	SAP R/3 UN*X
PerfAgt START	✓	✓
PerfAgt STOP	✓	✓
PerfAgt STATUS		✓

The SPI for SAP Performance Monitors

The SPI for SAP performance monitors can be one of two types: **snapshot** or **time-frame**. A snapshot monitor runs once and gathers only one set of values. This means that snapshot monitors must be scheduled to run on a regular basis in order to create a comprehensive picture of the performance of the SAP R/3 environment. Time-frame monitors run, as the name suggests, over a period of time. Most SPI for SAP performance monitors do not make use of alert types or parameters.

The following SPI for SAP performance monitors are available with the SPI for SAP and are explained in greater detail in the individual sections that follow:

- **“DBINFO_PERF”**
monitors database-performance analysis values
- **“DOCSTAT_PERF”**
collects the document volume statistics for the last full hour
- **“ICMSTAT_PERF”**
monitors the status and performance of the SAP Internet Communication Manager
- **“JOBREP_PERF”**
counts the number of jobs per state (scheduled, running, etc.)
- **“SAPBUFFER_PERF”**
returns values for the use of SAP *buffers* for an SAP instance
- **“SAPMEMORY_PERF”**
monitors SAP memory use by SAP users for an SAP instance
- **“SPOOL_PERF”**
counts the number of spool requests in its different states
- **“STATRECS_PERF”**
returns the response/net times of defined transactions
- **“SYSUP_PERF”**
monitors the status of the SAP R/3 instances

- **“UPDATE_PERF”**
monitors the number of update processes
- **“USER_PERF”**
monitors the number of users and user sessions per SAP client
- **“WLSUM_PERF”**
collects the performance-workload statistics hourly
- **“WP_PERF”**
monitors the number of users/sessions per SAP client for an SAP application server

DBINFO_PERF

The DBINFO_PERF performance monitor returns a set of values as they are displayed in the SAP database-performance analysis page. This information can be used to detect database performance problems and assess whether database tuning could improve database performance.

NOTE

The DBINFO_PERF performance monitor works *only* with Oracle database data structures. It does *not* work with data structures from other database products.

Type

The DBINFO_PERF monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set.

Frequency

It is recommended to run the monitor once every 15 minutes.

Datasource

The SAP R/3 transaction **ST04** (DB Performance Overview)

Metrics

[Table 6-2](#) shows the values in the performance table returned by the monitor.

Table 6-2

DBINFO_PERF Performance Monitor Metrics

Order	Metric Name	Description	% Value	Cum
1	CPUUSAGE	Database CPU usage		No
2	BUFPREADS	Physical reads		Yes
3	BUFPWRITES	Physical writes		Yes
4	BUFQUAL	Quality of data base buffer pool	%	No
5	BUFSIZE	Data base buffer pool size		Static
6	BUFWAITS	Buffer busy waits		Yes
7	BUFWTIME	Buffer busy wait time		Yes

Table 6-2 DBINFO_PERF Performance Monitor Metrics (Continued)

Order	Metric Name	Description	% Value	Cum
8	DICTSIZE	Dictionary cache size		Static
9	DDQUAL	Quality of Data Dictionary cache	%	No
10	LOGBLOCKS	Redo log blocks written		Yes
11	LOGENTRIES	Redo log buffer entries		Yes
12	LOGSIZE	Redo log buffer size		Static
13	LOGFAULT	Allocation error rate of redo log buffer	%	No
14	LOGALLOC	Redo log buffer allocation retries		Yes
15	ROLLBACKS	Rollbacks		Yes
16	SCANLONG	Long table scans		Yes
17	SORTDISK	Sort disk		Yes
18	SORTMEM	Sort memory		Yes
19	SORTROWS	Sort rows		Yes

Figure 6-4 and Figure 6-5 show the values in the performance table returned by the monitor pointing to a specified field in the transaction screen of ST04. The call-out numbers present in Figure 6-4 and Figure 6-5 correspond to the numbers in the Order column of Table 6-2 and indicate the sequence of the values in the performance string:

Figure 6-4


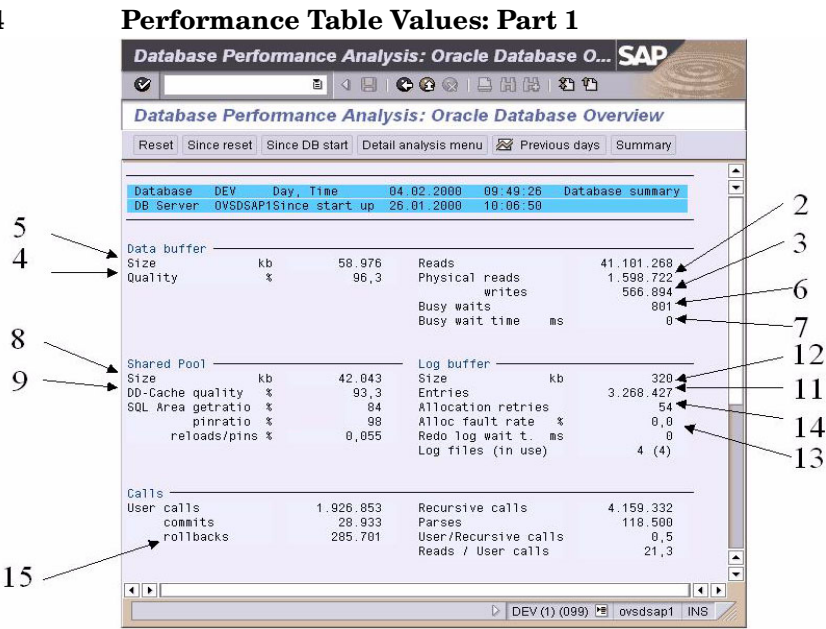


Figure 6-5

Performance Table Values: Part 2

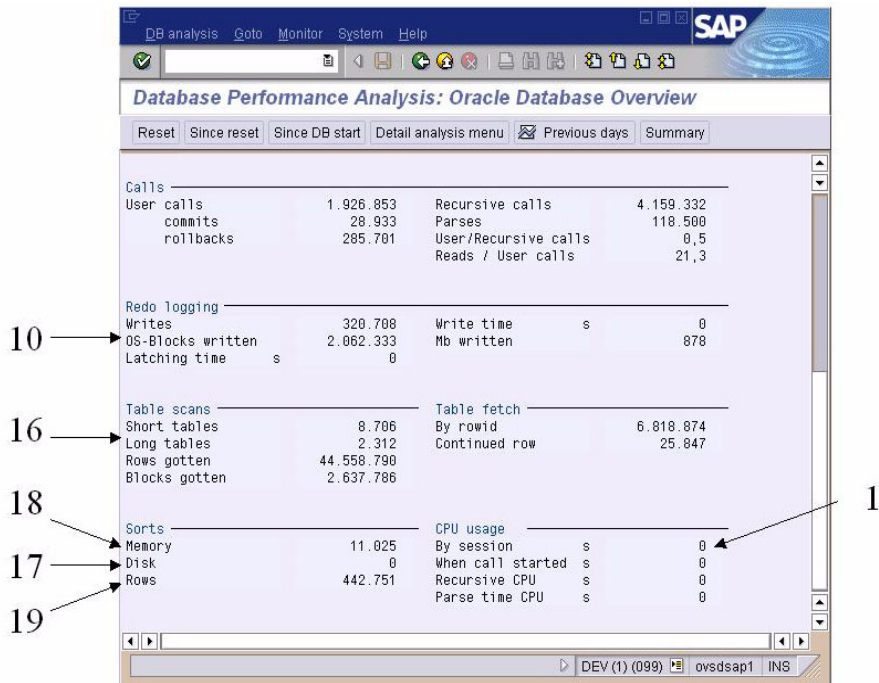

DOCSTAT_PERF

The performance monitor, DOCSTAT_PERF, collects the quantity-structure statistics relating to the volume of documents generated and processed for the last full hour. This monitor must be configured only once for every SAP R/3 System that you want to monitor.

Type The DOCSTAT_PERF monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set.

Frequency It is recommended to run the monitor hourly.

Data Source The SAP R/3 transaction **ST07** (quantity structure) is used as the data source for this monitor.

Metrics [Table 6-3](#) shows the values in the performance table returned by the DOCSTAT_PERF monitor.

Table 6-3 DOCSTAT_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	SID	The SAP System ID
2	DESCRIPTION	Description of an application-monitor object
3	CNTHHEADER	Document headers
4	CNTITEM	Document items
5	CNTDIV	Document Division
6	CNTTOTAL	Total number of records
7	CNTLINE	Number of line items
8	CNTCHGDOC	The number of changed documents
9	CNTTEXT	Text

ICMSTAT_PERF

The performance monitor, ICMSTAT_PERF, monitors the status and performance of the SAP Internet Communication Manager (ICM).

Type	The ICMSTAT_PERF monitor is of type <i>snapshot</i> and does not make use of alert types or parameters. One monitor run gathers only one value set.
Frequency	It is recommended to run the monitor approximately once every fifteen minutes or so.
Datasource	The SAP R/3 transaction SMICM (ICM Monitor) is used as the data source for this monitor.
Metrics	Table 6-4 shows the values in the performance table returned by the ICMSTAT_PERF monitor.

Table 6-4 ICMSTAT_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	ICM_Status	The status of the Internet Communication Manager
2	Max_Threads	The defined max. number of open threads allowed by the ICM
3	Peak_Threads	Peak number of open threads in the ICM in a given period
4	Cur_Threads	Number of currently open threads in the ICM
5	Max_Connections	The defined max. number of open connections allowed by the ICM
6	Peak_Connections	Peak number of connections in the ICM in a given period
7	Cur_Connections	Number of current connections in the ICM

Table 6-4 ICMSTAT_PERF Performance Monitor Metrics (Continued)

Order	Metric Name	Description
8	Max_QueueEntries	The max. number of queued requests allowed by the ICM defined in: <code>icm/req_queue_len</code>
9	Peak_QueueEntries	Peak number of queued requests in the ICM in a given period
10	Cur_QueueEntries	Number of currently queued requests in the ICM
11	Running_Threads	Number of work threads waiting for a request (<i>idle</i>)
12	Dead_Threads	Number of work threads in a problematic state, for example; dead or hanging
13	Processed_Threads	Number of work threads currently processing a request

JOBREF_PERF

The JOBREF_PERF performance monitor counts the jobs per state in the time period between the end date and time of the last monitor run and the start date and time of the actual monitor run.

Type	The JOBREF_PERF monitor is of type <i>time-frame</i> and does not make use of alert types or parameters. One monitor run gathers only one value set.
Frequency	It is recommended to run the monitor between once an hour and once a day.
Datasource	The SAP R/3 transaction SM37 (Background Job Overview) is used as the data source for this monitor.
Metrics	Table 6-5 shows the values in the performance table returned by the JOBREF_PERF monitor.

Table 6-5 **JOBREF_PERF Performance Monitor Metrics**

Order	Metric Name	Description
1	RUNNING	The number of jobs with status <i>running</i> since the last monitor run
2	READY	The number of jobs with status <i>ready</i> since the last monitor run
3	SCHEDULED	The number of jobs with status <i>scheduled</i> since the last monitor run
4	RELEASED	The number of jobs with status <i>released</i> since the last monitor run
5	ABORTED	The number of jobs with status <i>aborted</i> since the last monitor run
6	FINISHED	The number of jobs with status <i>finished</i> since the last monitor run

Table 6-5 **JOBREF_PERF Performance Monitor Metrics (Continued)**

Order	Metric Name	Description
7	PUT_ACTIVE	The number of jobs with status <i>put_active</i> since the last monitor run
8	UNKNOWN_STATE	The number of jobs with status <i>unknown</i> since the last monitor run

SAPBUFFER_PERF

The SAPBUFFER_PERF performance monitor returns values for the use of SAP memory *buffers* by SAP users for a given instance, for example; hit ratios, buffer quality, free space available and so on in the R/3 repository, programs, and database tables.

NOTE Use the SAPBUFFER_PERF and SAPMEMORY_PERF performance monitors to collect data previously collected by the SYSBUF_PERF Monitor.

Type The SAPBUFFER_PERF monitor is of type *timeframe*.

Frequency It is recommended to run the monitor every fifteen minutes.

Data Source The SAPBUFFER_PERF monitor reads information from the SAP buffers transaction **ST02**.

Metrics [Table 6-7](#) shows the values in the performance table returned by the SAPBUFFER_PERF monitor.

Table 6-6 SAPBUFFER_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	BUFFER_NAME	The name of the buffer
2	HITRATIO	Buffer object reads / logical requests. The buffer hit ratio is displayed as a percentage.
3	ALLOCATED_SIZE	The amount of space allocated to the buffers ^a
4	FREE_SPACE	The amount of free space (KB) available in the buffer
5	FREE_SPACE_PERCENT	Available free buffer space as a percentage of total

Table 6-6 SAPBUFFER_PERF Performance Monitor Metrics (Continued)

Order	Metric Name	Description
6	MAXDIR_ENTR	The number of directories available for the buffer ^b
7	FREEDIR_ENTR	Number of free directories available for the buffer
8	FDIR_ENTR_PERCENT	Free directories available for the buffer as a percentage
9	BUFFER_SWAPS	Swap activity both inwards and outwards since System start ^c
10	BUFFER_SWAPS_DELTA	Difference between the number of buffer swaps measured in the current and previous monitor runs
11	DB_ACCESSES	The number of database accesses since System start ^d
12	DB_ACCESSES_DELTA	Difference between the number of database accesses measured in the current and previous monitor runs

- a. Buffer size and “available buffer size” differ because part of the buffer space is used for buffer management.
- b. The buffer directories point to the location of the objects stored in the buffer.
- c. Buffers swap objects *out* of the buffer in order to load a new object *in*, if insufficient free space or free directories exist.
- d. Database access occurs when an object cannot be read from the buffer.

SAPMEMORY_PERF

The SAPMEMORY_PERF performance monitor returns values for SAP memory use by SAP users for a given instance, for example; roll and paging areas, and extended memory.

NOTE

Use the SAPBUFFER_PERF and SAPMEMORY_PERF performance monitors to collect data previously collected by the SYSBUF_PERF Monitor.

Type

The SAPMEMORY_PERF monitor is of type *snapshot*: one monitor run gathers one value set.

Frequency

It is recommended to run the monitor every fifteen minutes.

Data source

The SAPMEMORY_PERF monitor reads information from the SAP buffers transaction **ST02**.

Metrics

[Table 6-7](#) shows the values in the performance table returned by the SAPMEMORY_PERF monitor.

Table 6-7

SAPMEMORY_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	MEMORY_AREA	The type of memory buffer
2	CURRENT_USE_PERCENT	The amount of space currently used expressed as a percentage of the total available
3	CURRENT_USE	The amount of space currently used in KB
4	MAX_USE	The maximum value (max. use) since system startup

Table 6-7 SAPMEMORY_PERF Performance Monitor Metrics (Continued)

Order	Metric Name	Description
5	IN_MEMORY	The amount of space used in shared memory
6	ON_DISK	The amount of space used on the disk

SPOOL_PERF

The SPOOL_PERF performance monitor counts the number of spool requests present in their different states.

- Type** The SPOOL_PERF monitor is of type *time frame* and does not make use of alert types or parameters. One monitor run gathers only one value set.
- Frequency** It is recommended to run the monitor once every 10 to 30 minutes.
- Data Source** The SAP R/3 transaction **SP01** (Output Controller) is used to get the data part of this monitor.
- Metrics** [Table 6-8](#) shows the values in the performance table returned by the monitor.

Table 6-8 SPOOL_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	ALL_SJ	Total number of spool jobs
2	SJ_ARCHIVE	Number of spool jobs in status archive
3	PRINT_REQ	Total number of print requests
4	OPEN_PR	Number of open print requests
5	SUCCESS_PR	Number of successfully processed print requests
6	ERROR_PR	Number of Print requests with errors
7	FAILED_PR	Number of failed print requests

STATRECS_PERF

The STATRECS_PERF performance monitor reads the statistical records and returns the average response time per transaction.

NOTE

The implementation of the statistical records file in R/3 is not the same for the versions 3.1x, 4.0x and 4.6x, hence, there is a dedicated STATRECS_PERF monitor for each SAP R/3 version.

The STATRECS_PERF performance monitors uses the alert types RESPONSE_TIME and the parameter TRANSACTION to restrict the data selected. The transactions monitored are specified in the parameter TRANSACTION. If this parameter is not specified, the average response time is reported for each transaction in the local statistics file for the specified time frame.

Type

The STATRECS_PERF monitor is *time-frame* based. Each run gathers only one value set. To collect a set of values, the monitor must be scheduled on a regular basis. The interval must be specified for each monitor individually, as the various monitors have different requirements. This monitor is based on the time frame between the last start and the current start of this monitor. A transaction must have ended within the time-frame a monitor checks in order to be taken into account.

Frequency

It is recommended you set this monitor to run once a minute.

Data Source

SAP R/3 transaction **STAT** (Local transaction statistics).

Metrics

Table 6-9 shows the values in the performance table returned by the monitor.

Table 6-9 STATRECS_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	TCODE	Transaction Code of the measured Transaction

Table 6-9 STATRECS_PERF Performance Monitor Metrics (Continued)

Order	Metric Name	Description
2	RESPONSE_TIME	Response Time
3	NET_TIME	Net Time

Configuring and Uploading STATRECS_PERF

To activate the STATRECS_PERF monitor, the `r3perfstat.cfg` file must be configured and the results uploaded into SAP R/3. There are two possible configurations:

- Global: `global_r3perfstat.cfg`
- Local: `local_r3perfstat.cfg`

To set and upload the STATRECS_PERF configurations:

1. Open and edit the `r3perfstat.cfg` configuration file

Use the configuration-file policy editor to modify the `global_r3perfstat.cfg` file to suit the needs of your environment:

- In the details pane of the OVO for Windows Console, select and right-click the configuration file `global_r3perfstat.cfg`. The `global_r3perfstat.cfg` is located in the folder:

Policy Management > Policies grouped by type > ConfigFile

- Click the following option in the menu which pops up:

All Tasks > Edit...

OVO for Windows displays the `global_r3perfstat.cfg` file shown in [Figure 6-6 on page 300](#).

2. Modify and save the `r3perfstat.cfg` configuration file

Change any values as required and save the file. This file is stored on the OVO for Windows management server and must be deployed to the managed nodes whose statistical records you want to monitor and, in addition, uploaded to SAP R/3.

NOTE

For local configuration files, we suggest you include the name of the machine for which the local configuration is intended in the local-configuration file name, for example;
`<machine_name>_r3perfstat.cfg`. Note that local configuration settings override global ones.

3. Deploy the `r3perfstat.cfg` file to the managed node

You need to deploy the modified `r3perfstat.cfg` file to the SAP R/3 servers, whose statistical records you want to monitor with the SPI for SAP, as follows:

- a. Locate and right-click the configuration file `r3perfstat.cfg` and browse to the following option in the menu which pops up:
All Tasks > Deploy on...
- b. In the Deploy Policies on... dialog which appears, select the managed nodes to which you want to deploy the new `r3perfstat.cfg` file and click **OK**.
- c. Verify that the deployment completes successfully by monitoring progress in the Deployment Jobs pane at the bottom of the OVO for Windows Console.

4. Upload the new configuration to SAP R/3


Upload the `global_r3perfstat` configuration to SAP R/3 using the Write Statistical Records tool, which you can find in the SAP R/3 Admin tools group.

- a. Locate and right-click the Write Statistical Records tool and browse to the following option in the menu which pops up:

All Tasks > Launch Tool...

- b. In the Edit Parameters... dialog which appears, select the managed nodes where you want to launch the tool and click **OK**.

Figure 6-6 **Editing the r3perfstat.cfg File**

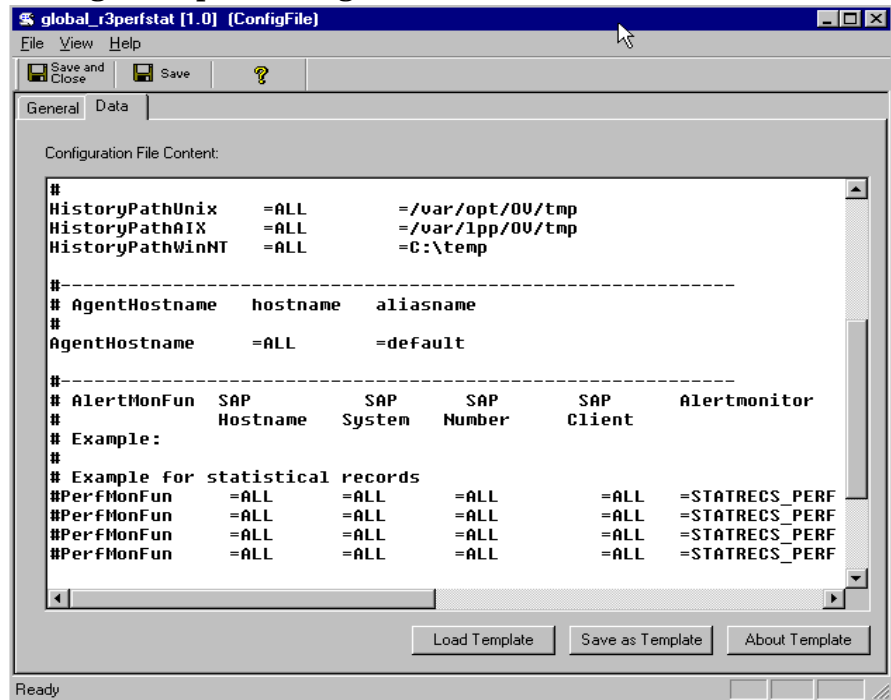

SYSUP_PERF

The SYSUP_PERF performance monitor is used to determine whether the SAP R/3 system is available or not.

Type The SYSBUF_PERF monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set.

Frequency It is recommended you set this monitor to run once a minute.

Data Source Internal SAP RFC calls.

Metrics [Table 6-10](#) shows the values in the performance table returned by the monitor.

Table 6-10 **SYSUP_PERF Performance Monitor Metrics**

Metric Name	Description
SYSTEM_STATUS	Status of the System (UP/DOWN) on the basis of the following values: <ul style="list-style-type: none">• SAP System available• SAP System logon failure• SAP System communication problems• SAP System unknown Indicates that the performance agent was not running and could not collect any data.

UPDATE_PERF

The UPDATE_PERF performance monitor is used to determine whether update errors are occurring.

When the SAP R/3 system is behaving well, no update errors should occur. However, an update error can occur, if an update is performed on a database table record that has previously been deleted. A normal update process should not have to wait in status INIT for more than 5 minutes for an update task. If a greater number of work processes exist with the status INIT the reason could be that a table space is full.

- Type

The UPDATE_PERF monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set.
- Frequency

It is recommended you set this monitor to run once a minute.
- Data Source

The UPDATE_PERF monitor uses the SAP R/3 transaction **SM13** (Update Records) as its data source.
- Metrics

[Table 6-11](#) shows the values in the performance table returned by the monitor.

Table 6-11 UPDATE_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	ALL	Number of all VB-update tasks
2	INITIAL	Number of initial VB-update tasks
3	ERRONEOUS	Number of erroneous VB-update tasks
4	VB1	Number of update tasks having V1 executed
5	VB2	Number of update tasks having V2 executed

USER_PERF

The USER_PERF performance monitor provides important information about the number of users and user sessions per SAP client for a given SAP application server.

- Type

The USER_PERF monitor is of type *snapshot*: one monitor run gathers one value set.
- Frequency

It is recommended to run the monitor every five minutes.
- Data source

The USER_PERF monitor reads information from the SAP transaction **SM04** (Overview of Users).
- Metrics

[Table 6-12](#) shows the values in the performance table returned by the USER_PERF monitor.

Table 6-12 **USER_PERF Performance-Monitor Metrics**

Order	Metric Name	Description
1	USER_CLIENT	The SAP client number associated with the users
2	USER_CNT	The number of users logged in per client
3	SESSION_CNT	The total number of user sessions per client

WLSUM_PERF

The performance monitor, WLSUM_PERF, collects the performance workload statistics for the last full hour. You can display the workload statistics for all task types, for example; dialog, background, RFC, ALE, or update. The WLSUM_PERF monitor is required and must be configured for every application server that you want to monitor.

NOTE	You can use the WLSUM_PERF performance monitor to collect data previously collected by the MIB_PERF Monitor.
Type	The WLSUM_PERF monitor is of type <i>time-frame</i> and does not make use of alert types or parameters. One monitor run gathers only one value set.
Frequency	It is recommended to run the monitor hourly.
Data source	The SAP R/3 transaction ST03 (workload analysis) is used as the data source for this monitor.
Metrics	Table 6-3 shows the values in the performance table returned by the WLSUM_PERF monitor.

Table 6-13 **WLSUM_PERF Performance Monitor Metrics**

Order	Metric Name	Description
1	Hostname	The SAP System hostname
2	SID	The SAP System ID
3	INSTANCE	The SAP instance number, if SAP version < 4.6x
4	TASKTYPE	Type of SAP R/3 task (RFC, Dialog, etc.)
5	CNT	The number of Dialog steps
6	DBACTIVCNT	Counter for database-active dialog steps

Table 6-13 WLSUM_PERF Performance Monitor Metrics (Continued)

Order	Metric Name	Description
7	RESPTI	Time that elapses between a dialog sending a request to the dispatcher and receiving a response
8	CPUTI	CPU time used in the work process
9	QUEUE TI	The time an unprocessed dialog step waits in the dispatcher queue for a free work process
10	LOADGENTI	Time taken loading and generating objects such as ABAP source code and screen information from the database
11	COMMITTI	Time required for commit to complete
12	DDICTI	Time required for Data Dictionary
13	QUETI	Time required for batch-input queue
14	CPICTI	Time required for RFC and CPI-C
15	ROLLINCNT	Number of roll-ins (rolled-in user contexts)
16	ROLLINTI	Processing time for roll-ins
17	ROLLOUTCNT	Number of roll-outs (rolled-out user contexts)
18	ROLLOUTTI	Processing time for roll-outs
19	READDIRCNT	Number of direct read accesses
20	READDIRTI	Time for direct read access
21	READSEQCNT	Number of sequential read attempts
22	READSEQTI	Time for sequential read accesses
23	CHNGCNT	Number of modified database accesses
24	CHNGTI	Time for modified database accesses

Table 6-13 **WLSUM_PERF Performance Monitor Metrics (Continued)**

Order	Metric Name	Description
25	BYTES	Number of bytes
26	GUI TIME	Total time taken for a GUI request to be executed by the Dispatcher
27	GUICNT	Count of GUI steps
28	GUINETTIME	Time taken for the application server to respond to a request from the SAP GUI

WP_PERF

The SPI for SAP performance agent uses the WP_PERF monitor to detect performance problems when, for example:

- processes need to wait for semaphores
- processes are in *private* mode
- a dialog work-process does not return to idle after use/release

Type The WP_PERF monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set.

Frequency It is recommended you set this monitor to run once every 15 minutes.

Data Source The SAP R/3 transaction **SM50** (Work Process Overview) is used as the data source for this monitor.

Metrics [Table 6-14](#) shows the values in the performance table returned by the monitor.

Table 6-14 WP_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	ALL_WP	Number of all work processes
2	SEMAPHORE_WP	Number of work processes waiting on a semaphore
3	DEBUG_WP	Number of work processes in debug mode
4	LONG_RUNNING	Number of long running dialog wp
5	PRIVAT_WP	Number of dialog wp in private mode
6	NOSTART_WP	Number of dialog wp with no restart capability
7	DIA_IDLE	Number of idle dialog work processes
8	DIA_ALL	Number of dialog work processes

Table 6-14 WP_PERF Performance Monitor Metrics (Continued)

Order	Metric Name	Description
9	DIA_RUNNING	Number of running dialog wp
10	BTC_IDLE	Number of idle batch work processes
11	BT_ALL	Number of batch work processes
12	BTC_RUNNING	Number of running batch wp
13	SPO_IDLE	Number of idle spool work processes
14	SPO_ALL	Number of spool work processes
15	SPO_RUNNING	Number of running spool wp
16	ENQ_IDLE	Number of idle enqueue work processes
17	ENQ_ALL	Number of enqueue work processes
18	ENQ_RUNNING	Number of running enqueue wp
19	UPD_IDLE	Number of idle update work processes
20	UPD_ALL	Number of update work processes
21	UPD_RUNNING	Number of running update wp
22	UPD2_IDLE	Number of idle update2 work processes
23	UPD2_ALL	Number of update2 work processes
24	UPD2_RUNNING	Number of running update2 work processes

De-installing the SAP/Performance Subagent

To de-install the SAP/Performance subagent from the managed node, you need to perform the following steps in the order indicated:

1. In the OVO for Windows Console, browse to the following tools folder:

Tools > SPI for SAP > SAP R/3 Admin

2. Select and right click the appropriate Performance Package tool (according to the operating system) for the SAP System environment as illustrated below:

- **Remove Performance Package (UN*X)**
- **Remove Performance Package (Windows)**

3. Launch the Remove Performance Package tool you have selected using the following menu option:

All tasks > Launch Tool...

7

The ITS Monitor

This section describes how to install, configure, and remove the ITS Monitor.

In this Section

The information in this section introduces you to the ITS Monitor sub-agent for SPI for SAP and explains how to use it to expand the performance-monitoring capability of the SPI for SAP. In this section, you will find information about the following topics:

- “What is ITS?”
- “ITS Installations”
- “The ITS Monitor”
- “Installing the ITS Monitor”
- “Verifying the ITS Monitor Installation”
- “Configuring the ITS Monitor”
- “ITS Performance Metrics”
- “ITS Service Reports”
- “ITS Performance Graphs”
- “ITS Status and Availability”
- “Removing the ITS Monitor”

What is ITS?

The **Internet Transaction Server** (ITS) provides the SAP R/3 user with an SAP R/3 transaction interface in a web browser. With this transaction interface, the SAP R/3 user can:


- log on to the SAP R/3 System via the internet
- make requests for information by entering transactions directly in the SAP R/3 system
- immediately see the results of the transaction request in a web browser via the transaction interface provided by ITS

NOTE

The SAP R/3 ITS is only available for MS Windows platforms.

Figure 7-1

Logging in to SAP R/3 with ITS

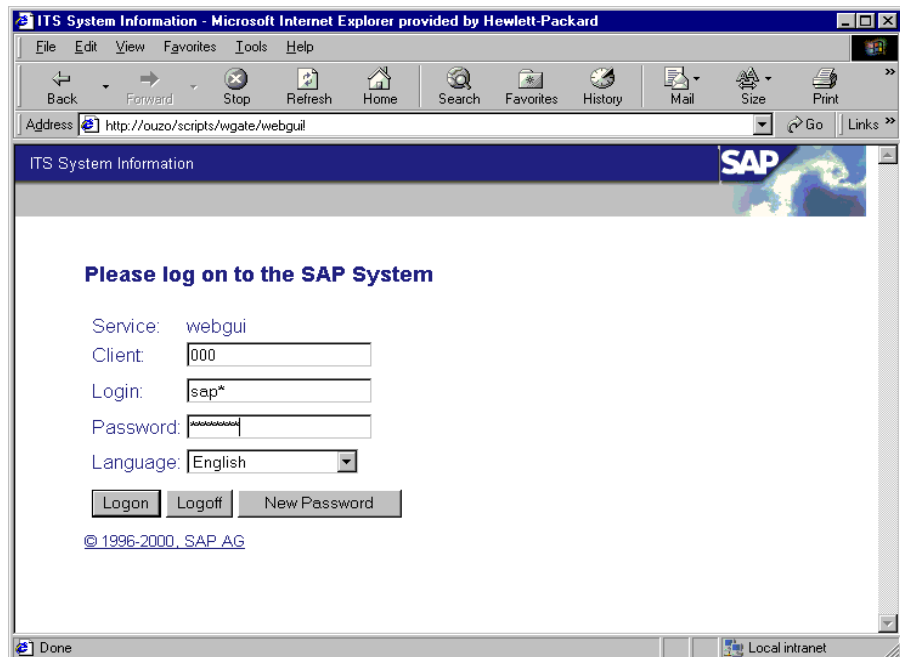


ITS Installations

The ITS server comprises two main components, the **Application Gateway** (AGate) and the **Web Gateway** (WGate). Both these components can be monitored by the ITS performance monitor, which is installed as part of the SPI for SAP.

Figure 7-2

ITS Architecture

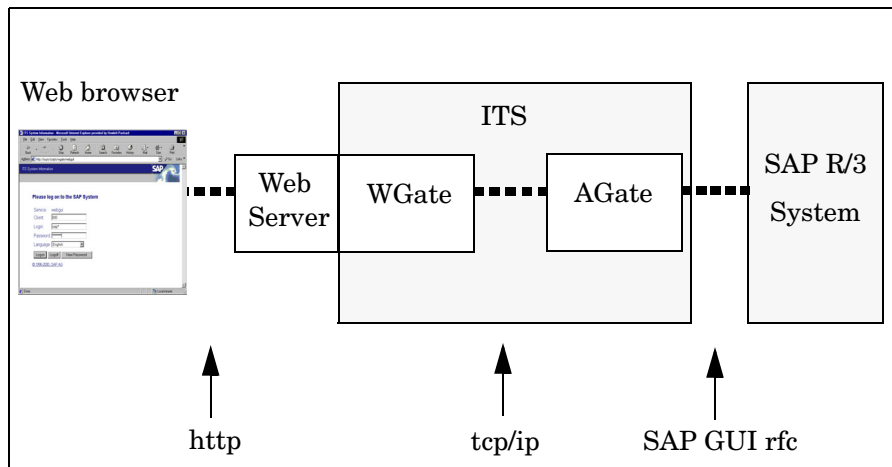

Application Gateway

The Application Gateway links the ITS server to the SAP R/3 application server. The AGate is the core processing component of the ITS: it receives Web browser requests from the WGate and communicates with the SAP R/3 application server via either the DIAG or the RFC protocol.

Web Gateway


The Web Gateway connects the ITS server to the Web server. The WGate component is always located on the same host as the Web server. The WGate receives requests from the Web server and then establishes a connection *with* and forwards the requests *to* the AGate.

You can either install both components of the ITS, the AGate and the WGate, on a **single-host** or on two *separate* hosts (**dual-host** installation). The single-host installation illustrated in [Figure 7-3](#) is appropriate for test or development purposes, where small loads are

present: the dual-host configuration shown in [Figure 7-4](#) tends to work better in a production environment, where higher loads are to be expected.

Figure 7-3


ITS Single-Host Configuration

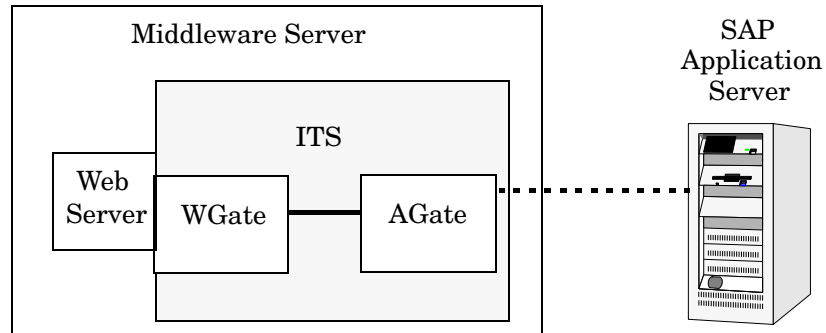

In a dual-host installation, the Web server and the WGate run on one host, which must be connected to the client-access network (Internet or intranet) and the AGate runs on the second host, which is connected to the WGate through the TCP/IP network and handles all communication with the SAP System by means of SAP remote function calls.

Figure 7-4

ITS Dual-Host Configuration

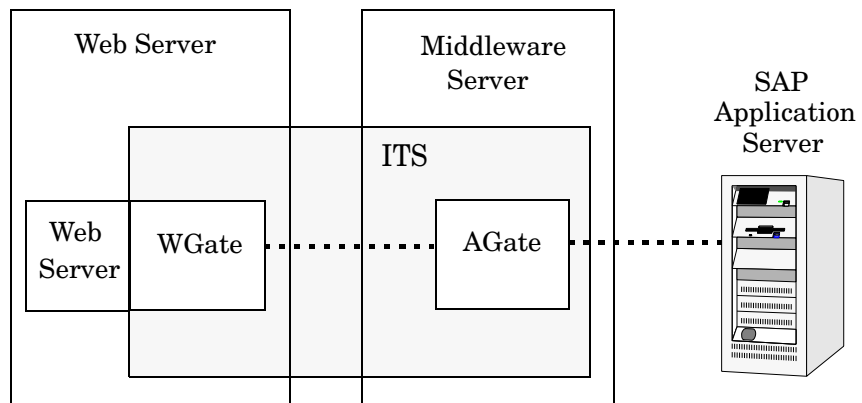

ITS also allows the configuration of multiple AGate and WGate instances, which can share the increased load generated by large numbers of remote users logging on. The scalability feature allows individual AGate instances to communicate with multiple WGate

instances and multiple application servers, too. Similarly, to balance overall load, individual WGate instances can communicate with multiple AGate instances.

The ITS Monitor

The SPI for SAP includes a dedicated SAP ITS (Internet Transaction Server) monitor which allows you to perform the following actions:

- **check ITS availability**

You can check the availability of the various components of the ITS server, including; AGate, WGate, and Web Server

- **pinpoint communication problems**

You can now pinpoint communication problems between the ITS components even in an environment with multiple ITS instances and complex load sharing

- **collect important SAP ITS performance metrics**

SAP R/3 performance metrics can be used in conjunction with other system or application performance data to identify bottlenecks and long term performance trends

- **use Agate hostname routing**

A new entry in the `r3itsperfmon.cfg` file allows the SAP ITS monitor to handle Agate hostname routing, so that you can use an “Alias” for an AGATE hostname in order to route requests to a given ITS server instance using a machine-name alias.

- **SAP message-server support**

The SPI for SAP ITS monitor supports the SAP message-server functionality, which is often used in a load-balancing environment, where one Agate instance can be associated with several SAP Application Servers.

The ITS Monitor collects data by parsing ITS log files and regularly sending http requests for specific information from the ITS server instances.

The ITS Monitor saves the data it collects along with the data collected by OpenView Performance Agent (formerly MWA) or the OVO Embedded Performance Component (CODA), or both. OpenView performance tools such as the OpenView Reporter or Performance Manager can then use

the correlated data to generate reports and graphs, which can be used to investigate problems, performance issues, and general trends relating to ITS.

The ITS Monitor allows you to monitor the following aspects of the ITS Application Gateway:

- the status of both local *and* remote AGate instances in one AGate cluster
- the status of each AGate process and AGate-process work thread
- accumulated performance data since AGate startup
- the number of user sessions
- current work-thread activity
- performance monitor

Together with OpenView Internet Services (OVIS), the `r3itsperfmon` performance monitor allows you to monitor the ITS Web Gateway, too. However, since the ITS Web Gateway's main tasks involve passing requests to and from the internet, whose performance is outside your control, the information you glean from such monitoring is probably not very useful.

Installing the ITS Monitor

The instructions in this section assume that either the OVO Embedded Performance Component (CODA) or the OpenView Performance Agent agent is already installed on all OVO for Windows managed nodes, where the ITS Monitor is required. To install the ITS Monitor on an OVO for Windows managed node, you need to perform the steps indicated below, each of which is described in more detail in the appropriate subsections that follow:

- [“ITS-Monitor: Installation Pre-requisites” on page 319](#)
- [“ITS Monitor Deployment Tasks” on page 320](#)

ITS-Monitor: Installation Pre-requisites

Before you start the installation of the ITS Monitor, make sure that the MS Windows SAP R/3 servers on which you have chosen to install the SPI for SAP ITS Monitor meet the following requirements:

- Operating system: Windows NT 4.0, Windows 2000
- OVO for Windows agent installed and running
- either the Performance Agent agent for MS Windows or the OVO Embedded Performance Component
- SAP ITS 4.6 - 6.10
- OpenView Performance Manager (but not necessarily on the ITS server machine)
- HP OpenView Reporter (but not necessarily on the ITS server machine)
- the config.-file policy-type editor for Windows nodes must be deployed
- the SPI Data Instrumentation must be installed on the OVO for Windows management server

NOTE

The ITS Monitor is designed to monitor the ITS Agate server. If your environment has the Agate and Wgate servers running on separate hosts, make sure the ITS Monitor is installed on the host where the Agate instance is running.

If you do not want to use the default settings for the SPI for SAP ITS Monitor, you need to select the source you want the SAP R/3 ITS to use for performance data. For more information about installation pre-requisites and selecting the performance-data source, see the *HP OpenView Smart Plug-in for SAP Configuration Guide*.

ITS Monitor Deployment Tasks

To deploy the ITS-Monitor deployment to the ITS servers, which you want to monitor with the SPI for SAP, you need to perform the following steps in the order indicated:

- [“Deploying the ITS Monitor Instrumentation” on page 320](#)
- [“Deploying the Configuration-file Policies for ITS” on page 321](#)
- [“Deploying the ITS Policies to the Managed Nodes” on page 321](#)

Deploying the ITS Monitor Instrumentation

To deploy the ITS Monitor Instrumentation to the SAP ITS server which you want to monitor:

1. In the OVO for Windows Console, select and right-click the SAP (managed node) where the ITS components will be deployed.
2. Browse to the following menu option:
All Tasks > Deploy instrumentation
3. In the Deploy Instrumentation... window, select the following items:
 - Actions
 - Commands
 - Monitors
 - SPI Data Collector

4. Click **OK**

NOTE

You can monitor the deployment in real time in the Deployment Jobs pane at the bottom of the OVO for Windows Console.

Deploying the Configuration-file Policies for ITS

To deploy the Configuration-file Policies to the SAP ITS server which you want to monitor:

1. In the OVO for Windows Console, browse to the following folder:
Policy management > Policy groups > SPI for my SAP.com
2. Select all policies beginning with `global_r3`
3. Right click and browse to the following option in the menu, which pops up:
All Tasks > Deploy on...
4. In the Deploy Policies on... window which appears, select the managed nodes where you want to deploy the configuration-file policies.
5. Click **OK**

NOTE

You can monitor the deployment in real time in the Deployment Jobs pane at the bottom of the OVO for Windows Console window.

Deploying the ITS Policies to the Managed Nodes

To deploy the ITS policies on the ITS servers, which you want to monitor with the SPI for SAP:

1. In the OVO for Windows Console, browse to the following folder:
Policy management > Policy groups > SPI for SAP > SAP ITS
2. Select and right click the following files:
 - `r3itsperfmon` (Scheduled Task)
 - `SAP R3 opc msg` (Open Message Interface)

3. Browse to the following option in the menu, which pops up:

All Tasks > Deploy on...

4. In the Deploy Policies on... window which appears, select the managed nodes where you want to deploy the ITS Policies.

5. Click **OK**

NOTE

You can monitor the deployment in real time in the Deployment Jobs pane at the bottom of the OVO for Windows Console.

Verifying the ITS Monitor Installation

This section describes how to verify that the installation of the ITS Monitor completed successfully:

1. In the OVO for Windows Console, select and right-click the ITS node and browse to the following option in the menu which pops up:

View > Policy Inventory

2. In the right-hand (details) pane of the OVO for Windows Console, check for the presence of the items displayed in the list below:
 - r3itsperfmon (scheduled task)
 - global_r3itsperfconfig (configuration file)
 - SAP R/3 opcmmsg (OpC message Interface)

Configuring the ITS Monitor

This section describes how to configure the ITS Monitor. To carry out the tasks described in this section, you must have installed the ITS Monitor and, in addition, verified that the installation completed successfully as described in [“Installing the ITS Monitor” on page 319](#) and [“Verifying the ITS Monitor Installation” on page 323](#), respectively.

The ITS Monitor collects performance, status, and availability data from ITS by parsing the ITS instance-specific log files and using `http` requests to collect specific information from the ITS instances. For more information about the data sources which the ITS Monitor uses to collect performance information, see [“ITS Performance Metrics” on page 333](#). This section covers the following topics:

- [“ITS Monitor: Selecting the Performance-Data Source” on page 324](#)
- [“ITS-Monitor: Configuration Tasks” on page 326](#)
- [“ITS-Monitor: Default Configuration” on page 327](#)
- [“ITS-Monitor: File Locations” on page 328](#)
- [“ITS-Monitor: Configuration-File Key Words” on page 329](#)
- [“ITS-Monitor: the Command-line Interface” on page 332](#)

ITS Monitor: Selecting the Performance-Data Source

If you prefer to use the Performance Agent (formerly HP OpenView MeasureWare) as the source for performance data for newly installed OpenView products rather than the OVO Embedded Performance Component (CODA), for example; to be able to feed the data into the Performance Manager (formerly PerfView), you can set up a small text file, `nocoda.opt`, which instructs the SPI for SAP to ignore the Windows default data source, the OVO Embedded Performance Component, and switch to the Performance Agent. Once configured, you must place the `nocoda.opt` file in the following location on each ITS managed node, whose performance-data source you want to change:

```
\Program Files\HP  
OpenView\{790C06B4-844E-11D2-972B-080009EF8C2A}\conf\dsi2ddf  
\nocoda.opt
```

To change the performance-data source:

1. Open the nocoda.opt file

Open the (or create a new) `nocoda.opt` file in a text editor and manually enter the appropriate information using the format and syntax illustrated in [Example 7-1](#).

2. Specify a generic data source

To designate the Performance Agent (MeasureWare) as the agent for all data sources on the managed node, enter (or activate) the key word `ALL` at the top of the `nocoda.opt` file.

NOTE

Using the `ALL` keyword in the `nocoda.opt` file to enable all SAP R/3 and SAP ITS instances on the managed node as data sources for the Performance Agent overrides any references to explicit data sources, which are still present in the `nocoda.opt` file.

3. Specify individual data sources

To designate the Performance Agent (MeasureWare) as the data source tied to a specific SAP R/3 (or SAP R/3 ITS) instance, remove (or disable) the key word `ALL` at the top of the `nocoda.opt` file and include a reference to each SAP and/or SAP ITS instance on a separate line of the `nocoda.opt` file, as illustrated in [Example 7-1](#), using the following format:

```
R3ITS_<Virtual_SAPITS_Instance_Name>_  
<SAPITS_Hostname>_DATA
```

NOTE

Any SAP R/3 and SAP ITS instances on the managed node which are not explicitly listed in the `nocoda.opt` file, will continue to use the default data source, namely; the OVO Embedded Performance Component (CODA).

4. Save the changes to the nocoda.opt file

Save the changes to the `nocoda.opt` file

5. Restart the OVO for Windows agent

Restart the OVO for Windows agent on the managed node where the `nocoda.opt` file has been modified

Example 7-1

Example `nocoda.opt` file

```
#####  
# Add to (or modify) the contents of this file to change the  
# data-source from the default CODA to the Performance Agent  
#####  
# All hosts:  
# ALL  
# SAP R/3 hosts/instances:  
R3_ovdsap_DEV_00_DATA  
# SAP R/3 ITS hosts/instances:  
R3ITS_SP6_00_ovspi_DATA
```

ITS-Monitor: Configuration Tasks

The ITS Monitor uses information in the ITS `global.srv` configuration file to provide a default configuration automatically. However, to set up the ITS Monitor to collect performance information, you need to perform the following configuration tasks:

1. Make sure that the ITS Monitor has access to (and the necessary permissions for) the directories containing the following log files:

```
<DRIVE>:\Program  
Files\SAP\ITS\2.0\<ITS_Instance_Name>\logs
```

2. Activate performance monitoring by means of http requests by setting the following keys to the value one (1) in the Registry on the ITS managed node for *each* ITS instance:

- a. Enable the command interface under:

```
HKEY_LOCAL_MACHINE\Software\SAP\ITS\2.0\<ITS_instance>\  
\Programs\AGate\AdminEnabled
```

- b. Configure performance monitoring under:

```
HKEY_LOCAL_MACHINE\Software\SAP\ITS\2.0\<ITS_instance>\  
\CCMS\PerfMonitoring
```

This allows you to set a trace level (by default off=0) and view performance-monitoring data in a Web browser.

- c. Restart the AGate instance(s) to activate the changes made to the registry.

Figure 7-5

Setting Registry Keys with the ITS Administrator GUI

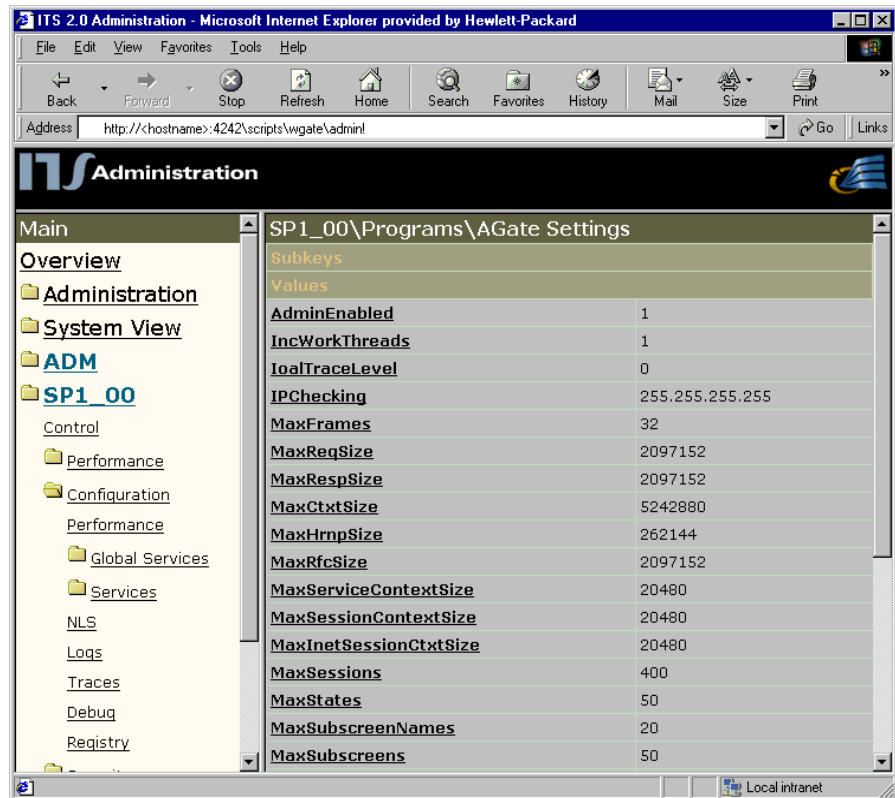


Figure 7-5 shows you how to set the appropriate SAP ITS registry keys using the ITS administrator GUI. Enter:

`http://<hostname>:4242/scripts/wgate/admin!`

ITS-Monitor: Default Configuration

The ITS Monitor stores configuration details in the file, `r3itsperfmon.cfg`. After installation, the ITS Monitor uses the default version of the configuration file shown in Example 7-2. For more information about where to find the configuration file for the ITS Monitor, see “ITS-Monitor: File Locations” on page 328.

Example 7-2 The ITS Monitor Configuration File

```
# The r3itsperfmon.cfg file
#-----
# TraceLevel hostname      Disable=0, only error messages=1
#                          info messages=2, debug messages=3
#
TraceLevel      =ALL      =0

#-----
# TraceFile  hostname      filename
#
TraceFile      =ALL      =r3itsperfmon.log

#-----
# History    hostname      path
# Path
#
HistoryPathWinNT  =ALL      =c:\usr\OV\tmp

#-----
# Datafiles location
DatafilesLocation      =ALL      =c:\rpmtools\data\datafiles

#-----
# Remote          LocalHost      RemoteHost
# Monitoring
RemoteMonitoring      =sapits2      =sapweb11
RemoteMonitoring      =sapits3      =sapweb12
RemoteMonitoring      =sapperits      =sapperweb
#-----
# PerfMon  ITS      ITS      Enable/  Webserver  Portnumber  Agate
#          hostname System ID  Disable
#
ITSPerfMon =ALL      =ALL      =1      =default  =default  =default

#-----
```

ITS-Monitor: File Locations

The ITS Monitor installs the configuration files it reads and the trace and log files it writes in the following location on the OVO for Windows managed node (ITS server):

<DRIVE>:\usr\OV\bin\OpC\monitor

Table 7-1 lists the files the r3itsperfmon performance monitor uses.

Table 7-1
r3itsperfmon Files

File	Description
r3itsperfmon.exe	Executable for the SAP R/3 ITS performance monitor
r3itsperfmon.cfg	Configuration file for the SAP R/3 ITS performance monitor. See Example 7-2 .
r3itsperfmon.his	History file for storing data after each monitor run
r3itsperfmon.log	Log file used to store trace information when tracing is enabled

ITS-Monitor: Configuration-File Key Words

The SPI for SAP provides a default configuration for the ITS performance monitor, which is designed to work without modification immediately after installation. However, if you want to set up the ITS performance monitor for the particular demands of your SAP environment, you can modify the r3itsperfmon.cfg file by enabling or disabling the keywords in the following list and, where necessary, setting the appropriate parameters:

- **TraceLevel**

The TraceLevel keyword accepts the following parameters:

- **Hostname:**

- =ALL All SAP ITS servers being monitored by the SPI for SAP ITS Performance Monitor. This is the default setting.
- =<ITS_host> The name of the SAP ITS server, where you want to specify a trace level. Use a new line for each individual SAP ITS Server.

- **Trace level:**

- =0 Disable. This is the default setting.
- =1 Log only error messages

=2	Log all messages
=3	Log only debug messages

- **TraceFile**

The TraceFile keyword accepts the following parameters:

- **Hostname:**

=ALL	All SAP ITS servers being monitored by the SPI for SAP ITS Performance Monitor. This is the default setting.
=<ITS_host>	The name of a specific SAP ITS server where tracing is enabled and where you want to specify a trace level. Use a new line for each individual SAP ITS Server.

- **Filename:**

=r3itsperfmon.log - which is the default setting or, alternatively, the name of the file to which you want to write the trace log and, if necessary, the path. For more information about the location of the r3itsperfmon binaries, see [“ITS-Monitor: File Locations” on page 328](#).

- **HistoryPathWinNT**

The HistoryPathWinNT keyword accepts the following parameters:

- **Hostname:**

=ALL	All SAP ITS hosts monitored by the SPI for SAP. This is the default setting.
=<ITS_host>	The name of the SAP ITS server, where you want to specify the path to the monitor history file. Use a new line for each individual SAP ITS Server.

- **Path:**

Windows: =default

- **DatafilesLocation**

The default location of the files which contain the data used by Performance Manager and OpenView Reporter:

c:\rpmtools\data\datafiles

The DatafilesLocation keyword is intended for use by the SPI for SAP Performance Agent (and not the ITS Performance Monitor) but *must* be enabled in the r3itsperfmon.cfg file, too.

- **ITSPerfMon**

The the ITSPerfMon keyword appears in the ITS Performance Monitor's configuration file and *requires* a value for the following parameters:

- **ITS Hostname:**

- =ALL All SAP ITS servers will be monitored by the SPI for SAP. This is the default setting.
- =<ITS_host> The host name of a specific SAP ITS server where performance monitoring is to be enabled. Use a new line for each individual SAP ITS Server.

- **ITS System ID:**

- =ALL All SAP ITS Systems will be monitored by the SPI for SAP. This is the default setting.
- =<ITS_SID> The SAP ITS System ID (SID) for which performance monitoring is to be enabled, for example; "DEV". Use a new line for each individual SAP ITS SID.

- **Enable/Disable**

- =0 Disable the ITS Performance Monitor
- =1 Enable the ITS Performance Monitor. This is the default setting.

- **Webserver**

- =default The name of the default ITS web server defined in ITS global.srvc configuration file. Used for load balancing.
- =<webserver> <webserver> is the host name of a web server other than the default defined in the ITS global.srvc configuration file

— **Portnumber**

- =default The *default* port number (defined in the ITS `global.srvc` configuration file) on which the SAP ITS Wgate web server is listening.
- =<*nn*> Use this option to change the port number parameter from the default defined in the ITS `global.srvc` configuration file to a specific port number <*nn*>, for example; **6100**.

— **Agate Hostname**

- =default The AGATE Hostname defined in the ITS configuration file `global.srvc`. This option allows you to use an “Alias” for an AGATE hostname in order to route requests to a given ITS server instance using a machine-name alias.
- =<*hostname*> <*hostname*> is the name of a machine (other than the default defined in the ITS configuration file `global.srvc`) where an AGATE instance is running. Use this option if you want to change the AGATE Hostname “Alias” from the default to a specific machine-name of your choice.

ITS-Monitor: the Command-line Interface

You can use the `\bin\r3itsperfmon` command to overwrite the default configuration for the ITS monitor. The `r3itsperfmon` command recognizes the following command-line parameters:

`r3itsperfmon -config`

ITS Performance Metrics

Table 7-2 lists the performance metrics which the SAP R/3 ITS Performance Monitor collects and uses to monitor ITS AGate instances, indicates which data source is used to collect the information required, and describes briefly what the metric information relates to.

Table 7-2 **Collected Performance Metrics**

Metric Name	Data Source	Description
AVBLOCKLENGTH	agateperf	Average length of a block (in bytes)
AVBLOCKSPERTRANSAC	agateperf	Average number of blocks per transaction.
AVTAT	loadstat.log	Average turn-around time for this instance (not including WGate and WWW-Server)
AVAGATETIME	agateperf	Average time taken (in millisecs) within AGate
AVAGATETIMEPERCENT	agateperf	Average time taken within AGate in milliseconds as a percentage of total AGate time
AVWEIGHT	loadstat.log	Average Weight of the Instance. The weight is an aggregate measure (from 0 to 1) that specifies how suitable a certain AGate instance is to handle further requests.
AVBROWSETIME	agateperf	Time taken to send results to Web browser via WGate and Web server / percentage of total time.

Table 7-2 **Collected Performance Metrics (Continued)**

Metric Name	Data Source	Description
AVBROWSETIMEPERCENT	agateperf	Time taken to send results to Web browser (via WGate and Web server) as a percentage of total browse time
AVDESTROYEDTHREADS	agateperf	Number of times a work thread has been dynamically created and destroyed during peak loads of the AGate
AVHITSPERSECOND	loadstat.log	Average number of hits per second
AVKERNELTIME	agateperf	Kernel CPU time usage in millisecs
AVR3TIME	agateperf	Time taken in milliseconds to send a request to R/3 and receive a response
AVR3TIMEPERCENT	agateperf	Time taken in milliseconds to send a request to R/3 and receive a response as a percentage of the total R/3 time
AVTOTALTIME	agateperf	Sum of: Agate time + Wait time + R3 time + Browse time
AVUSERTIME	agateperf	User CPU time usage in milliseconds
AVWAITTIME	agateperf	Average time taken by dispatcher to assign request to a work thread

Table 7-2 Collected Performance Metrics (Continued)

Metric Name	Data Source	Description
AVWAITTIMEPERCENT	agateperf	Time taken by dispatcher to assign request to a work thread as a percentage of total wait time
HOSTNAME_ITS	System Environment	Name of the ITS host
R3_APPSERVER	System environment (global.srvc config. file)	Name of the SAP R/3 application server(s) connected to the ITS host
ITS_INSTANCE_NAME	Registry	Name of the ITS instance
RUNAGATEPROCESSES	loadstat.log	Total number of running AGATE processes
TOTREADBLOCKS	agateperf	Total number of blocks sent from R/3 for all transactions.
R3_SID	System environment (global.srvc config. file)	System ID of the SAP R/3 application server(s) connected to the ITS host
TOTSESSIONSAVAIL	loadstat.log	Number of currently available sessions in the ITS instance
TOTSESSIONSMAX	loadstat.log	Maximum number of sessions an ITS instance can handle.
TOTLOGGEDINUSERS	agateusers	Total number of active users who are logged in to SAP via ITS (user sessions)

Table 7-2 **Collected Performance Metrics (Continued)**

Metric Name	Data Source	Description
TOTWEBTRANSAC	agateperf	Number of Web transactions executed
TOTWORKTHREADSAVAIL	loadstat.log	Total number of available (idle) work threads in the instance
TOTWORKTHREADSMAX	loadstat.log	Total maximum number of work threads of this ITS instance
WEBSERVER_ITS	System environment (global.srv config. file)	Name of the Web server that is used for the http requests: <i><hostname></i> : <i><portnumber></i>
WORKTHRINITIAL	agatestatus	Total number of work threads in status “initial”
WORKTHREADSNOTUSED	agatestatus	Total number of work threads in status “not used”

ITS Service Reports

This section describes how to use the OpenView Reporter to examine the data collected by the ITS Monitor. For a complete list of the ITS reports available with the SPI for SAP, see [Table 9-3 on page 374](#). This section covers the following topics:

- [“ITS Service Reports: Installation Pre-requisites” on page 337](#)
- [“ITS Service Reports: Configuring the OpenView Reporter” on page 337](#)
- [“Viewing ITS Service Reports” on page 338](#)

ITS Service Reports: Installation Pre-requisites

You will need to ensure that the following products are installed and configured before you can use the OpenView Reporter to generate and view reports relating to information collected by the ITS Monitor:

- HP OpenView Reporter
- SPI for SAP ITS Monitor Reports Snap-In

ITS Service Reports: Configuring the OpenView Reporter

The installation of the SPI for SAP service reports described in [“Installing the SPI for SAP Reports” on page 364](#) automatically completes most of the installation and configuration of the SAP R/3 ITS service reports. However, you should:

1. Add managed nodes to the OV Reporter

Check that the individual SAP ITS systems you want to monitor with the SAP R/3 ITS monitor have been added to (and discovered by) the OpenView Reporter. The OV Reporter automatically attempts to discover all the new systems you add to it. If it cannot find a node, OV Reporter will not be able to generate any reports for that node.

2. Schedule the report generation

Remember to schedule a job to generate reports for the SAP R/3 ITS systems

Viewing ITS Service Reports

To view the complete list of the ITS Monitor reports, you can use one of several options:

- click the **View Reports** button in the OV Reporter window
- browse to the following file/directory on the OV Reporter machine, *host.name.com*:

`\\<host.name.com>\rpmtools\Data\Webpages\reports.htm`
- open a (remote) Web-browser window and enter the following URL:


`http://<host.name.com>/HPOV_reports/reports.htm`

Note that this assumes that a Web server is configured on the OV Reporter machine *host.name.com*.

In the page that appears, browse to the group of reports that you want to examine, for example: SAP R/3 Last Full Week. Next, you can select an individual report from the list of reports that is displayed. [Figure 7-6](#) shows a report about the number of active ITS users and the affect the number of users is having on the CPU load.

Figure 7-6

SAP R/3 ITS Reports

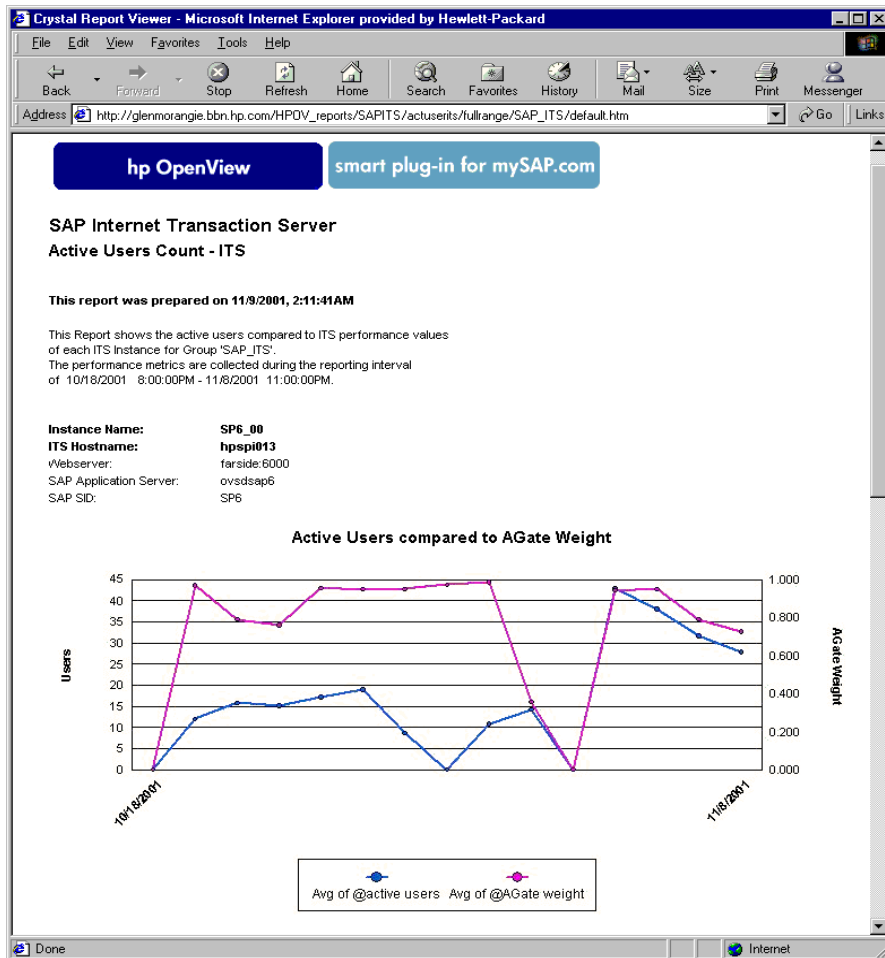

ITS Performance Graphs

This section describes how to use the OpenView Performance Manager to examine the data collected by the ITS Monitor. Note that Performance Manager can only use the OpenView Performance Agent as a data source. This section covers the following topics:

- [“ITS Performance Graphs: Installation Pre-requisites” on page 340](#)
- [“ITS Performance Graphs: Configuring OpenView Performance Manager” on page 340](#)
- [“Viewing ITS Performance Graphs” on page 341](#)

ITS Performance Graphs: Installation Pre-requisites

You will need to ensure that the following products are installed and configured before you can use the OpenView Performance Manager to view graphs using information collected by the ITS Monitor:

- OpenView Performance Manager
- OpenView Performance Agent

ITS Performance Graphs: Configuring OpenView Performance Manager

Make sure that the ITS servers and ITS instances which you want to monitor with the ITS Monitor are known to Performance Manager. If an ITS server/instance is not already configured in Performance Manager, you can add it as follows:

1. Open the Performance Manager window
2. Click the **Add...** button
3. Enter the details of the ITS server or instance and save the newly configured node

NOTE


Performance Manager automatically recognizes the presence of multiple ITS instances on a given ITS server.

Viewing ITS Performance Graphs

Performance Manager is a powerful tool that allows a great deal of scope for defining customized graphs that meet the requirements of your particular environment. For example, not only can you select the ITS instance you want to examine in closer detail, and choose from a list of various metrics, you can also change many aspects of the graph, which Performance Manager draws. Figure 7-7 shows a graph that Performance Manager has drawn for the given ITS instance using the global GBL_CPU_TOTAL_UTIL metric.

Figure 7-7

ITS Metrics in Performance Manager

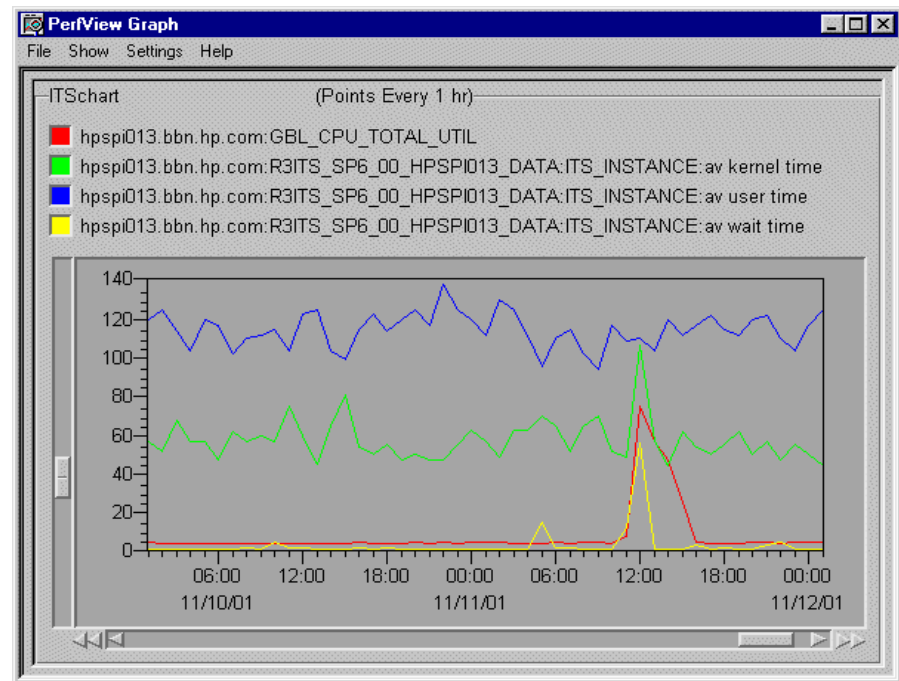

To use ITS data to draw a graph with Performance Manager:

1. In the list of data sources, choose the ITS instance which you want to examine in greater detail, for example:

R3ITS_<SID>_...

2. Click **Connect Sources**

3. Choose a metric from the list of metrics displayed, for example;
AGate Processes or **av. agate time**, and click **OK**.
4. In the Metrics to be Drawn window, click **Draw**.
5. You can use the Select Metrics window to remove unwanted metrics from the graph.

ITS Status and Availability

The ITS Monitor checks the availability of the various critical components of the ITS server, including; the Application Gateway, the Web Gateway, and the Web Server itself. The ITS Monitor also monitors the connections between the critical components in order to pinpoint potential and existing communication problems between them. This capability is particularly important in an environment which has multiple ITS instances and complex load sharing.

This section describes the messages which the ITS Monitor sends to OVO for Windows if it discovers a problem when checking the availability of SAP ITS on the managed nodes you have asked it to monitor:

- **The connection to the WGATE is down**

The connection between the ITS Instance: *<Instance Name>* on host: *<Hostname>* and the Web server: *<Webserver-Hostname>*:*<Portnumber>* is down.

- **The connection to the SAP AppServer is down**

The Internet Transaction Server: *<instance_name>* on host: *<Hostname>* could not connect to the SAP R/3 System *<SAP_SID>* on host *<Hostname>*

- **No ITS instance was found on the node**

No ITS instance was found on the node.

- **The web server extension (WGate) cannot connect to the AGate process.**

The WGate: *<Hostname:portnumber>* cannot connect to the AGate process: *<process_number>* from the instance: *<Instance Name>* on host: *<Hostname>*.

- **Create session failed**

The ITS instance *<Instance Name>* on host: *<Hostname>* is currently experiencing a very high load.

Removing the ITS Monitor

This section describes how to remove the ITS Monitor from the managed node quickly and easily: it does not describe how to remove either the SPI for SAP or the OVO for Windows components, which the ITS Monitor requires to work properly.

To remove the ITS Monitor components from the OVO for Windows managed node, you should carry out the following steps in the order specified

1. Remove the generic ITS Policies from the managed nodes

- a. In the OVO for Windows Console, locate and right-click the managed node(s) where the ITS policies are deployed and select the following option from the menu, which pops up:

View > Policy Inventory

- b. In the right pane, select and right-click the following policies:
r3itsperfmon (Scheduled Task)
- c. Browse to the following option in the menu, which pops up:

All Tasks > Remove from node

2. Remove the ITS Configuration-file Policies from the managed nodes

- a. In the OVO for Windows Console, locate and right-click the managed nodes where the ITS policies are deployed and select the following option from the menu, which pops up:

View > Policy Inventory

- b. Select the configuration policy: global_r3itsperfmon

If, as part of the ITS-Monitor installation, you deployed (and now want to remove) *all* the SPI for SAP configuration-file policies, hold down the **Ctrl** key and select all the configuration-file policies that begin with “global_R3”.

- c. Right click and browse to the following option in the menu, which pops up:

All Tasks > Remove from node

3. Verify the successful removal of the ITS components

- a. In the OVO for Windows Console, locate and right-click the managed node(s) from which the ITS policies have been removed and select the following option from the menu, which pops up:

View > Package/Policy Inventory

- b. Check that the ITS Monitor policies and packages which you removed from the managed nodes in the preceding steps are no longer present.
- c. At this point, you have removed only the ITS components: the ITS server is still configured as an SPI for SAP managed node. Check that the OVO for Windows agent, instrumentation, and configuration-file policy editor package are still present, and in addition, the SPI for SAP policies and components, for example:
 - OpenView Operations Agent
 - ConfigFile policy package for Windows Nodes
 - SPI Collector Data
 - SAP R/3 opc msg
 - SPI for SAP monitors (r3monal, r3mondmp, etc)

8 **Service Views**

This section describes how to install, set up, and use the service views provided with the SPI for SAP.

In this Section

The information in this section introduces you to the concept of Service Views and explains how they are used by both the SPI for SAP and OVO for Windows to provide you with information that is specifically designed to help you manage your SAP R/3 landscape in a more efficient and more convenient way. You can find detailed information about the following topics:

- [“What are Service Views?” on page 349](#)
- [“Service Views in the SPI for SAP” on page 351](#)
- [“Configuring Service Views for SAP R/3” on page 356](#)
- [“Troubleshooting Service Discovery” on page 357](#)

What are Service Views?

Service views provide you with a way of viewing the objects that make up your environment so that you can better determine the impact of current problems or predict potential problems.

Use the capabilities of OVO for Windows to:


- Map messages to the services that they directly affect
- Generate a service model of your environment, which includes all relationships and dependencies between component objects
- Identify and select actions available for each object
- Define propagation rules, which can identify potential or present problems on objects and on related services

The scoping pane of the main window shows discovered services in addition to the usual OVO for Windows managed nodes and applications. Clicking a service expands the service's navigation tree in the scoping pane. From the tree, you can select any service or sub-service and display a service graph.

In both the navigation tree and service graph, the component services are color-coded according to status. This color-coding matches the color-coding of messages in your message browser, which is determined by message severity level.

For instance, a service displayed in red indicates that a condition exists that has a critical impact on that service or on a related service. The action Get Root Cause traces the origin of a condition that has affected the status of a selected service.

Figure 8-1 The Service Map

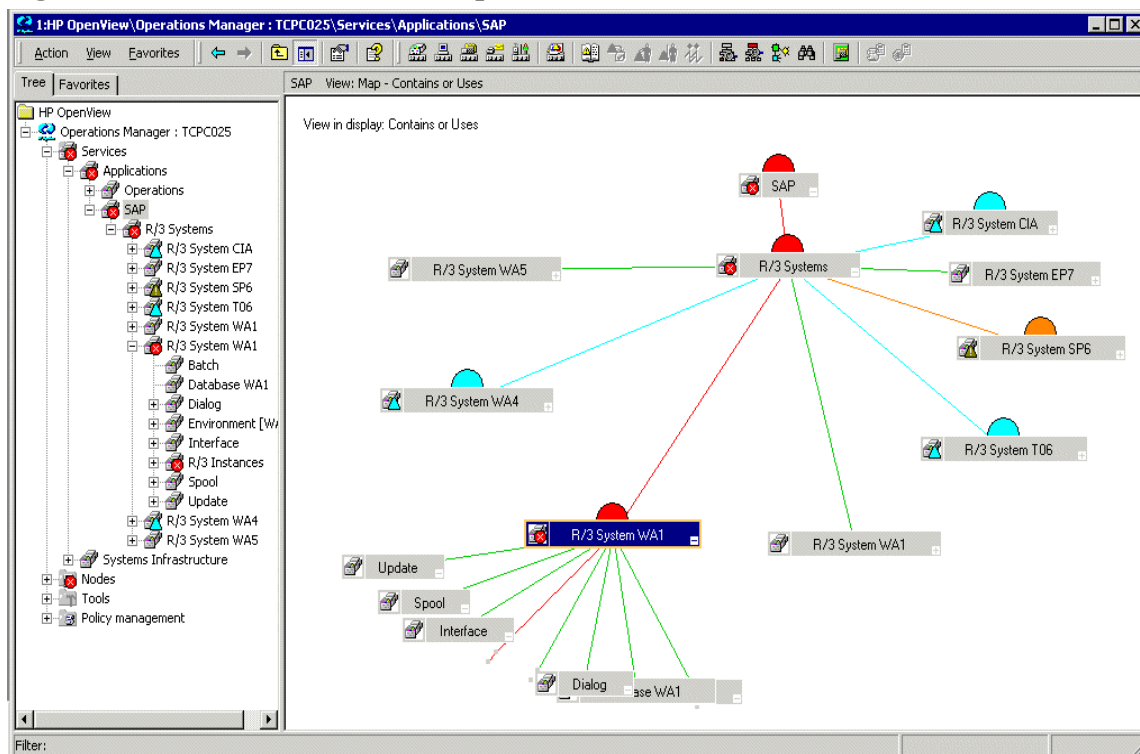

Service Views in the SPI for SAP

The SPI for SAP provides a Service Auto-Discovery policy, which you can deploy on each managed node to analyze the SAP R/3 environment and generate a service view. The service view represents all existing ownership and dependency relationships between objects on the nodes, message-propagation rules, and any actions that are available for objects.

The service view reflects your individual setup. Each service view is a unique representation of the environment from which it is taken. In general, the SAP service view consists of several levels.


The first level is an accumulation object including all SAP R/3 systems. When you expand a first-level object, you see an object for each SAP R/3 system in your environment. The SAP R/3 Systems object changes status in response to a change of status in any of the objects that make up the instances that it contains.

The second level includes logical objects within each SAP R/3 system. Notice that none of the objects shown at this level have any messages mapped directly to them. They are logical objects, used to give a general overview of the status of the services provided by the SAP R/3 system. Expand an SAP R/3 system object to display the following logical objects:

- R/3 Instances
- Database (<SID>)
- Environment (<SID>)
- Interface
- Batch
- Dialog
- Spool
- Update

Figure 8-2 shows an example SAP R/3 service view expanded to the logical object level.

Figure 8-2 Service Map of R/3 Systems

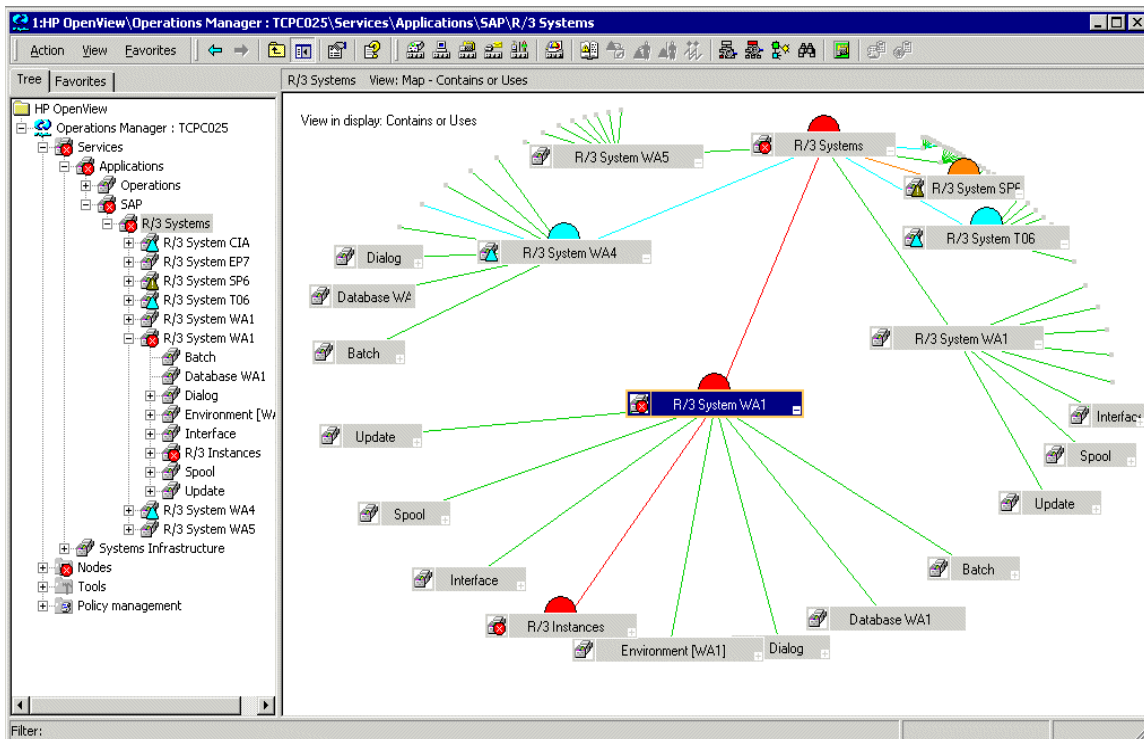


When you expand the SAP R/3 Instance object, each R/3 instance is displayed as an object in the tree. When you expand the environment object, you will see displayed three further objects:

- Operating System
- Network
- Memory Management

These objects have messages mapped to them which would then be propagated to the environment object. The other objects have **use** relationships with objects contained within the processes object; an event that affects a related process would cause a change in status in these objects.

Figure 8-3 Service Map of an R/3 Instance

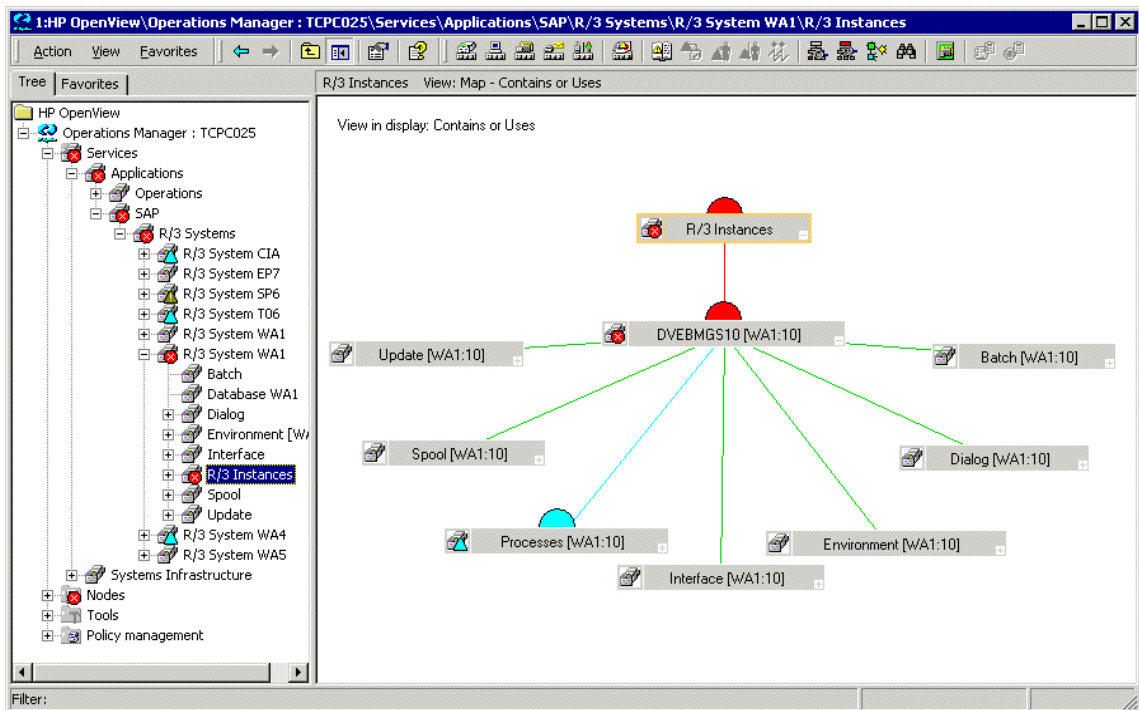

The processes object can be expanded to show the following objects:

- Gateway
- Message
- Dialog work process
- Batch work process
- Spool work process
- Update work process


Line of Business Views

The SAP R/3 service view and the other service views available with OVO for Windows provide graphical representations of the individual areas being monitored, for example SAP R/3, a WAN or a LAN, or printer

services. Business processes are not typically confined to any one of these areas and each business process depends on the services of several areas and is specific to the customer's defined processes.

For example, for an operator to enter orders and print acknowledgments, the printer, the network, and SAP R/3 Dialog Spool Service must all be available. To monitor order entry and printing at a particular location, you could set up a view that includes the WAN, the LAN at that location, the printer being used for the order acknowledgments, and the SAP R/3 dispatch, dialog, and spooling processes for the specific SAP R/3 instance.

Figure 8-4 **Service Areas Affecting Order Entry**

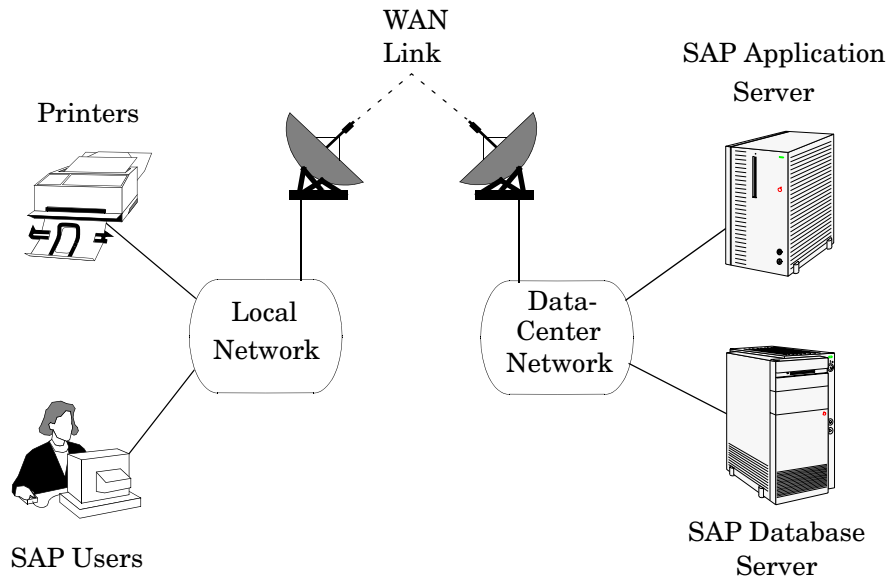


To create a line-of-business service view, you must first define the structure you want to see by generating a custom service view, in which you must define one or more logical objects (for example, Order Entry) to which messages will be propagated by the objects you include in the view.

Using the Service Editor (which you can start by right clicking a service object and browsing to the option; **Configure > Services** in the menu that pops up) obtain the service names of the objects you want to include and add use references and dependencies to them from your custom service view.

Be aware that the services should only be built on top of logical (not physical) service objects. For example, use the SAP R/3 Spool-Service object in a reference but not the underlying physical objects such as Spool Work Process. This ensures that your customization and Business Service Views remain working, even if new releases of SAP or the SPI for SAP change the dependencies between physical components, for example as a result of architectural changes.

Figure 8-5 Line of Business View for Order Entry

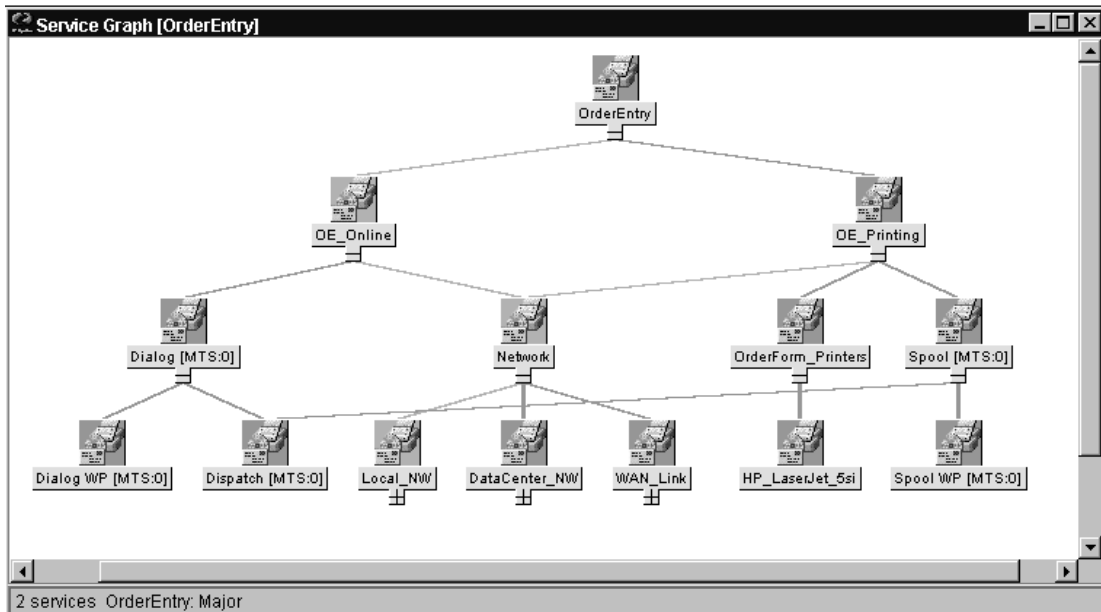

Configuring Service Views for SAP R/3

In order to use the service-views feature of the SPI for SAP, you need to find out which services are running on the SAP servers you are monitoring and upload the discovered information to the OVO for Windows database, as follows:

1. Ensure that the `r3itosap.cfg` file has been deployed to the managed nodes for which you want to generate a service view: typically, the managed nodes are the SAP servers, which you want to manage with the SPI for SAP. The service-discovery policy requires the information in the `r3itosap.cfg` file to complete its task successfully.
2. In the OVO for Windows Console, browse to the following folder:
Policy management > Policy groups > SPI for SAP
3. Select and right click the following policy:
 - **r3disc** (Service auto-discovery)
4. Browse to the following option in the menu, which pops up:
All Tasks > Deploy on...
5. In the Deploy Policies on... window which appears, select the managed nodes (SAP servers) where you want to run the automatic discovery of SAP services.
6. Click **OK**

NOTE

You can monitor the deployment in real time in the Deployment Jobs pane at the bottom of the OVO for Windows Console.

7. The service discovery starts as soon as the policy is successfully deployed to the managed node and, in addition, according to the schedule defined in the policy. The default schedule is once a day.

You can verify that the service discovery has completed successfully, by browsing to the Services folder in the OVO for Windows Console and checking for the presence of the SAP Servers (where you ran the service discovery) and the associated services.

Troubleshooting Service Discovery

In normal circumstances, the SPI for SAP discovers SAP services automatically and without any problem. However, if for any reason the information the SPI for SAP is looking for is not present in the default locations, then the service-discovery process will fail.

For example, the SPI for SAP needs to know the names of the hosts on which SAP instances are running and, in addition, the location of the SAP profile directory, which contains the SAP **default**, **instance**, and **startup** profiles. The SAP default and instance profiles are of particular interest as they contain SAP System- and Instance-specific information, which the SPI for SAP uses to determine the SAP System IDs (SID) and SAP Instance names as well as the SAP Instance numbers whose services it will attempt to discover.

In the event that the Service Discovery fails, you can use the environment variables in [Table 8-1](#) on the managed node to help the SPI for SAP find the information it needs to discover SAP services successfully. The SPI for SAP Service discovery tool looks for the SAP profiles in the following locations:

- **UNIX** (SAP application servers)
`/sapmnt/<SID>/profile/`
- **Microsoft Windows**
`\\<central_instance_host>\sapmnt\<SID>\SYS\profile\`
The `<central_instance_host>` is the name of the host on which the SAP central instance is installed. You can use the long or short hostname, the IP address of the hostname, or the UNC notation.

Table 8-1 **Service-discovery Environment Variables**

Environment Variable	Description
SAPOPC_SAPPROFILEDIR	the path to the location of the SAP profiles. Like the PATH environment variable, it may contain a list of directories where the profiles could reside

Table 8-1 Service-discovery Environment Variables (Continued)

Environment Variable	Description
SAPOPC_HOSTNAMES	used on managed nodes in a high-availability cluster to define the list of physical and virtual hostnames (each separated by a space) to be processed by service-discovery

9 **Service Reports**

This section describes how to install, set up, and use the service reports provided with the SPI for SAP.

In this Section

The information in this section introduces you to the concept of Service Reports and explains how you can use them in conjunction with both the SPI for SAP and OVO for Windows to provide you with information that is specifically designed to help you manage your SAP R/3 landscape in a more efficient and more convenient way. You can find detailed information about the following topics:


- [“What Are Service Reports?” on page 361](#)
- [“Upgrading the SPI for SAP Reports” on page 363](#)
- [“Installing the SPI for SAP Reports” on page 364](#)
- [“Service Reports in the SPI for SAP” on page 368](#)
- [“SPI for SAP Report Metrics” on page 379](#)
- [“Removing the SPI for SAP Reports” on page 382](#)

What Are Service Reports?

Service reports are web-based reports that are produced by HP OpenView Reporter (OV Reporter) using Crystal Reports templates and viewed using a web browsers. OV Reporter allows you to request both scheduled and on-demand versions of reports.

Figure 9-1

Service Reports Viewed on Internet Explorer

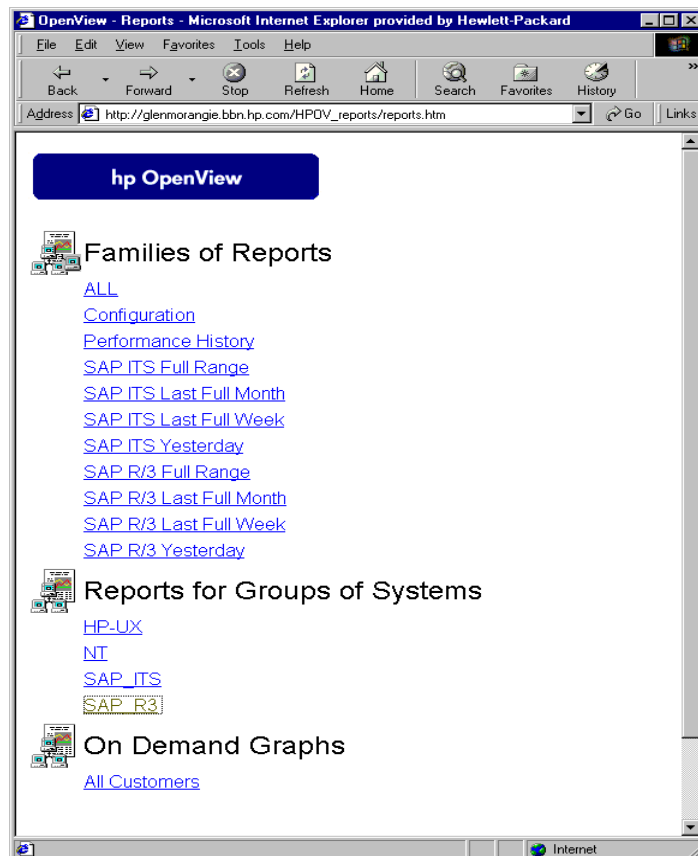

SPI for SAP service reports correlate the data extracted from either the OVO Embedded Performance Component (CODA) or the OpenView Performance Agent agent (formerly MWA). You can use the correlated data to generate reports which display short-, medium-, or long-term

What Are Service Reports?

views of your IT environment and supplement the detailed, real-time graphs available with Performance Manager. The combination of reports and graphs is a powerful tool for trend analysis. For example, you can:

- identify potential bottlenecks in your IT system, so that you can take action before problems become acute.
- use the information to help you to make accurate predictions for future upgrades.
- collect accurate information to be used in measuring service levels.

Upgrading the SPI for SAP Reports

This section describes what you have to do if you upgrade the SPI for SAP software and the SAP/Performance subagent and want to continue using the service-reporter functionality. For more information about upgrading the SAP/Performance subagent, which gathers performance data for the Service Reports, see [“Upgrading the SAP/Performance Subagent” on page 253](#). For more information about upgrading the SPI for SAP itself, see the section “Upgrading the SPI for SAP” in the *HP OpenView Smart Plug-in for SAP Configuration Guide*.

NOTE

Upgrading the SPI for SAP reports in the manner described in this section removes from the OV Reporter system *all* old report data collected by the Smart Plug-in for SAP. However, you can use database tools to preserve the tables containing information that you want to use after completing the upgrade process. For more information, see the documentation provided with the database product.

1. Remove the old SPI for SAP reporter-integration package using the standard Windows method:

Start: Settings > Control Panel > Add/Remove Software

2. Install the new SPI for SAP reporter integration as described in [“Installing the SPI for SAP Reports” on page 364](#).

Installing the SPI for SAP Reports

This section explains how to install the SAP R/3 service reports which come with the SPI for SAP and, in addition, provides information designed to help you prepare for the installation. The section covers the following topics:

- [“Before You Begin” on page 364](#)
- [“To Install SAP R/3 Service Reports” on page 365](#)

Before You Begin

Before you install and set-up for the SAP R/3 Service Reports, you must ensure that the following tasks have been completed:

1. Performance Agent

Either the OVO Embedded Performance Component or the OpenView Performance Agent agent must be installed on all SAP R/3 managed nodes for which you want to produce service reports.

The OpenView Performance Agent agent must also have been configured according to the instructions given in [“The SPI for SAP Performance Monitors” on page 249](#).

2. Service Reports

OV Reporter must be installed on an MS Windows NT/2000 host.

NOTE

OpenView Reporter lite, which comes bundled with OVO for Windows, does not offer the same functionality as the full OpenView Reporter product: there are a number of restrictions, particularly in the area of supported performance agents. We recommend you install and use the *full* version of the OpenView Reporter in order to ensure compatibility with the installed performance agent and with the full range of performance metrics used in the SPI for SAP reports.

To edit existing or create new Service Reports for the SPI for SAP, Seagate's Crystal Reports version 8.5 needs to be installed and running on the machine hosting the OpenView Reporter version A.03.50 (or later) .

To Install SAP R/3 Service Reports

The service reports for SAP R/3 are installed into the OV Reporter product as a snap-in using InstallShield on the OpenView Reporter system. During set-up you will be asked to select the common application path of OV Reporter. This is the folder into which OV Reporter is installed. The set-up routine will attempt to discover this path automatically and indicate to you what it finds. In most circumstances you should avoid changing it and accept the default settings.

The set-up copies components to the directories as summarized in [Table 9-1](#). All directory paths are relative to the OV Reporter common application path.

Table 9-1

Locations of SAP Service Report Components

Component	Directory
Configuration files	\newconfig\
Installation script	\newconfig\
Report template files	\data\reports\Sap\
Executables	\bin\

To install the SPI for SAP Service Reports:

1. Insert the product CD and browse to the following directory:

\Disk2\SAP SPI Reporter Package

Double-click the `sapspi_reporter.msi` file, and select the **Custom Setup** option.

2. Follow the installation-wizard's instructions. During set-up of the SPI for SAP service reports you will be asked to confirm or specify the common application path for the OpenView Reporter. Accept the default to ensure that all automatic configuration steps are correctly executed without the need for manual re-configuration.

NOTE

If you change the common application path, set-up will not be able to find its executables and will generate warning messages.

3. Set-up automatically performs the following tasks:

- assigns two SAP-specific report groups: SAP_R3 and SAP_ITS
- assigns metric lists to the SAP_R3 and SAP_ITS report groups
- assigns group reports to the SAP_R3 and SAP_ITS report groups
- assigns system reports to the SAP_R3 and SAP_ITS report groups

4. Verify that the installation of the SPI for SAP service reports completed successfully by confirming that setup created the report and metrics groups mentioned in the previous step and listed in full in [“SPI for SAP Report Metrics” on page 379](#). The installation should look similar to the example illustrated in [Figure 9-2](#).

5. If you choose to add your SAP R/3 and SAP ITS systems to OpenView Reporter manually, you can use the following values in the Add System window:

- System: **host.name.com**
- Network: **SAP**
- Domain: either **SAP** or **ITS** as appropriate

Check that your SAP R/3 and SAP ITS hosts have been added to the appropriate OpenView Reporter group, namely; SAP_R3 or SAP_ITS. Hosts are automatically assigned to a report group according to the kind of data source (SAP R/3 or SAP ITS) discovered on the monitored host.

Click **OK** to display the newly added systems in the OV Reporter's Details Pane.


6. Use the OV Reporter GUI to schedule the generation of the SPI for SAP reports or generate them now using the following option:

Actions > Run > Generate Reports

7. After you have successfully generated the SPI for SAP reports, you can view them with any standard web browser. For more information about how to view the SPI for SAP reports, see [“Viewing SPI for SAP Reports”](#) on page 377.

Figure 9-2

SPI for SAP Reports and Metrics

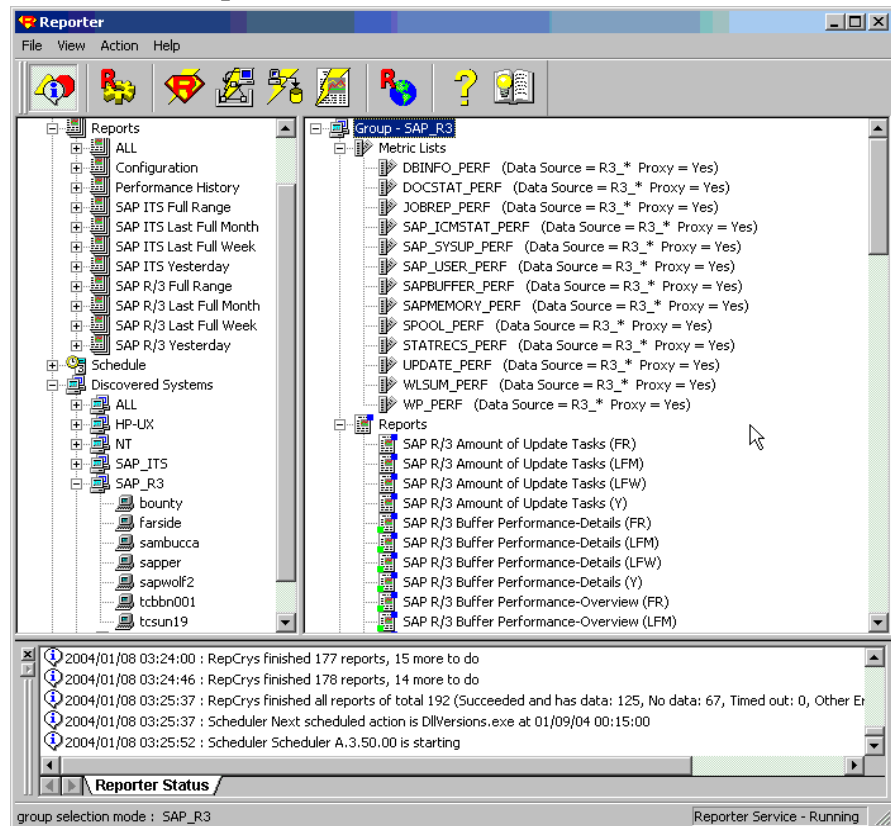

Service Reports in the SPI for SAP

The Smart Plug-in for SAP includes a package of service reports that use the data collected by the OVO Embedded Performance Component (CODA) and OpenView Performance Agent (formerly MWA) to generate reports, which display vital information about the health and availability of the Systems in your SAP R/3 landscape. The reports provided in the Smart Plug-in for SAP report package cover a wide variety of system- and business-critical areas.

The information in this section describes in detail the service reports, which are supplied with the SPI for SAP. You can find information about the following topics:

- [“SAP R/3 Reports” on page 369](#)

A complete list of all the SAP R/3-related reports provided with the SPI for SAP including the metrics used

- [“SAP-ITS Service Reports” on page 374](#)

A complete list of all the reports for the SAP Internet Transaction Server provided with the SPI for SAP including the metrics used

- [“Defining the Scope of SAP R/3 Service Reports” on page 376](#)

Hints to help you target more accurately the information you want to display in a report

- [“Generating SPI for SAP Reports” on page 377](#)

Instructions for starting the generation of the SPI for SAP reports

- [“Viewing SPI for SAP Reports” on page 377](#)

Instructions for viewing the SPI for SAP reports you have generated

The SPI for SAP service-report integration supports the remote-monitoring functionality, where SAP servers which are *not* OVO for Windows managed nodes and do *not* have the SPI for SAP software installed, are monitored remotely from an OVO for Windows managed node, where the SPI for SAP monitors are installed, configured, and running. You can generate service reports for SAP servers, which are managed remotely. For more information about remote monitoring feature, see [“Remote Monitoring with the Alert Monitors” on page 28](#), and [“Remote Performance Monitoring” on page 269](#).

SAP R/3 Reports

Table 9-2 lists the SAP R/3 reports available with the Smart Plug-in for SAP. You can also find in the table details about the information displayed in the reports and the individual metrics used to generate the reports. For more information about the SPI for SAP performance monitors, see [“The SPI for SAP Performance Monitors” on page 281](#).

Table 9-2 **SAP R/3 Performance Reports**

Report	Purpose	Metrics
Database Performance	shows the important database performance metrics correlated together	<ul style="list-style-type: none"> Physical reads/writes Disk Physical IO Long Table Scans Sort Rows Sort in Memory Sort on Disk Redo block Written Redo Buffer Size
Database Quality	show important metrics, which taken together give a detailed picture of the quality of the database configuration	<ul style="list-style-type: none"> Quality of data base buffer pool Quality of Data Dictionary cache Redo-Log faults Buffer Pool Size Dictionary Cache Size Redo log buffer size Buffer busy waits Buffer busy wait time
E2E Time	shows the E2E Transaction Time of the configured transactions, divided into Response and Network Time	<ul style="list-style-type: none"> Response Time Network Time

Table 9-2 SAP R/3 Performance Reports (Continued)

Report	Purpose	Metrics
ICM Statistics - Overview	overview of the status of the Internet Communication Manager plus general information about queues, threads, and connections	<ul style="list-style-type: none"> • ICM Status • Max. number of threads • Peak number of threads • Current number of threads • Max. number of connections
ICM Statistics - Details	shows a much more detailed view of the status of the Internet Communication Manager including up-time and down-time periods, plus statistics for request queues, work threads, and open connections	<ul style="list-style-type: none"> • Peak number of connections • Current number of connections • Max. number of queue entries • Peak number of queue entries • Current number of queue entries • Number of running work threads • Number of dead work threads • Number of processed work threads
Job Overview	shows the number of jobs for the SAP R/3 instances in the different, specified states (running, ready, released, etc.)	<p>Number of Jobs in the status:</p> <ul style="list-style-type: none"> • Running • Ready • Scheduled • Released • Aborted • Finished

Table 9-2 SAP R/3 Performance Reports (Continued)

Report	Purpose	Metrics
Number of Spool Jobs	shows the number of Spool Jobs and Print Requests in different status	<ul style="list-style-type: none"> • Total Number of Spool Jobs • Number of Spool Jobs in status Archive • Number of open print Requests • Number of print Requests with errors • Number of failed print requests
Amount of Update Tasks	shows the Amount of Update Tasks	<ul style="list-style-type: none"> • total VB-update tasks • initial VB-update tasks • erroneous VB-update tasks • update tasks having V1 executed • update tasks having V2 executed
Work Process Overview	compares the total number of the different Work Processes with the number of in use processes	<ul style="list-style-type: none"> • Dialog processes/processes in Use • Batch processes/processes in Use • Spool processes/processes in Use • Update processes/processes in Use • Update2 processes/processes in Use
Document Volume	shows the total document volumes per module (BW, FA, QA, etc.) correlated with business-transaction metrics	<ul style="list-style-type: none"> • GUI net time • Response time • CPU time • DB Request time
Document & Lines	shows the number of documents and the lines created per document, sorted by SAP R/3 application module	<ul style="list-style-type: none"> • Head - generic doc. information • Detail - the average number of lines in the document. The larger the file, the longer it takes to commit to the database.

Table 9-2 SAP R/3 Performance Reports (Continued)

Report	Purpose	Metrics
Document Volume by Module	shows the volume of documents per application module	Number of documents
Workload Overview Count	shows the number of steps for all Task Types in an SAP R/3 System (Batch, Dialog, Spool, Update)	<ul style="list-style-type: none"> • GUI net time • Response time • CPU time • DB Request time
Workload Overview Response Time	shows the average number of steps and response time (in seconds) for each SAP R/3 instance	<ul style="list-style-type: none"> • CPU Time • Load Time • Queue Time • DB Read Time • DB Update Time
Workload Overview Task Type	shows the average number of steps and response time (in seconds) for each task type (e.g. AUTOABA, BCKGRD)	
Workload Overview DB Overview	shows the work-load metrics based on database activity for a defined SAP R/3 system	<ul style="list-style-type: none"> • Change Count • Change Time • DB Calls • DB Requests • DB Time per Req. • Read-Dir Count • Read-Dir Time • Read-Seq. Count • Read-Seq. Time • Requested Bytes
Workload Overview DB Task Type	shows the work-load metrics per task type and based on database activity for a defined SAP R/3 system	

Table 9-2 SAP R/3 Performance Reports (Continued)

Report	Purpose	Metrics
SAP R/3 Memory	SAP R/3 Memory use for the defined System	<ul style="list-style-type: none"> • Extended Memory • Paging Area • Roll Area
SAP R/3 Users - Overview	the number of users and user sessions per SAP client for a given SAP application server	<ul style="list-style-type: none"> • Average Users • Average Sessions
SAP R/3 Users - Workload	shows the load for named SAP R/3 work process of users and user sessions (per SAP client/Application Server)	<ul style="list-style-type: none"> • Average Users • Average Sessions • Average Response Time • CPU Time • Dialog, Update, Spool, Batch steps
SAP R/3 Users - Document Statistics	shows the document statistics per SAP R/3 module for users and user sessions (per SAP client/Application Server)	<ul style="list-style-type: none"> • Average Sessions • Average Users • SAP R/3 Module (FA, MM, SD, etc.)

Table 9-2 SAP R/3 Performance Reports (Continued)

Report	Purpose	Metrics
SAP R/3 Buffer Performance - Overview	Shows general and detailed analyses of the use of SAP memory buffers by SAP users for a given instance and client.	<ul style="list-style-type: none"> • Buffer Name • Hit Ration • Allocated Size • Free Space • Free Space Percent • Max. Dir Entry • Free Dir Entry • Free Dir Entry (Percent) • Buffer Swaps • Buffer Swaps (Delta) • Database Accesses • Database Accesses (Delta)
SAP R/3 Buffer Performance - Detailed Analysis		

SAP-ITS Service Reports

[Table 9-3](#) lists the Internet-Transaction-Server (ITS) reports available with the Smart Plug-in for SAP. You can also find in the table details about the information displayed in the reports and the individual metrics used to generate the reports. For more information about the SPI for SAP performance monitors, see [“The SPI for SAP Performance Monitors” on page 281](#).

Table 9-3 Internet Transaction Server Reports

Report	Purpose	Metrics
Availability	shows the overall availability of the ITS systems	<ul style="list-style-type: none"> • Up • Down • Unknown

Table 9-3 Internet Transaction Server Reports (Continued)

Report	Purpose	Metrics
Session Overview	the overall number of sessions for <i>all</i> the ITS instances (for machines in the SAP ITS reporter group)	<ul style="list-style-type: none"> • Max/Active/Available sessions • Hit Count • Max./Available Threads
Sessions by Instance	shows the number of sessions for a selected ITS instance	<ul style="list-style-type: none"> • Restarts • TAT
Active Users Overview	the overall number of users for <i>all</i> the ITS instances (for machines in the SAP ITS reporter group)	Total number of active (logged-in) users
Active Users - OS	shows the number of active users correlated with operating-system metrics	<ul style="list-style-type: none"> • Active (logged-in) users • CPU Load • Memory Page Rate
Active Users - ITS	the number of active users correlated with performance metrics for each ITS instance	<ul style="list-style-type: none"> • Active ITS users • Agate weight • Turn-around time (TAT)
Response Time Overview	shows the ITS response times	<ul style="list-style-type: none"> • Agate time • R3 time • Browse time • Wait time

Table 9-3 Internet Transaction Server Reports (Continued)

Report	Purpose	Metrics
Response Time by Instance	shows the response times for each selected ITS instance	<ul style="list-style-type: none"> • Agate time • R3 time • Browse time • Wait time • Kernel time • User time
Agate Processes	shows the total number of Agate processes running	Number of Agate processes
Transaction Data	shows the transaction information for each ITS instance	<ul style="list-style-type: none"> • Max. available work threads • Available Work threads • Initial Work threads • Not used Work threads
Agate Weight	Average weight of the ITS Instance.	Average AGate Weight ^a
Work thread Overview	shows the number of Work threads each ITS Instance	<ul style="list-style-type: none"> • Max. avail. Work threads • Available Work threads • Initial Work threads • Not used Work threads
Work thread by Instance	shows the number of Work threads each ITS instance can handle	

a. The weight is an aggregate measure (from 0 to 1) that specifies how suitable an AGate instance is to handle further requests.

Defining the Scope of SAP R/3 Service Reports

You can limit the scope of any service report by:

- specifying which systems to include. Possible values are:

- *all* systems
- a selected *group* of systems
- a selected *system*
- specifying the period for which report data is to be included. Possible values are:
 - a full *range* (up to the last 180 days)
 - last full *month*
 - last full *week*
 - *yesterday*

Generating SPI for SAP Reports

Use the OV Reporter GUI either to schedule the generation of the SPI for SAP reports or generate them immediately as described in this section. You should consider using the schedule option, if there are a lot of reports to be generated and the reports involve collecting and processing data from multiple SAP Systems.

If you want to generate a single report or multiple reports immediately, follow the steps described below:

1. Make sure you have completed installation and configuration steps described in [“To Install SAP R/3 Service Reports” on page 365](#)
2. Open the OV Reporter GUI
3. Use the OV Reporter GUI to start the generation of the SPI for SAP reports using the following option:

Actions > Run > Generate Reports

Viewing SPI for SAP Reports

To view the SPI for SAP reports:

1. First, ensure that the reports have been successfully generated. For more information about generating reports, see [“To Install SAP R/3 Service Reports” on page 365](#).
2. Open a web browser
3. Enter the following string in the location bar:

`http://<machine.name.com>/HPOV_reports/reports.htm`

4. Navigate through the displayed reports to the report, which you want to examine more closely.

SPI for SAP Report Metrics

This section lists the metrics used by the reports for SAP R/3 and SAP R/3 ITS, which are installed as part of the SPI for SAP reporter package. For more information about the metrics listed in the section below, see [“The SPI for SAP Performance Monitors” on page 281](#). For more information about the SPI for SAP reports, see [“Service Reports in the SPI for SAP” on page 368](#).

In this section, you can find information about the following topics:

- [“SAP R/3 Report Metrics” on page 379](#)
- [“SAP ITS Report Metrics” on page 380](#)

SAP R/3 Report Metrics

The following list shows which performance metrics are used to gather the data that is used in the preparation of the performance-related reports for the SPI for SAP.

- [“DBINFO_PERF”](#)
This metric monitors database-performance analysis values
- [“DOCSTAT_PERF”](#)
This metric collects the quantity-structure statistics (the document volume) for the last full hour
- [“ICMSTAT_PERF”](#)
Monitors the status and performance of the SAP Internet Communication Manager
- [“JOBREP_PERF”](#)
Counts the number of jobs per state (scheduled, running, etc.)
- [“SAPBUFFER_PERF”](#)
Returns values for the use of SAP memory *buffers* for an SAP instance
- [“SAPMEMORY_PERF”](#)
SAP memory use by SAP users for an SAP instance

- **“SPOOL_PERF”**
Counts the number of spool requests in different states
- **“STATRECS_PERF”**
Returns the response/net times of defined transactions
- **“SYSUP_PERF”**
The status of the SAP R/3 instances
- **“UPDATE_PERF”**
The number of update processes
- **“USER_PERF”**
Monitors the number of users and user sessions per SAP client for a given SAP application server
- **“WLSUM_PERF”**
Collects the performance-workload statistics hourly
- **“WP_PERF”**
Number of users/sessions per SAP client for an SAP application server


SAP ITS Report Metrics

The following list shows which performance metrics are used to gather the data that is used in the preparation of the performance-related reports for the SPI for SAP's ITS Monitor:

- **SAP_ITS_INSTANCE**
Uses the data source “R3ITS_ <SAPITS_Instance_Name>_<SAPITS_Hostname>_DATA” to gather data relating to the named ITS instances.

For more information about the individual metrics contained in the metric list, SAP_ITS_INSTANCE, see [“ITS Performance Metrics” on page 333](#).

Figure 9-3 SAP R/3 ITS Reports Metrics

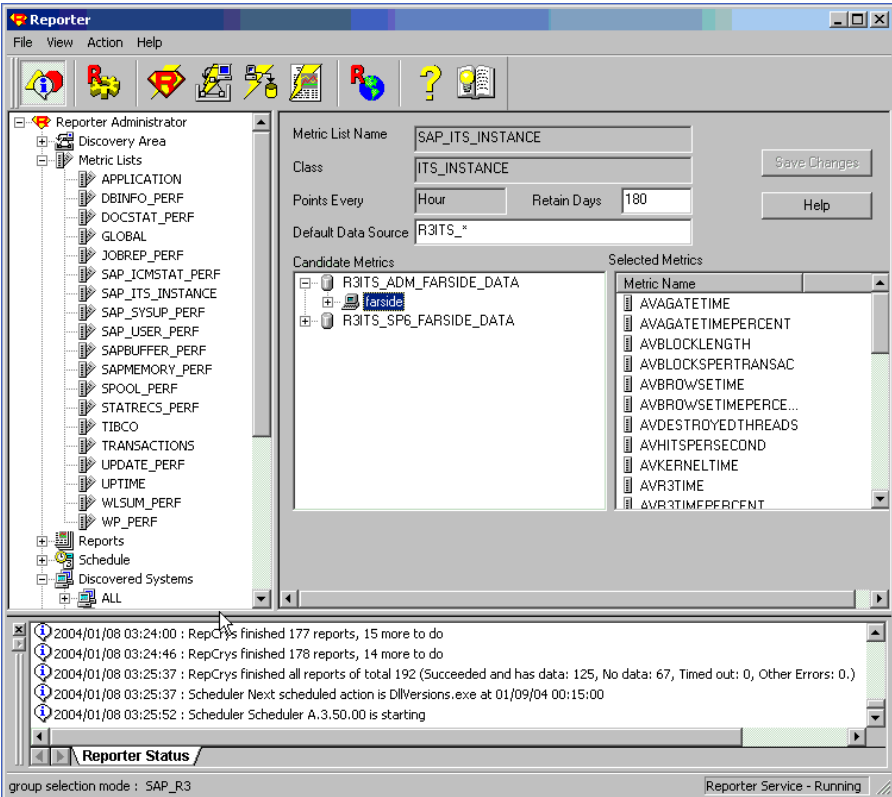

Removing the SPI for SAP Reports

In order to completely remove the SPI for SAP reports and the integration with the OpenView Reporter, you need to perform the following steps described in this section in the order specified. This section covers the following topics:

- [“To Remove OpenView Reporter Snap-in Packages” on page 382](#)
- [“To Remove the SPI for SAP from the OV Reporter System” on page 382](#)

To Remove OpenView Reporter Snap-in Packages

Use the following instructions to help you remove the SPI for SAP snap-in package for the OpenView Reporter quickly and easily from the OpenView Reporter system:

1. In OV Reporter, browse to:
File > Configure > Reporter Packages
2. Select the following files from the Installed Packages window located in the right pane of the Configure Report Packages window:
 - SPI for ITS_SAP
 - SPI for SAP
3. Double-click the left arrow button [**<-**] in the Available Packages window located in the left pane of the Configure Report Packages window.
4. Click [**OK**] to finish

To Remove the SPI for SAP from the OV Reporter System

To remove the SPI for SAP binaries from the OpenView Reporter system, you need to carry out the following steps on the OpenView Reporter system as the system Administrator:

1. Open the Windows Start menu, and browse to the following item:

Start:Settings > Control Panel > Add/Remove Programs

2. Select: **HP OpenView Operations Performance for Windows**

3. Highlight: **Reports for hp OpenView smart plug-in for SAP**

4. Select: **Remove**

Follow the on-screen instructions to complete the removal process.

A

- ABAP DUMP Monitor, 160
- Aborted
 - condition in job monitor, 163
- Admin Local SAP R/3, 49
- Admin SAP R/3, 43, 48
- Agate-Hostname parameter for ITS
 - Performance Monitor configuration, 332
- Agent Hostname for r3perfagent
 - configuration, 274
- AgentHostname keyword, 32, 122
- alert
 - adding messages, 236
- Alert Classes, 66, 89, 97
- AlertMonitor, 33, 123
- Alerttype, 32, 123
- Enable/Disable, 33, 36, 123
- Filemask, 33
- OPC MsgGroup, 33, 124
- OPC Object, 34, 123
- OPC Severity, 34, 123
- ProcessName, 34
- ProcessNumber, 34
- RFC FUNCTION with r3perfagent, 277
- RFC Parameter, 34, 124
- SAP Client, 35, 124
- SAP Hostname, 35, 124
- SAP Number, 35, 125
- SAP System, 35, 125
- SyslogId, 35, 36
- Alert Classes for monitor configuration
 - Mode, 33
- Alert Collector, 111
 - history file, 114
- Alert generation
 - from the system log filter, 237
- Alert Monitors
 - command-line parameters for r3moncol, 118
 - configuration file for r3moncol, 122
 - configuring remote monitor, 28
 - environment variables, 118
 - environment variables for r3moncol, 118
 - history file for r3moncol, 114
 - Order of Precedence, 26
 - Polling Rates, 112
 - polling rates for r3moncol, 112
 - Query Conditions, 114
 - query conditions for r3moncol, 114
 - remote monitoring with r3moncol, 119
 - ReportTypes for r3moncol, 111
 - Run Locations, 113
 - run locations for r3moncol, 112
 - SPI R/3, 54
 - the Alert Collector, 111
- Alert Thresholds
 - SAP-RFC alert types, 181
 - SAP-RFC Parameter
 - CONNECTION_TYPE, 181
 - NAME, 181
 - transport alert types, 191
- Alert type
 - CHANGE_OPTION
 - SAP R/3 (3.x), 139
 - SAP R/3 (4.0x/4.5x), 140
 - SAP R/3 (4.6x), 143
 - CHECK, 182
 - JOB_ABORTED, 172
 - JOB_MAX_RUN_TIME, 167
 - JOB_MIN_RUN_TIME, 169
 - OBJECT_RELEASED, 158
 - OBJECT_USED, 156
 - OLD_LOCKS, 175
 - OM_SWITCH_OVERDUE, 178
 - PRINT_ERROR_EXISTS, 188
- r3monale
 - configuring, 128
 - IDOC_CURRENT_STATUS, 129
- r3monchg
 - CHANGE_OPT (SAP R/3 3.x), 139
 - CHANGE_OPT (SAP R/3 4.0x/4.5x), 140
 - CHANGE_OPT (SAP R/3 4.6x), 143
 - configuring, 139
- r3moncts
 - configuring, 149
 - OBJECT_RELEASED, 158
 - OBJECT_USED, 156
 - REQUEST_CREATED, 151
 - REQUEST_RELEASED, 152
 - TASK_CREATED, 154
 - TASK_RELEASED, 155
- r3mondmp
 - ABAP4_ERROR_EXIST, 162
 - configuring, 162
- r3monjob
 - configuring, 166
 - JOB_ABORTED, 172
 - JOB_MAX_RUN_TIME, 167
 - JOB_MIN_RUN_TIME, 169

Index

START_PASSED, 170
r3monlck
 configuring, 175
 OLD_LOCKS, 175
r3monoms
 configuring, 178
 OM_SWITCH_OVERDUE, 178
r3monrfc
 CHECK, 182
 configuring, 181
r3monspl
 configuring, 186
 PRINT_ERROR_EXISTS, 188
 SPOOL_ENTRIES_RANGE, 186
 SPOOL_ERROR_RANGE, 187
r3montra
 configuring, 191
 REPAIR, 194
 RFCONNECT, 195
 TPTEST, 196
 TRANS, 191
r3monupd
 configuring, 200
 UPDATE_ACTIVE, 200
 UPDATE_ERRORS_EXIST, 200
r3monusr
 configuring, 202
 USER_LOGGEDIN_MAX, 202
r3monwpa
 configuring, 206
 WP_AVAILABLE, 207
 WP_CHECK_CONFIGURED, 213
 WP_IDLE, 210
 WP_STATUS, 214
REPAIR, 194
REQUEST_CREATED, 151
REQUEST_RELEASED, 152
RFCONNECT, 195
SPOOL_ENTRIES_RANGE, 186
SPOOL_ERROR_RANGE, 187
START_PASSED, 170
TASK_CREATED, 154
TASK_RELEASED, 155
TPTEST, 196
TRANS, 191
UPDATE_ACTIVE, 200
UPDATE_ERRORS_EXIST, 200
USER_LOGGEDIN_MAX, 202
WP_AVAILABLE, 207
WP_CHECK_CONFIGURED, 213
WP_IDLE, 210
WP_STATUS, 214
alert type
 r3monale monitor, 127
 r3monchg monitor, 137
 r3moncts monitor, 147
 r3mondmp monitor, 160
 r3monjob monitor, 163
 r3monlck monitor, 173
 r3monoms monitor, 177
 r3monrfc monitor, 180
 r3monspl monitor, 184
 r3montra monitor, 189
 r3monupd monitor, 198
 r3monusr monitor, 201
 r3monwpa monitor, 205
alert-collector monitor
 configuring remote monitor, 119
AlertMonitor Alert Class, 33, 123
AlertThrBufCUA, 228
AlertThrBufNTABField, 228
AlertThrBufNTABInit, 228
AlertThrBufNTABShort, 228
AlertThrBufNTABTable, 228
AlertThrBufProgram, 228
AlertThrBufScreen, 228
AlertThrBufTablesGen, 228
AlertThrBufTablesSin, 228
AlertThrInfActiv, 232
AlertThrInfData, 232
AlertThrInfDB, 232
AlertThrOraArch, 231
AlertThrOraCall, 231
AlertThrOraData, 231
AlertThrOraDB, 230
AlertThrOraGen, 230
AlertThrOraScan, 231
AlertThrOraSort, 231
AlertThrOthers, 229
Alerttype Alert Class, 32, 123
and/or parameter values, 117
APSERVER
 OM_SWITCH_OVERDUE, 179
 USER_LOGGEDIN_MAX, 203
 WP_AVAILABLE, 208
 WP_IDLE, 211
 WP_STATUS, 215
availability
 ITS monitor, 343

B

Batch service, 351
Batch WP service, 353
BehindSyncMessage
 schedule synchronization for performance monitor, 274
 synchronize schedule of r3perfagent, 274
buffer alerts
 setting thresholds, 228

C**CCMS**

adding alert messages in alert monitor, 236
alert classes, 89
customizing message flow, 233
LocalAutoAck, 38
message flow customization, 224, 233
monitoring conditions with r3monsap, 87
Severity Levels, 62

CCMS alert monitor, 58
environment variables, 62, 329
file locations, 61
files, 97

Remote Monitoring, 63
SAP R/3 4.6(6.x), 69
SAP R/3 4.x, 64
Severity Levels, 62

CCMSAcknowledgeMessage for Alert Monitors, 36, 75

CCMSInterface for Alert Monitors, 37, 70, 71

CCMSMonitorSet for Alert Monitors, 37, 71

CHANGE_OPTION

SAP R/3 (4.0x/4.5x), 140
SAP R/3 3.x, 139
SAP R/3 4.6x, 143

CHECK Alert Type for the r3monrfc monitor, 182

Check SAP Shared Memory, 41

Coda

migrating from MWA, 256

Command

r3ovo2ccms, 246

Command-Line Interface

ITS Performance Monitor, 332

command-line parameter options

r3ovo2ccms, 247

command-line parameters, 118

for r3moncol alert monitors, 118

r3monale monitor, 128

r3monchg monitor, 138

r3moncts monitor, 148
r3mondmp monitor, 161
r3monjob monitor, 165
r3monlck monitor, 174
r3monoms monitor, 177
r3monrfc monitor, 181
r3monspl monitor, 185
r3montra monitor, 190
r3monupd monitor, 199
r3monusr monitor, 202
r3monwpa monitor, 206
r3ovo2ccms, 246

commands

performance monitor, 278

conditions

query for r3moncol alert monitors, 114

r3mondev monitor, 80

r3monpro monitor, 83

r3monsap monitor, 87

config. type policy editor, 319

configuration

global, 48

local, 49

monitors, 43

configuration file for Alert Monitors, 31, 56

AgentHostname keyword, 32, 122

Alert Classes, 32

AlertMonitor, 33, 123

Alerttype, 32, 123

Enable/Disable, 33, 36, 123

Filemask, 33

Mode, 33

OPC MsgGroup, 33, 124

OPC Object, 34, 123

OPC Severity, 34, 123

ProcessName, 34

ProcessNumber, 34

RFC Parameter, 34, 124

SAP Client, 35, 124

SAP Hostname, 35, 124

SAP Number, 35, 125

SAP System, 35, 125

SyslogId, 35, 36

conditions, 38

HistoryPathAIX keyword, 38, 103

HistoryPathUnix keyword, 38, 103

HistoryPathWinNT keyword, 38, 103

RemoteMonitoring keyword, 39, 103, 122

SAPSHMCheck keyword, 41

Index

- trace file, 42, 102
- trace level, 43, 61, 102
- configuration file for r3moncol
 - HistoryPathAIX keyword, 122
 - HistoryPathUnix keyword, 122
 - HistoryPathWinNT keyword, 122
- trace file, 122
- trace level, 122
- configuration file for r3moncol Alert Monitors, 122
- configuration file for r3perfagent
 - Alert Classes
 - RFC FUNCTION, 277
- configuration files
 - r3itosap.cfg, 19, 100
 - r3monal.cfg, 61
 - r3mondev.cfg, 79
 - r3monpro.cfg, 82
 - r3monsap.cfg, 86
 - r3monxmi.cfg, 93
 - r3perfagent.cfg, 267
 - r3status.cfg, 100
 - r3status.log, 100
- configuring
 - ITS performance monitor
 - Agate Hostname, 332
 - Datafileslocation, 330
 - Enable/Disable, 331
 - HistoryPathWinNT, 330
 - ITS Hostname, 331
 - ITS System ID, 331
 - ITSPerfMon, 331
 - Portnumber, 332
 - Trace File, 330
 - Trace Level, 329
 - Webserver, 331
 - performance monitor, 264
 - Agent Hostname, 274
 - BehindSyncMessage, 274
 - Perfmon, 276
 - Remote Monitoring, 275
 - SyncBack, 274
 - Trace File, 273
 - Trace Level, 273
 - performance-monitor scheduler, 271
 - remote Alert Monitor, 28
 - remote alert-collector monitor, 119
 - remote performance monitor, 269
 - remote r3status monitor, 104

- STATRECS_PERF, 298
- configuring Alert Types
 - r3monale, 128
 - IDOC_CURRENT_STATUS, 129
 - r3monchg, 139
 - CHANGE_OPT (SAP R/3 3.x), 139
 - CHANGE_OPT (SAP R/3 4.0x/4.5x), 140
 - CHANGE_OPT (SAP R/3 4.6x), 143
 - r3moncts, 149
 - OBJECT_RELEASED, 158
 - OBJECT_USED, 156
 - REQUEST_CREATED, 151
 - REQUEST_RELEASED, 152
 - TASK_CREATED, 154
 - TASK_RELEASED, 155
 - r3mondmp, 162
 - ABAP4_ERROR_EXIST, 162
 - r3monjob, 166
 - JOB_ABORTED, 172
 - JOB_MAX_RUN_TIME, 167
 - JOB_MIN_RUN_TIME, 169
 - START_PASSED, 170
 - r3monlck, 175
 - OLD_LOCKS, 175
 - r3monoms, 178
 - OM_SWITCH_OVERDUE, 178
 - r3monrfc, 181
 - CHECK, 182
 - r3monspl, 186
 - PRINT_ERROR_EXISTS, 188
 - SPOOL_ENTRIES_RANGE, 186
 - SPOOL_ERROR_RANGE, 187
 - r3montra, 191
 - REPAIR, 194
 - RFCONNECT, 195
 - TPTEST, 196
 - TRANS, 191
 - r3monupd, 200
 - UPDATE_ACTIVE, 200
 - UPDATE_ERRORS_EXIST, 200
 - r3monusr, 202
 - USER_LOGGEDIN_MAX, 202
 - r3monwpa, 206
 - WP_AVAILABLE, 207
 - WP_CHECK_CONFIGURED, 213
 - WP_IDLE, 210
 - WP_STATUS, 214

CORRECTION AND TRANSPORT SYSTEM (CTS) Monitor, 147

- customizing
 - alert classes, 66, 77, 89
 - alert collector monitoring conditions, 114
 - changing severity level, 223
 - disabling messages in SAP R/3, 233
 - including messages in the SAP R/3 system
 - log file, 236
 - message flow, 220
 - setting thresholds for messages in SAP R/3, 235
 - syslog severity levels, 94
 - thresholds
 - Informix databases, 232
 - Oracle databases, 230
 - other alerts, 229
 - performance alerts, 225
 - syslog alerts, 226

D

- Data
 - Instrumentation for the SPI, 319
- Database service, 351
- Datafileslocation for r3itsperfagent
 - configuration, 330
- DBINFO_PERF Performance metrics, 281, 283, 379
- de-install
 - SAP ITS software, 344
- de-installing
 - SAP/Performance subagent, 309
- Delta
 - condition in process monitor, 84
- Dialog service, 351
- Dialog WP service, 353
- DOCSTAT_PERF Performance metrics, 281, 287, 379
- dsi2ddf wrapper utility, 319

E

- editor
 - config. type policy, 319
- Enable/Disable Alert Class, 33, 36, 123
- Enable/Disable parameter for ITS
 - Performance Monitor configuration, 331
- Enqueue process, 173
- Environment service, 351
- environment variables
 - CCMS alert monitor, 62, 329
 - for r3moncol alert monitors, 118
 - process monitor, 83

- r3monal monitor, 62
- r3monale monitor, 128
- r3monchg monitor, 138
- r3moncts monitor, 148
- r3mondev monitor, 80
- r3mondmp monitor, 161
- r3monjob monitor, 165
- r3monlck monitor, 174
- r3monoms monitor, 177
- r3monpro monitor, 83
- r3monrfc monitor, 181
- r3monsap monitor, 87
- r3monspl monitor, 185
- r3montra monitor, 190
- r3monupd monitor, 199
- r3monusr monitor, 202
- r3monwpa monitor, 205
- r3monxmi monitor, 93
- r3status monitor, 100
- SAPOPC_DRIVE, 62, 80, 83, 87, 93
- SAPOPC_HISTORYPATH, 62, 80, 83, 87, 93, 100
- SAPOPC_R3ITOSAP_CONFIGFILE, 101
- SAPOPC_R3MONAL_CONFIGFILE, 62
- SAPOPC_R3MONDEV_CONFIGFILE, 80
- SAPOPC_R3MONPRO_CONFIGFILE, 83
- SAPOPC_R3MONSAP_CONFIGFILE, 87
- SAPOPC_R3MONSAP_SAPMSGFILE, 87
- SAPOPC_R3MONXMI_CONFIGFILE, 93
- SAPOPC_R3STATUS_CONFIGFILE, 101
- SAPOPC_RFC_TIMEOUT, 100
- SAPOPC_SAPDIR, 62, 80, 83, 87, 93
- SAPOPC_TRACEMODE, 62, 80, 83, 87, 93, 101
- SAPOPC_TRACEPATH, 62, 80, 83, 87, 93, 101
- syslog monitor, 93

Exact

- condition in process monitor, 83

F

- file
 - Agate-Hostname parameter in ITS
 - Performance Monitor
 - configuration, 332
 - Agent Hostname for r3perfagent
 - configuration, 274
 - Alert Collector history, 114
 - configuration for Alert Monitors, 31, 56

Index

- AgentHostname keyword, 32, 122
- Alert Classes, 32
- CCMSAcknowledgeMessage, 36, 75
- CCMSInterface, 37, 70, 71
- CCMSMonitorSet, 37, 71
- conditions, 38
- HistoryPathAIX keyword, 38, 103
- HistoryPathUnix keyword, 38, 103
- HistoryPathWinNT keyword, 38, 103
- LocalAutoAck, 38
- RemoteMonitoring keyword, 39, 103, 122
- RFCTimeOut, 40, 70
- RSAPSHMCheck keyword, 41
- trace file, 42, 102
- trace level, 43, 61, 102
- configuration for ITS Performance Monitor
 - HistoryPathWinNT, 330
 - trace file, 330
 - trace level, 329
- configuration for ITS performance monitor
 - Agate Hostname, 332
 - Enable/Disable, 331
 - ITS Hostname, 331
 - ITS System ID, 331
 - ITSPerfMon, 331
 - Portnumber, 332
 - Webserver, 331
- configuration for r3itsperfagent
 - Datafileslocation, 330
- configuration for r3moncol
 - HistoryPathAIX keyword, 122
 - HistoryPathUnix keyword, 122
 - HistoryPathWinNT keyword, 122
- configuration for r3moncol Alert Monitors, 122
- configuration for r3perfagent
 - Agent Hostname, 274
 - BehindSyncMessage, 274
 - Perfmon, 276
 - Remote Monitoring, 275
 - SyncBack, 274
 - trace file, 273
 - trace level, 273
- configuration for r3moncol
 - trace file, 122
 - trace level, 122
- Datafileslocation for r3itsperfagent
 - configuration, 330
- Enable/Disable parameter in ITS Performance Monitor
 - configuration, 331
- history for r3moncol Alert Monitors, 114
- HistoryPathWinNT with ITS Performance Monitor
 - configuration, 330
- ITS Hostname in ITS Performance Monitor
 - configuration, 331
- ITS System ID in ITS Performance Monitor
 - configuration, 331
- ITSPerfMon with ITS Performance Monitor
 - configuration, 331
- Perfmon with r3perfagent
 - configuration, 276
- Portnumber parameter in ITS Performance Monitor
 - configuration, 332
- r3itosap.cfg, 19, 100
 - configuring, 19
- r3itsperfmon.cfg, 329
- r3itsperfmon.exe, 329
- r3itsperfmon.his, 329
- r3itsperfmon.log, 329
- r3monal.cfg, 61
- r3monal.exe, 61
- r3monal.his, 61
- r3monale.cfg, 127
- r3monale.log, 127
- r3monchg.cfg, 138
- r3moncol(.exe), 127
 - r3monchg, 138
- r3moncts, 148
- r3mondmp, 161
- r3monjob, 165
- r3monlck, 174
- r3monoms, 177
- r3monrnc, 180
- r3monspl, 185
- r3montra, 190
- r3monupd, 199
- r3monusr, 201
- r3monwpa, 205
- r3moncts.cfg, 148
- r3mondev.cfg, 79
- r3mondev.exe, 79
- r3mondev.his, 79
- r3mondmp.cfg, 161
- r3monjob.cfg, 165

- r3monlck.cfg, 174
- r3monoms.cfg, 177
- r3monpro.cfg, 82
- r3monpro.exe, 82
- r3monpro.his, 82
- r3monrfc.cfg, 180
- r3monsap.cfg, 86
- r3monsap.exe, 86
- r3monsap.his, 86
- r3monsap.msg, 61, 86
- r3monspl.cfg, 185
- r3montra.cfg, 190
- r3monup.his, 100, 101
- r3monupd.cfg, 199
- r3monwpa.cfg, 205
- r3monxmi.cfg, 93
- r3monxmi.exe, 93
- r3monxmi.his, 93
- r3status - see r3monup.his, 100
- r3status(.exe), 99
- r3status.cfg, 100
- r3status.log, 100
- Remote Monitoring with r3perfagent
 - configuration, 275
- schedule synchronization for r3perfagent
 - configuration, 274
- TemSe, 217
- trace file listed for each monitor, 44
- trace for Alert-Monitor configuration, 42, 102
- trace for ITS Performance Monitor
 - configuration, 330
- trace for r3moncol configuration, 122
- trace for r3perfagent
 - configuration, 273
- trace level for r3perfagent
 - configuration, 273
- Webserver parameter in ITS Performance Monitor
 - configuration, 331
- file locations
 - r3monal, 61
 - r3monale monitor, 127
 - r3monchg monitor, 138
 - r3moncts monitor, 148
 - r3mondev, 79
 - r3mondmp monitor, 161
 - r3monjob monitor, 165
 - r3monlck monitor, 174

- r3monoms monitor, 177
- r3monpro, 82
- r3monrfc monitor, 180
- r3monsap, 86
- r3monspl monitor, 185
- r3montra monitor, 190
- r3monupd monitor, 199
- r3monusr monitor, 201
- r3monwpa monitor, 205
- r3monxmi, 93
- r3status, 99
- file monitor, 79
- Filemask Alert Class, 33
- frequency
 - r3status monitor run interval, 99

G

- Gateway service, 353
- generating
 - SPI for SAP service reports, 366, 377
- global configuration, 26, 48

H

- history file, 45
 - path, 45
 - r3monal.his, 61
 - r3moncol, 114
 - r3mondev.his, 79
 - r3monpro.his, 82
 - r3monsap.his, 86
 - r3monup.his, 100, 101
 - r3monxmi.his, 93
 - r3status - see r3monup.his, 100
- history file for r3moncol Alert Monitors, 114
- HistoryPathAIX keyword, 38, 103, 122
- HistoryPathUnix keyword, 38, 103, 122
- HistoryPathWinNT keyword, 38, 103, 122
 - for ITS Performance Monitor, 330

I

- ICMSTAT_PERF Performance metrics, 281, 288, 379
- Informix databases
 - setting thresholds, 232
- installation
 - ITS Performance Monitor
 - verifying, 323
- installing
 - SAP/Performance subagent, 259

Index

- SPI for SAP service reports, 364
- Installing the SPI for SAP Reports, 364
- Instrumentation
 - SPI Data, 319
- Integration
 - SPI for SAP and SAP Solution Manager, 239
 - pre-requisites, 239
- Interface service, 351
- ITS
 - availability monitor, 343
 - status monitor, 343
- ITS Hostname parameter for ITS
 - Performance Monitor configuration, 331
- ITS Performance Monitor, 311
 - Command-Line Interface, 332
 - configuring
 - Agate Hostname, 332
 - Datafileslocation, 330
 - Enable/Disable, 331
 - HistoryPathWinNT, 330
 - ITS Hostname, 331
 - ITS System ID, 331
 - ITSPerfMon, 331
 - Portnumber, 332
 - Trace File, 330
 - Trace Level, 329
 - Webserver, 331
 - configuring PerfView, 340
 - configuring Service Reports, 337
 - installation, 319
 - pre-requisites, 319
 - verifying, 323
 - integration
 - Performance metrics, 333
 - PerfView, 340
 - SAP SPI, 317
 - Service Reports, 337
 - pre-requisites
 - PerfView, 340
 - Service Reports, 337
 - viewing performance graphs, 341
 - viewing Service Reports, 338
- ITS System ID parameter for ITS
 - Performance Monitor configuration, 331
- ITSPerfMon Keyword
 - Agate-Hostname parameter, 332
 - Enable/Disable parameter, 331
 - ITS Hostname parameter, 331

- ITS Performance Monitor configuration, 331
- ITS System ID parameter, 331
- Portnumber parameter, 332
- Webserver parameter, 331

J

- JOB_ABORTED, 172
- JOB_MAX_RUN_TIME, 167
- JOB_MIN_RUN_TIME, 169
 - condition in job monitor, 163, 176
- JOBREP_PERF Performance metrics, 281, 290, 379
- JOBREPORT Monitor, 163

K

Keyword

- ITS Monitor Configuration
 - Agate-Hostname parameter, 332
 - DatafilesLocation, 330
 - Enable/Disable parameter, 331
 - HistoryPathWinNT, 330
 - ITS Hostname parameter, 331
 - ITS System ID parameter, 331
 - ITSPerfMon, 331
 - Portnumber parameter, 332
 - TraceFile, 330
 - TraceLevel, 329
 - Webserver parameter, 331
- Monitor Configuration
 - AlertMonitor, 33, 123
 - Alerttype, 32, 123
 - CCMSAcknowledgeMessage, 36, 75
 - CCMSInterface, 37, 70
 - CCMSMonitorSet, 37, 71
 - Enable/Disable, 33, 36, 123
 - Filemask, 33
 - LocalAutoAck, 38
 - Mode, 33
 - OPC MsgGroup, 33, 124
 - OPC Object, 34, 123
 - OPC Severity, 34, 123
 - Perfmon for r3perfragent configuration, 276
 - ProcessName, 34
 - ProcessNumber, 34
 - RFC Parameter, 34, 124
 - RFCTimeOut, 40, 70
 - SAP Client, 35, 124

- SAP Hostname, 35, 124
- SAP Number, 35, 125
- SAP System, 35, 125
- SAPSHMCheck, 41
- SyslogId, 35, 36
- TraceLevel, 61
- Performance Monitor Configuration
 - RFC FUNCTION, 277
- L**
- level
 - trace for Alert-Monitor configuration, 43, 61, 102
 - trace for ITS Performance Monitor configuration, 329
 - trace for r3moncol configuration, 122
- Levels
 - r3monal monitor Severity, 62
- line of business service, 353
- local configuration, 26
- LocalAutoAck for Alert Monitors, 38
- locations
 - r3monal monitor configuration files, 61
 - r3mondev monitor configuration files, 79
 - r3monpro monitor configuration files, 82
 - r3monsap monitor configuration files, 86
 - r3monxmi monitor configuration files, 93
 - r3status monitor configuration files, 99
 - run for r3moncol Alert Monitors, 112
- LOCK CHECK Monitor, 173
- M**
- Manager
 - Solution
 - Integration pre-requisites, 239
 - Integration with SPI for SAP, 239
- MAX
 - USER_LOGGEDIN_MAX, 203
- Max
 - condition in process monitor, 84
- memory
 - check SAP shared, 41
- Memory Management service, 352
- message browser, 115
 - customizing messages, 221
- message customization, 221
- Message service, 353
- message source templates, 22
- messages
 - changing severity level, 223
 - customizing message browser contents, 221
 - disabling in SAP R/3, 233
 - including in SAP R/3 system log file, 236
 - setting thresholds in SAP R/3, 235
- Metrics
 - performance
 - DBINFO_PERF, 281, 283, 379
 - DOCSTAT_PERF, 281, 287, 379
 - ICMSTAT_PERF, 281, 288, 379
 - JOBREF_PERF, 281, 290, 379
 - SAPBUFFER_PERF, 281, 292, 379
 - SAPMEMORY_PERF, 281, 294, 379, 380
 - SPOOL_PERF, 296
 - STATRECS_PERF, 281, 297, 380
 - SYSUP_PERF, 281, 301, 380
 - UPDATE_PERF, 282, 302, 380
 - USER_PERF, 282, 303, 380
 - WLSUM_PERF, 282, 304, 380
 - WP_PERF, 282, 307, 380
 - metrics
 - ITS Performance Monitor
 - integration, 333
 - PerfView integration, 340
 - Service Reports, 337
 - SAP ITS service reports, 380
 - SAP R/3 service reports, 379
 - SPI for SAP service reports, 379
- migration
 - performance data, 253
 - Coda, 256
 - MWA, 254
 - perflbd file, 255, 256
 - SPI for SAP service reports, 363
- Min
 - condition in process monitor, 84
- Mno Syslog Message Component, 95
- Mode Alert Class, 33
- Monitor
 - performance metrics
 - DBINFO_PERF, 281, 283, 379
 - DOCSTAT_PERF, 281, 287, 379
 - ICMSTAT_PERF, 281, 288, 379
 - JOBREP_PERF, 281, 290, 379
 - SAPBUFFER_PERF, 281, 292, 379
 - SAPMEMORY_PERF, 281, 294, 379, 380
 - SPOOL_PERF, 296
 - STATRECS_PERF, 281, 297, 380
 - SYSUP_PERF, 281, 301, 380
 - UPDATE_PERF, 282, 302, 380

Index

- USER_PERF, 282, 303, 380
- WLSUM_PERF, 282, 304, 380
- WP_PERF, 282, 307, 380
- monitor
 - AgentHostname keyword, 32, 122
 - Alert Classes, 32
 - AlertMonitor, 33, 123
 - Alerttype, 32, 123
 - Enable/Disable, 33, 36, 123
 - Filemask, 33
 - Mode, 33
 - OPC MsgGroup, 33, 124
 - OPC Object, 34, 123
 - OPC Severity, 34, 123
 - ProcessName, 34
 - ProcessNumber, 34
 - RFC Parameter, 34, 124
 - SAP Client, 35, 124
 - SAP Hostname, 35, 124
 - SAP Number, 35, 125
 - SAP System, 35, 125
 - SyslogId, 35, 36
 - alert-configuration file, 56
 - CCMSAcknowledgeMessage, 36, 75
 - CCMSInterface, 37, 70, 71
 - CCMSMonitorSet, 37, 71
 - LocalAutoAck, 38
 - RFCTimeOut, 40, 70
 - CCMS alert, 54, 58
 - environment variables, 62
 - file locations, 61
 - Remote Monitoring, 63
 - SAP R/3 4.6(6.x), 69
 - SAP R/3 4.x, 64
 - Severity Levels, 62
 - command-line parameters for r3moncol
 - alert monitors, 118
 - conditions, 38
 - configuration file, 31
 - AgentHostname keyword, 32, 122
 - Alert Classes, 32
 - conditions, 38
 - HistoryPathAIX keyword, 38, 103, 122
 - HistoryPathUnix keyword, 38, 103, 122
 - HistoryPathWinNT keyword, 38, 103, 122
 - RemoteMonitoring keyword, 39, 103, 122
 - SAPSHMCheck keyword, 41
 - trace file, 42, 102, 122
 - trace level, 43, 61, 102, 122
 - configuration file for r3moncol alerts, 122
 - configuring, 43
 - environment variables for r3moncol alert monitors, 118
 - file, 79
 - history file for r3moncol alerts, 114
 - HistoryPathAIX keyword, 38, 103, 122
 - HistoryPathUnix keyword, 38, 103, 122
 - HistoryPathWinNT keyword, 38, 103, 122
 - ITS availability, 343
 - ITS status, 343
 - polling rates for r3moncol alerts, 112
 - process, 82
 - query conditions for r3moncol alert monitors, 114
 - r3monal, 58
 - SAP R/3 4.6(6.x), 69
 - SAP R/3 4.x, 64
 - r3monale, 127
 - alert types, 127
 - command-line parameters, 128
 - configuring alert types, 128
 - environment variables, 128
 - file locations, 127
 - IDOC_CURRENT_STATUS alert type, 129
 - remote monitoring with, 128
 - type of, 127
 - r3monchg, 137
 - alert types, 137
 - CHANGE_OPT (SAP R/3 3.x) alert type, 139
 - CHANGE_OPT (SAP R/3 4.0x/4.5x) alert type, 140
 - CHANGE_OPT (SAP R/3 4.6x) alert type, 143
 - command-line parameters, 138
 - configuring alert types, 139
 - environment variables, 138
 - file locations, 138
 - parameter values, 139
 - remote monitoring with, 138
 - r3moncol
 - parameter values, 116
 - r3moncts, 147
 - alert types, 147
 - command-line parameters, 148
 - configuring alert types, 149
 - environment variables, 148

- file locations, 148
- OBJECT_RELEASED alert type, 158
- OBJECT_USED alert type, 156
- remote monitoring with, 149
- REQUEST_CREATED alert type, 151
- REQUEST_RELEASED alert type, 152
- TASK_CREATED alert type, 154
- TASK_RELEASED alert type, 155
- r3mondev, 79
- r3mondmp, 160
 - ABAP4_ERROR_EXIST alert type, 162
 - alert types, 160
 - command-line parameters, 161
 - configuring alert types, 162
 - environment variables, 161
 - file locations, 161
 - remote monitoring with, 161
- r3monjob, 163
 - alert types, 163
 - command-line parameters, 165
 - configuring alert types, 166
 - environment variables, 165
 - file locations, 165
 - JOB_ABORTED alert type, 172
 - JOB_MAX_RUN_TIME alert type, 167
 - JOB_MIN_RUN_TIME alert type, 169
 - parameter values, 166
 - remote monitoring with, 166
 - START_PASSED alert type, 170
- r3monlck, 173
 - alert types, 173
 - command-line parameters, 174
 - configuring alert types, 175
 - environment variables, 174
 - file locations, 174
 - OLD_LOCKS alert type, 175
 - remote monitoring with, 174
- r3monoms, 176
 - alert types, 177
 - command-line parameters, 177
 - configuring alert types, 178
 - environment variables, 177
 - file locations, 177
 - OM_SWITCH_OVERDUE alert type, 178
 - remote monitoring with, 178
- r3monpro, 82
- r3monrfc, 180
 - alert types, 180
 - CHECK alert type, 182
 - command-line parameters, 181
 - configuring alert types, 181
 - environment variables, 181
 - file locations, 180
 - parameter values, 181
 - remote monitoring with, 181
- r3monsap, 86
- r3monspl, 151, 184
 - alert types, 184
 - command-line parameters, 185
 - configuring alert types, 186
 - environment variables, 185
 - file locations, 185
 - PRINT_ERROR_EXISTS alert type, 188
 - remote monitoring with, 185
 - SPOOL_ENTRIES_RANGE alert type, 186
 - SPOOL_ERROR_RANGE alert type, 187
- r3montra, 189
 - alert types, 189
 - command-line parameters, 190
 - configuring alert types, 191
 - environment variables, 190
 - file locations, 190
 - parameter values, 191
 - remote monitoring with, 190
 - REPAIR alert type, 194
 - RFCONNECT alert type, 195
 - TPTEST alert type, 196
 - TRANS alert type, 191
- r3monupd, 198
 - alert types, 198
 - command-line parameters, 199
 - configuring alert types, 200
 - environment variables, 199
 - file locations, 199
 - remote monitoring with, 199
 - UPDATE_ACTIVE, 200
 - UPDATE_ERRORS_EXIST, 200
- r3monusr, 201
 - alert types, 201
 - command-line parameters, 202
 - configuring alert types, 202
 - configuring USER_LOGGEDIN_MAX, 202
 - environment variables, 202
 - file locations, 201
 - remote monitoring with, 202
- r3monwpa, 204

Index

- alert types, 205
- command-line parameters, 206
- configuring alert types, 206
- environment variables, 205
- file locations, 205
- parameter values, 206
- remote monitoring with, 206
- r3monxmi, 92
- RemoteMonitoring keyword, 39, 103, 122
- report types for r3moncol alerts, 111
- run locations for r3moncol alerts, 112
- SAPSHMCheck keyword, 41
- spooler data, 151
- syslog, 92
- trace file, 42, 102, 122
- trace level, 43, 61, 102, 122
- Monitor Type
 - Snapshot, 112
- Monitoring
 - r3monal monitor Remotely, 63
- monitoring
 - remotely with r3moncol alert monitors, 119
 - remotely with the Alert Monitors, 28
 - remotely with the performance monitor, 269
 - remotely with the r3monale monitor, 128, 129
 - remotely with the r3monchg monitor, 138
 - remotely with the r3moncts monitor, 149
 - remotely with the r3mondmp monitor, 161
 - remotely with the r3monjob monitor, 166
 - remotely with the r3monlck monitor, 174
 - remotely with the r3monoms monitor, 178
 - remotely with the r3monrfc monitor, 181
 - remotely with the r3monspl monitor, 185
 - remotely with the r3montra monitor, 190
 - remotely with the r3monupd monitor, 199
 - remotely with the r3monusr monitor, 202
 - remotely with the r3monwpa monitor, 206
 - remotely with the r3status monitor, 104
 - the performance-monitor scheduler, 271
- monitoring conditions
 - process monitor, 83
 - r3mondev monitor, 80
 - r3monpro monitor, 83
 - r3monsap monitor, 87
 - syslog monitor, 94
- monitoring TEMSE file consistency, 217
- MonitorType
 - TimeFrame, 111
- N**
- network
 - setting alert thresholds, 224
- Network service, 352
- O**
- OBJECT_RELEASED, 158
- OBJECT_USED, 156
- OLD_LOCKS, 175
- OM_SWITCH_OVERDUE, 178
 - APSERVER, 179
 - OVERDUE_TIME, 179
- OPC MsgGroup Alert Class, 33, 124
- OPC Object Alert Class, 34, 123
- OPC Severity Alert Class, 34, 123
- operating system
 - setting alert thresholds, 224
- Operating System Service, 352
- OPERATION MODE Monitor, 176
- options
 - command-line parameter
 - r3ovo2ccms, 247
- Oracle databases
 - setting thresholds, 230
- other alerts
 - setting thresholds, 229
- other configuration and customization
 - methods, 219
- OV Operations, see OVO
- OVERDUE_TIME
 - OM_SWITCH_OVERDUE, 179
- OVO
 - configuring to customize CCMS message flow, 224
 - message customization, 221
- P**
- Parameter
 - AND/OR Comparisons, 117
 - Blocks, 117
 - Delimiter, 115
 - Line Breaks, 117
 - Name, 115
- parameter values
 - r3monchg monitor, 139
 - r3moncol monitor, 116
 - r3monjob monitor, 166
 - r3monrfc monitor, 181

- r3montra monitor, 191
- r3monwpa monitor, 206
- parameters
 - command-line
 - r3ovo2ccms, 246
 - with the r3monchg monitor, 138
 - command-line for r3monale monitor, 128
 - command-line for r3moncol alert monitors, 118
 - command-line parameter
 - with the r3moncts monitor, 148
 - with the r3mondmp monitor, 161
 - with the r3monjob monitor, 165
 - with the r3monlck monitor, 174
 - with the r3monoms monitor, 177
 - with the r3monrnc monitor, 181
 - with the r3monspl monitor, 185
 - with the r3montra monitor, 190
 - with the r3monupd monitor, 199
 - with the r3monusr monitor, 202
 - with the r3monwpa monitor, 206
- path
 - history file, 45
- perflbd file, 255, 256
- Perfmon Keyword for r3perfagent
 - configuration, 276
- Performance Agent
 - r3perfagent.cfg, 267
- performance alerts
 - setting thresholds, 225
- performance data
 - migrating MWA, 254
 - migrating perflbd file, 255, 256
 - migrating to Coda, 256
 - migration, 253
- Performance metrics
 - DBINFO_PERF, 281, 283, 379
 - DOCSTAT_PERF, 281, 287, 379
 - ICMSTAT_PERF, 281, 288, 379
 - ITS Performance Monitor
 - integration, 333
 - JOBREP_PERF, 281, 290, 379
 - SAP ITS service reports, 380
 - SAP R/3 service reports, 379
 - SAPBUFFER_PERF, 281, 292, 379
 - SAPMEMORY_PERF, 281, 294, 379, 380
 - SPI for SAP service reports, 379
 - SPOOL_PERF, 296
 - STATRECS_PERF, 281, 297, 380
 - SYSUP_PERF, 281, 301, 380
 - UPDATE_PERF, 282, 302, 380
 - USER_PERF, 282, 303, 380
 - WLSUM_PERF, 282, 304, 380
 - WP_PERF, 282, 307, 380
- Performance monitor
 - DBINFO_PERF, 281, 283, 379
 - DOCSTAT_PERF, 281, 287, 379
 - ICMSTAT_PERF, 281, 288, 379
 - JOBREF_PERF, 281, 379
 - JOBREP_PERF, 290
 - SAPBUFFER_PERF, 281, 292, 379
 - SAPMEMORY_PERF, 281, 294, 379, 380
 - SPOOL_PERF, 296
 - STATRECS_PERF, 281, 297, 380
 - SYSUP_PERF, 281, 301, 380
 - UPDATE_PERF, 282, 302, 380
 - USER_PERF, 282, 303, 380
 - WLSUM_PERF, 282, 304, 380
 - WP_PERF, 282, 307, 380
- performance monitor
 - Alert Classes
 - RFC FUNCTION, 277
 - commands, 278
 - configuring, 264
 - Agent Hostname, 274
 - BehindSyncMessage, 274
 - Perfmon, 276
 - Remote Monitoring, 275
 - SyncBack, 274
 - Trace File, 273
 - Trace Level, 273
 - configuring remote monitor, 269
 - description, 281
 - overview, 251
 - scheduler, 271
 - subagent files
 - AIX, 261
 - HP-UX, 262
 - Windows NT, 262
- PerfView
 - ITS Performance Monitor integration, 340
 - pre-requisites
 - ITS Performance Monitor, 340
- policy editor
 - config. type, 319
- polling frequency
 - r3status, 99
- Polling Rates, 112

Index

- polling rates for r3moncol Alert Monitors, 112
- Portnumber parameter for ITS Performance Monitor configuration, 332
- Precedence
 - Order of, 26
- pre-requisites
 - ITS Performance Monitor
 - PerfView, 340
 - Service Reports, 337
- PRINT_ERROR_EXISTS, 188
- process, 23
- process monitor, 82
 - environment variables, 83
 - monitoring conditions, 83
- ProcessName Alert Class, 34
- ProcessNumber Alert Class, 34

Q

- Query Conditions, 114
 - for r3moncol alert monitors, 114

R

- R/3 Instances service, 351
- r3itosap.cfg, 19, 100
 - configuring, 19
- r3itothr.cfg, 224, 230, 232
- r3itsperfmon.cfg, 329
- r3itsperfmon.exe, 329
- r3itsperfmon.his, 329
- r3itsperfmon.log, 329
- r3modev
 - SAPOPC_HISTORYPATH, 80
- r3momdmp monitor
 - report type, 160
- r3monaco monitor
 - report type, 217
- r3monal
 - default settings, 67
 - file locations, 61
 - monitor, 58
 - SAP R/3 4.6(6.x), 69
 - SAP R/3 4.x, 64
 - Remote Monitoring, 63
 - SAPOPC_DRIVE, 62
 - SAPOPC_HISTORYPATH, 62
 - SAPOPC_R3MONAL_CONFIGFILE, 62
 - SAPOPC_SAPDIR, 62
 - SAPOPC_TRACEMODE, 62
 - SAPOPC_TRACEPATH, 62

- Severity Levels, 62
- r3monal.cfg, 61
- r3monal.exe, 61
- r3monal.his, 61
- r3monal.msg, 61
- r3monale, 127
 - alert types
 - configuring, 128
 - IDOC_CURRENT_STATUS, 129
 - monitor alert types, 127
 - monitor command-line parameters, 128
 - monitor environment variables, 128
 - monitor file locations, 127
 - monitor type, 127
 - remote monitoring with, 128
- r3monale Monitor, 127
 - alert types, 127
 - command-line parameters, 128
 - environment variables, 128
 - file locations, 127
 - remote monitoring with, 128
 - type, 127
- r3monale.cfg, 127
- r3monale.log, 127
- r3monchg, 137
 - alert types
 - CHANGE_OPT (SAP R/3 3.x), 139
 - CHANGE_OPT (SAP R/3 4.0x/4.5x), 140
 - CHANGE_OPT SAP R/3 4.6x, 143
 - configuring, 139
 - command-line parameters, 138
 - monitor alert types, 137
 - monitor environment variables, 138
 - monitor file locations, 138
 - parameter values, 139
 - remote monitoring with, 138
- r3monchg Monitor
 - alert types, 137
 - command-line parameters, 138
 - environment variables, 138
 - file locations, 138
 - parameter values, 139
 - remote monitoring with, 138
- r3monchg monitor
 - report type, 137
- r3monchg.cfg, 138
- r3moncol, 111
 - command-line parameters for, 118
 - configuration file for, 122
 - environment variables for, 118

- ul style="list-style-type: none;">
- history file for, 114
- parameter values, 116
- query conditions for, 114
- remote monitoring with, 119
- ReportTypes for, 111
- run frequency of, 112
- run locations for, 112
- r3moncol(.exe), 127, 138, 148, 161, 165, 174, 177, 180, 185, 190, 199, 201, 205
- r3moncol.cfg, 119
- r3moncts, 147
 - alert types
 - configuring, 149
 - OBJECT_RELEASED, 158
 - OBJECT_USED, 156
 - REQUEST_CREATED, 151
 - REQUEST_RELEASED, 152
 - TASK_CREATED, 154
 - TASK_RELEASED, 155
 - command-line parameters, 148
 - monitor alert types, 147
 - monitor environment variables, 148
 - monitor file locations, 148
 - remote monitoring with, 149
- r3moncts Monitor
 - alert types, 147
 - command-line parameters, 148
 - environment variables, 148
 - file locations, 148
 - remote monitoring with, 149
 - report type, 147
- r3moncts.cfg, 148
- r3mondev
 - default settings, 80
 - environment variables, 80
 - file locations, 79
 - monitor, 79
 - monitoring conditions, 80
 - SAPOPC_DRIVE, 80
 - SAPOPC_R3MONDEV_CONFIGFILE, 80
 - SAPOPC_SAPDIR, 80
 - SAPOPC_TRACEMODE, 80
 - SAPOPC_TRACEPATH, 80
- r3mondev.cfg, 79
- r3mondev.exe, 79
- r3mondev.his, 79
- r3mondmp, 160
 - alert types
 - configuring, 162
 - command-line parameters, 161
 - monitor alert types, 160
 - monitor environment variables, 161
 - monitor file locations, 161
 - remote monitoring with, 161
- r3mondmp Monitor
 - alert types, 160
 - command-line parameters, 161
 - environment variables, 161
 - file locations, 161
 - remote monitoring with, 161
- r3mondmp.cfg, 161
- r3monjob, 163
 - alert types
 - configuring, 166
 - command-line parameters, 165
 - monitor alert types, 163
 - monitor environment variables, 165
 - monitor file locations, 165
 - parameter values, 166
 - remote monitoring with, 166
 - report type, 163
- r3monjob Monitor
 - alert types, 163
 - command-line parameters, 165
 - environment variables, 165
 - file locations, 165
 - parameter values, 166
 - remote monitoring with, 166
- r3monjob.cfg, 165
- r3monlck, 173
 - alert types
 - configuring, 175
 - command-line parameters, 174
 - monitor alert types, 173
 - monitor environment variables, 174
 - monitor file locations, 174
 - remote monitoring with, 174
- r3monlck Monitor
 - alert types, 173
 - command-line parameters, 174
 - environment variables, 174
 - file locations, 174
 - remote monitoring with, 174
- r3monlck monitor
 - report type, 173
- r3monlck.cfg, 174
- r3monoms, 176
 - alert types
 - configuring, 178
 - command-line parameters, 177

Index

- monitor alert types, 177
- monitor environment variables, 177
- monitor file locations, 177
- remote monitoring with, 178
- r3monoms Monitor
 - alert types, 177
 - command-line parameters, 177
 - environment variables, 177
 - file locations, 177
 - remote monitoring with, 178
 - report type, 177
- r3monoms.cfg, 177
- r3monpro
 - environment variables, 83
 - file locations, 82
 - monitor, 82
 - monitoring conditions, 83
 - SAPOPC_DRIVE, 83
 - SAPOPC_HISTORYPATH, 83
 - SAPOPC_R3MOPRO_CONFIGFILE, 83
 - SAPOPC_SAPDIR, 83
 - SAPOPC_TRACEMODE, 83
 - SAPOPC_TRACEPATH, 83
- r3monpro.cfg, 82
- r3monpro.exe, 82
- r3monpro.his, 82
- r3monrfc, 180
 - alert types
 - CHECK, 182
 - configuring, 181
 - command-line parameters, 181
 - monitor alert types, 180
 - monitor environment variables, 181
 - monitor file locations, 180
 - parameter values, 181
 - remote monitoring with, 181
 - report type, 180
- r3monrfc Monitor
 - alert types, 180
 - command-line parameters, 181
 - environment variables, 181
 - file locations, 180
 - parameter values, 181
 - remote monitoring with, 181
- r3monrfc monitor
 - report type, 180
- r3monrfc.cfg, 180
- r3monsap
 - default settings, 89
 - environment variables, 87
 - file locations, 86
 - monitor, 86
 - monitoring conditions, 87
 - SAPOPC_DRIVE, 87
 - SAPOPC_HISTORYPATH, 87
 - SAPOPC_R3MONSAP_CONFIGFILE, 87
 - SAPOPC_R3MONSAP_SAPMSGFILE, 87
 - SAPOPC_SAPDIR, 87
 - SAPOPC_TRACEMODE, 87
 - SAPOPC_TRACEPATH, 87
- r3monsap.cfg, 86
- r3monsap.exe, 86
- r3monsap.his, 86
- r3monsap.msg, 86
- r3monspl, 151, 184
 - alert types
 - configuring, 186
 - PRINT_ERROR_EXIST, 188
 - SPOOL_ENTRIES_RANGE, 186
 - SPOOL_ERROR_RANGE, 187
 - command-line parameters, 185
 - monitor, 151
 - monitor alert types, 184
 - monitor environment variables, 185
 - monitor file locations, 185
 - remote monitoring with, 185
- r3monspl Monitor
 - alert types, 184
 - command-line parameters, 185
 - environment variables, 185
 - file locations, 185
 - remote monitoring with, 185
- r3monspl monitor
 - report type, 184
- r3monspl.cfg, 185
- r3montra, 189
 - alert types
 - configuring, 191
 - REPAIR, 194
 - RFCONNECT, 195
 - TPTEST, 196
 - TRANS, 191
 - command-line parameters, 190
 - monitor alert types, 189
 - monitor environment variables, 190
 - monitor file locations, 190
 - parameter values, 191
 - remote monitoring with, 190
- r3montra Monitor
 - alert types, 189

- command-line parameters, 190
- environment variables, 190
- file locations, 190
- parameter values, 191
- remote monitoring with, 190
- r3montra monitor
 - report type, 189
- r3montra.cfg, 190
- r3monup.his, 100
- r3monup.his r3status history file, 101
- r3monupd, 198
 - alert types
 - configuring, 200
 - UPDATE_ACTIVE, 200
 - UPDATE_ERRORS_EXIST, 200
 - command-line parameters, 199
 - monitor alert types, 198
 - monitor environment variables, 199
 - monitor file locations, 199
 - remote monitoring with, 199
- r3monupd Monitor
 - alert types, 198
 - command-line parameters, 199
 - environment variables, 199
 - file locations, 199
 - remote monitoring with, 199
- r3monupd monitor
 - report type, 198
- r3monupd.cfg, 199
- r3monusr, 201
 - alert types
 - configuring, 202
 - USER_LOGGEDIN_MAX, 202
 - command-line parameters, 202
 - monitor alert types, 201
 - monitor environment variables, 202
 - monitor file locations, 201
 - remote monitoring with, 202
- r3monusr Monitor
 - alert types, 201
 - command-line parameters, 202
 - environment variables, 202
 - file locations, 201
 - remote monitoring with, 202
- r3monusr monitor
 - report type, 201
- r3monusr.cfg, 201
- r3monwpa, 204
 - alert types
 - configuring, 206
 - WP_AVAILABLE, 207
 - WP_CHECK_CONFIGURED, 213
 - WP_IDLE, 210
 - WP_STATUS, 214
 - command-line parameters, 206
 - monitor alert types, 205
 - monitor environment variables, 205
 - monitor file locations, 205
 - parameter values, 206
 - remote monitoring with, 206
- r3monwpa Monitor
 - alert types, 205
 - command-line parameters, 206
 - environment variables, 205
 - file locations, 205
 - parameter values, 206
 - remote monitoring with, 206
- r3monwpa monitor
 - report type, 204
- r3monwpa.cfg, 205
- r3monxmi
 - default settings, 97
 - environment variables, 93
 - file locations, 93
 - monitor, 92
 - SAPOPC_DRIVE, 93
 - SAPOPC_HISTORYPATH, 93
 - SAPOPC_R3MONXMI_CONFIGFILE, 93
 - SAPOPC_SAPDIR, 93
 - SAPOPC_TRACEMODE, 93
 - SAPOPC_TRACEPATH, 93
- r3monxmi.cfg, 93
- r3monxmi.exe, 93
- r3monxmi.his, 93
- r3ovo2ccms, 246
 - command-line parameter options, 247
 - command-line parameters, 246
- r3perfagent.cfg, 267
- r3status
 - R/3 Status monitor, 99
 - SAPOPC_HISTORYPATH, 100
 - SAPOPC_R3ITOSAP_CONFIGFILE, 101
 - SAPOPC_R3STATUS_CONFIGFILE, 101
 - SAPOPC_RFC_TIMEOUT, 100
 - SAPOPC_TRACEMODE, 101
 - SAPOPC_TRACEPATH, 101
- r3status - see r3monup.his, 100
- r3status monitor
 - configuring remote monitor, 104
 - environment variables, 100

Index

- file locations, 99
- polling frequency, 99
- report type, 99
- r3status(.exe), 99
- r3status.cfg, 100
- r3status.log, 100
- Remote Monitoring
 - r3monal monitor, 63
- remote monitoring
 - r3monale monitor, 128
 - r3monchg monitor, 138
 - r3moncts monitor, 149
 - r3mondmp monitor, 161
 - r3monjob monitor, 166
 - r3monlck monitor, 174
 - r3monoms monitor, 178
 - r3monrfc monitor, 181
 - r3monspl monitor, 185
 - r3montra monitor, 190
 - r3monupd monitor, 199
 - r3monusr monitor, 202
 - r3monwpa monitor, 206
 - with the Alert Monitors, 28
 - with the alert-collector monitor, 119
 - with the alert-collector monitors, 119
 - with the performance monitor, 269
 - with the r3status monitor, 104
- Remote Monitoring for r3perfact
 - configuration, 275
- remote monitoring with r3moncol alert monitors, 119
- RemoteMonitoring keyword, 39, 103, 122
- remove
 - SAP ITS software, 344
- removing
 - SPI for SAP service reports, 382
- REPAIR, 194
- report type
 - r3monaco, 217
 - r3monchg, 137
 - r3moncts, 147
 - r3mondmp, 160
 - r3monjob, 163
 - r3monlck, 173
 - r3monoms, 177
 - r3monrfc, 180
 - r3monspl, 184
 - r3montra, 189
 - r3monupd, 198
 - r3monusr, 201

- r3monwpa, 204
- r3status, 99
- Reports
 - pre-requisites
 - ITS Performance Monitor, 337
 - Service
 - ITS Performance Monitor integration, 337
- reports
 - service
 - generating in SPI for SAP, 366, 377
 - generatng in SPI for SAP, 377
 - installing in SPI for SAP, 364
 - metrics, 379
 - removing in SPI for SAP, 382
 - SAP ITS metrics, 380
 - SAP R/3 metrics, 379
 - upgrading in SPI for SAP, 363
 - viewng in SPI for SAP, 367, 377
- ReportTypes for the Alert Monitors, 111
- ReportTypes for the r3moncol Alert Monitors, 111
- REQUEST_CREATED, 151
- REQUEST_RELEASED, 152
- RFC FUNCTION Alert Class
 - with r3perfact, 277
- RFC Parameter Alert Class, 34, 124
- RFC-destination Monitor, 180
- RFCONNECT, 195
- RFCTimeOut for Alert Monitors, 40, 70
- roll/paging messages
 - disabling in SAP R/3, example, 233
- Run Locations, 113
 - for r3moncol Alert Monitors, 112

S

- SAP Client Alert Class, 35, 124
- SAP Hostname Alert Class, 35, 124
- SAP ITS software
 - de-install, 344
- SAP Number Alert Class, 35, 125
- SAP R/3
 - Status, 99
- SAP R/3 service, 351
- SAP System Alert Class, 35, 125
- SAP/Performance subagent
 - de-installing, 309
 - installing, 259
- SAPBUFFER_PERF Performance metrics, 281, 292, 379
- SAPMEMORY_PERF Performance metrics, 281, 294, 379, 380

- SAPOPC_DRIVE, 62, 80, 83, 87, 93
- SAPOPC_HISTORYPATH, 62, 80, 83, 87, 93, 100
- SAPOPC_R3ITOSAP_CONFIGFILE, 101
- SAPOPC_R3MONAL_CONFIGFILE, 62
- SAPOPC_R3MONDEV_CONFIGFILE, 80
- SAPOPC_R3MONSAP_CONFIGFILE, 87
- SAPOPC_R3MONSAP_SAPMSGFILE, 87
- SAPOPC_R3MONXMI_CONFIGFILE, 93
- SAPOPC_R3MOPRO_CONFIGFILE, 83
- SAPOPC_R3STATUS_CONFIGFILE, 101
- SAPOPC_RFC_TIMEOUT, 100
- SAPOPC_SAPDIR, 62, 80, 83, 87, 93
- SAPOPC_TRACEMODE, 62, 80, 83, 87, 93, 101
- SAPOPC_TRACEPATH, 62, 80, 83, 87, 93, 101
- SAPSHMCheck keyword, 41
- schedule synchronization
 - for r3perfact configuration, 274
 - SyncBack for r3perfact configuration, 274
- scheduler
 - performance-monitor, 271
- service
 - batch, 351
 - batch WP, 353
 - database, 351
 - dialog, 351
 - dialog WP, 353
 - environment, 351
 - gateway, 353
 - interface, 351
 - line of business (LOB), 353
 - memory management, 352
 - message, 353
 - network, 352
 - operating system, 352
 - R/3 instances, 351
 - SAP R/3, 351
 - spool, 351
 - spool WP, 353
 - update, 351
 - update WP, 353
- service report, 361
- Service Reporter, 361
- Service Reports
 - ITS Performance Monitor
 - integration, 337
 - pre-requisites
 - ITS Performance Monitor, 337
- service reports
 - generating SPI for SAP, 377
 - installing SPI for SAP, 364, 366, 377
 - metrics, 379
 - removing SPI for SAP, 382
 - SAP ITS metrics, 380
 - SAP R/3 metrics, 379
 - upgrading SPI for SAP, 363
 - viewing SPI for SAP, 367, 377
- service view, 349
- ServiceNavigator, 349
- setting thresholds, 235
- Setting Up Messages for Inclusion in the SAP R/3 System Log File, 236
- severity
 - syslog event, 96
- Severity Critical, 98
- severity level
 - changing, 223
- Severity Levels
 - r3monal monitor, 62
 - Syslog, 94
- Severity Major, 41
- Severity Minor, 41
- SeverityCritical, 66, 76, 88, 94
- SeverityNormal, 66, 77, 88, 94, 95
- SeverityNull, 66, 77, 88, 89, 94, 95
- SeverityWarning, 65, 66, 76, 77, 88, 89, 94, 95
- Shared memory
 - check, 41
- Snapshot Monitor Type, 112
- software
 - de-install SAP ITS from managed node, 344
- Solution Manager
 - Integration with SPI for SAP, 239
 - pre-requisites, 239
- SPI Data Instrumentation, 319
- SPI for SAP
 - Solution-Manager integration, 239
 - pre-requisites, 239
- Spool service, 351
- Spool WP service, 353
- SPOOL_ENTRIES_RANGE, 186
- SPOOL_ERROR_RANGE, 187
- SPOOL_PERF Performance metrics, 296
- SPOOLER Monitor, 184
- START_PASSED, 170
 - condition in job monitor, 163, 176, 198, 204
- STATRECS_PERF
 - configuring, 298
- STATRECS_PERF Performance metrics, 281, 297, 380

Index

- status
 - ITS monitor, 343
- Status monitor, 99
- SyncBack
 - synchronize schedule of r3perfagent, 274
- synchronization
 - schedule for r3perfagent configuration, 274
 - schedule SyncBack for r3perfagent configuration, 274
- syslog
 - setting alert thresholds, 226
- syslog event severity, 96
- syslog ID, 95
- syslog messages, 68
- syslog monitor, 92
 - environment variables, 93
 - monitoring conditions, 94
- syslog severity level
 - mapping, 94
- SyslogId Alert Class, 35, 36
- SYSTEM CHANGE Monitor, 137
- system log file
 - adding messages, 236
- system log filter
 - configuring for alert generation, 237
- SYSUP_PERF Performance metrics, 281, 301, 380

T

- TASK_CREATED, 154
- TASK_RELEASED, 155
- Temporary Sequential File
 - see TEMSE, 217
- TEMSE
 - Monitoring the file, 217
 - report, 217
- threshold
 - performance alert, 236
 - syslog alert, 238
- thresholds
 - buffer alerts, 228
 - Informix databases, 232
 - Oracle databases, 230
 - other alerts, 229
 - performance alerts, 225
- thresholds in SAP R/3, 235
- Time Frame monitor type, 111
- TPTEST, 196
- trace
 - file for Alert-Monitor configuration, 42, 102

- file for ITS Performance Monitor configuration, 330
- file for r3moncol configuration, 122
- file for r3perfagent configuration, 273
- level for Alert-Monitor configuration, 43, 61, 102
- level for ITS Performance Monitor configuration, 329
- level for r3moncol configuration, 122
- level for r3perfagent configuration, 273
- tracefile
 - alert-monitor list, 44
- TraceFile keyword
 - for ITS Performance Monitor, 330
- TraceLevel keyword
 - for ITS Performance Monitor, 329
- tracing
 - ITS performance monitor, 329
- TRANS, 191
- TRANSPORT Monitor, 189
- type
 - r3monaco monitor report, 217
 - r3monchg monitor report, 137
 - r3moncts monitor report, 147
 - r3mondmp monitor report, 160
 - r3monjob monitor report, 163
 - r3monlck monitor report, 173
 - r3monoms monitor report, 177
 - r3monrfc monitor report, 180
 - r3monspl monitor report, 184
 - r3montra monitor report, 189
 - r3monupd monitor report, 198
 - r3monusr monitor report, 201
 - r3monwpa monitor report, 204
 - r3status monitor report, 99

U

- UPDATE Monitor, 198
- Update service, 351
- Update WP service, 353
- UPDATE_ACTIVE, 200
- UPDATE_ERRORS_EXIST, 200
- UPDATE_PERF Performance metrics, 282, 302, 380
- upgrading
 - performance monitor subagent, 253
 - SPI for SAP service reports, 363
- USER Monitor, 201
- USER_LOGGEDIN_MAX, 202
- APSERVER, 203

MAX, 203
USER_PERF Performance metrics, 282, 303,
380
utility
 dsi2ddf wrapper, 319

V

values
 r3moncol monitor parameters, 116
 r3monjob monitor parameters, 166
 r3monrfc monitor parameters, 181
 r3montra monitor parameters, 191
 r3monwpa monitor parameters, 206
variable
 environment
 SAPOPC_DRIVE, 62, 80, 83, 87, 93
 SAPOPC_HISTORYPATH, 62, 80, 83, 87,
93, 100
 SAPOPC_R3ITOSAP_CONFIGFILE, 101
 SAPOPC_R3MONAL_CONFIGFILE, 62
 SAPOPC_R3MONDEV_CONFIGFILE,
80
 SAPOPC_R3MONPRO_CONFIGFILE,
83
 SAPOPC_R3MONSAP_CONFIGFILE,
87, 93
 SAPOPC_R3MONSAP_SAPMSGFILE,
87
 SAPOPC_R3STATUS_CONFIGFILE, 101
 SAPOPC_RFC_TIMEOUT, 100
 SAPOPC_SAPDIR, 62, 80, 83, 87, 93
 SAPOPC_TRACEMODE, 62, 80, 83, 87,
93, 101
 SAPOPC_TRACEPATH, 62, 80, 83, 87, 93,
101

variables

 r3monal monitor environment, 62
 r3monale monitor environment, 128
 r3monchg monitor environment, 138
 r3moncol (alert-collectors) environment,
118
 r3moncts monitor environment, 148
 r3mondev monitor environment, 80
 r3mondmp monitor environment, 161
 r3monjob monitor environment, 165
 r3monlck monitor environment, 174
 r3monoms monitor environment, 177
 r3monpro monitor environment, 83
 r3monrfc monitor environment, 181

 r3monsap monitor environment, 87
 r3monspl monitor environment, 185
 r3montra monitor environment, 190
 r3monupd monitor environment, 199
 r3monusr monitor environment, 202
 r3monwpa monitor environment, 205
 r3monxmi monitor environment, 93
 r3status monitor environment, 100
verifying the ITS Performance Monitor
 installation, 323
viewing
 SPI for SAP service reports, 367, 377

W

Webserver parameter for ITS Performance
 Monitor configuration, 331
WLSUM_PERF Performance metrics, 282,
304, 380
WORKPROCESS Monitor, 204
WP_AVAILABLE, 207
 APSERVER, 208
WP_CHECK_CONFIGURED, 213
WP_IDLE, 210
 APSERVER, 211
WP_PERF Performance metrics, 282, 307,
380
WP_STATUS, 214
 APSERVER, 215