HP Operations Smart Plug-in for SAP

for HP Operations Manager for UNIX®

Software Version: 12.00

Reference Guide



Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notices

© Copyright 1998 - 2009 Hewlett-Packard Development Company, L.P.

Trademark Notices

Acrobat®, Adobe®, and PostScript® are trademarks of Adobe Systems Incorporated.

Intel®, Itanium®, and Pentium® are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Java[™] is a U.S. trademark of Sun Microsystems, Inc.

Microsoft®, Windows®, and Windows NT® are U.S. registered trademarks of Microsoft Corporation.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates.

UNIX® is a registered trademark of The Open Group.

Documentation Updates

This guide's title page contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.
- Software Release Date, which indicates the release date of this version of the software.

To check for recent updates, or to verify that you are using the most recent edition of a document, go to:

http://h20230.www2.hp.com/selfsolve/manuals

This site requires that you register for an HP Passport and sign-in. To register for an HP Passport ID, go to:

http://h20229.www2.hp.com/passport-registration.html

Or click the New users - please register link on the HP Passport login page.

You will also receive updated or new editions if you subscribe to the appropriate product support service. Contact your HP sales representative for details.

Support

You can visit the HP Software Support web site at:

http://www.hp.com/go/hpsoftwaresupport

HP Software Support Online provides an efficient way to access interactive technical support tools. As a valued support customer, you can benefit by using the support site to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Download software patches
- Manage support contracts
- Look up HP support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and sign in. Many also require a support contract.

To find more information about access levels, go to:

http://h20230.www2.hp.com/new_access_levels.jsp

For more information about HP Passport, go to:

http://h20229.www2.hp.com/passport-registration.html

Contents

1	Introducing the Smart Plug-In for SAP	
	Overview	17
2	Customizing the SPI for SAP Monitors	19
	Introduction to the SPI for SAP Monitors	19
	Before Using the SPI for SAP Monitors	19
	The SPI for SAP Monitors	
	Important Monitor-Configuration Concepts	21
	Monitor-Configuration Files	
	Monitor-Configuration File: Global vs. Local	
	Monitor-Configuration Modes	22
	Alert Monitor Order of Precedence	23
	Remote Monitoring with Alert Monitors	23
	The SPI for SAP Monitor-Configuration File	25
	AlertMonFun	26
	AlertDevMon	26
	AlertMonPro	
	AlertInstMonPro	
	AlerMonSyslog	
	Alert Classes	
	CCMS Acknowledge Message	
	CCMS Monitor Set.	
	Disable Monitoring With Severity	
	DP Queue Check	
	Enable DP Queue Check	
	History Path	
	Instance Profile Path	
	RFCTimeOut	
	Severity Values	
	Trace File	
	Trace Level	
	XMISyslogMode	
	To Configure the SPI for SAP Alert Monitors	
	Distributing Alert-Monitor Configuration Files.	
	Local and Global Configurations.	
	To Apply a Global Configuration	
	To Apply a Local Configuration	
	To Delete All Local Configurations on a Node	

	To Delete Selected Local Configurations on a Node	. 44
3	The SPI for SAP Alert Monitors	. 45
	Introducing the SPI for SAP Monitors	. 45
	Polling Rates for the Alert Monitors	. 45
	The Alert-Monitor Configuration Files	. 46
	r3monal: the CCMS 4.x Alert Monitor	. 47
	r3monal: Monitoring Conditions	. 48
	r3monal: CCMS Monitor Sets	
	r3monal: CCMS Alert Monitors	. 51
	r3monal: CCMS Acknowledge Message	. 53
	r3monal: Environment Variables	
	r3monal: File Locations	. 54
	r3monal: Remote Monitoring	. 54
	r3monal: RFC Time Out	. 54
	r3monal: Severity Levels	. 55
	r3monal: Trace Levels	. 56
	r3monal: XMI Compatibility Mode	. 56
	r3monal: Alert Classes	. 57
	r3monal: Migrating from r3monxmi	. 57
	r3monal: Monitoring the J2EE Engine (Web AS Java)	. 59
	r3monal: Monitoring Stand-alone Enqueue Servers	. 59
	r3monal: Monitoring SAP Security-Audit Logs	. 59
	r3monal: Monitoring the Enterprise Portal	
	r3monal: Monitoring the CEN	
	r3monal: Testing the Configuration	. 60
	r3mondev: The SAP Trace-file Monitor	
	r3mondev: File Locations	
	r3mondev: Environment Variables	. 61
	r3mondev: Monitoring Conditions	. 61
	r3mondev: Editing the Configuration File	. 62
	r3monpro: The SAP Process Monitor	
	r3monpro: File Locations	. 63
	r3monpro: Environment Variables	. 63
	r3monpro: Monitoring Conditions	. 63
	r3monpro: Example Configuration	. 64
	r3status: The SAP Status Monitor	. 66
	r3status: File Locations	. 66
	r3status: Environment Variables	. 67
	r3status: History File	. 67
	The r3status Configuration File	
	r3status: Establishing the SAP Status	
	r3status: Monitoring SAP Remotely	. 69
	r3monsec: The SAP Security Monitor	. 70
	r3monsec: File Locations	. 71
	r3monsec: Alert Types	. 71
	r3monsec: SAP_PARAMETERS	. 72

r3monsec: PRIVILEGED_USERS	
	75
r3monsec: Monitoring Security Remotely	10
r3mondisp: the ABAP Dispatcher Monitor	76
r3mondisp: Pre-requisites	76
r3mondisp: File Locations	77
Integrating r3mondisp with the SPI for SAP Monitors	77
The r3mondisp Configuration File	78
The J2EE (Web AS Java) Monitor	80
J2EE Monitor: Enabling CCMS Alerts	80
J2EE Monitor: Configuration Pre-requisites	81
Configuring the SPI for SAP J2EE Monitor	82
The Enqueue-Server Monitor	83
Enqueue Server: Enabling CCMS Alerts	83
Enqueue Server: Configuration Pre-requisites	84
Enqueue Server: Configuring the Enqueue-Server Monitor	84
The SAP Enterprise-Portal Monitor	85
Enterprise Portal: Enabling CCMS Alerts	86
Enterprise Portal: Configuration Pre-requisites	86
Enterprise Portal: Configuring the Portal Monitor	87
The SAP Security-Audit Monitor	89
SAP Security-Alerts	90
Configuring the Security-Audit Monitor	91
Installing the SPI for SAP's Security-Monitoring Feature	
Configuring the SAP Security Audit	92
Enabling CCMS Security Monitoring	92
4 The SPI for SAP Alert-Collector Monitors	95
Introducing r3moncol and the Alert-Collector MONITORS	95
Configuring the SPI for SAP Alert-Collector Monitors	
Report Types for the Alert-Collector Monitors	
Polling Rates for the Alert-Collector Monitors	
Alert-Collector Monitor History	
Alert-Collector Monitor Query Conditions	99
Parameter Data Types	
Specifying Query Conditions	99
Parameter Values	. 100
Query Conditions	. 101
Alert-Collector Monitor Environment Variables	. 101
Alert-Collector Monitor Command-Line Parameters	. 102
Remote Monitoring with the Alert-Collector Monitors	. 102
The Alert-Collector Monitor Configuration Files	. 104
Alert-Collector Keywords and Parameters	. 104
Severity Levels	. 107
Validating the Alert-Collector Configuration Files	. 108
Understanding Configuration-File Error Messages	. 108
r3monale: The iDOC-Status Monitor	. 111

Monitor Type	
Alert Types	 . 112
File Locations	 . 112
Environment Variables	 . 112
Command-Line Parameters	 . 112
Remote Monitoring	 . 112
Configuring iDOC-Monitor Alert Types	 113
IDOC_CURRENT_STATUS	 113
Checking the iDOC Status	 115
r3monchg: The System-Change-Option Monitor	 119
Monitor Type	 119
Alert Types	 119
File Locations	 119
Environment Variables	 119
Command-Line Parameters	 . 119
Remote Monitoring	
Configuring SYSTEM CHANGE OPTION Monitor Alert Types	
Parameter Values	
CHANGE OPT	
r3moncts: The Correction and Transport System Monitor	
Monitor Type	
Alert Types	
File Locations	
Environment Variables	
Command-Line Parameters	
Remote Monitoring	
Configuring CTS Monitor Alert Types	
REQUEST_CREATED	
REQUEST_RELEASED	
TASK CREATED	
TASK RELEASED	
OBJECT_USED	
OBJECT_RELEASED	
r3mondmp: The ABAP-Dump Monitor	
Monitor Type	
Alert Types	
File Locations	
Environment Variables	
Command-Line Parameters	
Remote Monitoring	
ABAP4_ERROR_EXIST	
r3monjob: The Job-Report Monitor	
Monitor Type	
Alert Types	
First Time Monitoring.	
Performance Aspects	
File Locations	
FIIV 1400/4010115	 . тоо

Environment Variables	. 136
Command-Line Parameters	. 136
Remote Monitoring	. 136
Configuring Job-Report Monitor Alert Types	. 136
Parameter Values	. 136
JOB_MAX_RUN_TIME	. 137
JOB_MIN_RUN_TIME	. 139
START_PASSED	. 140
JOB_ABORTED	. 141
r3monlck: The Lock-Check Monitor	. 142
Monitor Type	
Alert Types	. 143
File Locations	. 143
Environment Variables	
Command-Line Parameters	
Remote Monitoring	
OLD_LOCKS	
r3monoms: The Operation-Mode Monitor	
Monitor Type	
Alert Types.	
File Locations	
Environment Variables	
Command-Line Parameters	
Remote Monitoring	
OM_SWITCH_OVERDUE	
r3monrfc: The RFC-Destination Monitor	
Monitor Type	
Alert Types	
File Locations	
Environment Variables	
Command-Line Parameters	
Remote Monitoring	
Limitations	
Configuring RFC-destination Alert Types.	
Parameter Values	
CHECK	
r3monspl: The Spooler Monitor	
Monitor Type	
Alert Types	
File Locations	
Environment Variables	
Command-Line Parameters	
Remote Monitoring	
Configuring Spooler-Monitor Alert Types	
SPOOL_ENTRIES_RANGE	
SPOOL_ERROR_RANGE	
PRINT ERROR EXISTS	152

r3montra: The Transport Monitor	
Monitor Type	153
Alert Types	154
File Locations	154
Environment Variables	154
Command-Line Parameters	154
Remote Monitoring	154
Configuring Transport-Monitor Alert Types	154
Parameter Values	155
TRANS	155
REPAIR	157
RFCONNECT	158
TPTEST	159
r3monupd: The Update Monitor	160
Monitor Type	
Alert Types	
File Locations	
Environment Variables	
Command-Line Parameters	
Remote Monitoring	
Configuring Update-Monitor Alert Types	
UPDATE_ACTIVE	
UPDATE_ERRORS_EXIST	
r3monusr: The SAP-User Monitor	
Monitor Type	
Alert Types	
File Locations	
Environment Variables	
Command-Line Parameters	
Remote Monitoring	
USER_LOGGEDIN_MAX	
r3monwpa: The Work-Process Monitor	
Monitor Type	165
Alert Types	165
File Locations	166
Environment Variables	166
Command-Line Parameters	166
Remote Monitoring	166
Configuring Work-Process Monitor Alert Types	166
Parameter Values	166
WP_AVAILABLE	167
WP_IDLE	169
WP_CHECK_CONFIGURED	
WP_STATUS	173
Monitor Type	
Report Description.	

	Running the TemSe Monitor	. 174
5	Understanding Message Flow	. 177
	In this Section	
	HPOM Message Customization	
	Setting Up the Message Views	
	Changing the Message Severity	
	Customizing CCMS Message Flow in SAP	
	Disabling Messages	
	Setting Thresholds for SAP CCMS Alert Monitor Messages	
	Obtaining a Message ID from the SAP NetWeaver Syslog File	
	SAP Solution-Manager Integration	. 184
	Pre-requisites	
	Integration Overview	
	Sending Messages from SAP to HPOM	
	Sending Messages from HPOM to SAP	
	The r3ovo2ccms Command	
	Command Parameters	
	Optional Parameters	. 188
	Examples	. 189
	Monitoring CCMS Alerts in the CEN	
	CEN-Integration Overview	
	Configuring the SAP CEN	. 190
	SAP Central Monitoring System	. 190
	SAP ABAP Instances	. 191
	J2EE Instances	. 192
	Configuring the SPI for SAP	. 193
6	The SPI for SAP Performance Monitors	197
_	Performance Monitors Overview.	
	Upgrading the SPI for SAP R/3 Performance Agent	
	Upgrading the SPI for SAP R/3 Performance Agent with CODA	
	Installing the SPI for SAP R/3 Performance Agent	
	Locating the SPI for SAP R/3 Performance Agent Files	
	SPI for SAP R/3 Performance Agent: AIX	
	SPI for SAP R/3 Performance Agent: HP-UX, Solaris, and Linux	
	SPI for SAP R/3 Performance Agent: Windows	
	Configuring the SPI for SAP R/3 Performance Agent	
	Selecting the Performance-data Source	
	Configure the SPI for SAP R/3 Performance Agent	
	Remote Performance Monitoring	
	The Performance-Monitor Scheduler	
	The r3perfagent.cfg Configuration File	
	Managing the SPI for SAP R/3 Performance Agent	
	SPI for SAP R/3 Performance Agent Command Line Syntax	
	SAP Logins for the SPI for SAP R/3 Performance Agent	. 217

The SPI for SAP Performance Monitors	218
DBINFO_PERF	220
Type	220
Frequency	220
Datasource	220
Metrics	220
DOCSTAT_PERF	221
Type	221
Frequency	221
Data Source	221
Metrics	222
EP_PERF	222
Type	222
Frequency	222
Datasource	222
Metrics	223
ICMSTAT_PERF	224
Type	224
Frequency	224
Datasource	
Metrics	225
JOBREP_PERF	225
Type	225
Frequency	225
Datasource	
Metrics	226
SAPBUFFER_PERF	226
Type	226
Frequency	226
Data Source	
Metrics	227
SAPMEMORY_PERF	228
Type	228
Frequency	
Data source	
Metrics	228
SPOOL_PERF	228
Type	
Frequency	
Data Source	229
Metrics	229
STATRECS_PERF	
Type	
Frequency	
Data Source	
Metrics	
Configuring and Uploading STATRECS PERF	230

SYSUP_PERF	. 231
Type	. 231
Frequency	. 232
Data Source	. 232
Metrics	. 232
UPDATE_PERF	. 232
Type	. 232
Frequency	. 232
Data Source	
· -	
• •	
• •	
• •	
Removing the SPI for SAP R/3 Performance Agent	. 231
Monitoring SAP NetWeaver Web Application Server (J2EE)	. 239
Before You Begin	. 239
The SiteConfig File	. 241
Scenarios for Viewing the Service Map for the Java Systems	. 245
Monitoring the J2EE Engine	. 247
Deploy the Scheduled Action Policies	. 247
Deploy the Monitor Policies	
Reference Information on SAP NetWeaver Java Monitoring 7.0 Policies	. 248
Policies: the J2EE Engine - Kernel Group	. 248
Policies to Monitor the Configuration Manager Data	. 248
Policies to Monitor the Cluster Manager Data	. 250
Policies: the J2EE Engine - Services Group	. 269
Policies to Monitor the JMX Adapter Service	. 270
Policies to Monitor the HTTP Provider Service	. 272
Policies to Monitor the SAPSR3DB Connector Container Service	
Policies to Monitor the SAP/EP_PRT Connector Container Service	
Policies to Monitor the SAP/BC_MIGSERVICE Connector Container Service	
Policies to Monitor the SAP/CAF_EUP_GP Connector Container Service	
Policies to Monitor the SAP/BC_WDRR Connector Container Service	
Policies to Monitor the SAP/CAF_RT Connector Container Service	001
	Type Frequency Data Source Metrics UPDATE PERF Type Frequency Data Source Metrics USER_PERF Type Frequency Data source Metrics USER_PERF Type Frequency Data source Metrics WLSUM_PERF Type Frequency Data source Metrics WLSUM_PERF Type Frequency Data source Metrics WLSUM_PERF Type Frequency Data source Metrics WP_PERF Type Frequency Data source Metrics WP_PERF Type Frequency Data Source Metrics WP_DERF Type Frequency Data Source Metrics WP_DERF Type Frequency Data Source Metrics Removing the SPI for SAP R/3 Performance Agent Monitoring SAP NetWeaver Web Application Server (J2EE) Before You Begin The SiteConfig File Scenarios for Viewing the Service Map for the Java Systems Monitoring the J2EE Engine. Deploy the Scheduled Action Policies Deploy the Monitor Policies Deploy the Monitor Policies Deploy the Monitor Policies Deploices to Monitor the Configuration Manager Data Policies the J2EE Engine - Service Group Policies to Monitor the Configuration Manager Data Policies to Monitor the SAPSRDB Connector Container Service Policies to Monitor the SAPSRD Connector Container Service Policies to Monitor the SAPSRD Connector Container Service

Policies to Monitor the SAP/BW_MMR Connector Container Service	 283
Policies to Monitor the SAP/EP_DQE Connector Container Service	 284
Policies to Monitor the SAP/CAF/EUP_GP/MAIL_CF Connector Container Service	 285
Policies to Monitor the SAP/BC_UME Connector Container Service	 287
Policies to Monitor the SAP/BC_JMS Connector Container Service	 288
Policies to Monitor the SAP/BC_FO Connector Container Service	 289
Policies to Monitor the SAP/BC_XMLA Container Service	 291
Policies to Monitor the SAP/BC_MON Connector Container Service	 292
Policies to Monitor the SAP/CAF_EUP_ER Connector Container Service	 293
Policies to Monitor the SAP/EP_PCD Connector Container Service	 295
Policies to Monitor the SAP/BC_ADM Connector Container Service	 296
Policies to Monitor the SAP/CAF_BW_RT Connector Container Service	 297
Policies to Monitor the SAP/BC_SLM Connector Container Service	 298
Policies to Monitor the SAP/LOCAL_MAINFRAME_POOL Connector Container Service	 300
Policies to Monitor the SAP/BC_SLD Connector Container Service	 301
Policies to Monitor the SAP/BC_JDO Connector Container Service	 302
Policies to Monitor the SAP/BC_UDDI Connector Container Service	 303
Policies to Monitor the utdb Connector Container Service	 305
Policies to Monitor the ADS Connector Container Service	 306
Policies to Monitor the SDK_JDBC Connector Container Service	 307
Policies to Monitor the SDK_CAF Connector Container Service	
Policies to Monitor the SDK_SAPQ Connector Container Service	 310
Policies to Monitor the SDK_XMLA Connector Container Service	 311
Policies to Monitor the SDK_ODBO Connector Container Service	 312
Policies to Monitor the EJB Container Services	 313
Policies to Monitor the Web Container Service	 322
Policies: the J2EE Engine - Performance Group	 323
Reference Information on SAP Netweaver Java Monitoring 7.1 Policies	 325
Policies : the J2EE Engine : Kernel Group	 325
Policy to Monitor the Session Manager Data	 325
Policies to Monitor the System Threads Pool	 325
Policies to Monitor the Application Threads Pool	 326
Policies to Monitor the Cluster Manager Data	 327
Policy to Monitor the Class Loader Manager Data	 328
Policies to Monitor the Configuration Manager Data	 328
Policies : the J2EE Engine - Services Group	 329
Policy to Monitor Timeout Service	 329
Policy to Monitor WebContainer Service	 330
Policies to Monitor the JMS Service	 330
Policy to Monitor the Log Configurator Service	 331
Policies to Monitor the HTTP Provider Service	 331
Policy to Monitor the Transaction Service	 332
Policy to Monitor the IIOP Service	 333
Policies to Monitor the JMX Adapter Service	 333
Policies to Monitor the JNDI Registry Service	 334
Policy to Monitor the Security Service	 334
Policies : the J2EE Engine - Performance Group	 335

8	Service Views	337
	In this Section	337
	What are Service Views?	337
	Service Views in the SPI for SAP	338
	Line of Business Views	340
	Configuring Service Views for SAP	342
	Create the Service Configuration file	343
	Upload the Service Configuration File to HPOM	343
	Assign the SAP Services to an HPOM Operator	
	Troubleshooting Service Discovery	
	SPI for SAP Service View for Java Server	
	Deploy the SiteConfig File	
	Configuring Service Views for Java System	346
9	Service Reports	349
•	In this Section	
	What Are Service Reports?	
	Upgrading the SPI for SAP Reports	
	Installing the SPI for SAP Reports	
	Installing SAP Service Reports	
	Service Reports in the SPI for SAP.	
	SAP Reports	
	Defining the Scope of SAP Service Reports.	
	Generating SPI for SAP Reports	
	Viewing SPI for SAP Reports	
	SPI for SAP Report Metrics.	
	SAP Report Metrics	
	SAP Netweaver Report Metrics	
	Removing the SPI for SAP Reports.	
	To Remove HP Reporter Snap-in Packages	
	To Remove the SPI for SAP from the Reporter System	363
IC	Troubleshooting the SPI for SAP	
	Characterizing Problems	365
	Problem Identification Procedures	365
	Checking the HPOM Agent Installation	366
	Checking the HPOM Server Installation	
	Checking Installed Patches	
	Testing the SPI for SAP Installation	
	Checking the Distributed Templates	
	Checking the Execution of Monitors on HP-UX Nodes	
	Checking SPI for SAP Access to the SAP Front End	
	Common SPI for SAP Problems	
	SPI Product Cannot be Installed	
	Distributing SPI for SAP Software to a Microsoft Windows Node Aborts	
	Configuration Files Cannot be Edited	371

	SAP NetWeaver Service Discovery Fails on some Managed Nodes	372
	SAP System Up/Down Not Reported Correctly	372
	Duplicate HPOM Messages in the Message Browser	373
	Performance Monitor out of Synchronization	373
	Performance Monitor does not Work	374
	Work-Process monitor (r3monwpa) ends with an rfc exception	374
	Distributing Actions, Monitors, and Commands on Windows Nodes	374
	Change the location of dev_rfc.trc	375
Α	SPI for SAP Golden Metrics	377
В	Data Store Details for SPI for SAP Reports	381
Inc	dex	395

1 Introducing the Smart Plug-in for SAP

This chapter describes what information is in the *HP Operations Smart Plug-in for SAP Administrator's Reference* and where you can find it.

Overview

The *HP Operations Smart Plug-in for SAP Administrator's Reference* provides information that is designed to help the administrators of both HP Operations Manager (HPOM) and SAP NetWeaver to configure the SPI for SAP to suit the needs and requirements of the SAP NetWeaver landscape, which they plan to manage with HPOM. The book also explains how to install and configure the various additional sub-agents that come with the SPI for SAP. Finally, the *HP Operations Smart Plug-in for SAP Administrator's Reference* describes how to integrate the SPI for SAP with performance-related products that are available as a part of HP Software.

2 Customizing the SPI for SAP Monitors

This chapter describes how to set up the SPI for SAP monitors and distribute them to the SAP servers in your SAP landscape.

Introduction to the SPI for SAP Monitors

The SPI for SAP includes a set of monitors, which you configure to run at regular intervals to collect information regarding various aspects of your SAP environment's health.

The HPOM administrators, working from the HPOM desktop, distribute the appropriate SPI for SAP policies to the SAP servers which they want to manage and monitor with HPOM. Monitor distribution is usually completed as part of the SPI for SAP installation and configuration process.

If you have never configured the SPI for SAP monitors, you will want to read the detailed description of each alert monitor and alert-monitor configuration file. The alert-monitor configuration files include information about default configurations as well as a list of changes you need to make to ensure that the monitor works correctly in your SAP environment.

Before Using the SPI for SAP Monitors

Before using any of these monitors, be sure to complete the following tasks:

- Set up the required SAP users and their associated logons as described in the HP
 Operations Smart Plug-in for SAP Installation and Configuration Guide for UNIX.
- Specify details of all SAP systems to monitor in the r3itosap.cfg file. You can define entries in r3itosap.cfg:
 - as a part of the installation procedure (refer to the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide for UNIX*) or,
 - At any time, use the Config SAP R/3 GUI function in the SPI for SAP > SAP R/3 Admin tool groupconfiguration-file policy editor.



If the SAP instance you want to monitor is part of a high-availability cluster, such as MC/ServiceGuard, you need to add an extra entry to the "cluster host mapping" section of the r3itosap.cfg file to tell the SPI for SAP about the nodes configured in the cluster. If the host-mapping entry is not present in the r3itosap.cfg file, the SPI for SAP might encounter problems monitoring the nodes in the cluster, for example, resolving the hostname of the cluster nodes, starting the monitors at the correct time, and associating messages with the appropriate managed nodes.

For more information about configuring the SPI for SAP to monitor SAP in a high-availability environment, see the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide for UNIX*.

The SPI for SAP Monitors

Table 1 provides an overview of SPI for SAP alert-monitors.

Table 1 The Alert Monitors

	T
Alert Monitor	Monitor Function
r3monal ^a	Monitors SAP NetWeaver system log events and alerts from the internal SAP CCMS 4.x alert monitor
r3mondev	Monitors errors in SAP trace and log files
r3mondisp	Monitors the status of the ABAP dispatcher for all SAP instances configured in the SPI for SAP's central configuration file r3itosap.cfg
r3monpro	Monitors SAP work processes and database processes
r3monsec	Monitors the security settings in SAP for instances configured in the r3itosap.cfg file
r3status	Monitors the status of the SAP instances configured in the r3itosap.cfg file

a. SAP syslog monitor r3monxmi is now obsolete.

Table 2 provides an overview of the alert-collector monitors used by r3moncol, the SPI for SAP alert collector.

Table 2 The r3moncol Alert-Collector Monitors

Alert-Collector Monitor	Monitor Function
r3monaco	Although this is not an alert-collector monitor, you must assign r3monaco to the managed nodes to monitor SAP's Temporary Sequential (TemSe) file. For more information, see Monitoring the TemSe file on page 174
r3monale	Monitors the status of iDOCs in the SAP NetWeaver System
r3monchg	Monitors the SAP NetWeaver system change options
r3moncts	Monitors the correction-and-transport system
r3mondmp	Monitors ABAP/4 Dumps

Table 2 The r3moncol Alert-Collector Monitors (cont'd)

Alert-Collector Monitor	Monitor Function
r3monjob	Monitors SAP NetWeaver batch jobs
r3monlck	Monitors the Enqueue process, which manages logical locks for SAP NetWeaver transactions and reports on obsolete locks
r3monoms	Monitors the operation mode switch to determine whether a scheduled operation mode started after the specified time. Note that changes in SAP mean there are no operation-mode switch errors to monitor in WebAS 7
r3monrfc	Checks the status of RFC destinations in an SAP environment
r3monspl	Monitors spooler entries, spooler errors, and print errors
r3montra	Monitors the transport system.
r3monupd	Monitors the update process for active status and errors
r3monusr	Monitors the number of users logged-in to SAP NetWeaver
r3monwpa	Monitors the status of the work processes. It reports any processes that are running in debug, private, or no restart modes, compares the number of configured work processes with the actual number running, and checks the number of expected work processes waiting and the number running

Important Monitor-Configuration Concepts

This section describes the concepts supporting the CCMS alert-monitors and in addition, explains how to configure the monitors.

Monitor-Configuration Files

Each alert or alert-collector monitor has an associated configuration file, which you can edit to define your own rules for how you want to monitor alerts for all the monitors. However, the monitors have default configurations, which you can use without modification. For more information about the contents of the SPI for SAP's monitor-configuration files, see:

The SPI for SAP Monitor-Configuration File on page 25
 General information which applies to the configuration of all the SPI for SAP monitors.

• The Alert-Monitor Configuration Files on page 46

Information about the keywords and parameters, which you use to configure the alert monitors r3monal, r3mondev, r3monpro, and r3monsec.

• The r3mondisp Configuration File on page 78

Information about the keywords and parameters, which you use to configure the ABAP dispatch-queue monitor, r3mondisp.

- The r3status Configuration File on page 68
- The Alert-Collector Monitor Configuration Files on page 104

Information which applies to the configuration of the alert-collector monitor r3moncol and the alert collectors it uses, for example, r3monale, r3mondmp, r3monjob, and so on.

Monitor-Configuration File: Global vs. Local

Configuration files can be distributed to the managed nodes either globally or locally, as follows:

Globally

Globally using the Install Config function in the SPI for SAP > SAP R/3 Admin tool group, which distributes copies of each configuration file to all selected managed nodes.

Locally

Locally using the Distribute Local Config function in the SPI for SAP > SAP R/3 Admin Local tool group.

For more information about when to use each of these distribution methods and for instructions on editing the configuration files, see The SPI for SAP Monitor-Configuration File on page 25.

Monitor-Configuration Modes

The SPI for SAP supports the following configuration modes:

• Global

You define the monitoring conditions for all managed nodes in a single configuration file. If you specify a *global* configuration, the monitoring conditions you define must cover the monitoring needs of all managed nodes.

• Local

You define the monitoring conditions for a particular node in a configuration file associated only with that single, managed node. If a *local* configuration is used, each node can have its own configuration file, which defines only the monitoring conditions for that particular node.

You can deploy a mixture of global and local configurations. For an explanation of the relationship between local and global configuration as well as instructions on the use of each configuration mode, see Distributing Alert-Monitor Configuration Files on page 41.

Alert Monitor Order of Precedence

Each time an alert monitor runs, its behavior is determined by information defined in an alert-monitor-specific configuration file. An alert monitor chooses which configuration file to use according to a defined "order of precedence", as follows:

The monitor first checks for the presence of the SAPOPC_<R3monitor_name>_CONFIGFILE variable and determines the location of the configuration files from this. For more information about the SAPOPC_<R3monitor_name>_CONFIGFILE variable, see the section about the specific monitor you want to configure, for example, r3monpro: Environment Variables on page 63.

2 On UNIX managed nodes:

a Local configuration file

The monitor checks for (and if found uses) the HPOM for UNIX local configuration file in:

 $<\!OvDataDir\!>$ /conf/sapspi/local

b Global configuration file

If the monitor does not find an HPOM for UNIX local configuration file, the monitor checks for (and if found uses) the OVO for UNIX global configuration file in:

< OvData Dir > / conf/sapspi/global

- 3 On Windows managed nodes:
 - a Local configuration file

The monitor checks for (and if found uses) the HPOM for Windows local configuration file in:

 $%OvAgentDir\% \conf\sapspi\local$

b Global configuration file

If the monitor does not find an HPOM for Windows local configuration file, the monitor checks for (and if found uses) the HPOM for Windows *global* configuration file in:

%OvAgentDir%\conf\sapspi\qlobal

Remote Monitoring with Alert Monitors

The SPI for SAP includes a feature which allows you to extend the scope of all the alert, alert-collector, and performance monitors (except r3mondev, r3monpro, r3mondisp) to monitor the status of SAP on remote SAP servers, which are *not* HPOM managed nodes and where the SPI for SAP is *not* installed. You set up and perform the remote monitoring from an HPOM managed node, where the SPI for SAP software is running.



Although the SAP Server defined in the RemoteHost parameter is not an HPOM managed node, it must still be present in the HPOM Node Bank. If you do not add the SAP Server defined in RemoteHost to the HPOM Node Bank, HPOM cannot resolve the host name associated with the remote host and, as a consequence, cannot display any messages from the remote host in the message browser.

In addition, the SAP Server defined in RemoteHost must appear in the r3itosap.cfg file to ensure that the SPI for SAP can log into (and extract information from) the SAP instances it is monitoring on the RemoteHost. For more information about the r3itosap.cfg file, refer to the HP Operations Smart Plug-in for SAP Installation and Configuration Guide for UNIX.

To make use of the remote-monitoring feature provided by the SPI for SAP, for example, to monitor an SAP System running in an environment that is not supported by the SPI for SAP, you need to perform the following actions. Specifying Individual Remote Servers to Monitor on page 24 shows how a new line is required for each *additional* SAP server, which you want to monitor remotely.

- Enable the **RemoteMonitoring** keyword by removing the leading hash symbol "#" in each monitor's configuration file.
- Define the name of the *local* host, on which you want to perform the monitoring. Note that you need a new line for each *local* host that you want to associate with a remote host.
- Define the name of the *remote* SAP server (*RemoteHost*), which you want to monitor.
- Make sure that the remote host is added to the HPOM node bank.

The RemoteMonitoring keyword accepts the following parameters:

LocalHost

This is the name of the local HPOM managed node where the SPI for SAP software is running and whose HPOM agent you want the SPI for SAP to use to remotely monitor the SAP server defined in the parameter "RemoteHost".

RemoteHost

This is the name of the *remote* SAP server you want to monitor from the host defined in the parameter "LocalHost". Although the remote host does not have the SPI for SAP software installed and is *not usually* an HPOM managed node, it must be present in the HPOM Node Bank to ensure that messages are handled correctly.

• **SAP System and SAP Number** (r3monal *only*)

The CCMS alert and syslog monitor r3monal needs to know both the ID and the Number of the SAP System running on the SAP server defined in the parameter "RemoteHost".

For more information about any additional requirements when defining remote monitoring with the alert monitors, and in particular r3monal (the CCMS alert monitor), see The SPI for SAP Monitor-Configuration File on page 25 and The Alert-Monitor Configuration Files on page 46.

Specifying Individual Remote Servers to Monitor

#		
# Remote	LocalHost	RemoteHost
# Monitoring		
RemoteMonitoring	=sap1	=sdsap1
RemoteMonitoring	=sap1	=sdsap2
RemoteMonitoring	=sap2	=sdsap3
#		

Note that you can use the Alert-classes section at the end of the monitor-configuration file to associate an instance of a monitor with a specific host, SAP instance, or processes on the remote server in the same way as you can with a normal (local) managed node. For more information about configuration-file keywords, see The SPI for SAP Monitor-Configuration File on page 25.

The SPI for SAP Monitor-Configuration File

During the SPI for SAP installation and configuration, the SAP specialist must set up initial configuration values for the SPI for SAP monitors and distribute the modified configuration files to the managed nodes.

Each configuration file provided with the SPI for SAP defines default settings by using the keyword. Some keywords can only be used with specific monitors, all which are specific to a particular sub-section of the monitor configuration file. The information below lists the keywords that appear in the various sub-sections of the configuration file and explains the contents of the alert-classes section at the end of the configuration file, where you define conditions that when met, generate messages about the SAP alerts you are monitoring. You can also see which keywords you can use with which monitors and find out the permitted values for keyword parameters:

• AlertMonFun on page 26

Configure the r3moncol alert collectors in the SAP System

AlertDevMon on page 26

Configure trace- and log-file monitoring in the SAP System

• AlertMonPro on page 26

Configure process monitoring per SAP System

• AlertInstMonPro on page 26

Configure process monitoring per SAP instance

• AlerMonSyslog on page 27

Configure filtering of CCMS alerts or system logs

• Alert Classes on page 27

In the alert-classes section at the end of the configuration file, valid keywords are monitor-specific.

- CCMS Acknowledge Message on page 30
- CCMS Monitor Set on page 31
- Disable Monitoring With Severity on page 31
- DP Queue Check on page 32

Monitor the size of the ABAP-dispatcher queue

Enable DP Queue Check on page 34

Check the status of the ABAP-dispatcher

- History Path on page 35
- Instance Profile Path on page 35
- Remote Monitoring on page 36
- RFCTimeOut on page 37
- Severity Values on page 37

The Severity Values section contains the Severity<*Level>* keyword

• Trace File on page 38

- Trace Level on page 39
- XMISyslogMode on page 39

AlertMonFun

Only with r3moncol

Use the AlertMonFun keyword in the r3moncol configuration files to configure the SPI for SAP alert collectors, which monitor internal SAP alerts generated by, for example, the iDOC monitor, the ABAP-dump monitor, the spooler monitor, and so on. The AlertMonFun keyword requires a value for the following parameters:

```
AlertMonFun =<SAP Hostname> =<SAP System> =<SAP Number> \
=<SAP Client> =<AlertMonitor> =<Enable/Disable> \
=<OpC Severity> =<OpC Object> =<OpC MsgGroup> \
=<Alerttype> =<RFC Parameter>
```

For more information about the parameters that you need to define for the AlertMonFun keyword, see Alert-Collector Keywords and Parameters on page 104.

AlertDevMon

Only with r3mondev

Use the AlertDevMon keyword in the r3mondev.cfg file to configure the SPI for SAP to monitor trace- and log-files in the SAP System. The AlertDevMon keyword requires a value for the following parameters:

```
AlertDevMon =<SAP System> =<SAP Number> =<Enable/Disable> \
=<Filemask> =<Opc Severity> =<Opc Object> =<Opc MsgGroup>
```

For more information about the parameters that you need to define for the AlertDevMon keyword, see Alert Classes on page 27.

AlertMonPro

Only with r3monpro

Use the AlertMonPro keyword in the r3monpro.cfg file to configure the SPI for SAP to monitor SAP-related processes per SAP System. On SAP servers running the UNIX operating systems, r3monpro can identify processes at the instance level with Alert*Inst*MonPro. For more information about r3monpro, see r3monpro: The SAP Process Monitor on page 62.

The AlertMonPro keyword requires a value for the following parameters:

```
AlertMonPro =<Hostname> =<Process name> =<Enable/Disable> \
=<Mode> =<Process number> =<Opc Severity> =<Opc Object> \ =<Opc MsgGroup>
```

For more information about the parameters that you need to define for the AlertMonPro keyword, see Alert Classes on page 27.

AlertInstMonPro

Only with r3monpro in UNIX

Use the AlertInstMonPro keyword in the r3monpro.cfg file to configure the SPI for SAP to monitor SAP-related processes per SAP *instance*. The AlertInstMonPro keyword requires a value for the following parameters:

```
AlertInstMonPro =<Hostname> =<Process name> \
=<Enable/
Disable> =<Mode> =<Process number> =<Opc Severity>\=<Opc Object> =<Opc MsgGro up>
```

For more information about the parameters that you need to define for the AlertInstMonPro keyword, see Alert Classes on page 27.

AlerMonSyslog

Only with r3monal

Use the AlerMonSyslog keyword in the r3monal.cfg file to configure the SPI for SAP to monitor Syslog filtering. This can be used *only* with the r3monal alert monitor CCMS alerts or system logs in combination with the XMI/XAL interface. If you want the format of the syslog alerts to resemble the style used by the now-obsolete r3monxmi monitor, see also XMISyslogMode on page 39. The AlerMonSyslog keyword requires a value for the following parameters:

```
AlerMonSyslog =<SAP System> =<SAP Number> =<SyslogId> \
=<Enabled/Disabled>
```

For more information about the parameters that you need to define for the AlerMonSyslog keyword, see Alert Classes on page 27.

Alert Classes

The alert-classes section at the end of the monitor-configuration file allows you to use keywords and parameters to define conditions that, when met, generate messages about the SAP alerts you are monitoring. The contents of the alert-classes section change according to the monitor you are configuring. Some monitors require a specific keyword, and each keyword requires a specific combination of parameters to configure a given SPI for SAP monitor.

For example, the keywords AlertMonPro and AlertInstMonPro appear exclusively in the configuration file for the SAP-process monitor, r3monpro. However, all r3moncol monitors use the keyword AlertMonFun to configure alert monitoring. The parameters SAP Hostname, SAP System, and SAP Number are present in all the monitor-configuration files, but the =CHANGE_OPT alert-type parameter can only be used with r3monchg, the SAP System-change Monitor.

For more information about which alert types and parameters are allowed with which monitor-specific alerts, see the information in this section and, in addition, the section which corresponds to the individual monitor you want to configure, for example: r3monale, or r3mondmp.



The SPI for SAP monitors are configured by default to manage *all* SAP Systems, which you define in the SPI for SAP's central configuration file r3itosap.cfg. The monitor-configuration files should not be edited by anyone who does not have a detailed knowledge of SAP NetWeaver and, in addition, the local SAP NetWeaver landscape, which you want to manage with the SPI for SAP.

The following list shows *all* the parameters in the alert-classes section of *all* the SPI for SAP monitor configuration files. Where appropriate, restrictions are indicated in brackets (), for example, (r3mondev only).

• **AlertMonitor** (r3moncol and r3monsec only):

=<Monitor Name>

The short form of the alert monitor you are configuring, for example, =ALE for r3monale, =CTS for r3moncts, and so on. Note: =SECURITY for r3monsec.

Alerttype (r3moncol and r3monsec only):

=<Alerttype>

The alert type is monitor specific. For example, r3monale uses the IDOC CURRENT STATUS alert type to monitor alerts related to the status of iDOCs; r3mondmp uses the alert type ABAP4 ERROR EXIST to monitor alerts relating to each ABAP dump that occurs in a monitored SAP System. For more information about which alert types belong to which alert-collector monitor, see the "Alert-Types" section for a given monitor, for example, r3monale: The iDOC-Status Monitor on page 111 includes the alert type IDOC CURRENT STATUS on page 113.

Enable/Disable:

=0Disable the monitor

=1*Enable* the monitor. This is the default setting.

Filemask (r3mondev only):

=<File Name>

The name of the trace file you want r3mondev to monitor. You can use the wildcard "*" (asterisk) to monitor multiple file names, for example, =dev *

Mode (r3monpro only):

=<mode value>

The mode or way in which you want to evaluate ProcessNumber, for example, Max, Min, Exact, and Delta. For more detailed information about the possible values, see r3monpro: The SAP Process Monitor on page 62.

OPCMsgGroup:

=<HPOM Msg_Group> The name of the HPOM message group to which the generated message belongs, for example: R3_CTS, or R3_DMP. The default names all start with "R3_" and reflect the names of the alert monitors to which they correspond, for example, r3moncts or r3mondmp. Note that if you change the names of the HPOM message groups in the monitor-configuration files, remember to ensure that the changes are reflected in the message conditions to avoid the generation of unmatched messages.

OPC Object:

=<HPOM Object>

The HPOM object associated with the generated message. The object names tend to reflect the names of the alert types associated with the alert-collector monitor, for example, REQUEST or TASK for r3moncts.

If you change the names of the HPOM objects in the monitor-configuration files (or add new ones), you must ensure that these changes are reflected in the message conditions to avoid the generation of unmatched messages.

The =SyslogId string in the OPC Object field has nothing to do with the SyslogId alert parameter described below, which only appears in the syslog-filtering section of the r3monal.cfg file.

OPC Severity:

=<#POM_Msg_Severity> The severity level of the HPOM message you want to map the CCMS alert to, for example: Normal, Warning, Major, Critical.

• **Process Name** (r3monpro only):

=<NameSID> The name of the SAP process you want r3monpro to monitor.

Process Number (r3monpro only):

=<nn>

The number (nn) of instances of the SAP process defined in ProcessName. You can qualify the number with Max, Min, Exact, and Delta. For more information see r3monpro: The SAP Process Monitor on page 62.

RFC Parameter (r3moncol only):

=<RFC_Param>

The name of the parameter followed by any required query conditions, each with the prefix "=", for example, =CP (for "Contains Pattern") or EQ for ("Equals"). For more information about query conditions, see Alert-Collector Monitor Query Conditions on page 99. For more information about monitor-specific, alert-type parameters, see the appropriate monitor description, for example: Task 24 on page 113 for the r3monale monitor.

• SAP Client:

=ALL Monitor all SAP instance numbers with the SPI for SAP. This is the

default setting.

=<ClientID> The number of the specific SAP client you want to monitor, for example,

099. Use a new line for each individual host.

SAP Hostname:

=ALL Monitor all SAP hosts with the SPI for SAP. This is the default setting.

=<SAP_host> The host name of a specific SAP server you want to monitor. Use a new line for each individual host.

• SAP Number:

=ALL Monitor all SAP instance numbers with the SPI for SAP. This is the default setting.
 =<Instance> The number of the specific SAP instance you want to monitor, for example, 00, 99. Use a new line for each host.

• SAP System:

=ALL Monitor all SAP Systems with the SPI for SAP. This is the default setting.
 =<SAP_SID> The ID of a specific SAP System want to monitor, for example, DEV. Use a new line for each individual host.

SyslogId (r3monal only):

=A00	The <i>lower</i> end of the range of SAP syslog IDs, whose CCMS Alerts or syslogs you want to monitor.
=ZZZ	The <i>upper</i> end of the range of SAP syslog IDs, whose CCMS Alerts or syslogs you want to monitor.

CCMS Acknowledge Message

The r3monal monitor uses the CCMSAcknowledgeMessage keyword to switch the CCMS auto-acknowledge feature on or off in SAP. CCMS alerts which are complete do not generate messages in HPOM. This keyword requires a value for the following parameters:

```
CCMSAcknowledgeMessage =<SAP System> =<Ack. Filtered \
Messages> =<Enabled/Disabled>
```

• SAP System:

The SAP System ID whose CCMS Alerts you want to acknowledge (or complete) in SAP.

Ack. Filtered Messages:

This feature determines whether SAP acknowledges (or completes) CCMS Alerts which match the defined conditions in CCMS or not. Acknowledged CCMS alerts do not generate messages in HPOM.

- =0 Do not acknowledge (complete) the CCMS Alerts in SAP. This is the default setting and leads to matched alerts generating an HPOM message.
- =1 Acknowledge the CCMS Alerts in SAP. This is same as clicking the [Complete Alert] button in SAP CCMS. No messages are sent to HPOM.

• Enable/Disable:

- *Disable* the auto-completion of CCMS alerts. Note that this also disables the setting for **Ack. Filtered Messages**. This is the default setting.
- =1 *Enable* the auto-completion of CCMS alerts.

CCMS Monitor Set

Define a CCMS monitor set to use with the new and enhanced XMI/XAL interface (BAPI). The CCMSMonitorSet keyword requires a value for the following parameters:

```
CCMSMonitorSet =<SAP System> =<SAP Number> =<Monitor Set> \
=<Monitor>
```

• SAP System:

The SAP System ID whose CCMS Alerts are defined in the parameter Monitor Set.

SAP Number:

This SAP *instance* number of the SAP System whose CCMS Alerts are defined in the parameter Monitor Set.

• Monitor Set:

=SAP CCMS Technical Expert Monitors

The name of the monitor set as it appears in the CCMS Alert- Monitor tree.

• Monitor:

=System / All Monitoring Segments / All Monitoring Context

The names of the monitors belonging to the monitor set defined in the parameter "Monitor Set" separated by a forward slash (/).

Disable Monitoring With Severity

Only with r3mondisp, the ABAP dispatcher monitor

Specify which r3mondisp message severity should trigger the disabling of integrated SPI for SAP monitors to prevent the monitors increasing loads unnecessarily by requesting work processes from the SAP Systems, whose ABAP dispatcher you are monitoring with the SPI for SAP. The DisableMonitoringWithSeverity keyword accepts the following parameters:

```
DisableMonitoringWithSeverity =<hostname> =<SID> \
=<InstanceNr> =<Severity>
```

• Hostname:

The name of the SAP Server where the instance is running whose ABAP dispatcher you want to monitor:

=ALL All hosts monitored by the SPI for SAP. This is the default setting.

=<SAP_host> The name of the SAP server, where you want to disable dispatcher-queue monitoring. Use a new line (and keyword) for each, individual SAP server.

• SID:

The SAP System ID of the instance whose ABAP dispatcher you are monitoring:

=ALL All System IDs which the SPI for SAP monitors. This is the default setting.
 =<SAP_SID> The SAP System ID of the instance whose ABAP dispatcher you want to monitor, for example: "SP1"

• InstanceNr:

The number of the SAP instance whose ABAP dispatcher you are monitoring:

=ALL All System IDs which the SPI for SAP monitors. This is the default setting.

=<SAP_InstNr> The number of the SAP instance whose ABAP dispatcher you want to monitor, for example: "45"

• Severity:

The severity level of the message r3mondisp sends which would trigger the disabling of SPI for SAP monitors that require a work process to logon to SAP, for example: "warning"

The DisableMonitoringWithSeverity keyword must be used in conjunction with keywords DPQueueCheck, which you configure in the r3mondisp.cfg file, and EnableDPQueueCheck, which you define in the configuration file of the SPI for SAP monitor you want to integrate with r3mondisp.

DP Queue Check

Only with r3mondisp, the ABAP dispatcher monitor

Manages the pro-active monitoring of the ABAP dispatcher and its queues. If more than one threshold matches for the same managed node and the same work-process, r3mondisp only sends the message with the highest severity level. The DPQueueCheck keyword accepts the following parameters:

```
DPQueueCheck =<hostname> =<SID> =<InstanceNr> \ =<disable/enable> \
=<OVO Msg Group> =<OVO Msg Object> =<OVO Severity> \
=<WP-Type> =<Idle/Queue> =<percentage idle/full>
```

Hostname:

The name of the SAP Server where the instance is running whose ABAP dispatcher you want to monitor:

=ALL All the hosts which the SPI for SAP monitors. This is the default setting.

=<SAP_host> The name of a SAP server, where you want to enable monitoring of the

dispatcher-queue. Use a new line for each individual host.

• SID:

The System ID of the SAP instance whose ABAP dispatcher you want to monitor:

=ALL All System IDs which the SPI for SAP monitors. This is the default

setting.

=<SAP_SID> The SAP System ID of the instance whose ABAP dispatcher you want to

monitor, for example: "SP1"

Instance Nr:

The number of the SAP instance whose ABAP dispatcher you want to monitor:

=ALL All instances which the SPI for SAP monitors. This is the default

setting.

=<SAP_InstNr> The number the SAP instance whose ABAP dispatcher you want to

monitor, for example: "45"

Enable/Disable:

Enable (1) or disable (0) the DPQueueCheck for the defined SAP instance, for example: 1

HPOM Msg Group:

The name of the HPOM message group to which the message generated by r3mondisp should be assigned

• HPOM Msg Object:

The name of the HPOM message object to which the message generated by r3mondisp should be assigned, for example: "Dialog"

• HPOM Msg Severity:

The severity level assigned to the HPOM message generated by r3mondisp, for example: "critical"

• WP-Type:

The type of work process whose queues you want to check, for example: DIA (for dialog), or BTC (Batch)

• Idle/Queue:

The status of the work process in the queues you are monitoring. Use "IDLE" if you want to monitor what percentage of the allocated work processes in the monitored queue are idle (or available) at a given point in time; use "QUEUE" if you want to monitor what percentage of the maximum allowed work processes in the monitored queue are currently allocated.

Percentage Full:

How full (or empty) the monitored queue must be as a percentage of the maximum before r3mondisp generates an alert. Note that =IDLE =10 generates an alert if *less* than 10% of the allocated work processes are idle; =QUEUE =70 generates an alert if *more* than 70% of the maximum allowed work processes in the queue are in use.

Enable DP Queue Check

Only with SPI for SAP monitors that require a dialog work process to log on to SAP.

Configure the SPI for SAP monitors that log on to SAP to check the status of the ABAP dispatcher and the size of its queues before starting. If there are no or too few dialog work processes available, the monitor does not start and displays a message in the message browser indicating the reason. Use this keyword if you think that allocating to the SPI for SAP monitor the work process it requires to logon to SAP might cause further performance problems for the ABAP dispatcher. For more information about monitoring the ABAP dispatcher and its queues, see r3mondisp: the ABAP Dispatcher Monitor on page 76.

The EnableDPQueueCheck keyword requires the following parameters:

```
EnableDPQueueCheck =<Hostname> =<SAP SID> =<SAP Number> \
=<Enable/Disable>
```

Hostname:

The name of the SAP Server where the instance is running whose ABAP dispatcher you want the SPI for SAP monitors to check before starting:

=ALL	All the hosts which the SPI for SAP monitors. This is the default setting.
= <sap_host></sap_host>	The name of a SAP server, where you want to enable checking of the dispatcher-queue. Use a new line for each individual host.

• SAP SID:

The SAP System ID of the instance whose ABAP dispatcher you want the SPI for SAP monitors to check before starting:

=ALL	All System IDs which the SPI for SAP monitors. This is the default setting.
=< <i>SAP_SID</i> >	The SAP System ID of the instance whose ABAP dispatcher you want to check, for example: "SP1"

• SAP Number:

The number of the SAP instance whose ABAP dispatcher you want the SPI for SAP monitors to check before starting:

=ALL	All instances which the SPI for SAP monitors. This is the default setting.
= <sap_instnr></sap_instnr>	The number the SAP instance whose ABAP dispatcher you want the SPI for SAP monitors to check, for example: "45"

• Enable/Disable:

Enable (=1) or disable (=0) this particular monitor to monitor the ABAP dispatcher for the defined SAP instance, for example: 1. The default is Disable (=0). You have to enable the SPI for SAP monitors individually.

Note that if you enable this feature, you do not need to schedule the ABAP dispatcher monitor r3mondisp. However, to ensure that a valid configuration file for r3mondisp is available. The r3mondisp.cfg configuration file defines the path to the profile of the SAP instance the SPI for SAP is monitoring and, in addition, the severity level of the message sent to HPOM when a threshold is violated for the ABAP dispatcher.

History Path

The HistoryPath[Unix \mid AIX \mid WinNT] keyword in the monitor-configuration file accepts the following parameters:

HistoryPath<Unix|Aix|WinNT> <HostName> =<Path>

Hostname:

=ALL Monitor all hosts with the SPI for SAP. This is the default setting.

=<SAP_host> The name of a SAP server, where you want to specify the path to the

monitor history file. Use a new line for each individual host.

• Path:

UNIX: =default
AIX: =default
Windows: =default

The =default value here is associated with the default path to the history files which the SPI for SAP monitors write. UNIX managed nodes generally use /var/opt/OV/conf/sapspi/. AIX uses /var/opt/OV/conf/sapspi for HTTPS agents.

Microsoft Windows managed nodes use %OvDataDir%\conf\sapspi.

Instance Profile Path

Only with r3mondisp, the ABAP dispatcher monitor

The path to the profile-configuration file for an SAP instance whose ABAP dispatcher you want to monitor; the InstanceProfilePath keyword accepts the following parameters:

InstanceProfilePath =<hostname> =<SID> =<InstanceNr> \ =<path>

• Hostname:

The name of the SAP Server where you want to specify a path to an SAP profile configuration file:

=ALL All hosts monitored by the SPI for SAP. This is the default setting.

=<SAP_host> The name of a SAP server, where you want to specify the path to the

SAP profile configuration file. Use a new line for each individual SAP

server.

• SID:

The ID of the SAP System whose profile path you want to specify:

=ALL All System IDs which the SPI for SAP monitors. This is the default

setting.

=<SAP SID> The System ID of the SAP instance whose configuration-file path you

want to specify, for example: "SP1"

Instance Nr:

The number of the SAP instance whose profile path you want to specify:

=ALL All instance numbers which the SPI for SAP monitors. This is the

default setting.

=<SAP_InstNr> The number of the SAP instance whose configuration-file path you

want to specify, for example: "45"

• Path:

The path to the profile file for the specified SAP instance. The default location for SAP profile files is /usr/sap/<SID>/SYS/profile. If the SAP profile file resides in the default location, use =default; if the profile is *not* in the default location, specify the full path to the profile file, for example: /usr/sap/<path>/profile

Remote Monitoring

The RemoteMonitoring keyword allows you to configure the SPI for SAP on a local host to monitor an SAP instance on a remote host. You can use the RemoteMonitoring keyword with all the SPI for SAP monitors *except* r3mondev, r3monpro, and r3mondisp. RemoteMonitoring accepts the following parameters:

RemoteMonitoring =<LocalHost> =<RemoteHost> =<SAPSystem> \ =<SAPNumber>

• LocalHost:

The name of the HPOM managed node where the SPI for SAP is running and whose HPOM agent the SPI for SAP will use to do the monitoring on the host defined in "RemoteHost".

• RemoteHost:

The name of the *remote* SAP system monitored by the host defined in "LocalHost". The RemoteHost does not have the SPI for SAP installed and is not usually (but could theoretically be) an HPOM managed node.

• **SAP System** (r3monal *only*):

This is the ID of the SAP System running on the SAP server defined in the parameter "RemoteHost" which you want to remotely monitor with the SPI for SAP running on "LocalHost".

• **SAP Number** (r3monal *only*):

This is the specific instance number of the SAP System running on the SAP server defined in the parameter "RemoteHost" which you want to remotely monitor with the SPI for SAP running on "LocalHost".

Note that the remote-monitoring feature does not work with all the alert monitors, for example, you cannot configure r3mondev, r3monpro, and r3mondisp to monitor SAP instances running on a remote server. For more information, see the appropriate section on the individual alert monitor.

Setting up Remote Monitoring for r3monal

#				
# Remote	LocalHost	RemoteHost	SAP	SAP
# Monitoring			System	Number
RemoteMonitoring	=sap1	=sdsap1	=SP6	=00
RemoteMonitoring	=sap1	=sdsap2	=SP6	=00
RemoteMonitoring	=sap2	=sdsap3	=WA1	=33
#				



The name of the host where the remote SAP instance is running must appear in the SPI for SAP's central-configuration file (r3itosap.cfg) along with the appropriate login information.

For more information about using the RemoteMonitoring keyword, see the individual alert monitors and, in addition:

- Remote Monitoring with Alert Monitors on page 23
- r3status: Monitoring SAP Remotely on page 69
- Remote Monitoring with the Alert-Collector Monitors on page 102
- Remote Performance Monitoring on page 211

RFCTimeOut

For all monitors except r3mondey, r3monpro, r3mondisp, and r3status

RFCTimeOut defines the maximum amount of time, in seconds, before an RFC XMI/XAL function call is canceled, for example: =120. If the RFC call takes longer than expected to complete, that is; to receive a reply to the initial request, the System is probably down or has a serious performance problem.



The time limit no longer applies after the call completes and SAP allocates a free Dialog process.

Severity Values

Only with r3monal, the CCMS-alert monitor

In the Severity Values section of the r3monal.cfg configuration file, the Severity<*Level>* keyword configures the r3monal monitor to map the severity of CCMS alerts (for example, SeverityCritical) in the SAP subsystem to a specific message-severity level in HPOM (for example, CRITICAL). The Severity<*Level>* keyword accepts the following values:

```
Severity<Level> =<SAPSystem> =<SAPNumber> =<Enabled> \
/<Disabled> =<OpcSeverity>
```

Note that the Enabled/Disabled parameter determines whether r3monal considers or ignores CCMS alerts with the specified SAP severity level for mapping to the defined message severity in HPOM:

=1 (Enabled) Consider CCMS alerts with the severity Severity *Level>* (for

example: SeverityCritical) and send a message to HPOM with the

severity < OpcSeverity >.

=0 (Disabled) Ignore CCMS alerts with the severity Severity < Level > (for example:

SeverityWarning) and do not send a message to HPOM.

Table 3 Mapping Severity Levels

CCMS Alert Severity	HPOM Message Severity
SeverityCritical (red)	= CRITICAL
SeverityWarning (yellow)	= WARNING
SeverityNormal (green)	= NORMAL
SeverityNull	= UNKNOWN

The alert-collector monitors (r3moncol) have two additional HPOM severity levels to map to; Minor and Major. The severity hierarchy in ascending order is; Normal, Warning, Minor, Major, Critical.

Trace File

The TraceFile keyword in the monitor-configuration file accepts the following parameters:

Tracefile =<HostName> =<FileName> =<TraceMode> =<TracePeriod>

• Hostname:

=ALL Monitor all SAP servers with the SPI for SAP. This is the default setting.

=<*SAP_host*> The name of a specific host where tracing is enabled and you want to specify a trace level. Use a new line for each individual host.

• Filename:

=r3mon<alert_monitor_name>.log, for example, r3mondev.log, or r3mondmp.log. This is the default setting. Alternatively, you can specify the name of the file to which you want to write the trace log. By default, monitor trace files are located in the following directories:

— UNIX: /var/opt/OV/log

- AIX:

- HTTPS: /var/opt/OV/log

— Microsoft Windows:

− HTTPS: %OvDataDir%\log

For more information about changing the path, see the environment variable SAPOPC_TRACEPATH in Alert-Collector Monitor Environment Variables on page 101.

TraceMode:

=w default value

=a append

TracePeriod

Monitor verifies whether the existing file has expired the time period mentioned in the config file. If the time period is expired, a new file will be created. Otherwise new trace log entries will be appended into the already existing file.

Trace Level

The TraceLevel keyword in the monitor-configuration file accepts the following parameters:

Tracelevel =<HostName> =<Trace Level>

Hostname:

=ALL Monitor all SAP hosts with the SPI for SAP. This is the default setting.

=<SAP_host> The name of a SAP server, where you want to specify a trace level. Use a new line for each individual host.

Trace level:

=0	Disable logging; this is the default setting for all configuration files.
=1	r3monal, r3mondev, r3monpro: Enable all logging
	r3moncol, r3mondisp, r3status, r3perfagent: Log only error messages
=2	r3moncol, r3mondisp, r3status, r3perfagent only: Log all messages
=3	r3moncol, r3mondisp, r3status, r3perfagent only: Log everything

XMISyslogMode

Alert monitor r3monal only.

The XmiSyslogMode keyword allows you to specify that the r3monal monitor sends SAP system log messages in the style and format previously used by the monitor r3monxmi, which is now obsolete. The XmiSyslogMode keyword accepts the following parameters:

XmiSyslogMode =<Enable | Disable>

• Enable/Disable:

- =0 Disable the XMI compatibility mode; this is the default setting.
- =1 Enable XMI compatibility mode.

including debug messages

For more information about the XMISyslogMode keyword and when you can use it, see r3monal: XMI Compatibility Mode on page 56.

To Configure the SPI for SAP Alert Monitors

1 In the Tool Bank window, click the appropriate tools. There are two Tool groups that include monitor configuration icons:

SAP R/3 Admin For global configurations SAP R/3 Admin Local For local configurations

In the Tool Group window, click the icon that corresponds to the alert monitor to be changed. The selected alert monitor's configuration file opens.

2 Edit or enter lines to define *trace levels*. For example, you can set a default for ALL hosts (hostname = ALL), then add lines for any hostname exceptions. For example:

```
TraceLevel =ALL =0
TraceLevel =hpbbx10 =1
```

In this example, tracing is turned off for all the hosts except for host hpbbx10. For more information about trace levels, see Trace Level on page 39.

3 Specify the name of the *trace file* in which you want to record trace information. For example:

```
TraceFile =ALL =r3monpro.log
```

Default trace file names for each monitor are given in Table 4

Table 4 Default Trace File Names

Tracefile Name	Monitor Alert Type
r3monaco.log	Alert Calls
r3monal.log	Alerts
r3monale.log	iDOC alerts
r3monchg.log	System Change
r3moncts.log	Correction and Transport System
r3mondev.log	Trace and Log Files
r3mondisp.log	ABAP dispatcher
r3mondmp.log	ABAP/4 Dumps
r3monjob.log	Job
r3monlck.log	Lock_Check
r3monoms.log	OM Switch
r3monpro.log	Work and Database Processes
r3monsec.log	Security
r3monspl.log	Spooling

Table 4 Default Trace File Names (cont'd)

Tracefile Name	Monitor Alert Type
r3montra.log	Transport
r3monupd.log	Update
r3monusr.log	User
r3monwpa.log	WorkProcess Availability

4 Specify the *history path*, which is the directory path by which you can locate an alert monitor's history file. Alert monitors include the following default paths for UNIX, AIX and Windows servers:

```
HistoryPathUnix =ALL =default
HistoryPathAIX =ALL =default
HistoryPathWinNT =ALL =default
```



You can tell the alert monitors to use a specific history path on Windows managed nodes rather than the default: =default, for example: %OvAgentDir%\Tmp. For more information, see the SAPOPC_HISTORYPATH environment variable and the alert-monitor configuration-file keyword, History Path on page 35.

Each alert monitor writes its own history file. Each time an alert monitor completes a run, it adds a new section to its history file. This feature enables the alert monitor to check for changes since the previous run.



Do *not* edit any of the monitor history (* .his) files. Editing the monitor history file could compromise the accuracy and consistency of your records. The monitor uses its history file to determine which, if any, events have occurred since the last run and whether to send any messages.

- 5 Define the monitoring conditions. Monitoring conditions are rules that control the checks which the alert monitor makes each time it runs. The monitoring conditions you enter are different for each alert monitor. See Alert Classes on page 27 for general information about the keywords and parameters that are allowed with each monitor.
 - For specific information on the monitoring conditions for each alert monitor, see the appropriate section on the particular alert monitor.

Distributing Alert-Monitor Configuration Files

You can distribute the alert-monitor configuration files to the managed nodes in any one of the following ways:

1 The Install Config tool

Use the Install Config tool located in the SPI for SAP > SAP R/3 Admin tool group. The Install Config tool distributes copies of each *global* monitor-configuration file to all selected managed nodes. This method can be used by any HPOM user with the necessary access permissions.

2 The Distribute Local Config tool

Use the Distribute Local Config tool located in the SPI for SAP > SAP R/3 Admin Local tool group. The Distribute Local Config tool distributes a copy of the local monitor-configuration file existing on the management server in the directory $/\text{var/opt/OV/share/conf/sapspi/local/<} node_name> to the selected managed node <math>only$. It is possible to have local configuration files for only a subset of the monitors. In that occasion, only this subset is distributed to the directory for local configuration on the managed node, and the other monitors (for which local configuration files do not exist) look into the directory for global configuration files instead.

Distributing monitors does *not* ensure the availability of monitor-configuration files on managed nodes. Always make sure that either a local or a global configuration file exists on the managed node for each monitor used.

This method can be used by any HPOM user with the necessary access permissions.

Global Configuration files

Global configuration files are installed in the following directories on the managed node:

- UNIX: /var/opt/OV/conf/sapspi/global
- AIX (HTTPS): /var/opt/OV/conf/sapspi/global
- Microsoft Windows (HTTPS): %OvDataDir%\conf\sapspi\global

Local Configuration Files

Local configuration files are installed in the following directories on the managed node:

- UNIX: /var/opt/OV/conf/sapspi/local
- AIX (HTTPS): /var/opt/OV/conf/sapspi/local
- Microsoft Windows (HTTPS): %OvDataDir%\conf\sapspi\local

Local and Global Configurations

This section explains briefly how to apply either a local or a global alert-monitor configuration and, in addition, how to delete configurations, which have already been applied and distributed. This section provides instructions for the following tasks:

- To Apply a Global Configuration on page 43
- To Apply a Local Configuration on page 43
- To Delete Selected Local Configurations on a Node on page 44

It is possible to configure both global and local directories on the same machine. When a monitor executable runs, it uses an order of precedence to determine which configuration file should be used. For more information, see Alert Monitor Order of Precedence on page 23.

The procedures described in this section assume that you have already distributed the SPI for SAP templates to the nodes you want to manage.

To Apply a Global Configuration

- In the tool group **SPI for SAP > SAP R/3 Admin**, click the icon associated with the alert monitor, which you want to configure.
- 2 Edit the configuration file of the alert monitor as required. For a detailed description of file parameters, see To Configure the SPI for SAP Alert Monitors on page 40.
- 3 Save the modified configuration file.



If you use the standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration file and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

- 4 Repeat steps 1 through 3 for each alert type you wish to monitor, making sure to make all required changes in each corresponding alert monitor configuration file.
- In the Node Bank window, select the managed nodes to which you want to distribute updated configurations.
- 6 Click the icon Install Config.

The *global* configuration files are copied to one of the directories mentioned in Global Configuration files on page 42 on each of the selected managed nodes.

To Apply a Local Configuration

- In the Node Bank window, select the managed node(s) on which you want to create or update a local configuration.
- 2 On the management server in the tool group SAP R/3 Admin Local, click the icon associated with the alert monitor you want to configure.
- 3 Edit the configuration file of the alert monitor as required. For more information, see To Configure the SPI for SAP Alert Monitors on page 40



If this is the first local configuration for the selected alert monitor and node, opening the configuration file automatically places a copy of the dedicated global-configuration file in the local-configuration directory on the managed node.

If you do not want to have a local configuration for this alert monitor, you must delete this file from the directory before the next distribution of local-configuration files (see To Delete Selected Local Configurations on a Node on page 44).

- 4 Save the modified configuration file. If you use the standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration file and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.
- 5 Repeat steps 1 through 4 for each alert type you wish to monitor locally, ensuring you make all required changes in *each* corresponding alert-monitor configuration file.
- In the Node Bank window, select the managed nodes to which you want to distribute updated local configurations.

7 In the tool group SAP R/3 Admin Local, click the Distribute Local Configuration. The *local* configuration files are copied to one of the directories mentioned in Local Configuration Files on page 42 on each of the selected managed nodes.

To Delete All Local Configurations on a Node

- In the Node Bank window, select the managed node(s) for which you want to delete the local configuration.
- On the management server, in the tool group SAP R/3 Admin Local, click the icon Delete Local Config.

On the management server, the local-configuration directories for the selected managed nodes are deleted and the updated configurations are distributed to the managed nodes.

To Delete Selected Local Configurations on a Node

- 1 On the HPOM management server, change to the local-configuration directory for the node:
 - cd /var/opt/OV/share/conf/sapspi/local/<node name>
- 2 Remove the configuration file that is no longer required:
 - rm <filename>.cfg
- 3 In the Node Bank window, select the managed node whose local configuration you want to delete.
- 4 In the tool group SPI for SAP > SAP R/3 Admin Local, click the icon Distribute Local Config.

The existing local configuration is removed and replaced by the new configuration, which does not include the configuration file you have removed. Even if it is empty, do not manually remove the directory /var/opt/OV/share/conf/sapspi/local/<node name> on the management server.

If you accidentally remove this directory, or this directory is otherwise not present, the Distribute Local Config function is not able to redistribute the configuration, which means that the local configuration on the managed node cannot be updated.

3 The SPI for SAP Alert Monitors

This chapter describes the alert monitors r3monal, r3monpro, r3mondev, r3status, and r3monsec and explains how to use the configuration files to control them.

Introducing the SPI for SAP Monitors

The SPI for SAP includes a set of monitors, which you configure to run at regular intervals to collect information regarding various aspects of your SAP environment.

You deploy SPI for SAP monitors to the SAP NetWeaver servers, which you want to manage and monitor with HPOM. Monitor distribution is part of the SPI for SAP installation and configuration process. Before distributing a monitor, the HPOM administrator, working from the HPOM desktop, first assigns and distributes the appropriate SPI for SAP policies.

If you are new to configuring the monitors, you will want to read the detailed description of each alert monitor and alert-monitor configuration file. Each alert-monitor configuration file includes information about default configurations as well as a list of changes you must make to the configuration file.

Polling Rates for the Alert Monitors

The alert monitors have different polling rates, that is, the frequency at which the monitor runs. You can change the polling rate at the schedule policy for the monitor. For more information about the default polling rates for each alert monitor, see Table 5, which shows the rates in days, hours, and minutes.

Table 5 Default Polling Rates for Alert Monitors

Alert-Monitor Name	Polling Rate				
Alei t-Monitor Name	Days	Hours	Mins		
r3monal			5		
r3mondev			5		
r3mondisp			3		
r3monpro			2		
r3monsec	1				
r3status			2		

The Alert-Monitor Configuration Files

Each SPI for SAP alert monitor is defined and configured in an HPOM policy and in several files, including an executable file and a configuration file.

The policy defines the rules for generating messages that appear in the HPOM message browser. The policy also controls the frequency with which the associated executable file runs. If you want to customize a policy, follow the instructions given in the online help for HPOM administrators.

The monitor executable file runs at the regular interval specified in the monitor policy. The monitor executable checks for and, if present, reports conditions defined in the individual monitor's associated configuration file. You can define these monitoring conditions to suit the needs of your environment. For information about copying and renaming the monitor templates, refer to the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

The SPI for SAP monitor's configuration file allows you to use keywords to set up the monitor to meet the requirements of your particular environment. Note that although most of the keywords appear in *all* the configuration files, some of the keywords can only be used in conjunction with specific monitors.

For more information about the keywords which you can use in the SPI for SAP alert-monitor configuration files, see Monitor-Configuration Files on page 21. Note that the contents of r3status.cfg and the r3status monitor configuration file, are explained in greater detail in The r3status Configuration File on page 68. Excerpt from the r3mondev.cfg File on page 46 shows what a configuration file looks like for the r3mondev monitor, which scans the trace and log files of the SAP system for the string "ERROR".

Excerpt from the r3mondev.cfg File

```
#-----
# TraceLevel hostname only error messages=1 info messages=2 debug
messages=3
                 Disable=0
TraceLevel
          =ALL
                  =0
# TraceFile hostname
                 filename
                            TraceMode
                                            TracePeriod
                      (a=append/w=create(default)) (in mins)
TraceFile
         =ALL =r3moncts.log =w
                                            =60
#-----
# History
         hostname
                  path
# Path
HistoryPathUnix
                 =default
            =ALL
HistoryPathAIX
             =ALL
                  =default
HistoryPathWinNT =ALL
                  =default
# AlertDevMon SAP SAP Enable =1 Filemask Severity Opc
                                                    OpC
          Sys Number Disable=0
#
                                            Object
                                                    MsgGro
                   =1 =dev * =WARNING =r3mondev =R3 Tr
#AlertDevMon =ALL =ALL
ace
```

#AlertDevMon	=ALL	=ALL	=1	=std*	=CRITICAL	=r3mondev	=R3_Tr
#Dispatcher tr	ace fi	le					
AlertDevMon			=1	=dev_disp	=WARNING	=r3mondev	=R3_Tr
#Workprocess t	race f	ile for	workproces	s with numbe	er O		
AlertDevMon	=ALL	=ALL	=1	=dev_w0	=WARNING	=r3mondev	=R3_Tr
#message serve	r trace	e file					
AlertDevMon ace	=ALL	=ALL	=1	=dev_ms	=WARNING	=r3mondev	=R3_Tr
#screen proces	sor tra	ace file					
AlertDevMon ace	=ALL	=ALL	=1	=dev_dy0	=WARNING	=r3mondev	=R3_Tr
#tp process tr	ace fi	le					
AlertDevMon ace	=ALL	=ALL	=1	=dev_tp	=WARNING	=r3mondev	=R3_Tr

r3monal: the CCMS 4.x Alert Monitor

The r3monal monitor uses the SAP NetWeaver CCMS monitoring architecture introduced at CCMS version 4.0 and enables you to monitor the output of SAP's own internal monitor, the CCMS alert monitor. The r3monal monitor maps the alerts identified by the CCMS monitor to HPOM messages, which you can view in the HPOM message browser.



Since SAP has indicated that it intends to phase out support for the shared-memory interface, the SPI for SAP only supports the XMI/XAL interface.

This section includes information about the following topics, which describe the contents of the r3monal configuration file:

- r3monal: Monitoring Conditions on page 48
- r3monal: CCMS Monitor Sets on page 48
- r3monal: CCMS Alert Monitors on page 51
- r3monal: CCMS Acknowledge Message on page 53
- r3monal: Environment Variables on page 53
- r3monal: File Locations on page 54
- r3monal: Remote Monitoring on page 54
- r3monal: RFC Time Out on page 54
- r3monal: Severity Levels on page 55
- r3monal: Trace Levels on page 56
- r3monal: XMI Compatibility Mode on page 56
- r3monal: Alert Classes on page 57
- r3monal: Migrating from r3monxmi on page 57

- r3monal: Monitoring the J2EE Engine (Web AS Java) on page 59
- r3monal: Monitoring Stand-alone Enqueue Servers on page 59
- r3monal: Monitoring SAP Security-Audit Logs on page 59
- r3monal: Monitoring the Enterprise Portal on page 59
- r3monal: Monitoring the CEN on page 60
- r3monal: Testing the Configuration on page 60

r3monal: Monitoring Conditions

You must define and enable the keywords——:—Severity<*Level>, RFCTimeOut, CCMSMonitorSet, and CCMSAcknowledgeMessage. All other keywords in the r3monal.cfg configuration file are optional. For more information, see Severity Values on page 37, RFCTimeOut on page 37, CCMS Monitor Set on page 31, and CCMS Acknowledge Message on page 30 respectively.

r3monal: CCMS Monitor Sets

The XMI/XAL interface allows the SPI for SAP to read, write, and reset CCMS alerts directly in the CCMS alert-monitor tree. The most obvious advantage of this feature is that you can use existing CCMS monitor sets as templates to define your own monitor sets, which contain only those CCMS alerts you want to monitor with the SPI for SAP.

Remember to login to SAP and define the new CCMS monitor sets which you want the SPI for SAP to use to generate messages *before* you start the configuration of the r3monal monitor in HPOM. Figure 1 on page 49 shows how the application servers bounty and hpspi003 appear in the Monitor-tree when you select and expand the central-instance item WA1.




To create or modify items in the CCMS monitor tree, you need to make sure that the Maintenance Function for the CCMS monitor sets is switched on. You can find the Maintenance function option in the Extras menu, as follows:

Extras > Activate Maintenance Function

If you are not interested in receiving messages concerning all the alerts present in the default monitor set, for example, OperatingSystem, DatabaseClient, and so on, you can expand the individual application-server item and select only the alerts which you want to use to generate messages that will be sent to HPOM. In the example configuration shown in Figure 1, we have also selected the Oracle @ item so that we hear about problems with the database too.

Figure 1 Defining a Monitor Set

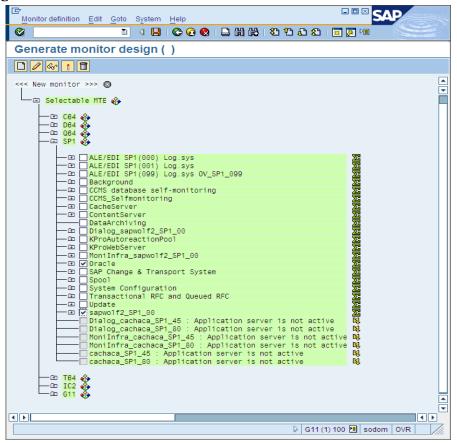

Make sure that the new monitor sets you define for the SPI for SAP are visible to and usable by the HPOM user, which you have defined for the SPI for SAP. If you are logged into SAP as the defined HPOM user, then you can see only the CCMS monitor sets defined for the defined HPOM user and those marked "Public". If you are logged into SAP as the administrator, you can see all available monitor sets, in which case you have to ensure that you make the new monitor sets you define for the SPI for SAP visible either to the defined HPOM user for the SPI for SAP or everyone by using the option "Public". Remember to use only ASCII characters when defining the name of a CCMS monitor set as the SPI for SAP cannot currently interpret non-ASCII characters in monitor-set names.

One SAP System/SID can have multiple monitor sets. If you need to define multiple monitor sets for a SAP System/SID, remember to include each new monitor set on a new line in the monitor-set section of the r3monal.cfg monitor configuration file, as illustrated in Configuring Multiple Monitor Sets. The name you define in the monitor parameter must match the name of the monitor set as it appears in the CCMS alert-monitor tree. The names of monitors must appear in the configuration file exactly as they are shown in SAP including, for example, forward slashes (/), as shown in Configuring Multiple Monitor Sets.

Note that the combination of traditional long SAP names and the line break in the example configuration file shown in Configuring Multiple Monitor Sets disguises the name of the monitor. The complete name of the last monitor is: =System / All Monitoring Segments / All Monitoring Contexts. Note that the names you use do not have to be this long. In addition, if you want to associate multiple monitors with one, single monitor set, you have to specify each individual monitor on a new line as shown by the first two entries in Configuring Multiple Monitor Sets, where the SPISAP monitor set has two Monitors; System and DB ALERT.

Configuring Multiple Monitor Sets

#				
# Monitor Set	SAP	SAP	Monitor Set	Monitor
#	System	Number		
CCMSMonitorSet	=WA1	=33	=SPISAP	=System
CCMSMonitorSet RT	=WA1	=33	=SPISAP	=DB_ALE
CCMSMonitorSet /\	=SP6	=00	=SAP CCMS Technical Expert Monitors	=System
		A	ll Monitoring Segments / All Monitori	ng
Contexts				
#				

The default configuration of individual CCMS alert monitors does not always meet the demands of your environment and, in some instances, you will need to change it. You can check and, if necessary, modify a monitor's properties in the Performance Attribute tab of the Monitor: Properties and Methods window, as illustrated in Figure 2 on page 51. If you decide to change the monitor properties, you need to consider the following points:

- Ensure that the severity level of the CCMS Alerts matches the severity level of the HPOM messages, which are generated by the CCMS Alerts. For more information about configuring severity levels, see Severity Values on page 37.
- Ensure that severity-level thresholds configured for a given CCMS alert monitor are appropriate for your needs.

BOX SAP Properties Edit Goto System Help **②** Monitoring: Properties and Methods Properties of G11\sodom_G11_00\R3Services\Dialog\ResponseTime MTE class R3DialogResponseTime General PerformanceAttribute Methods Addnl info Performance properties assigned from group R3DialogResponseTime Comparison Value / O Smoothing over last 1 min. Last reported value Average in the last hour O Smoothing over last 5 min. O Average in the last quarter of an hour Smoothing over last 15 mins Threshold values Change from GREEN to YELLOW 2.000 Change from YELLOW to RED 3.000 msec Reset from RED to YELLOW 2.000 msec Reset from YELLOW to GREEN 1 000 msec Alert is triggered if the comparative value falls below threshold value exceeds the threshold value Alert text / RT Message class 127 Message number &1 &3 > &2 &3 Dialog response time exceeds threshold (&4 dialog steps)

Figure 2 Checking and Modifying CCMS Alert-Monitor Thresholds


To open the Monitor: Properties and Methods window for a specific CCMS monitor, browse to the desired monitor in the monitor-set tree and either click the Properties button or double-click the monitor you want to view.

r3monal: CCMS Alert Monitors

Alerts are the most basic element of the strategy that SAP uses to monitor the health of the SAP Landscape. Alerts are associated with objects such as disks and CPUs, and objects have attributes such as response times and usage statistics. The status of the object as well as its performance and availability over time are important to the SAP System administrator. The SAP NetWeaver CCMS alert monitor displays the configured alerts (along with any associated objects and attributes) as CCMS **monitors** in a **monitor tree**, which you can browse, as illustrated in Figure 3. Note that *public* monitor sets are visible to (and usable by) all SAP users.


For ease of navigation, the CCMS monitors are grouped into pre-defined **monitor sets**, for example, SAP CCMS Technical Expert Monitors or SAP CCMS Admin Workplace. The pre-defined monitor sets contain a large number of sub sets and monitors, which can generate thousands of alerts, some of which you really do not need.

Figure 3 CCMS Monitor Sets

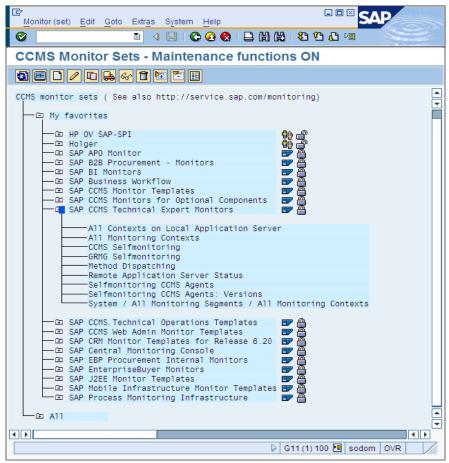

If you switch *on* the maintenance function for the CCMS monitor sets, you can create your own CCMS monitor sets, which contain only the monitors for the alerts you want to know about on a regular basis. When you have created your own monitor sets, you can add them to the monitor-set tree and configure the SPI for SAP to monitor them. In this way, you can reduce the alerts you hear about and the information you receive so that it is easier to manage.

Figure 4 CCMS Alert Properties

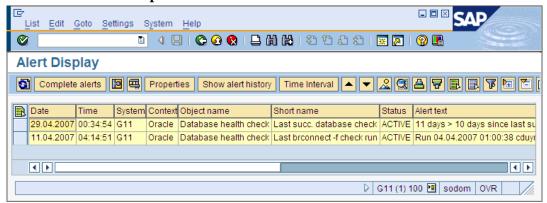

When a condition is reported in the SAP NetWeaver CCMS monitor, the monitoring object and its attributes are included in the resulting alert as shown in Figure 4.

r3monal: CCMS Acknowledge Message

The CCMSAcknowledgeMessage feature determines whether r3monal tells SAP to automatically acknowledge (complete) CCMS Alerts, which match the defined conditions. Enabling the CCMSAutoAcknowledge feature in the r3monal.cfg configuration file is same as selecting the alert and clicking the [Complete Alert] button in SAP CCMS.

Automatically Acknowledging CCMS Alerts

```
# Triggers auto-acknowledge of CCMS alerts
#------
# CCMSAcknowledgeMessage SAP Ack. filtered Enable=1
# System Messages Disable=0
CCMSAcknowledgeMessage =ALL =0 =0
CCMSAcknowledgeMessage =SP6 =0 =0
```

You can enable or disable the auto-acknowledgement feature for specific SAP Systems defined on individual lines in the r3monal.cfg configuration file. However, note that if you *disable* the auto-acknowledgement feature (=0) for a specific SAP System, r3monal ignores the setting for **Ack. Filtered Messages** defined on the same line.

If you enable the Ack. Filtered Messages keyword, messages that are filtered out (and not sent to the HP Operations agent) by the AlerMonSyslog specifications (which means, setting Disabled=0 in the appropriate line) will be acknowledged in CCMS. Therefore, these alerts will not be visible in the HPOM message browser or in SAP CCMS anymore. For more information on AlerMonSyslog, see r3monal: Alert Classes on page 57.

Note that, if you enable the CCMSAcknowledgeMessages keyword, you also need to make sure that you enable the Severity<*Level>* keyword. The Severity<*Level>* keyword allows you to filter CCMS alerts according to severity. For more information, see r3monal: Severity Levels on page 55.

r3monal: Environment Variables

Table 6 lists the environment variables, which you can use to configure the r3monal monitor.

Table 6 r3monal Environment Variables

Environment Variable	Description
SAPOPC_DRIVE	The Windows drive where the HPOM agent is running, for example, E:\usr\
SAPOPC_HISTORYPATH	Path to the r3monal history file
SAPOPC_R3MONAL_CONFIGFILE	Name of the r3monal configuration file
SAPOPC_SAPDIR	The Windows drive where SAP NetWeaver is running, for example, E:\usr\sap
SAPOPC_TRACEPATH	Path to the r3monal trace file

r3monal: File Locations

The r3monal monitor uses the default files listed in Table 7. For more detailed information about the contents of the in SPI for SAP monitor-configuration files in general and the file r3monal.cfg in particular, see The SPI for SAP Monitor-Configuration File on page 25.

Table 7 r3monal File

File Name	Description
r3monal(.exe)	Executable for the SAP NetWeaver CCMS alert monitor
r3monal.cfg	Configuration file for the CCMS alert monitor
r3monal.his	History file for storing data after each monitor run

r3monal: Remote Monitoring

The RemoteMonitoring keyword allows you to configure the SPI for SAP on local host to monitor an SAP instance on a remote host. For more information about the parameters you can use with the RemoteMonitoring keyword, see the list of keywords in Remote Monitoring with Alert Monitors on page 23. Note that SAP System and SAP Number are only required by r3monal.

Enabling Remote Monitoring in the r3monal.cfg File

#				
# Remote Host	Localhost	Remotehost	SAP	SAP
#			System	Number
RemoteMonitoring	=hpspi003	=ovsdsap6	=SP6	=00
#				

r3monal: RFC Time Out

You use the RFCTimeout keyword to define the maximum amount of time in seconds before an RFC XMI/XAL function call is canceled, for example: =120. You need to set a time-out which takes into account the environment in which SAP is running. For example, if the RFC call takes longer than expected to complete, that is, to receive a reply to the initial request, the SAP System is probably down or has a serious performance problem. Note that after the RFC call completes and SAP allocates a free Dialog process, the time limit no longer applies.

Setting the Time-out period for XMI/XAL Function Calls

r3monal: Severity Levels

The "Severity Values" section of the r3monal.cfg file defines how you filter CCMS alerts in the CCMS monitor trees you are managing with r3monal and map the severity level of the filtered CCMS Alerts to the desired severity level for the corresponding HPOM messages. You use the keywords SeverityWarning and SeverityCritical in combination with the CCMSAcknowledgeMessage keyword, which is described in more detail in r3monal: CCMS Acknowledge Message on page 53. For more information about the SPI for SAP configuration files in general, see The SPI for SAP Monitor-Configuration File on page 25.

By adding a new line for individual combinations of SAP system ID and SAP number, you can restrict the severity mapping between CCMS Alerts and HPOM messages to a specific SAP System ID and SAP Number. Default Settings for Severity Levels in r3monal.cfg shows the default settings for severity levels in the r3monal.cfg file.

Default Settings for Severity Levels in r3monal.cfg

#				
#Severity	SAP	SAP	Enabled=1	OpCSeverity
#Values	System	Number	Disabled=0	
SeverityWarning	=ALL	=ALL	=0	=WARNING
SeverityCritical	=ALL	=ALL	=1	=CRITICAL
#				

You can edit the severity levels in r3monal.cfg in any one of the following ways:

Enable or disable severity levels

If you want to disable (=0) the generation of messages for CCMS alerts with the severity "warning", add a new (or change the existing) SeverityWarning line as follows:

```
SeverityWarning =ALL =ALL =0 =WARNING
```

2 Change how the SPI for SAP maps CCMS severity levels to message severity levels in HPOM

If you want the SPI for SAP to report all SeverityWarning events as critical, add a new (or change the existing) SeverityWarning definition, as follows:

```
SeverityWarning =ALL =ALL =1 =CRITICAL
```

3 Define SID-Specific exceptions

If you want the SPI for SAP to report as critical all SeverityWarning events that occur on SAP system LP2, leave the default settings for ALL systems and add the following line:

```
SeverityWarning =LP2 =ALL =1 =CRITICAL
```

Excerpt from the r3monal Configuration File

```
# A Monitor Set defines the messages you want to forward to HPOM.
# Monitor Set
                SAP
                       SAP
                              Monitor Set Monitor
                System Number
                =WA1 = 33
#CCMSMonitorSet
                               =SPISAP
                                           =System
#CCMSMonitorSet
                =WA1 = 33
                              =SPISAP
                                           =DB ALERT
                 =SP6 =00
#CCMSMonitorSet
                                 =SAP CCMS Technical Expert Monitors
=System / All Monitoring Segments / All Monitoring Contexts
                Localhost Remotehost SAP
# Remote Host
                                                SAP
                                        System Number
#RemoteMonitoring =hpspi003 =ovsdsap6 =SP6
                                                =00
```

```
# CCMSAcknowledgeMessage SAP Ack.filtered Enable=1
# System Messages Disable=0
CCMSAcknowledgeMessage =ALL =0
                                                      =0
CCMSAcknowledgeMessage =SP6
                                  =0
                                                    =0
# XMI compatibility mode
\# makes the r3monal send syslog messages r3monxmi style
# XmiSyslogMode Enabled =1
                  Disabled =0
                 =0
XmiSyslogMode
# Syslog filtering
# Alert Classes SAP SAP SyslogId Enabled=1
# System Number From To Disabled=0
AlerMonSyslog =ALL =ALL =A00 =MZZ =1
AlerMonSyslog =ALL =ALL =N00 =ZZZ =0
                                         =MZZ =1
AlerMonSyslog =LPO =01 =A00 =ZZZ =1
```

r3monal: Trace Levels

For more information about the trace levels the alert monitors use and, in particular, the trace levels available to the r3monal monitor, see Trace Level on page 39 in the section Monitor-Configuration Files on page 21.

r3monal: XMI Compatibility Mode

The XmiSyslogMode keyword allows you to specify that the r3monal monitor sends SAP system log alerts in the style and format previously used by the r3monxmi monitor. Note that at SPI for SAP version 11.10, the r3monxmi monitor is now obsolete; to continue monitoring CCMS syslog alerts, you will have to use the r3monal monitor, which uses the BAPI External Alert Management Interface (XAL).

Sending Syslog Messages in XMI Format

If you enable XmiSysLogMode you need to define in detail how the old r3monxmi monitor would filter SAP system-log messages. In most cases, you would do this by copying an existing configuration for the now-obsolete r3monxmi monitor and paste it into the r3monal configuration file, r3monal.cfg. If you do not provide the r3monxmi configuration, the SAP syslog messages will not appear in the XMI format you want. For more information about migrating from r3monxmi to r3monal, see r3monal: Migrating from r3monxmi on page 57.

r3monal: Alert Classes

In the alert-classes section of the r3monal.cfg file, you define how the SPI for SAP's CCMS alert monitor r3monal filters syslog events in the SAP System; the filtering mechanism ensures that you extract and display only those syslog events that you are interested in seeing. You filter the syslog events that you want to monitor by specifying ranges of message numbers (syslog IDs). Each line of the alert-classes section of the r3monal.cfg file is set up in a particular way. Each entry defines monitoring for a specified range of syslog events. You can specify which syslog events to monitor by enabling or disabling ranges of syslog IDs either globally or for specified SAP systems and instances.

In Syslog events in the r3monal.cfg file, r3monal monitors the syslog events with IDs A00 through MZZ on all SAP Systems and SAP numbers but does not monitor the syslog events with IDs N00 through ZZZ on all SAP Systems and numbers. Syslog event monitoring is enabled on SAP System LPO for IDs A00 through ZZZ.

Syslog events in the r3monal.cfg file

# Syslog filtering #					
# Alert Classes	SAP	SAP	Syslo	ogId	Enabled=1
#	System	Number	From	To	Disabled=0
AlerMonSyslog	=ALL	=ALL	=A00	=MZZ	=1
AlerMonSyslog	=ALL	=ALL	=N00	=ZZZ	=0
AlerMonSyslog	=LPO	=01	=A00	=ZZZ	=1
#					

r3monal: Migrating from r3monxmi

The old r3monxmi monitor used XMI, the eXternal Management Interface, which was first introduced with SAP 3.0F. Since the SPI for SAP no longer supports SAP version 3.x, you can no longer use r3monxmi to monitor SAP System-log messages. If you want to continue to monitor syslog messages and CCMS alerts, you will have to migrate your XMI configuration to r3monal, the CCMS 4.x alert monitor. However, you can use the contents of the message-filtering section of the old r3monxmi.cfg file in the new configuration file for r3monal.



The r3monxmi monitor was application-server *dependent*; you had to install r3monxmi on each application server of the SAP System whose syslog messages you wanted to monitor.

The r3monal monitor is application server *independent*; r3monal can read the syslog messages from all application servers from a single location. Typically, you install r3monal on the central instance of the SAP system, whose syslog messages you want to monitor.

To migrate syslog-message monitoring from r3monxmi to r3monal:

- Define a CCMS monitor and monitor set for the syslog alerts r3monal uses the internal SAP NetWeaver CCMS monitor to check for syslog alerts; use transaction RZ20 to configure CCMS monitors.
- 2 In the CCMS monitor tree, check the r3syslog branches of *all* the application servers, whose syslog messages you want to monitor with the SPI for SAP.

You can automate the process by creating monitor-tree elements (MTEs) based on rules. When adding the new MTE node to the CCMS monitor, check the option Rule Node in the Create Nodes dialog; when setting up the CCMS rule, use the following values:

Rule Type:

 $CCMS_GET_MTE_BY_CLASS$

MTE Class:

R3Syslog

3 Enable the XmiSyslogMode keyword in the r3monal.cfg file

If you want the r3monal monitor to use the old r3monxmi configuration based on XMI message conditions, use the XmiSyslogMode keyword in the r3monal.cfg file. In this mode, r3monal sends SAP system-log alerts in the style and format previously used by the r3monxmi monitor.


4 Set up the system-log filters

Since r3monal supports the same system-log message filtering as r3monxmi, you can copy an existing system-log filtering configuration from the old r3monxmi.cfg configuration file and paste it into the new r3monal.cfg file. System-log message filtering is defined with the AlerMonSysLog keyword in the AlertClasses section of the configuration file.

#					
# Alert Classes	SAP	SAP	SyslogId Enable		Enabled=1
#	System	Number	From	To	Disabled=0
AlerMonSyslog	=ALL	=ALL	=A00	=MZZ	=1
AlerMonSyslog	=ALL	=ALL	=N00	=ZZZ	=0
AlerMonSyslog	=LP	=01	=A00	=ZZZ	=1
#					

Figure 5 on page 58 shows you how the CCMS rule node for SAP syslog elements should look when you complete the configuration successfully.

Figure 5 Rules-based CCMS MTE for Syslog Elements

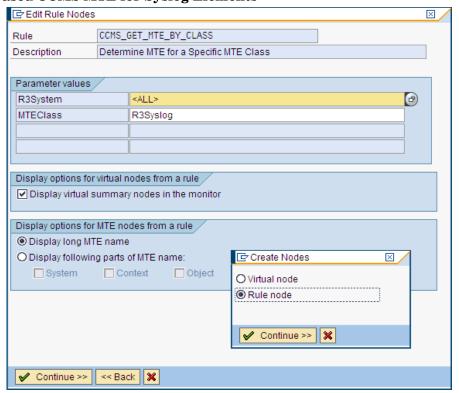

r3monal: Monitoring the J2EE Engine (Web AS Java)

The SPI for SAP can help you monitor the complete SAP NetWeaver environment, including the SAP J2EE Engine. Monitoring the SAP J2EE Engine is important since the combination of Java technology and the J2EE infrastructure is the foundation on which new SAP components such as the SAP Enterprise Portal or Process Infrastructure (PI) are built.

To monitor the SAP J2EE engine, you configure r3monal, the SPI for SAP's CCMS Alert monitor, to check for alerts generated by the J2EE monitor sets, which concern the status and availability of SAP's J2EE Engine, for example: the J2EE kernel, J2EE services, or the registered SAP CCMS agents within the SAP NetWeaver environments that you are monitoring with the SPI for SAP. For more information about configuring r3monal to monitor SAP's J2EE engine, see The J2EE (Web AS Java) Monitor on page 80.

r3monal: Monitoring Stand-alone Enqueue Servers

The enqueue server stores information about the locks currently in use by the users logged into the SAP System; the lock-related information is stored in the lock table of the main memory. If the host on which the enqueue server is running fails, the lock data is lost and cannot be restored even when the enqueue server restarts and all locks have to be reset. In a high-availability environment, you can avoid problems of this kind by configuring a stand-alone enqueue server. The combination of a stand-alone enqueue server and an enqueue replication server running on a separate host forms the basis of a high-availability solution.

To use the SPI for SAP to monitor alerts generated by a stand-alone enqueue server configured in a high-availability WebAS environment, you have to enable the appropriate CCMS monitors and MTEs (monitor-tree elements) in SAP and then configure r3monal, the SPI for SAP's CCMS alert monitor, to check for alerts concerning the status and performance of the stand-alone enqueue server in the SAP System. For more information about configuring r3monal to monitor a stand-alone enqueue server in WebAS, see The Enqueue-Server Monitor on page 83.

r3monal: Monitoring SAP Security-Audit Logs

The SAP security-audit log keeps a record of security-related activities in the SAP System and stores the information it collects in an audit log on each application server. The SPI for SAP allows you to monitor the CCMS alerts logged by the security-audit use them to generate messages, which you can arrange to send to the HPOM message browser.

To use the SPI for SAP to monitor the SAP security-audit logs, you have to enable the appropriate CCMS monitors and MTEs (monitor-tree elements) in SAP and then configure r3monal, the SPI for SAP's CCMS alert monitor, to check for alerts generated by the security-audit-log monitor, which concern the status of security events in the SAP System. For more information about configuring r3monal to monitor SAP's security-audit logs, see The SAP Security-Audit Monitor on page 89.

r3monal: Monitoring the Enterprise Portal

The SAP Enterprise Portal provides a secure and stable web interface that gives users global access to the information, applications, and services that they need to work effectively in the SAP landscape. The SPI for SAP allows you to make use of standard SAP elements to monitor the components of the SAP Enterprise Portal and provide reports on availability, response time, configuration, and performance.

To use the SPI for SAP to monitor alerts generated by a fully configured SAP Enterprise Portal, you have to enable the appropriate CCMS monitors and MTEs (monitor-tree elements) in SAP and then configure r3monal, the SPI for SAP's CCMS alert monitor, to check for alerts concerning the status and performance of the Enterprise Portal. For more information about configuring r3monal to monitor an Enterprise Portal, see The SAP Enterprise-Portal Monitor on page 85.

r3monal: Monitoring the CEN

The central monitoring system (CEN) is a single SAP system that you designate as the central point of control for CCMS alerts originating from all over the monitored SAP landscape. The CEN concept allows you to reduce the overhead of monitoring and managing multiple SAP systems by making essential information concerning problem alerts available in one, central location.

After you configure SAP to use the CEN for the central management of CCMS alerts, you can use the SPI for SAP's r3monal monitor to intercept the CCMS alerts destined for the CEN and use the alerts to generate messages, which it forwards to the HPOM message browser. For more information about configuring r3monal to monitor an SAP CEN, see Monitoring CCMS Alerts in the CEN on page 189.

r3monal: Testing the Configuration

The SPI for SAP's optional test transport includes a program that generates an ABAP dump which you can use to verify that the r3monal monitor checks the syslog and sends a message to HPOM if a dump occurs in the SAP System. If the test completes successfully, a message about the test dump appears in the HPOM message browser. Note that this test works only if you configure r3monal to monitor the appropriate SAP CCMS monitor sets, for example: <SAPSID>/R3Abap/Shortdumps.

For more information about SPI for SAP transports, see the transports read-me file /usr/sap/trans/readme on the HPOM managed node; for more information about importing and applying SPI for SAP transports, see the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*. After importing the transport, you can view the test programs installed by using the SAP transaction SE80 to open the ABAP object navigator and browsing to the report (or program) /HPOV/YSPI0004.

r3mondev: The SAP Trace-file Monitor

The r3mondev monitor scans the trace files and log files of the SAP system for the string "ERROR". Because it monitors only what has occurred since its previous run, any error within a trace file generates only a single alert. The file monitor scans the following directories, where <SID> stands for the SAP system ID and <InstanceNumber> stands for the SAP instance number of the monitored SAP System:

- UNIX/Linux: /usr/sap/<SID>/<InstanceNumber>/work/
- Windows: <drive:>\usr\sap\<SID>\<InstanceNumber>\work

Messages generated by this monitor include an operated-initiated action, which calls the vi editor. vi then displays a list of all trace files and log files and prompts you to select a file from the list and display its contents.

This section contains information about the following topics:

- r3mondev: File Locations on page 61
- r3mondev: Environment Variables on page 61
- r3mondev: Monitoring Conditions on page 61
- r3mondev: Editing the Configuration File on page 62

r3mondev: File Locations

The file monitor, r3mondey, includes the files listed in Table 8. For more detailed information about the contents of the in SPI for SAP monitor-configuration files in general and the file r3mondey.cfg in particular, see The SPI for SAP Monitor-Configuration File on page 25.

Table 8 r3mondev Files

File	Description
r3mondev(.exe)	Executable for the file monitor
r3mondev.cfg	Configuration file for monitored files
r3mondev.his	History file that stores data for each monitor run

r3mondev: Environment Variables

The file monitor uses environment variables listed in Table 9.

Table 9 r3mondey Environment Variables

Environment Variable	Description
SAPOPC_DRIVE	The Windows drive where the HPOM agent is running, for example, E:\usr\
SAPOPC_HISTORYPATH	Path to the r3mondev history file
SAPOPC_R3MONDEV_CONFIGFILE	Name of the r3mondev configuration file
SAPOPC_SAPDIR	The Windows drive where SAP NetWeaver is running, for example: E:\usr\sap
SAPOPC_TRACEPATH	Path to the r3mondev trace file

r3mondev: Monitoring Conditions

This section of the r3mondev.cfg file enables you to specify the device monitoring details for the SPI for SAP.

For more information about the entries in the r3mondev.cfg file including keywords and their possible values along with a description of each editable parameter, see The Alert-Monitor Configuration Files on page 46.

The monitoring conditions section of the r3mondev.cfg file includes the following default settings:

# AlertDevMon	SAP	SAP	Enable=1	File	Severity	Opc	OpC
#	System	Number	Disable=0	Mask		Object	MsgGrou
р							
AlertDevMon	=ALL	=ALL	=1	=dev_*	=WARNING	=r3mondev	=R3_Tra
се							
AlertDevMon	=ALL	=ALL	=1	=std*	=CRITICAL	=r3mondev	=R3_Tra
ce							

r3mondev: Editing the Configuration File

You can edit the r3mondev monitor's configuration file, r3mondev.cfg, in the following ways:

• Disable messages

If you do not want to receive any messages relating to dev_* files for any of the SAP systems you are monitoring with the SPI for SAP, change the first line of the r3mondev.cfg configuration file as follows:

```
AlertDevMon =ALL =ALL =0 =dev_* =WARNING =r3mondev =R3_Tr ace
```

• Change a message's severity level

If you want to reduce the severity of all messages relating to std* files from critical to warning, change the second line of the r3mondev.cfg configuration file as follows:

```
AlertDevMon =ALL =ALL =1 =std* =WARNING =r3mondev =R3 Trace
```

Define exceptions to general rules

If you want to increase the severity of messages relating to dev_* files on SAP system LP2 from warning to critical, leave the default settings as they are and add the following line:

```
AlertDevMon =LP2 =ALL =1 =dev_* =CRITICAL =r3mondev\
=R3 Trace
```



Wildcards are only allowed at the end of the string. Only SAP trace files located in the work directory are relevant and the names of these files must begin with either dev or std.

r3monpro: The SAP Process Monitor

The r3monpro monitor scans all processes associated with a given instance, such as dialog, enqueue, update, batch, dispatch, message, gateway, and spool work processes. It is also used for monitoring database processes.

This section contains information about the following topics:

- r3monpro: File Locations on page 63
- r3monpro: Environment Variables on page 63
- r3monpro: Monitoring Conditions on page 63
- r3monpro: Example Configuration on page 64

r3monpro: File Locations

The process monitor r3monpro contains the files listed in Table 10. For more detailed information about the contents of the in SPI for SAP monitor-configuration files in general and the file r3monpro.cfg in particular, see The SPI for SAP Monitor-Configuration File on page 25

Table 10 r3monpro Files

File	Description
r3monpro(.exe)	Executable for the process monitor
r3monpro.cfg	Configuration file for the process monitor
r3monpro.his	History file for storing data after each monitor run

r3monpro: Environment Variables

The process monitor r3monpro uses the environment variables listed in Table 11.

Table 11 r3monpro Environment Variables

Environment Variable	Description
SAPOPC_DRIVE	The Windows drive where the HPOM agent is running, for example, E:\usr\
SAPOPC_HISTORYPATH	Path to the r3monpro history file
SAPOPC_R3MONPRO_CONFIGFILE	Name of the r3monpro configuration file
SAPOPC_SAPDIR	The Windows drive where SAP NetWeaver is running, for example: E:\usr\sap
SAPOPC_TRACEPATH	Path to the r3monpro trace file

r3monpro: Monitoring Conditions

Monitoring conditions for r3monpro are specified in the r3monpro.cfg file. Individual rows define monitoring conditions for specific processes. You use the r3monpro.cfg file to set the rules which define how the number of processes running should be measured and what severity level should be assigned to the alert that is generated if the number of processes exceeds the limits you define.

You can set monitoring conditions for a specific process to any of the following modes:

Exact

The number of process running on a managed node must be equal to the specified number.

Min

The number of processes running on a managed node must not be less than the specified number.

Max

The number of processes running on a managed node must not be more than the specified number

Delta

r3monpro triggers an alert if there is any change in the number of processes running on a managed node or if the specific amount of allowed change in the number of instances of the same process exceeds the defined limit. This mode enables you to recognize changes without having to define an absolute number of processes for a managed node.

For example, if Delta =2, then a difference of 2 or more between the number of processes (n) found in the previous and current monitor run on a managed node triggers an alert. Note that if r3monpro triggers an alarm, it resets n to the number of processes discovered in the most recent monitor run, and calculates the new Delta on the basis of the new number of processes found running.

Messages generated by matched conditions include an operated-initiated action; the action calls an SPI for SAP module which lists all the current processes for the affected SAP instance.

For more information about the entries in the r3monpro.cfg file including keywords and their possible values along with a description of each editable parameter, see The Alert-Monitor Configuration Files on page 46.

r3monpro: Example Configuration

The first row of the following example shows how to monitor the saposcol process on all hosts. Note that exactly one such process should run at any given time. Any violation of this number is critical. It affects the HPOM object saposcol. The associated HPOM message group is R3 State.

The last row of the same example specifies that eight or fewer instances of the dw.sapSID process should run on all hosts. If the number is larger than eight, the monitor generates a warning message associated with HPOM object dw.sap and HPOM message group R3 State.

The string SID has special meaning in this context. SID will be replaced by the SAP System name on the managed node. This enables global definitions for different SAP Systems.

```
AlertInstMonPro =ALL =00 =saposcol =1 =Exact=1 =CRITICAL =saposcol =R3_State

AlertInstMonPro =C01 =00 =explorer =1 =Max =1 =CRITICAL =explorer =R3_State

AlertInstMonPro =T11 =00 =dw.sapSID =1 =Min =8 =WARNING =dw.sap =R3_State
```

It is also possible to ensure that a process is not running. To do so, use the mode Exact and enter 0 as the number.



On servers running the UNIX operating system, r3monpro can identify processes at the instance level. On servers running the Windows operating system, you need to define on a single line the total number of work processes on the node. For example, if there are two SAP instances, each with four (4) work processes, the total number of processes is eight (8).

For SAP servers running on UNIX operating systems, you can configure the SPI for SAP process monitor r3monpro to monitor the specific SAP-gateway read process gwrd associated with individual SAP SIDs, which is especially useful in a multi-SID environment. If you have multiple instances of SAP running in the same SID, you can configure r3monpro to monitor the specific SAP-gateway read process gwrd assigned to each, individual *instance*, too. For

more information about how to configure r3monpro to monitor individual gwrd processes in an environment where multiple SAP instances or multiple SAP SIDs are running on the same SAP server, have a look at the following examples:

- Monitoring SAP-Gateway Read Processes per SID on page 65
 Monitoring SAP-Gateway Read Processes per SAP SID
- Monitoring SAP-Gateway Read Processes per SAP Instance on page 65
 Monitoring SAP-Gateway Read Processes per SAP Instance

Monitoring SAP-Gateway Read Processes per SID on page 65 shows how to configure r3monpro to monitor the individual gwrd processes associated with specific SIDs on a SAP server hosting multiple SAP SIDs.

Monitoring SAP-Gateway Read Processes per SID

```
AlertInstMonPro =Q12 =ALL =gwrd -dp pf=/usr/sap/SID* =1 =Exact =1 =CRITICAL \
=gwrd =R3_State
AlertInstMonPro =Q22 =ALL =gwrd -dp pf=/usr/sap/SID* =1 =Exact =1 =CRITICAL \
=gwrd =R3_State
AlertInstMonPro =Q32 =ALL =gwrd -dp pf=/sapmnt/SID* =1 =Exact =1 =CRITICAL \
=gwrd =R3_State
AlertInstMonPro =Q52 =ALL =gwrd -dp pf=/usr/sap/SID* =1 =Exact =1 =CRITICAL \
=gwrd =R3_State
AlertInstMonPro =Q52 =ALL =gwrd -dp pf=/usr/sap/SID* =1 =Exact =1 =CRITICAL \
=gwrd =R3_State
```

Monitoring SAP-Gateway Read Processes per SAP Instance on page 65 shows how to configure r3monpro to monitor the individual gateway processes associated with specific SAP instances on a SAP server hosting multiple SAP instances per SAP SID.

Monitoring SAP-Gateway Read Processes per SAP Instance

```
AlertInstMonPro =Q12 =12 =gwrd -dp pf=/usr/sap/
SID* =1 =Exact =1 =CRITICAL \ =gwrd =R3_State
AlertInstMonPro =Q22 =21 =gwrd -dp pf=/usr/sap/Q22/SYS/profile/
Q22_D21_sap2ap1 \ =1 =Exact =1 =CRITICAL =gwrd =R3_State
AlertInstMonPro =Q22 =22 =gwrd -dp pf=/usr/sap/Q22/SYS/profile/
Q22_D22_sap2ap1 \ =1 =Exact =1 =CRITICAL =gwrd =R3_State
AlertInstMonPro =Q32 =32 =gwrd -dp pf=/sapmnt/
SID* =1 =Exact =1 =CRITICAL \ =gwrd =R3_State
AlertInstMonPro =Q52 =52 =gwrd -dp pf=/usr/sap/
SID* =1 =Exact =1 =CRITICAL \ =gwrd =R3_State
```

In the configuration file r3monpro.cfg, the path to the SAP-instance profile defined in the pf parameter is case-sensitive. To avoid problems, make sure that the path to the SAP-instance profile defined in the r3monpro.cfg configuration file matches the path displayed in the output of the ps command, for example:

r3status: The SAP Status Monitor

The r3status monitor checks the current status of SAP NetWeaver and compares it with the last recorded status to determine whether any change in status occurred since the last time the monitor ran. Using the SAP NetWeaver function module RFC_SYSTEM_INFO, the r3status monitor provides the following features:

- Reports about local SAP NetWeaver system-availability
- Recognition and monitoring of each individual SAP NetWeaver instance
- SAP NetWeaver availability status reported may be: up, down, hanging (RFC time out).

The r3status monitor is of type *time frame*. It runs every two minutes and compares the current value with the previous value stored in the history file and generates a message if it finds a difference, which it needs to report. For more information about reporting types, see Report Types for the Alert-Collector Monitors on page 97.



The lack of response from SAP could be due to a problem which does not mean that the System is down. For example, SAP would not respond if all available dialog work processes were allocated. For more information about how r3status interprets the responses it receives from SAP, see r3status: Establishing the SAP Status on page 69.

This section contains information about the following topics:

- r3status: File Locations on page 66
- r3status: Environment Variables on page 67
- r3status: History File on page 67
- The r3status Configuration File on page 68
- r3status: Establishing the SAP Status on page 69
- r3status: Monitoring SAP Remotely on page 69

r3status: File Locations

This table lists the files used by the r3status monitor.

Table 12 r3status Files

File	Description
r3status(.exe)	Executable for the r3status monitor
r3status.log	The r3status monitor creates a log/trace file after each run of the monitor. The trace file is stored in the standard HPOM Agent log directory.

Table 12 r3status Files (cont'd)

File	Description
r3itosap.cfg	The r3status monitor uses information in the r3itosap.cfg file to determine which SAP instances it is supposed to monitor.
r3status.cfg	The r3status monitor uses information in the r3status.cfg file to determine history paths, trace levels, and which SAP instances it is supposed to monitor on remote SAP servers.
r3status.his	History file for storing data after each run of the r3status monitor. The r3status monitor uses information in this file to determine whether a change of status has occurred. For more information, see r3status: History File on page 67.

r3status: Environment Variables

Table 13 lists the environment variables used by the r3status monitor.

Table 13 r3status Environment Variables

Environment Variable	Description
SAPOPC_RFC_TIMEOUT	set time out value for RFC connections - default is 20 seconds
SAPOPC_HISTORYPATH	Path to the r3status.his history file a
SAPOPC_R3STATUS_CONFIGFILE	Name of the configuration file, which the r3status monitor uses
SAPOPC_R3ITOSAP_CONFIGFILE	Name of the general configuration file, which contains SAP login information used by the SPI for SAP monitors
SAPOPC_TRACEPATH	Path to the r3status trace file
G 0 1 1 III 1 III 0=	

a. See: r3status: History File on page 67

r3status: History File

The first time the r3status monitor runs, it writes its findings to the history file, r3status.his. The next time the r3status monitor runs, it uses the information in the r3status.his file to determine whether a change of status has occurred since the last time the monitor ran and, as a consequence, which if any message it needs to send to the HPOM management server. For more information about the default location of the monitor history files on the managed nodes, see The SPI for SAP Monitor-Configuration File on page 25.

The r3status monitor updates the entries in the r3status.his file at the end of each time it runs, with the current timestamp and the current status of each monitored SAP instance.

Excerpt from the r3status.his file on page 68 shows the format and contents of the r3status.his file.

Excerpt from the r3status.his file

SAP	SAP	SAP	State
System	Number	Instance	
=DEV	=00	=DVEBMGS00	=UP
=PKR	=99	=DVEBMGS99	=DOWN
	SAP System =DEV	SAP SAP System Number =DEV =00	SAP SAP SAP System Number Instance =DEV =00 =DVEBMGS00

The r3status Configuration File

The r3status monitor's configuration file allows you to use the keywords listed below to change the configuration from the default settings to meet the requirements of your particular environment. Where appropriate, possible values for a given keyword are also specified. Default r3status Configuration File on page 70 shows what a complete configuration file looks like for the r3status monitor, which monitors the status of both local and remote SAP Systems.

The following standard keywords work as expected in the context of the r3status.cfg configuration file. For more information about the parameters the keywords require, see The SPI for SAP Monitor-Configuration File on page 25:

- TraceLevel
- TraceFile
- HistoryPath[Unix | AIX | WinNT]

The following keywords require special attention when used in the context of the SPI for SAP r3status.cfg configuration file:

EnableDPQueueCheck

r3status requires a dialog work process to log on to SAP and determine the System's status. Enable the EnableDPQueueCheck keyword (=1) if the SAP System whose status you are monitoring is experiencing performance problems and you want r3status to check the size and status of the ABAP dispatcher before starting its monitor run. If there are no, or too few, dialog work processes available, r3status sends a message to the message browser indicating that it did not start due to the violation of a threshold defined for dialog processes. The command disables the monitor run only for the SIDs where the threshold violation for the dialog work processes occurred.

If you use the EnableDPQueueCheck keyword in the r3status configuration file, remember to configure the keywords DPQueueCheck and DisableMonitoringWithSeverity in the r3mondisp.cfg configuration file, too. For more information about monitoring the ABAP dispatcher and its queues, see r3mondisp: the ABAP Dispatcher Monitor on page 76.

The default run interval for r3status is two minutes. If your SAP landscape consists of large numbers of SAP instances running on multiple hosts, network congestion or a slow response from SAP might prevent EnableDPQueue from checking the status of the ABAP dispatchers on all the configured SAP instances before r3status starts its next run. In the unlikely event that this happens, the old instance of r3status aborts without reporting the status of any dispatchers that it has not yet checked. To avoid this problem re-occurring, increase the run interval for r3status.

RemoteMonitoring

r3status cannot check the status of the ABAP dispatcher on a SAP System, which the SPI for SAP is monitoring remotely.

For more information about monitoring the status of remote SAP Systems, see r3status: Monitoring SAP Remotely on page 69.

r3status: Establishing the SAP Status

When the status monitor r3status checks the availability of an SAP System, it reports the status as: up, down, or connection time-out. Although the meaning of "up" and "down" is clear, the status of the connection time-out status requires some explanation. The time-out status could occur if an SAP System is hanging, in which case the problem could be due to an RFC time out, which itself needs investigating and is a good example to show how difficult it can be sometimes be to establish the exact state of the SAP System the SPI for SAP is monitoring.

The status monitor, r3status, considers an SAP instance as "not available" if the SAP instance does not respond within 60 seconds. However, the lack of response from SAP could be due to a problem which does not mean that the System is down, for example: all available dialog work processes are allocated, or all available SAP gateway connections are busy. The SPI for SAP status monitor, r3status, reports the status of the SAP System it is monitoring according to the following rules:

• Available:

r3status reports an SAP System as available if it can log on to the SAP instance and, in addition, start and receive a response from the SAP function module RFC_SYSTEM_INFO within 60 seconds.

Not Available:

r3status reports an SAP System as *not* available if the SAP instance does not respond within 60 seconds or the function module RFC_SYSTEM_INFO could not start, for example: due to the fact that the instance is down.

r3status: Monitoring SAP Remotely

The SPI for SAP includes a feature which allows you to extend the scope of the monitors to remotely monitor the status of SAP on SAP servers (which are *not* HPOM managed nodes) from a host, which *is* already configured as an HPOM managed node and where the SPI for SAP is running.

To make use of the remote-monitoring feature provided by the SPI for SAP, for example, to monitor a SAP server running on an operating system that is not supported by the SPI for SAP, you need to enable the **RemoteMonitoring** keyword (by removing the leading hash symbol "#") in the r3status.cfg file. Next, on the same line, you define the name of the local host, which you want to perform the monitoring. Finally, you have to define the name of the remote SAP server, which you want to monitor. Default r3status Configuration File on page 70 shows how a new line is required for each additional SAP server, which you want to monitor remotely.



You can associate multiple remote SAP servers with one, single local host or you can associate single remote hosts with individual, different local hosts. Default r3status Configuration File on page 70 shows a mixed approach where one *local* host "sap1" is used to monitor two *remote* hosts; "sdsap" and "sapwolf". A third local host "sap2" remotely monitors the remote host "triosap".

For more information about the contents of the r3status monitor's configuration file including the keywords and parameters you use to define local and remote server names, see the entry concerning "Remote Monitoring" in The r3status Configuration File on page 68.

Default r3status Configuration File

```
#-----
# TraceLevel hostname Disable=0 only error messages=1
                   info messages=2 debug messages=3
TraceLevel =ALL =0
#-----
# TraceFile hostname filename TraceMode
                                              TracePeriod
                   (a=append/w=create(default)) (in mins)
TraceFile =ALL =r3status.log =w
                                                =60
#-----
# History hostname path
# Path
HistoryPathUniX =ALL
                     =default
HistoryPathAIX =ALL
                     =default
HistoryPathWinN =ALL
                      =default
# Check the ABAP dispatcher before a connection to SAP is
# opened. If the dialog queue is too full or not enough
# free work processes are available, monitoring is disabled.
# This feature should only be enabled in special cases. For
# regular dispatcher monitoring, use the r3mondisp.
# EnableDPQueueCheck hostname SAP SAP Enable=1/
                       System Number Disable=0
EnableDPQueueCheck =ALL =ALL =ALL
#-----
# Remote
              Local
                       Remote
# Monitoring Host
                       Host
# Monitoring Host Host
RemoteMonitoring = sap1 = sdsap
RemoteMonitoring = sap1 = sapwolf
RemoteMonitoring = sap2 = triosap
```

r3monsec: The SAP Security Monitor

The SPI for SAP security monitor checks the following areas in your SAP Systems:

- The privileges and authorizations assigned to (and used by) important SAP users
- Insecure (default) passwords in use by SAP and Oracle users
- SAP System parameters which affect overall system security
- Miscellaneous security events such as failed logins or attempts to change SAP System settings

In addition to the other SAP user roles and authorizations required by the SPI for SAP (such as SAPSPI_MONITORING_*), you also have to assign the authorizations defined in the SAP user role /HPOV/SAPSPI_SECURITY_MON to the HPOM user under which r3monsec runs before r3monsec starts; the user role /HPOV/SAPSPI_SECURITY_MON includes authorizations (such as S_TCODE or S_USER_AUT) that are needed to execute the SAP reports, which r3monsec calls by means of the SAP RFC interface.

This section contains information about the following topics:

r3monsec: File Locations on page 71

• r3monsec: Alert Types on page 71

r3monsec: Monitoring Security Remotely on page 75



If you use the SPI for SAP tools located in the tool bank to configure r3monsec, the SPI for SAP checks the validity of the new configuration when you try to save the modified configuration file. For more information about the validation tool and the messages it generates, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

r3monsec: File Locations

The SAP System-security monitor r3monsec uses the files listed in this table.

Table 14 r3monsec Files

File	Description
r3monsec(.exe)	Executable for the SAP System-security monitor
r3monsec.cfg	Configuration file for the SAP System-security monitor.
r3monsecpw.msg	Contains encrypted passwords for standard Oracle users in an SAP environment.
r3monsec.log	File used to store trace data collected by the SAP System-security monitor.

r3monsec: Alert Types

The security monitor r3monsec uses the following alert types:

• r3monsec: SAP_PARAMETERS on page 72

Monitors security-related parameters such as those defined in the SAP report RSPFPAR.

r3monsec: DEFAULT_USERS on page 74

Monitors settings for passwords defined for SAP and Oracle users to ensure that insecure default passwords are not in use.

r3monsec: PRIVILEGED_USERS on page 74

Monitors any special privileges granted to SAP users or being requested by users who are not normally entitled.

The SPI for SAP interprets *include* and *exclude* parameter values for an alert-type entry according to whether the values appear in the same parameters or in different parameters. The SPI for SAP compares values in *different* parameters using 'and'; the SPI for SAP compares values in the *same* parameter as follows.

- **Include**: use 'or' to compare the parameters
- **Exclude**: use 'and' to compare the parameters

The SPI for SAP evaluates include values before it evaluates exclude values.

Note that the SPI for SAP ignores include and exclude parameters for the r3monsec alert types SAP_PARAMETERS and DEFAULT_USERS; however, you *must* use include and exclude parameters for the alert type PRIVILEGED_USERS.

r3monsec: SAP PARAMETERS

Use the SAP_PARAMETERS alert type to configure the SPI for SAP's security monitor, r3monsec, to monitor the settings of (and any changes to) security-related SAP parameters. The SAP_PARAMETERS alert type compares the values you define in the r3monsec.cfg file with the contents of the SAP report RSPFPAR, which contains security-related parameters for the SAP instances you are monitoring.

The default settings for the alert type SAP_PARAMETERS reflect a small selection of the parameters defined in the SAP report RSPFPAR; you can change the contents of the SAP_PARAMETERS section of the r3monsec.cfg file to suit the needs of your SAP environment by adding, modifying, or removing values accordingly.



The alert type SAP_PARAMETERS ignores include (=I) and exclude (=E) parameter.

Example SAP_PARAMETERS settings on page 72 shows how to configure r3monsec to monitor the SAP parameter, which defines whether SAP should automatically unlock locked SAP users at midnight. The example configuration tells r3monsec to check that the automatic unlocking of locked SAP users is *disabled* in SAP (=EQ =0). In this example, r3monsec would generate a message with the severity level "critical" if it found that the parameter was enabled in SAP and assign the generated message to the HPOM message group R3_Security.

Example SAP_PARAMETERS settings

```
AlertMonFun =ALL =ALL =ALL =SECURITY =1\
=CRITICAL =SAP_PARAMETERS =R3_Security\
=SAP_PARAMETERS =login/failed user auto unlock =I =EQ =0 =
```

Table 15 on page 73 shows the default settings for the SAP_PARAMETERS alert type; if your SAP Systems are configured differently, r3monsec will generate alerts. For example, in the default configuration, SAP user passwords must have 6 characters or more and contain at least 4 letters and 2 integers. If you configure your SAP instance to allow passwords which do not conform to the rules defined in r3monsec's configuration file, for example: passwords which contain only five characters or do not contain any integers, r3monsec sends a message to the message browser.

Note that r3monsec does not read or check the SAP passwords themselves; r3monsec compares the *rules* you define in r3monsec.cfg for the length and form of SAP passwords with the *rules* defined in SAP itself for password creation. If the rules for password creation, form, or length in the r3monsec.cfg file differ in any way from the rules for passwords defined in SAP, the SPI for SAP sends a message to the message browser

Table 15 Default Settings for SAP_PARAMETERS

Parameter	Default Value
login/failed_user_auto_unlock	0 (0=disabled; 1=enabled)
login/fails_to_session_end	3
login/fails_to_user_lock	5
login/min_password_diff	3
login/min_password_lng	6
login/min_password_letters	4
login/min_password_digits	2
login/min_password_specials	0
login/no_automatic_user_sapstar	1
login/password_max_new_valid	10
login/password_max_reset_valid	2
login/password_expiration_time	30
login/disable_password_logon	0 (0=disabled; 1=enabled)
login/disable_multi_gui_login	0 (0=disabled; 1=enabled)
login/disable_cpic	0 (0=disabled; 1=enabled)
login/system_client	100
login/disable_multi_rfc_login	0 (0=disabled; 1=enabled)
rdisp/gui_auto_logout	1800

r3monsec: DEFAULT USERS

Use the DEFAULT_USERS alert type to configure the SPI for SAP's security monitor, r3monsec, to check the passwords for standard SAP or Oracle database users and determine whether any well-known, default passwords are still in use. Standard SAP users include SAP*, DDIC, SAPCPIC, and EARLYWATCH. The DEFAULT_USERS alert type makes use of the SAP report RSUSR003.

The r3monsec.cfg configuration file provides default settings for the alert type DEFAULT_USERS. Note that include (=I) and exclude (=E) parameter is ignored for the alert type DEFAULT_USERS.

Default Settings for DEFAULT_USERS

```
AlertMonFun =ALL =ALL =ALL =ALL =SECURITY =1\
=CRITICAL =DEFAULT_USERS =R3_Security\
=DEFAULT USERS
```

The default configuration for the DEFAULT_USERS alert type enables the SAP and Oracle user check, which means the monitor generates an alert if it finds a default password in use.

r3monsec: PRIVILEGED USERS

Use the PRIVILEGED_USERS alert type to configure the SPI for SAP's security monitor, r3monsec, to check the authorizations granted to SAP users in the Systems you are monitoring with the SPI for SAP. The PRIVILEGED_USERS alert type compares the values defined in the r3monsec.cfg file with the contents of the SAP report RSUSR005, which lists information concerning the critical authorizations granted to SAP users. The SAP System-security monitor, r3monsec, generates an alert for any SAP user who has critical authorizations but is not defined in the r3monsec.cfg file.



The SAP report RSUSR005 is SAP-client dependent; r3monsec monitors only the users for the SAP clients defined in the central SPI for SAP configuration file r3itosap.cfg.

The r3monsec.cfg configuration file does not provide any default settings for the alert type PRIVILEGED_USERS; you have to decide which user authorizations you want to monitor in SAP and insert the strings that define them into the monitor-configuration file manually. You can use the report RSUSR005 to find the strings defining the authorizations you want to monitor, for example: "All rights for background jobs", as illustrated in Example Settings for PRIVILEGED_USERS on page 74. Note that you need to use a new line for each user authorization that you want to monitor.

After you have determined which user authorizations you want to monitor, set include (=I) or exclude (=E) parameter to specify which SAP users you want to check for the use (or misuse) of the defined authorization. Example Settings for PRIVILEGED_USERS on page 74 shows how to exclude SAP user KWAME from the check to determine which users have permission to execute external operating-system commands.

Example Settings for PRIVILEGED_USERS

```
AlertMonFun =ALL =ALL =ALL =SECURITY =1\
=CRITICAL =PRIVILEGED_USERS =R3_Security\
=PRIVILEGED_USERS =All rights for background jobs =I =EQ =ALL =
AlertMonFun =ALL =ALL =ALL =SECURITY =1\
=CRITICAL =PRIVILEGED_USERS =R3_Security\
=PRIVILEGED_USERS =Execute external operating system commands\
=E =EQ =KWAME =
```

Note that the string you paste into the r3monsec.cfg file must match an existing string in SAP. If the string you paste into the r3monsec.cfg configuration file does not exist in SAP, for example because it contains a typo or is only a sub-set of a known SAP user-authorization string, no match occurs and the r3monsec monitor does not send any message to the message browser. For example: "Execute external operating" would not match, since it is only a part of the complete user-authorization string "Execute external operating system commands" defined in the r3monsec.cfg file.

r3monsec: Monitoring Security Remotely

To make use of the remote-monitoring feature provided by the SPI for SAP, for example, to monitor security on an SAP server running on an operating system that is not supported by the SPI for SAP, you need to enable the RemoteMonitoring keyword (by removing the leading hash symbol "#") in the r3monsec.cfg file.

You also need to specify the name of the local host, which you want to perform the monitoring and the name of the remote SAP server, whose security settings you want to monitor. Note that you must add a new line for each *additional* SAP server, which you want to monitor remotely.

Default r3monsec Configuration File

```
#-----
# TraceLevel hostname Disable=0 only error messages=1
                 info messages=2 debug messages=3
TraceLevel =ALL =0
# TraceFile hostname filename TraceMode TracePeriod
                   (a=append/w=create(default)) (in mins)
TraceFile =ALL =r3monsec.log =w
#-----
# History hostname path
# Path
HistoryPathUnix =ALL =default
HistoryPathAIX =ALL =default
HistoryPathWinNT =ALL
                     =default
# Remote Local
# Monitoring Host
                      Remote
                      Host
RemoteMonitoring =sap1 =sdsap
#-----
# AlertMonFun SAP SAP SAP SAP Alertmonitor Enable =1/
         Hostname System Number Client
                                               Disable=0
           OpC
                     OpC
  OpC
  Severity Object MsgGroup
# Alerttype RFC Parameter
           =Parameter =Sign =Opt =Low =High 
 [=Param =Sign =Opt =Low =High] \dots
#
AlertMonFun =ALL =ALL =ALL =SECURITY =1
```

```
=CRITICAL =SAP_PARAMETERS =R3_Security\
=SAP_PARAMETERS =login/failed_user_auto_unlock =I =EQ =0 =

AlertMonFun =ALL =ALL =ALL =SECURITY =1\
=CRITICAL =DEFAULT_USERS =R3_Security\
=DEFAULT_USERS = = = = =

AlertMonFun =ALL =ALL =ALL =SECURITY =1\
=CRITICAL =PRIVILEGED_USERS =R3_Security\
=PRIVILEGED_USERS =All rights for background jobs =I =EQ =ALL =
```

r3mondisp: the ABAP Dispatcher Monitor

The SPI for SAP's ABAP dispatcher monitor, ramondisp, checks the size, content, and status of the queues for the different types of SAP work-processes and generates an alert if a queue becomes so full that it could have an adverse effect on SAP-System performance, or if a low percentage of work processes are idle.

r3mondisp monitors the queues which belong to the SAP instances defined in the SPI for SAP's central configuration file, r3itosap.cfg and allows you to manage SAP performance issues more pro-actively by avoiding bottlenecks and helping to ensure that the monitored SAP Systems have enough work processes available to fulfill all user requests, even when loads are typically very high.

This section contains information about the following topics:

- r3mondisp: Pre-requisites on page 76
- r3mondisp: File Locations on page 77
- Integrating r3mondisp with the SPI for SAP Monitors on page 77
- The r3mondisp Configuration File on page 78

r3mondisp: Pre-requisites

If r3mondisp is not able to find either the correct version of the SAP executable dpmon or the profile of the SAP instance whose queues you want to monitor, it aborts its run, writes an entry in its log file, and sends a message to the message browser. r3mondisp requires a version of the dpmon executable, which recognizes the -s[snapshot] option.

To check if the correct version of the dpmon executable is available on the SAP server which you want to monitor with r3mondisp, log on to the SAP server as user <SID>adm and run the dpmon command with the -help option. If the command output displays the -s[snapshot] option as shown in Checking the snapshot option on page 76, you can configure and use the r3mondisp monitor.

Checking the snapshot option

\$>dpmon -help

```
-t <trace_level> tracelevel (default:1)
-f <trace_file>] name of the tracefile (default: dev_dpmon)
-T <timeout> network time-out value in ms (default:500)
```

On both UNIX and Windows operating systems, r3mondisp uses the environment variables SAPOPC_DPMON_PATH_ <SID> and SAPOPC_PROFILE_<SID>_<InstNr> to determine the location of dpmon and the SAP instance profile respectively. If the variables are not set, r3mondisp uses the registry on Windows operating systems to determine the path to dpmon and the profile-file for the monitored SAP instances.

On UNIX operating systems, r3mondisp does not require any special interface to determine the location of dpmon or the profile-file for the monitored SAP instances: it assumes they are in the default SAP location. If you know the profiles files are not in the default location, or the name of the profile does not follow standard SAP naming conventions, you must indicate this in the r3mondisp.cfg configuration file. The standard naming convention for an SAP profile is:

```
<SID>_[D|DVEBMGS]<SysNr>_<hostname>
```

For more information about the contents of the r3mondisp configuration file, see The r3mondisp Configuration File on page 78.

r3mondisp: File Locations

The SAP System-security monitor r3mondisp uses the files listed in this table.

File Description

r3mondisp(.exe) Executable for the ABAP Dispatcher-queue monitor

r3mondisp.cfg Configuration file for the ABAP dispatcher-queue monitor.

r3mondisp.log File used to store trace data collected by the ABAP dispatcher-queue monitor.

Table 16 r3mondisp Files

Integrating r3mondisp with the SPI for SAP Monitors

To prevent the SPI for SAP itself causing excessive and unnecessary load on the SAP System at critical times, you can configure the SPI for SAP's ABAP-dispatcher monitor r3mondisp to work together with the other SPI for SAP monitors so that the monitors check the status of the ABAP dispatcher and establish how full the dispatcher queues are *before* requesting a work process. SPI for SAP monitors require a dialog work process to logon to SAP. To enable this integration feature, use the EnableDPQueueCheck keyword in the configuration file for the SPI for SAP monitor, which you want to configure to check the dispatcher status before starting.

For example, if you want the CCMS monitor, r3monal, to check the status of the ABAP dispatcher before r3monal starts its monitor run, configure the EnableDPQueueCheck keyword in the file r3monal.cfg, as illustrated in Checking the ABAP Dispatcher Before Startup on page 78. If r3monal's request for a work process violated a threshold for dialog work processes defined in the r3mondisp.cfg configuration file, the r3monal monitor would not start its monitor run; it would send a message to the message browser indicating the

reason why it did not start. You should consider using this feature where SAP System performance could be further compromised as a result of a request for an additional dialog work process by a SPI for SAP monitor.



r3mondisp is not affected by the thresholds defined for the EnableDPQueueCheck keyword; r3mondisp continues to work normally even if other monitors do not start as a result of a lack of available dialog work processes.

Checking the ABAP Dispatcher Before Startup

<pre># EnableDPQueueCheck</pre>	hostname	SAP	SAP	Enable =1
#		System	Number	Disable=0
#				
EnableDPQueueCheck	=ALL	=ALL	=ALL	=1

For more information about the EnableDPQueueCheck keyword, see Enable DP Queue Check on page 34.

The r3mondisp Configuration File

The r3mondisp monitor's configuration file allows you to use the keywords listed in this section to configure r3mondisp to meet the requirements of your particular SAP environment. Excerpt from a r3mondisp Configuration File on page 79 shows an excerpt from the r3mondisp monitor's default configuration file.



If you configure the SPI for SAP monitors to check the status of the ABAP dispatcher before starting their monitor run, make sure they can see and read a valid r3mondisp.cfg configuration file. The monitors require the information stored in this file and will not start if they cannot find it.

You can use the following keywords in the SPI for SAP r3mondisp configuration file. For more information about allowed values for the parameters in the following list, see The SPI for SAP Monitor-Configuration File on page 25.

TraceLevel

Set the trace level for r3mondisp when it runs on the specified SAP server. The TraceLevel keyword accepts the following parameters:

```
TraceLevel =<hostname> =<TraceLevel>
```

TraceFile

Set the name of the trace file, which r3mondisp uses to log entries. The TraceFile keyword accepts the following parameters:

```
TraceFile =<hostname> =<filename> =<TraceMode> =<TracePeriod>
```

DPQueueCheck

Manages the pro-active monitoring of the ABAP dispatcher. If more than one threshold matches for the same managed node and the same work-process, r3mondisp only sends the message with the highest severity. The DPQueueCheck keyword accepts the following parameters:

```
DPQueueCheck =<hostname> =<SID> =<InstanceNr> \ =<disable/enable>\
=<OVO Msg Group> =<OVO Msg Object> =<OVO Severity> \
=<WP-Type> =<Idle/Queue> =<Percentage idle/full>
```

Since the status of queued work-process is, generally speaking, more important than the status of idle work processes of the same work-process type, we recommend that the severity level assigned to messages concerning queued work processes is higher than the severity level you associate with messages about idle work processes. For example, you can assign the severity level Warning to messages about idle work processes and Critical to messages about queued work processes.

For more information about required parameters, see The SPI for SAP Monitor-Configuration File on page 25.

DisableMonitoringWithSeverity

Specify which r3mondisp message severity should trigger the disabling of integrated SPI for SAP monitors to prevent the monitors increasing loads unnecessarily by requesting additional dialog work processes from the SAP Systems, whose dispatcher you are monitoring with the SPI for SAP. The DisableMonitoringWithSeverity keyword accepts the following parameters:

```
DisableMonitoringWithSeverity =<hostname> =<SID> \
=<InstanceNr> =<Severity>
```

For more information about the required parameters, see The SPI for SAP Monitor-Configuration File on page 25.

The DisableMonitoringWithSeverity keyword must be used in conjunction with keywords DPQueueCheck, which you configure in the r3mondisp.cfg file, and EnableDPQueueCheck, which you define in the configuration file of the SPI for SAP monitor you want to integrate with r3mondisp. For more information about the keyword EnableDPQueueCheck, see Enable DP Queue Check on page 34.

InstanceProfilePath

The path to the profile-configuration file for an SAP instance whose dispatcher you want to monitor; the InstanceProfilePath keyword accepts the following parameters:

```
InstanceProfilePath =<hostname> =<SID> =<InstanceNr> \ =<path>
```

For more information about the required parameters, see The SPI for SAP Monitor-Configuration File on page 25.

Excerpt from a r3mondisp Configuration File on page 79 shows how to configure r3mondisp to send a warning message to the message browser if less than 15 percent of the total allocated dialog work processes for all SAP clients in all the SAP instances monitored by the SPI for SAP are idle.

Excerpt from a r3mondisp Configuration File

Excerpt from a r3mondisp Configuration File on page 79 also shows how to use the keyword DisableMonitoringWithSeverity to configure r3mondisp to prevent SPI for SAP monitors from starting if the start up requires a dialog work process (for example, to logon to SAP) and the allocation of that work process would violate a threshold for idle dialog work processes defined in the configuration file and, as a result, generate a message with the severity "warning" or higher.

Note that you have to use the EnableDPQueueCheck keyword to configure each individual SPI for SAP monitor that logs on to SAP to check the dialog work-process queue before starting its run. For more information about the keyword EnableDPQueueCheck, see Enable DP Queue Check on page 34.

The J2EE (Web AS Java) Monitor

Monitoring the SAP J2EE Engine is essential if you want to manage your SAP environment effectively, since the combination of Java technology and the J2EE infrastructure is the base on which new SAP components such as the SAP Enterprise Portal or Exchange Infrastructure (XI) are built.

This section contains information about the following topics:

- J2EE Monitor: Enabling CCMS Alerts on page 80
- J2EE Monitor: Configuration Pre-requisites on page 81
- Configuring the SPI for SAP J2EE Monitor on page 82

J2EE Monitor: Enabling CCMS Alerts

To enable the SPI for SAP to monitor the J2EE engine, you configure r3monal, the CCMS alert monitor, to monitor alerts in SAP generated by the J2EE and XI monitors. Monitoring Alerts from CCMS Monitor Sets on page 80 shows how to use the CCMSMonitorSet keyword in the r3monal.cfg configuration file to define which CCMS alerts to monitor and use to send messages to HPOM

Monitoring Alerts from CCMS Monitor Sets

```
# Monitor Set SAP SAP Monitor Set Monitor

# System Number

CCMSMonitorSet =ALL =ALL =HP OV SAP-SPI =J2EE Monitoring

CCMSMonitorSet =ALL =ALL =HP OV SAP-SPI =XI Monitoring
```

Note that both the CCMS monitors (J2EE Monitoring/XI Monitoring) and the CCMS monitor set (HP OV SAP-SPI) shown in Monitoring Alerts from CCMS Monitor Sets on page 80 are automatically created when you apply the SPI for SAP transports to SAP. For more information about the contents of the SPI for SAP transports, see the transport README file, which you can find in the following location on the HPOM management server after the installation of the SPI for SAP bits:

/opt/OV/lbin/sapspi/trans/readme

By default, the SPI for SAP monitor for Web AS Java allows you to monitor alerts from the following areas:

J2EE Kernel

Information about the registered managers such as the Connections Manipulator, the Locking Manager, or the Application Threads Pool. These managers provide the core functionality of the SAP J2EE Engine; it is essential to know if one of these managers is not working correctly since any malfunction could prevent the J2EE Services from working properly.

• J2EE Services

Information about J2EE services such as the Connector Service, Transaction Service, or Web Service, which form the second level of the SAP System after the SAP Java Runtime Environment. The SPI for SAP's CCMS alert-monitor tree gives you an overview of the health of important services in the J2EE Engine.

SAPCCMSR Availability

Information about the availability of all registered and installed SAP CCMS agents within the SAP NetWeaver environments you are monitoring with the SPI for SAP.

GRMG Monitoring

Information about the availability of the different Web AS Java instances configured in an SAP NetWeaver environment. Using heartbeat monitoring, you can monitor the status and accessibility of the SAP J2EE Engines within your SAP NetWeaver environment including the Web components such as: the EJB container (for Enterprise JavaBeans), the Java Connector (JCo), P4 services for managing communication between remote Java objects, the Java Servlet engine, and HTTP services.

Note that SAP's internal GRMG monitor does not enable monitoring of the SAP J2EE Engine by default. If you want to use the GRMG monitor, you will need to enable the CCMS monitors (such as heartbeat polling or Web Dynpro) so that CCMS alerts are generated, which the SPI for SAP CCMS alert monitor can use to send messages to the message browser.

J2EE System

Information about the J2EE system is now included as a separate CCMS-monitor node which collects information for both the dispatcher and the server. The SPI for SAP's CCMS alert-monitor tree gives you an overview of the health of important services in the J2EE Engine.

J2EE Monitor: Configuration Pre-requisites

If you want to use the SPI for SAP's J2EE monitor to manage the SAP J2EE environment, make sure that your environment meets the following pre-requisites:

• J2EE

Install, register with the -j2ee option, and start the CCMS agent for J2EE on *each* J2EE 6.40 (or later) engine, which you want to monitor with the SPI for SAP. The SAP CCMS agent must report to an SAP Web AS ABAP version 6.40 (or higher).

For more information about installing and configuring the CCMS agent, refer to the SAP product documentation, for example: *CCMS Agents: Features, Installation, and Operation*.

SPI for SAP Transports

The new SPI for SAP transports include the J2EE and security CCMS monitors, which you must apply to each of the SAP 6.40 (or later) Systems, to which the SAP CCMS agent monitoring the J2EE Engine reports.

For more information about applying the SPI for SAP transports, refer to the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

CCMS Agents

The CCMS agents ensure that CCMS alerts are reported in ABAP, where the SPI for SAP can intercept them. Make sure that the CCMS agent for J2EE is running on *each* J2EE Engine which you want to monitor with the SPI for SAP. This is especially important if multiple instances of the J2EE Engine are running in a stack.

• SPI for SAP Monitors

The SPI for SAP monitors and their configuration files must be available for distribution to the SAP Systems, whose J2EE Engines you want to monitor.

Configuring the SPI for SAP J2EE Monitor

This section explains how to configure the SPI for SAP to monitor the J2EE engine. To configure the SPI for SAP to monitor the SAP J2EE engine:

- 1 Make sure that the CCMS agent for J2EE is running on *each* J2EE Engine which you want to monitor with the SPI for SAP. This is especially important if multiple instances of the J2EE Engine are running in a stack.
- 2 Apply the new SPI for SAP transports to the SAP System hosting the J2EE Engines you want to monitor; the new SPI for SAP transports include the J2EE and security monitors.
- 3 Edit the monitor-set section of the r3monal.cfg configuration file and enable the monitoring of the J2EE monitor sets, by removing the leading hash (#) from the appropriate lines, as illustrated in Monitoring Alerts from CCMS Monitor Sets on page 80.
- Enable the CCMS alerts for J2EE, which you want to monitor with r3monal. You enable CCMS alerts by checking the CCMS monitors in the CCMS monitor sets for J2EE, as illustrated in Monitoring Alerts from the J2EE Engine on page 83. For more information about which CCMS alerts you need to enable for J2EE, see J2EE Monitor: Enabling CCMS Alerts on page 80.

Monitoring Edit Goto Views Extras System Help

HP OV SAP-SPI (J2EE Monitoring) - Maintenance functions ON

View: Current system status (15.05.2007, 09:32:32)

View: Current System Status (15.05.2007, 09:32:32)

J2EE Monitoring
SAP

Wiew: Current System Status (15.05.2007, 09:32:32)

J2EE Services
SAP

J2EE Monitoring
SAP

J2EE System SAP

J2EE System SAP

A

A

Figure 6 Monitoring Alerts from the J2EE Engine

The Enqueue-Server Monitor

The combination of a stand-alone enqueue server and replication server running on separate hosts forms the basis of a high-availability enqueue solution for SAP WebAS; separating essential services avoids the necessity of replicating the entire central instance in a high-availability environment and makes the SAP System faster and more efficient. In a high-availability environment, the failover of a stand-alone enqueue server does not lose any lock data or require you to reset locks when the enqueue server restarts.

If your System runs a stand-alone enqueue server, you can use the SPI for SAP's CCMS-alert monitor, r3monal, to monitor CCMS alerts relating to the status of the stand-alone enqueue server and configure r3monal to send messages to the HPOM message browser when problems occur that require urgent attention. This section contains information about the following topics:

- Enqueue Server: Enabling CCMS Alerts on page 83
- Enqueue Server: Configuration Pre-requisites on page 84
- Enqueue Server: Configuring the Enqueue-Server Monitor on page 84

Enqueue Server: Enabling CCMS Alerts

To enable the SPI for SAP to monitor a stand-alone enqueue server, you configure r3monal, the SPI for SAP's CCMS alert monitor, to monitor alerts in SAP generated by the CCMS monitor Standalone Enqueue Server Monitoring. Monitoring Enqueue Alerts in CCMS on page 83 shows how to use the CCMSMonitorSet keyword in the r3monal.cfg configuration file to define which CCMS alerts to monitor and use to send messages to HPOM

Monitoring Enqueue Alerts in CCMS

By default, the SPI for SAP monitor for stand-alone enqueue servers allows you to monitor alerts from the following areas:

Enqueue-Server Status

Information about the status and availability of the current enqueue server, for example, whether the enqueue server is available or running, whether a connection to a replication server exists, and whether replication is active, on hold, or disabled, and so on.

• Enqueue Replication-Server (ERS) Status

Information about the status and availability of the current enqueue-replication server, for example: whether the server is enabled, has acquired the replication table, is connected to the enqueue server, and so on.

Enqueue Server: Configuration Pre-requisites

If you want to use the SPI for SAP to monitor a stand-alone enqueue server running in a high-availability cluster, make sure that your environment meets the following pre-requisites:

• SPI for SAP Transports

The new SPI for SAP transports include the enqueue-server CCMS monitor, which you must apply to each of the SAP Systems, to which the SAP CCMS agents report.

For more information about applying the SPI for SAP transports, refer to the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

CCMS Agents

The CCMS agents ensure that CCMS alerts are reported in ABAP, where the SPI for SAP can intercept them. Make sure that the CCMS agents are available on *all* the physical hosts in the high-availability cluster, where the stand-alone enqueue server that you want to monitor runs, that is: on both primary and backup nodes.

SPI for SAP Monitors

The SPI for SAP monitors and their configuration files must be available for distribution to the SAP Systems, whose stand-alone enqueue server you want to monitor.


Enqueue Server: Configuring the Enqueue-Server Monitor

This section explains how to configure the SPI for SAP to monitor CCMS alerts generated by a stand-alone enqueue server, which is running in a WebAS high-availability environment. To configure the SPI for SAP to monitor the stand-alone enqueue server, perform the following steps:

1 Make sure that the CCMS agents are running on *each* physical host system in the high-availability environment on which the stand-alone enqueue server runs and which you want to monitor with the SPI for SAP.

- 2 Edit the monitor-set section of the r3monal.cfg configuration file and enable the monitoring of the stand-alone enqueue-server monitor sets, for example: Standalone Enqueue Server Monitoring as illustrated in Monitoring Enqueue Alerts in CCMS on page 83.
- Enable the CCMS alerts for the stand-alone enqueue server, which you want to monitor with r3monal. You enable CCMS alerts by checking the CCMS monitors in the CCMS monitor sets for the Enqueue service, as illustrated in Figure 7 on page 85.

Figure 7 Enabling CCMS alerts for the Enqueue Server Instance

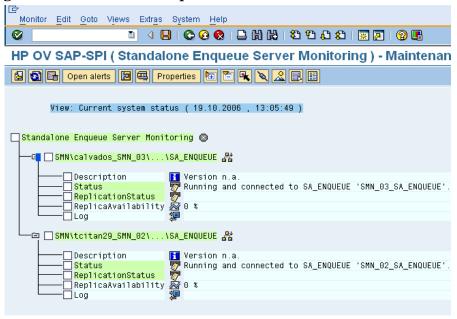

The SAP Enterprise-Portal Monitor

The SAP Enterprise Portal provides a secure and stable web interface that gives users global access to the information, applications, and services that they need to work effectively in the SAP landscape. The SPI for SAP allows you to monitor critical aspects of the Enterprise Portal such as availability, response times, configuration, and performance.

If your SAP System provides users with an Enterprise Portal, you can configure the SPI for SAP's CCMS-alert monitor, r3monal, to monitor CCMS alerts relating to the portal's status and send messages to the HPOM message browser when problems occur that require urgent attention. You can also use the SPI for SAP to collect and correlate performance and availability data and display the correlated data in service reports for more convenient viewing. This section contains information about the following topics:

- Enterprise Portal: Enabling CCMS Alerts on page 86
- Enterprise Portal: Configuration Pre-requisites on page 86
- Enterprise Portal: Configuring the Portal Monitor on page 87

Enterprise Portal: Enabling CCMS Alerts

To enable the SPI for SAP to monitor an instance of the Enterprise Portal, you configure r3monal, the SPI for SAP's CCMS alert monitor, to monitor alerts in SAP generated by the CCMS monitors J2EE Monitoring. Monitoring Enterprise-Portal Alerts in CCMS on page 86 shows how to use the CCMSMonitorSet keyword in the r3monal.cfg configuration file to define which CCMS alerts to monitor and use to send messages to HPOM

Monitoring Enterprise-Portal Alerts in CCMS

By default, the SPI for SAP monitor for the Enterprise Portal allows you to monitor alerts from the following areas:

Enterprise-Portal Status

You can monitor information concerning the status and availability of the Java- or HTTP-based components of the Enterprise Portal. Java-based components include: the EJB container (for Enterprise JavaBeans), the Java Connector (JCo), P4 services for managing communication between remote Java objects, the Java Servlet engine, and Java Web services; HTTP-based components include all HTTP services.

Enterprise-Portal Performance

You can monitor information concerning the performance of the Enterprise Portal, for example: request response times, request demand over time, the number of component calls per request, the average amount of outbound data per request, and so on.

• Enterprise-Portal Configuration

You can monitor the information that is available concerning configuration parameters for Enterprise Portal components such as the portal runtime (PRT) and the portal content directory (PCD), for example: thread and connection pool size, security settings, cache length and validity times.

Enterprise Portal: Configuration Pre-requisites

If you want to use the SPI for SAP to monitor an instance of the Enterprise Portal, make sure that your environment meets the following pre-requisites:

• SPI for SAP Transports

The new SPI for SAP transports include the Enterprise-Portal monitor; you must apply the new transports included in the transport file SAPSPI_CCMS_Monitors.car to each of the SAP Systems, to which the SAP CCMS agents report.

For more information about applying the SPI for SAP transports, refer to the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

CCMS Agents

The CCMS agents ensure that CCMS alerts are reported in ABAP, where the SPI for SAP can intercept them. Make sure that the CCMS agents are available on the machine hosting the instance of the J2EE engine on which the Enterprise Portal that you want to

monitor is running. Note that, if the TREX component (for search and classification functionality) is running on a different system, you will have to make sure the CCMS agents are running there, too.

• Java-Application Response-Time Measurement

To collect performance-related data from J2EE applications and components, you must enable Java-application response-time measurement (JARM) functionality. Note that JARM is enabled by default and maps all collected data to CCMS automatically; the J2EE engine's Network Administrator (NWA) displays the JARM status.

Generic Request and Message Generator (GRMG)

To monitor the availability of the Enterprise Portal in SAP, you need to customize the GRMG configuration files and upload the modified configuration files to the CCMS agent; the J2EE engine's Network Administrator (NWA) displays example XML files that are available for modification and upload to CCMS, as illustrated in Figure 18 on page 193. You can also use the transaction GRMG to display a list of active GRMG configuration scenarios that are available in the SAP central monitoring system.



If you want to monitor system availability with the GRMG, you must assign and configure one SAP system as the central monitoring system (CEN) in your SAP landscape. For more information about setting up a CEN in SAP, see the SAP documentation; for more information about using the SPI for SAP to monitor the CEN, see Monitoring CCMS Alerts in the CEN on page 189.

• Performance Agents

Either the HP Software Embedded Performance Component(CODA) or the HP Performance Agent and, in addition, the SPI for SAP R/3 Performance Agent must be running on the system hosting the Enterprise Portal you want to monitor. For more information about the SPI for SAP's performance monitor for the SAP Enterprise-Portal, see EP_PERF on page 222. Note that the SPI for SAP uses the performance data collected by EP_PERF to generate service reports.

• SPI for SAP Monitors

The SPI for SAP monitors and their configuration files must be available for distribution to the SAP Systems, whose Enterprise Portal you want to monitor.

Enterprise Portal: Configuring the Portal Monitor

The information in this section explains how to configure the SPI for SAP to monitor CCMS alerts generated by the Enterprise Portal. To configure the SPI for SAP to monitor an instance of the Enterprise Portal:

1 Make sure that the CCMS agents are running on the system hosting the Enterprise Portal services that you want to monitor with the SPI for SAP.



If you configure the TREX server to run on a separate host, you will need to make sure that CCMS agents are also running on the system hosting the remote TREX server and that CCMS alerts relating to search-and-classification functionality appear in ABAP.

2 If you have not already done so as part of the installation of the SPI for SAP, import the transport from SAPSPI_CCMS_Monitors.car file on each of the SAP Systems hosting the J2EE engine underlying the Enterprise Portal you want to monitor with the SPI for SAP; the SAPSPI CCMS Monitors.car transport file contains the CCMS monitors and

- objects that the SPI for SAP requires for EP performance monitoring. For more information about importing SPI for SAP transports, see the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.
- 3 Enable the Java Application Response-Time Measurement (JARM) functionality for the Java stack on which the Enterprise Portal is running; JARM allows you to monitor the availability and performance of the Java components underlying the Enterprise Portal. Use the J2EE Engine Network Administrator to check the JARM status. JARM is enabled by default.
 - The jarm/switch property key enables or disables performance monitoring; the jarm/comp/level property key allows you to modify the java-component monitor level, for example: 0 (default), 1, 2, or 3.
- 4 To monitor the availability of the web components in the J2EE engine underlying the Enterprise Portal, you need to customize an instance of the GRMG configuration files and upload the modified XML files to the CCMS agent. In particular, you need to define the names of the hosts where the instances of the J2EE engines are running. For more information about using the SAP Network Administrator to modify GRMG-configuration files and upload them to SAP's central monitoring system (CEN), see the SAP documentation.

Use the transaction GRMG to display a list of active GRMG configuration scenarios that are already uploaded to (and active in) CCMS.



It can take up to an hour for the GRMG scenarios that you upload in the Network Administrator to be transferred to the central monitoring system and started.

- 5 Edit the monitor-set section of the r3monal.cfg configuration file and enable the monitoring of both the J2EE monitor set, for example: J2EE Monitoring, as illustrated in Monitoring Enterprise-Portal Alerts in CCMS on page 86.
- 6 Enable the CCMS alerts for the Enterprise Portal that you want to monitor with r3monal. You enable CCMS alerts by checking the CCMS monitors in the CCMS monitor sets for the Enterprise Portal, as illustrated in Figure 8 on page 89.
 - Note that the Java-related CCMS alerts are available in the J2EE Services and J2EE System monitors, which you can find in the J2EE Monitoring CCMS monitor set. For more information about the SPI for SAP's J2EE monitor, see The J2EE (Web AS Java) Monitor on page 80.

Monitoring Edit Goto Views Extras System Help HP OV SAP-SPI (J2EE Monitoring) - Maintenance functions ON Open alerts D Properties O A G O D D C A S View: Current system status (24.05.2007 , 14:17:05) ☐ J2EE Monitoring ◎ □ J2EE Services 🕲 Segment SAP_CCMS_sapspiw5_SP1_25 (Status = SHUTDOWN) B1
Segment SAP CCMS sapspiwb (Status = SHUTDOWN) □ SP1 : Segment SAP_CCMS_sapspiw5_SP1_25 (Status = SHU □ SP1 : Segment SAP_CCMS_sapspiw6 (Status = SHUTDOWN) □ SP1\SP1 00 Disp 3842700 sapspiw3\...\Services\... SP1\SP1 00 Serv 3842750 sapspiw3\...\Services\ -⊞ Connector Service Log Configurator - 🖭 WebDynpro Security UME Œ Http Provider -Œ 🗸 Portal Web Container 器 Œ - Œ EJB JNDI Registry Œ Security 뫎 - (FI) Timeout ☐ JMX Adapter · 🖭 -Œ ₽4 Provider -⊞ Transaction
-⊞ Deploy ☐ Web Services RFC Engine Service 4 b

Figure 8 Enabling CCMS alerts for the Enterprise-Portal Instance

The SAP Security-Audit Monitor

Monitoring security audits is essential if you want to manage your SAP environment effectively; you can use the security-audit monitor to check what security-related changes occur in the SAP Systems you are monitoring with the SPI for SAP, who or what is responsible for the change, and where and when the change occurred. The security-audit monitor checks for alerts concerning the following events in the SAP System:

- Logons
- RFC Logons
- Transaction Starts
- Report Starts
- RFC Calls
- User Master Records
- System
- Miscellaneous

This section explains how to set up SAP's self-monitoring feature and configure the SPI for SAP to monitor the alerts the self-monitoring feature generates. The information in this section helps you understand the following topics:

- SAP Security-Alerts on page 90
- Configuring the Security-Audit Monitor on page 91

SAP Security-Alerts

The SAP security-audit log keeps a record of security-related activities in the SAP System and stores the information it collects in an audit file on each application server. The audit log uses filters to determine what information is important enough to record and updates the log at regular intervals. When an event occurs that matches a configured filter (for example, for an RFC logon or a transaction start), the audit log generates a message and writes it to the audit file. At the same time, a corresponding alert appears in the CCMS alert monitor.

You can configure the SPI for SAP to monitor the CCMS alerts logged by the security audit in any areas of particular interest to you and use the alerts to generate messages, which you can send to the HPOM message browser. Table 17 on page 90 shows the security areas audited by the SAP self-monitoring feature; you can monitor all or any of these areas with the SPI for SAP.


Table 17 SAP Security-Audit Classes

Audit Class	Description
Logons	An SAP logon or password check failed; an operator illegally locked or unlocked an SAP user.
RFC Logons	An RFC or CPIC logon failed due to user error or an unauthorized attempt to log on with an illegal user/password combination.
Transaction Starts	Possible unauthorized execution of code in the SAP System
Report Starts	
RFC Calls	
User Master Records	A security or licensing issue occurred concerning user records or the inappropriate activation of an authorization or profile.
System	An application server stopped or started; the security-audit configuration changed.
Miscellaneous	A transport request contains source objects, which are critical for security.

Configuring the Security-Audit Monitor

Enabling the monitoring of security events audited by SAP's security-audit feature involves a number of steps both in SAP and in HPOM; the number and complexity of the steps you have to perform depends on the version of SAP installed on the SAP System, whose security events you want to monitor with the SPI for SAP. Figure 9 on page 91 shows what the CCMS monitor tree looks like when you complete the configuration on the SAP side successfully.

Figure 9 CCMS Monitor Set: Monitoring Security Events

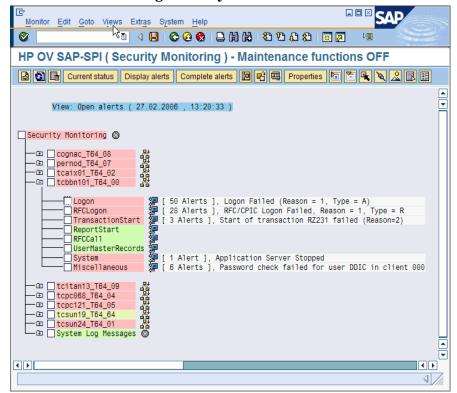

To configure the SPI for SAP to monitor the security events logged in the SAP security audit, perform the tasks described in more detail in the following topics:

- 1 Installing the SPI for SAP's Security-Monitoring Feature on page 91
- 2 Configuring the SAP Security Audit on page 92
- 3 Enabling CCMS Security Monitoring on page 92

Installing the SPI for SAP's Security-Monitoring Feature

The number and complexity of the steps you have to perform to enable the security-monitoring feature in SAP depends on the version of SAP installed on the SAP System you want to monitor with the SPI for SAP.


- For SAP Web AS ABAP version 6.40 and higher, apply the SPI for SAP transport, SAPSPI_CCMS_Monitors.car, which imports the new, CCMS monitor set automatically into SAP.
- For all supported SAP ABAP versions before 6.40:
 - Use transaction RZ20 to activate the SAP maintenance function.
 - Create a new CCMS monitor set called 'HP OV SAP-SPI'.

- Create a new CCMS monitor called 'Security Monitoring' and add it to the monitor set HP OV SAP-SPI.
- Enable the alert classes you want to monitor with the new CCMS monitor 'Security-Monitoring'. You can enable the complete tree or individual classes, for example: Logon, or Transaction Start.

For more information about the individual security-audit alert classes you can choose to monitor, see SAP Security-Alerts on page 90.

Configuring the SAP Security Audit

The information in this section explains how to specify which events the new security-audit profile monitors, in which SAP client, and relating to which SAP user.



- 1 Use transaction SM19 to create, customize, and activate a new profile for a security-audit.
 - To reduce administrative overhead, you can set up a system-wide profile which will monitor only the most important and critical security events, for example: critical SAP-logon events or important RFC-function calls.
 - Remember to check the Filter active option when configuring filter options.
- 2 Test the new profile for a security-audit.
 - You can test the activated profile by logging on to SAP with a false user/password combination. If you want to review the audit log, too, use transaction SM20.
- 3 Set up the SAP job REORG to maintain the security-audit logs:

The security audit writes logs to the file system which very quickly fills up if you do not implement a REORG job using the SAP report RSAUPURG. Transaction SM38 allows you to create a variant of the RSAUPURG report, which meets the needs of your environment. For example, you can arrange to delete logs which are more than ten days old.

Enabling CCMS Security Monitoring

The information in this section explains how to enable r3monal to monitor the generation of CCMS alerts in SAP and in particular the alerts, which concern security-related events. After configuring r3monal to monitor security-related CCMS alerts, you also have to enable the SAP Security Monitoring monitor in CCMS and, in addition, the corresponding MTE's (monitor tree elements) of interest, for example: Logon, ReportStart, and so on.

The SPI for SAP creates the CCMS monitor "Security Monitoring" when you apply the SPI for SAP transport SAPSPI_CCMS_Monitors.car to SAP 6.40 Systems and higher, whose security events you want to monitor with the SPI for SAP. For older SAP versions, you have to create the CCMS monitors and monitor sets manually.

Monitoring Audit Alerts from CCMS Monitor Sets on page 93 shows an excerpt from the r3monal monitor's configuration file. The CCMSMonitorSets keyword allows you to define the CCMS alert monitor set and CCMS alert monitors created by the SPI for SAP. In the example shown, you configure r3monal to monitor security-audit alerts for all SAP Systems known to the SPI for SAP using the CCMS alert monitor set "HP OV SAP-SPI" and the CCMS alert monitor "Security Monitoring".

Monitoring Audit Alerts from CCMS Monitor Sets

For more information about enabling CCMS alerts, see r3monal: CCMS Monitor Sets on page 48.

4 The SPI for SAP Alert-Collector Monitors

This section describes the alert-collector monitors controlled by r3moncol and explains how to configure and use them.

Introducing r3moncol and the Alert-Collector MONITORS

The SPI for SAP uses the one, single alert collector r3moncol to collect alerts from a number of additional SAP NetWeaver alert monitors. Each of the alert monitors listed in this section takes its name from the nature of alerts it monitors. For example, the r3mondmp alert-collector monitors ABAP dumps. The SPI for SAP groups the tasks that each monitor performs according to *alert types*. For example, the alert type IDOC_CURRENT_STATUS helps the r3monale monitor determines the current status of iDOCs in an SAP System.

You specify monitoring parameters at the alert-*type* (rather than alert-*monitor*) level. For example, you could use the parameter =CHECK_INBOUND to limit the range of the alert type IDOC_CURRENT_STATUS so that it checks the status of inbound iDOCs only.

This section contains information about the following topics:

- Configuring the SPI for SAP Alert-Collector Monitors on page 97
- The Alert-Collector Monitor Configuration Files on page 104

The following list shows which alert-collectors are available to r3moncol and gives a short description of each monitor's scope. For more detailed information about the alert types associated with each alert monitor as well as the parameters you can use to configure them, see the appropriate sections and tables later in this chapter:

- r3monaco Monitoring the TemSe file on page 174
 - To save runtime costs, a report now replaces the Temporary Sequential File (TEMSE) monitor. See Monitoring the TemSe file on page 174 for more details.
- r3monale: The iDOC-Status Monitor on page 111
 - The iDOC Status monitor checks the status of the iDOCs present in the SAP NetWeaver Systems configured in your SAP Landscape. r3monale generates an alert when a defined threshold for the number of iDOCs with a given status is exceeded
- r3monchg: The System-Change-Option Monitor on page 119
 - The SYSTEM CHANGE OPTION monitor checks for the occurrence of SAP System change options.
- r3moncts: The Correction and Transport System Monitor on page 123
 - The CORRECTION and TRANSPORT SYSTEM monitor checks the correction and transport system for important transport requests, tasks and objects. It generates an alert according to the specifications you define.
- r3mondmp: The ABAP-Dump Monitor on page 132

The ABAP Dump monitor detects ABAP dumps which occur in the SAP System. The cause of the dump can be identified from the details which the message gives and used to determine any corrective action, which you need to take.

r3monjob: The Job-Report Monitor on page 134

The JOBREPORT monitor checks for jobs that:


- exceed a specified run time
- do not run as long as they are expected to run
- do not start within a specified time frame
- are aborted
- r3monlck: The Lock-Check Monitor on page 142

The LOCK_CHECK monitor references the SAP NetWeaver Enqueue process which manages logical locks for SAP NetWeaver transactions and reports on obsolete locks. An obsolete lock is a lock which is older than the time period you specify.

• r3monoms: The Operation-Mode Monitor on page 144

The OPERATION MODE monitor detects when:

- a scheduled operation mode switch has occurred later than the time specified
- a scheduled operation mode switch has not occurred at all



• r3monrfc: The RFC-Destination Monitor on page 147

The SAP-RFC monitor checks RFC destinations in an SAP environment:

- the status of connections
- the availability of connections
- r3monspl: The Spooler Monitor on page 150

The SPOOLER monitor checks:

- the number of spool entries
- the number of erroneous spool requests in a specified range
- spool entries with state ERROR for specified printers
- r3montra: The Transport Monitor on page 153

The TRANSPORT monitor checks the following parts of the transport system:

- the status of exports and imports
- confirmed and unconfirmed repairs
- performs a ping of the specified system
- checks the TP interface
- r3monupd: The Update Monitor on page 160

The UPDATE-alert monitor checks:

— if an SAP user or the SAP System stops an update

- if update errors have occurred
- r3monusr: The SAP-User Monitor on page 162

The USER monitor specifies the number of users which would trigger an alert, using SAP transaction SM04 as reference

• r3monwpa: The Work-Process Monitor on page 164

The WORKPROCESS monitor performs the following checks on work processes:

- monitors their status and reports any processes that are running in *debug*, *private* or *no-restart* modes
- compares the number of configured work processes with the number of work process actually running
- checks the number of expected work processes waiting and the number of expected work processes running for each work process type

Configuring the SPI for SAP Alert-Collector Monitors

You can use the alert-collector monitors to define a series of monitoring tasks within SAP NetWeaver, for example, checks on SAP NetWeaver processing modes, SAP NetWeaver dumps, or the availability of SAP NetWeaver work processes. The alert-collector monitors ensure that each defined alert-collector configuration is executed on a regular basis and reports any messages that come back from the called function. For more information about the contents of the individual alert-collector monitor configuration files, see The Alert-Collector Monitor Configuration Files on page 104.

Report Types for the Alert-Collector Monitors

Each of the alert monitors use one of two reporting types.

• Time Frame

Time-frame monitors use a defined time range as their measurement base. For example, the r3monjob alert monitor uses a time frame which compares the time from the last monitor run with the configured start date and time of a batch job.

Snapshot

Snapshot monitors use one moment of time as their measurement base. For example, the r3monlck (LOCK_CHECK) monitor uses the moment the monitor runs to generate an alert indicating that a lock is "old", whenever the age of the lock exceeds a defined time span. The snapshot type is dynamic and can run continuously because the alerts can be generated without being confined to a specific time frame.

Polling Rates for the Alert-Collector Monitors

The alert-collector monitors have different default polling rates, that is: the frequency at which the monitor runs. You can change the polling rate at the schedule policy for the monitor. For more information about the default polling rates for alert-collector monitors, see Table 18, which shows the rates in days, hours, and minutes.

Table 18 Default Polling Rates for Alert-Collector Monitors

	Polling Rate		
Alert-Monitor Name	Days	Hours	Mins
r3monale			10
r3monchg		4	
r3moncts		1	
r3mondmp			5
r3monjob			5
r3monlck		1	
r3monoms			10
r3monrfc			5
r3monspl			30
r3montra	1		
r3monupd		1	
r3monusr			5
r3monwpa			5
r3monaco ^a			15

a. Strictly speaking,r3monaco is not an alert-collector monitor. See Monitoring the TemSe file on page 174.

Alert-Collector Monitor History

Unlike the SPI for SAP monitors r3monal or r3mondev, the alert-collector monitors controlled by r3moncol (such as r3monale or r3mondmp) do not write history information to a monitor-specific history file. Instead, any information relating to SAP alerts which come to the notice of the SPI for SAP alert-collector monitors is written directly to the SAP database, where it can be found by the alert collector r3moncol. At the start of each monitor run, r3moncol reads the relevant tables and uses the information to determine which if any events the HPOM management server has already been notified about and whether to generate further messages or not.

Alert-Collector Monitor Query Conditions

The data for each alert monitor is split into a number of alert types. For example, the JOBREPORT Monitor has four alert types: JOB_MAX_RUN-TIME, JOB_MIN_RUN_TIME, START_PASSED and JOB_ABORTED. For each of a given alert monitor's defined alert types you have to:

- specify which SAP NetWeaver Systems should be checked
- enter selection criteria which defines under what circumstances an alert will be raised.
 This is described in more detail below.

Parameter Data Types

Parameters in the monitoring-conditions section of the configuration files associated with each alert type define the conditions, which generate an alert. There are two general types of parameter data:

name

The parameter *name* describes the attributes of the SAP NetWeaver System for which you define the monitoring conditions. For example: MAX_RUNTIME and JOBNAME are the names of parameters for the alert type JOB_MAX_RUN_TIME, which is associated with the JOBREPORT Monitor, r3monjob.

delimiters

Parameter *delimiters* are used to specify the "select" options for each parameter. The parameter delimiters define the circumstances under which an alert should be generated. An HPOM message will be sent for each event that matches your specified conditions. There are four types of Parameter Delimiters, which must appear in the following order: SIGN, OPT(ION), LOW and HIGH. (See Table 19 on page 100)

Specifying Query Conditions

The following points apply generally when using parameter delimiters to specify query conditions:

- All possible and reasonable conditions can be used to configure the query condition, within the limitations given below.
- Messages which are excluded by your defined conditions will not appear in the HPOM message browser.
- Detailed descriptions of the alert-type configurations for each monitor follow this introductory section.

The SPI for SAP installs the alert monitors by default with an example configuration of the allowed parameters for each alert type. However, this example configuration should not be treated as necessarily ready to use for your particular environment. As a general rule, you first need to customize the alert type by editing the parameters. You can find information about when it is possible to use these unedited default values (and when editing is mandatory) in the detailed descriptions of each alert monitor's alert types, which follows this introduction. Note that the order of the parameter delimiters for the query conditions must

match the order shown in Table 19, namely; SIGN, OPTION, LOW, HIGH. For examples of the use of query conditions, see the sections for the appropriate alert collectors, for example: r3moncts.

Table 19 Description of Parameter Delimiters

Parameter Delimiters	Description
SIGN	I: Include E: Exclude
OPT	The standard SAP operators NE (Not Equal to), NB (Not Between and), and NP (does Not contain Pattern) cannot be used to configure the alert types described in this section. You should only use the following operators: • EQ: equal to • BT: between and • CP: contains pattern • LE: less than or equal to • GE: greater than or equal to • GT: greater than
LOW	 A comparison value such as a string when used with the operator CP The lower value of a range when used in conjunction with the operator BT. For some ALERT_TYPES, the value X is also used simply as a flag or switch which enables monitoring, for example: r3montra's TRANS and REPAIR.
HIGH	A numeric comparison value to specify the higher value of a range. This parameter delimiter should only be used in conjunction with the operator BT

Parameter Values

This section describes how the SPI for SAP interprets *include* and *exclude* parameter values for an alert type entry. The SPI for SAP compares values in *different* parameters using 'and'; the SPI for SAP compares values in the *same* parameter as follows.

• **Include**: use 'or' to compare the parameters

• **Exclude**: use 'and' to compare the parameters

Note that the SPI for SAP evaluates *include* values before *exclude* values, as shown in the Table 20.

Table 20 Comparing Include and Exclude Conditions for the Same Parameter

Select Options	Example Configuration of Select Options for JOB_MAX_RUN_TIME	Comparison
1	=JOBNAME =I =CP =ZREP* = =MAX_RUNTIME =I =GT =10 =	OR
2	=JOBNAME =I =CP =SAP* = =MAX_RUNTIME =I =GT =20 =	OR
3	=JOBNAME =E =CP =SAP_ZREP* =	AND

Query Conditions

The following rules apply to the use of blocks and line breaks when configuring the alert types for the alert collector monitors:

- Configure each parameter as a separate block. For example for JOB_MAX_RUN_TIME:

 =JOBNAME =I =CP =SAP* = is the block for the parameter JOBNAME

 =MAX_RUNTIME =I =GT =20 = is the block for the parameter MAX_RUNTIME.
- The symbol '\' indicates a line continuation.
- Use line breaks in the following locations:
 - Within each specified configuration between:
 - the general alert class configuration (SAP hostname, system, number and client)
 - the HPOM configurations (severity level, object and message group)
 - the monitoring query conditions (parameter name and the SIGN, OPT, LOW and HIGH parameter delimiters).
 - Between each separate specified condition for AND comparisons.

Alert-Collector Monitor Environment Variables

This section describes the environment variables for all the alert-collector monitors managed by r3moncol. The configuration is identical for all alert collectors except that the name of the alert-collector configuration file is monitor specific, for example: r3monjob, r3mondmp, r3monlok, r3monoms.

Table 21 Environment Variables for r3moncol.exe

Environment Variable	Description
SAPOPC_ <r3monname>_CONFIGFILE</r3monname>	Configuration-file name ^a
SAPOPC_R3ITOSAP_CONFIGFILE	General SAP NetWeaver login configuration file
SAPOPC_TRACEPATH	Trace path config. file

a. Where <R3MONNAME> is the name of the monitor whose configuration file location you want to change. For example, SAPOPC_R3MONDMP_CONFIGFILE

Alert-Collector Monitor Command-Line Parameters

The command line parameters for all the alert-collector monitors controlled by the r3moncol are described in this section. In the same way as for the environment variables, the configuration is identical for all alert-collector monitors except that the name of the alert-collector configuration file is monitor specific, for example: r3monjob.cfg, r3monlck.cfg, and r3monoms.cfg.

Table 22 r3moncol Command-Line Parameters

Parameter	Description ^a
-cfgfile	Name of the monitor's configuration file. For example, -cfgfile < <i>R3MONNAME</i> >.cfg
-trace	The monitor writes an initial trace file writetrace.log, which contains information about the configuration file r3itosap and the monitor-specific config file <r3monname>.cfg.</r3monname>

a. Where <R3MONNAME> is the name of the monitor whose configuration-file location you want to read. For example, r3mondmp

In the following example, the alert-collector monitor writes an initial trace file writetrace.log, which contains information about the general configuration file r3itosap and the monitor-specific configuration file r3monjob.cfg.

r3moncol -cfgfile r3monjob.cfg -trace

Remote Monitoring with the Alert-Collector Monitors

The current version of the SPI for SAP includes a feature which allows you to extend the scope of the alert-collector monitor to remotely monitor the health of SAP processes on additional SAP servers (which are *not* HPOM managed nodes) from an SAP server, which *is* already configured as an HPOM managed node.



Although the SAP Server defined in the RemoteHost parameter is not an HPOM managed node, it must still be present in the HPOM Node Bank. If you do not add the SAP Server defined in RemoteHost to the HPOM Node Bank, HPOM cannot resolve the host name associated with the remote host and, as a consequence, cannot display any messages from the remote host in the message browser.

In addition, the SAP Server defined in RemoteHost must appear in the r3itosap.cfg file to ensure that the SPI for SAP can login to the SAP instances it is monitoring on the RemoteHost. For more information about the r3itosap.cfg file, refer to the HP Operations Smart Plug-in for SAP Installation and Configuration Guide.

To make use of the remote-monitoring feature provided by the SPI for SAP, for example, to monitor an SAP System running an operating system that is not supported by the SPI for SAP, you need to enable the new **RemoteMonitoring** keyword (by removing the leading hash symbol "#") in the r3mon<alert_monitor_name>.cfg file (for example, r3mondmp.cfg) and then, on the same line, tell the SPI for SAP alert-collector monitor the

name of the local server which you want to perform the monitoring and, finally, the name of the remote server, which you want to monitor. Default Configuration for the CTS Monitor (r3moncts) on page 107 shows how a new line is required for each *additional* SAP server, which you want to monitor remotely. You use the following keyword parameters to define local and remote server names:

LocalHost

the name of the HPOM managed node where the SPI for SAP is running and whose alert-collector monitor you want the SPI for SAP to use to do the monitoring on the remote host defined in "RemoteHost"

RemoteHost

the name of the *remote* system to monitor with the system defined in "LocalHost". The RemoteHost does not have the SPI for SAP installed and is not usually (but could theoretically be) an HPOM managed node.

For more information about the contents of the alert-collector monitor configuration file, see The Alert-Collector Monitor Configuration Files on page 104.

Specifying Monitoring Rules for Individual Remote Servers shows a hypothetical example of how to configure the SPI for SAP on two different HPOM managed nodes (sap1 and sap2) to remotely manage three different SAP servers (ovsdsap1, ovsdsap2, and ovsdsap3) and, in addition, specify different monitoring rules to suit the different roles of the individual SAP servers, for example, production, development, or even test/unused:

Production System

The remote server <code>ovsdsap1</code> in Specifying Monitoring Rules for Individual Remote Servers is the *production* system, it has the monitor enabled (=1) and associates the HPOM message severity CRITICAL with alerts generated by the <code>=REQUEST_CREATED</code> alert type.

Development System

The remote server <code>ovsdsap2</code> in Specifying Monitoring Rules for Individual Remote Servers is the *development* system, it has the monitor enabled (=1) and associates the HPOM message severity MAJOR with alerts generated by the <code>=REQUEST_CREATED</code> alert type.

Test System

The remote server <code>ovsdsap3</code> in Specifying Monitoring Rules for Individual Remote Servers is the test system whose configuration is unchanged from the default which has the monitor disabled (=0) and associates the HPOM message severity WARNING with alerts generated by the <code>=REQUEST_CREATED</code> alert type.

Specifying Monitoring Rules for Individual Remote Servers

```
#-----
# Remote
             LocalHost
                      RemoteHost
# Monitoring
RemoteMonitoring =sap1
RemoteMonitoring =sap1
                      =ovsdsap2
RemoteMonitoring =sap2
                      =ovsdsap3
                         SAP
                  SAP
 AlertMonFun SAP
                                SAP
                                      Alertmonitor
                                                  Enable =1/
           Hostname System Number
                                Client
                                                  Disable=0
```

```
OpC \
# OpC
             OpC
# Severity
             Object
                     MsgGroup \
AlertMonFun =ovsdsap1 =ALL =ALL
                                     =ALL
                                           =CTS
=CRITICAL =Request
                       =R3 CTS\
                   =USERNAME
=REQUEST CREATED
                                =I
                                      =CP
AlertMonFun =ovsdsap2
                        =ALL
                               =ALL
                                     =ALL
                                           =CTS
=MAJOR =Request
                    =R3 CTS\
=REQUEST CREATED
                   =USERNAME
                                      =CP
                                =I
                              =ALL
AlertMonFun =ovsdsap3 =ALL
                                     =ALL
                      =R3 CTS\
=WARNING =Request
                   =USERNAME
=REQUEST CREATED
                                      =CP
                                =I
```

--

The Alert-Collector Monitor Configuration Files

The keywords listed in this section appear in the alert-collector monitors configuration files and can be used to set up the individual monitor to meet the requirements of your environment. Where appropriate, possible values for a given keyword are also specified. Default Configuration for the CTS Monitor (r3moncts) on page 107 shows what a complete configuration file looks like for the r3moncts monitor, which monitors the correction and transport system for important transport requests, tasks and objects. This section contains information about the following topics:

- Alert-Collector Keywords and Parameters on page 104
- Validating the Alert-Collector Configuration Files on page 108
- Understanding Configuration-File Error Messages on page 108

Alert-Collector Keywords and Parameters

The following list describes the keywords you can use in the configuration files for the SPI for SAP alert-collectors controlled by r3moncol; for more information about errors caused by incorrect configuration, see Validating the Alert-Collector Configuration Files on page 108:

TraceLevel

For more information, see The SPI for SAP Monitor-Configuration File on page 25.

TraceFile

For more information, see The SPI for SAP Monitor-Configuration File on page 25.

HistoryPath[Unix | AIX | Windows]

For more information, see The SPI for SAP Monitor-Configuration File on page 25.

• AgentHostname

Make sure that the AgentHostname keyword set to ALL.

RemoteMonitoring

Enables the SPI for SAP to monitor an SAP instance installed on remote SAP server. For more information, see Remote Monitoring with the Alert-Collector Monitors on page 102.

AlertMonFun

The AlertMonFun keyword defines a function for the alert-collector monitor and *requires* a value for the following parameters:

AlertMonFun =<SAP Hostname> =<SAP System> =<SAP Number> =<SAP Client> =<AlertMonitor> =<Enable/Disable> =<OpC Severity> =<OpC Object> =<OpC MsqGroup> =<Alerttype> =<RFC Parameter>

— Alerttype:

=<Alerttype>

The alert type is monitor specific. For example, r3monale uses the IDOC_CURRENT_STATUS alert type to monitor alerts relating to the status of iDOCs; r3mondmp uses the alert type ABAP4_ERROR_EXIST to monitor alerts relating to each ABAP dump that occurs in a monitored SAP System. For more information about which alert types belong to which alert-collector monitor, see the "Alert-Types" section for a given monitor, for example, r3monale: The iDOC-Status Monitor on page 111 refers to the alert type IDOC_CURRENT_STATUS.

— AlertMonitor:

=<Monitor Name>

The short form of the alert monitor you are configuring, for example, ALE for r3monale, CTS for the r3moncts, and so on.

— Enable/Disable:

=0 Disable the monitor.

=1 Enable the monitor. This is the default setting.

— OPC Severity:

=<HPOM_Msg_Severity>

The severity level of the HPOM message you want to map the CCMS alert to, for example: Normal, Warning, Major, Critical.

— OPC Object:

=<OpC Object>

The HPOM object associated with the generated message. These tend to reflect the names of the alert types associated with the alert-collector monitor, for example, Request, task or object for r3moncts. Note that if you change the names of the HPOM objects in the monitor-configuration files (or add new ones), you must ensure that these changes are reflected in the message conditions to avoid the generation of unmatched messages.

— OPC MsgGroup:

=<OpC_Msg_Group>

The name of the HPOM message group to which the generated message belongs, for example: R3_CTS, or R3_ABAP-4. The default names all start with "R3_" and reflect the names of the alert monitors to which they correspond, for example, r3moncts or r3mondmp. Note that if you change the names of the HPOM message groups in the monitor-configuration files, remember to ensure that the changes are reflected in the message conditions to avoid the generation of unmatched messages.

— RFC Parameter:

=<RFC Param> =I =CP =* =

=<RFC Param>

The name of a parameter for a given alert type, for example: USERNAME, followed by any required parameter-specific query conditions, each with the prefix "=", for example: = I (for include), =CP (for "Contains Pattern").

For more information about query conditions, see Alert-Collector Monitor Query Conditions on page 99. For more information about monitor- specific alert-type parameters, see the monitor descriptions. For example, for the r3moncts alert type REQUEST_CREATED, see: REQUEST_CREATED Configuration Parameters on page 126.

— SAP Client:

=ALL Monitor all SAP clients with the SPI for SAP. This is the

default setting.

=<ClientID> The ID of a specific SAP client ID whose performance you want to monitor, for example, 099. Use a new configuration

line for each entry.

— SAP Hostname:

=ALL Monitor all SAP hosts with the SPI for SAP. This is the

default setting.

=<SAP host> The host name of a specific SAP server which you want to

monitor. Use a new configuration line for each individual

entry.

— SAP Number:

=ALL Monitor all SAP instances with the SPI for SAP. This is the

default setting.

=<Instance> The number of a specific SAP *instance* which you want to

monitor, for example, 00, 99. Use a new configuration line for

each entry.

— SAP System:

=ALL Monitor all SAP Systems with the SPI for SAP. This is the

default setting.

=<SAP SID> The ID of a SAP System ID which you want to monitor, for

example, DEV. Use a new configuration line for each

individual entry.

Severity Levels

The alert-collector monitors map the severity of alerts in the SAP subsystem to messages in HPOM. For example, SAP alerts with the severity level *SeverityCritical* are mapped by default to the HPOM message severity *Critical*. The HPOM message- status hierarchy is, in ascending order; Normal, Warning, Minor, Major, Critical.

You can customize these severity levels to suit the severity conditions you want to define. For example, for the alert type OLD_LOCKS for the alert monitor LOCK_CHECK you could specify that if the lock is older than 12 hours, you receive a WARNING message, and if it is older than 24 hours, you receive a CRITICAL message.

Default Configuration for the CTS Monitor (r3moncts)

```
# TraceLevel hostname Disable=0 only error messages=1 info messages=2 \
               debug messages=3
                 =0
TraceLevel
         =\Delta T.T.
#-----
# TraceFile hostname filename
                        TraceMode
                                         TracePeriod
                      (a=append/w=create(default)) (in mins)
TraceFile
      =ALL
               =r3moncts.loa =w
#-----
# History
        hostname
               path
# Path
HistoryPathUnix
           =ALL
                    =default
HistoryPathAIX
            =ALL
                    =default
HistoryPathWinNT =ALL
# Remote
           LocalHost
                    RemoteHost
# Monitoring
RemoteMonitoring =rum
                  =ovsdsap1
RemoteMonitoring =whisky =ovsdsap2
#-----
# AlertMonFun SAP SAP SAP SAP Alertmonitor Enable =1/
```

```
Client
                                                                       Disable=0
                Hostname
                           System
                                    Number
#
#
                               OpC
    OpC
                  OpC
    Severity
                  Object
                               MsgGroup
#
                 RFC Parameter
  Alerttype
                 =Parameter
                                 =Sign
                                          =Opt
                                                           =High
                                                  =Low
                [=Parameter
                                 =Sign
                                                           =High] ...
                                          =Opt
                                                   =Low
  Example:
AlertMonFun
             =ALL
                    =ALL
                           =ALL
                                 =ALL
=WARNING
            =Request
                           =R3 CTS
=REQUEST CREATED
                    =USERNAME
                                 =I
                                        =CP
```

Validating the Alert-Collector Configuration Files

The configuration files used by r3moncol's alert-collector monitors have a known structure and content; commands and parameters appear in a particular order and location as illustrated in Default Configuration for the CTS Monitor (r3moncts) on page 107. To ensure an alert-collector monitor remains available and runs correctly, it is essential that the monitor can read and understand the contents of its configuration file each time the monitor starts. If the file is not available or contains errors, the monitor cannot perform its monitor function and in some cases will not start. To help prevent the situation where an alert-collector monitor cannot start or perform correctly due to a configuration error, the SPI for SAP automatically validates the contents of r3moncol configuration files when the SPI for SAP user tries to save it and when a SPI for SAP monitor reads it on startup.



The SPI for SAP checks the contents of an alert-collector's configuration file only if you use OVO for UNIX tools to edit and save it; the SPI for SAP does *not* check the contents of the configuration file for errors if you use a text editor to modify and save it.

If the SPI for SAP's validation tool finds an error when saving a configuration file, it displays a message describing the error, opens the file containing the error in the vi text editor, and places the cursor at the point in the configuration file where the error is located. To fix the problem, you will need to have a good understanding of the contents and structure of the configuration files, in particular, which parameters are associated with which commands and what values are allowed for the required parameters. For more information about the contents and the structure of the configuration files for the alert-collector-monitors, see Configuring the SPI for SAP Alert-Collector Monitors on page 97.

Understanding Configuration-File Error Messages

If you use OVO for UNIX tools to edit an alert-collector configuration file, you cannot save the file if it contains an error. If the SPI for SAP discovers an error when validating the contents of an alert-collector configuration file, it displays a message describing the error. For more information about the contents of the r3moncol configuration file, including what values are allowed and where, see The SPI for SAP Monitor-Configuration File on page 25.

The following list shows the messages that are displayed when an error is found in an alert-collector configuration file and explains what you need to do to fix the problem, which caused the error:

Arguments/Parameters are expected but missing in command AlertMonFun;
 check for arguments after the equals sign '='

The number of arguments present in the configuration file does not match the number of arguments required for the AlertMonFun keyword; check that you have not added or removed all or part of a parameter by accident when editing the file.

1. No value found for the parameter Enable/Disable in command AlertMonFun; setting to '0'

The command AlertMonFun is incomplete; an expected parameter to define enabling (=1) or disabling (=0) is missing. Assume disable (=0), which is the default.

OVO for UNIX only. This is a warning, not an error, so the configuration file can be saved.

 Value for the parameter Enable/Disable in command AlertMonFun must be '0' or '1'

The value assigned to the enable/disable parameter in the command AlertMonFun is an invalid number. It must be either 0 (disabled) or 1 (enabled).

2. Enable/Disable for the command AlertMonFun is not set; setting to '0'

The enable/disable parameter in the command AlertMonFun is missing or incorrectly defined; the default value of 0 (disabled) is assumed and set.

OVO for UNIX only. This is a warning, not an error, so the configuration file can be saved.

 The second argument in command TraceLevel must be a positive number between '0' and '3'

The TraceLevel setting is either missing or not allowed; the value must be one of the following: =0 (disabled), =1 (error messages), =2 (all messages), or =3 (debug).

Argument for <command name> must be a valid number

The indicated argument for the command command name> must be a valid number.

 Severity status <Status> defined in command DisableMonitoringWithSeverity is not allowed

The severity status of the messages you want to use to trigger the disable a monitor is unknown or not allowed. The following severity levels are allowed: Unknown, Normal, Warning, Minor, Major, Critical.

Invalid number of arguments in command DisableMonitoringWithSeverity

There are either too many or too few arguments defined in the command DisableMonitoringWithSeverity, which means the command is assuming the wrong values for the expected parameters. Check the number of parameters present in the command and their values.

3. Value for Disable/Enable in command DPQueueCheck must be either '0' or '1'; setting to '0' (disable)

The enable/disable parameter for the command DPQueueCheck is missing or incorrectly defined; the default value of 0 (disabled) is assumed and set.

OVO for UNIX only. This is a warning, not an error, so the configuration file can be saved.

Value for Disable/Enable in command DPQueueCheck is not a valid number

The value for the enable/disable parameter in the command DPQueueCheck is incorrect; it must be either =0 (disabled) or =1 (enabled).

<SeverityLevel> is an invalid Severity

The defined severity level is not allowed; check that you have spelled the severity level correctly and that the specified severity level is allowed in this context. The following severity levels are allowed: Unknown, Normal, Warning, Minor, Major, Critical.

<WorkProcess> is an invalid work process

The name of the work process defined in <WorkProcess> is either not known or not allowed; the names you can use in this context are the three-letter acronyms used in SAP, for example: DIA (dialog), UPD (update), BTC (batch).

Value of Workprocess must be either Idle or Queue in command DPQueueCheck.

The value defined for the status of the work-processes monitored by the DPQueueCheck command is either missing or invalid; the value must be set to either "Idle" or "Queue".

Threshold value in command DPQueueCheck is not a valid number.

The value defined (in percentage terms) for the status of the work-processes queue monitored by the DPQueueCheck command is either missing or invalid; the value must be between 0 (zero) and 100 (one hundred) per cent.

Threshold value is out of range in command DPQueueCheck

The value defined (in percentage terms) for the status of the work-processes queue monitored by the DPQueueCheck command must be between 0 (zero) and 100 (one hundred) per cent. This value defines how full (or empty) the monitored queue must be as a percentage of the maximum before the dispatch monitor r3mondisp generates an alert.

• Too many or too few arguments in command DPQueueCheck

The number of arguments present in the configuration file does not match the number of arguments required for the DPQueueCheck keyword. Check that you have not added or removed a parameter (or part thereof) by accident when editing the file.

• <Keyword> is an unknown keyword.

The keyword specified is invalid; check that you have spelled the keyword correctly and that the specified keyword is allowed in this context.

 Invalid or missing value <Value> for RFC parameter in configuration item AlertMonFun.

The value for the defined RFC parameter indicated in <Value> is not allowed or is absent. Check and, if necessary, change or add the value for the specified parameter.

The name of the alert monitor or the type of parameter specified for a given alert type is not allowed in this context. Check the spelling and make sure that the alert type is allowed with the specified alert-collector monitor.

Parameter <ParameterName> for Alertmonitor <AlertMonitorName> is not valid.

The specified parameter is not allowed in combination with the specified alert-collector monitor.

 Alertmonitor <AlertMonitorName> and Alerttype <AlertTypeName> requires the parameter USERNAME.

You must define the parameter USERNAME if you want to use the alert monitor and alert type indicated.

Values specified for HIGH or LOW parameter must be positive numbers.

The value(s) defined in the HIGH/LOW parameters for a given alert type are incorrect or not allowed; use a positive number.

Values for HIGH or LOW parameter must be between <Number> and <Number>.

The HIGH/LOW parameters for a given alert type must be between the numbers indicated.

 Invalid values specified for parameters LOW or HIGH, see the administrator reference guide for valid values.

The HP Operations Smart Plug-in for SAP Administrator's Reference describes the contents of each monitor's configuration file in great detail.

• The value <Value> specified for the SIGN parameter is not allowed; enter the appropriate value as described in the administrators reference.

The *HP Operations Smart Plug-in for SAP Administrator's Reference* describes the contents of each monitor's configuration file in great detail.

• Invalid value <Value> specified for the OPTION parameter.

The value used to define the OPTION parameter in the monitor-configuration file is not allowed. Check that the value is valid and that this kind of option is allowed in the specified context.

Low AND High parameter is required if OPTION is <OptionName>.

You must specify values for both the HIGH and LOW parameters when using the option indicated in <OptionName>; either one or both of the values is missing or incorrectly defined.

• No HIGH parameter is required if OPTION is <OptionName>.

Remove that value specified for the HIGH parameter; you do not need it when using the option indicated in <OptionName>.

4. Note: The character '*' in LOW parameter of OPTION 'EQ' will be interpreted literally; that is as '*' and NOT as a wildcard.

The asterisk character will be interpreted as the asterisk character and not as a wild card in the context of the EQ (equals) option.

• The number of arguments for keyword <KeyWord> is wrong.

Different keywords might require a different number or type of parameters. In this case, there are either too many or too few parameters specified for the keyword indicated in <KeyWord>. This could lead to a situation where the monitor assumes an incorrect value for a parameter.

r3monale: The iDOC-Status Monitor

The iDOC-status alert monitor, r3monale, is *time-frame* based and checks the status of existing iDOCs for errors using the transaction **WEO2** as the data source. The monitor is application-server independent and available for global (SAP NetWeaver System-wide) use. Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the

messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The iDOC-status alert monitor is of type *time frame*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The iDOC-Status Monitor has the following alert types:

IDOC_CURRENT_STATUS

Defines when to generate an alert concerning the current state of the iDOCs

File Locations

The r3monale alert monitor uses the files listed in this table.

Table 23 r3monale Files

File	Description
r3moncol(.exe)	Collector executable for the iDOC-status monitor
r3monale.cfg	Configuration file for iDOC-status monitor
r3monale.log	Trace file for storing trace data

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monale monitor uses the environment variables described in Table 21 on page 101. The environment variables for all the alert-collector monitors share the same format, the only difference being that the name of the configuration file varies to match each specific monitor as indicated in Table 21 on page 101.

Command-Line Parameters

The r3monale monitor uses the command-line parameters described in Table 22 on page 102. The command-line parameters for all the alert-collector monitors share the same format, the only difference being that the name of the configuration file must vary to match each specific monitor for both the -cfqfile and -trace parameters as indicated in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.



The remainder of this section describes the specific configuration requirements for the r3monale alert monitor. Alert-Collector Monitor Query Conditions on page 99 describes general configuration query rules which apply to all alert collector monitors. If you use OVO for UNIX tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the changes you make when you try to save the modified configuration file.

Configuring iDOC-Monitor Alert Types

When configuring the IDOC_CURRENT_STATUS alert type for r3monale, the iDOC status monitor, remember that you must define at least one of the parameters listed in Table 24. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

IDOC CURRENT STATUS

The IDOC_CURRENT_STATUS alert type defines the current status of iDOCs, which you want to monitor. Use the IDOC_CURRENT_STATUS alert type to configure the iDOC-status alert monitor r3monale to generate an alert if the status of an iDOC matches the status defined in the STATUS parameter.

Table 24 on page 113 lists the parameters that you can use to configure the IDOC_CURRENT_STATUS alert type and shows the value assigned to the parameters by default. Note that ''in the Default Value column signifies an empty string.

Table 24 IDOC_CURRENT_STATUS Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
DOCNUM	iDOC number, for	= Sign: I, E	"
	example: "05" (error during translation)	= Opt: GE, GT, LE, LT, BT	
		= Low	٠ ٠
		= High:	
DOCTYP	the basic iDOC type, for example: DOCMAS01	= Sign: I	
		= Opt: CP, EQ	
		= Low	٠.
		= High	٠.
MESCOD	Logical message	= Sign I	٠.
	code	= Opt: CP, EQ	٠ ،
		= Low	٠.
		= High	

 ${\bf Table~24~~IDOC_CURRENT_STATUS~Configuration~Parameters}$

Parameter Name	Description	Query Conditions	Default Value
MESFCT	Logical message	= Sign: I	٠.
	function	= Opt: CP, EQ	
		= Low	
		= High	٠.
MESTYP	Logical message	= Sign: I	٠.
	type	= Opt: CP, EQ	٠.
		= Low	٠.
		= High	٠.
RCVPFC	Partner function	= Sign: I	٠.
	of receiver	= Opt: CP, EQ	٠.
		= Low	٠.
		= High	٠.
RCVPRN	Partner number of receiver	= Sign: I	٠.
		= Opt: CP, EQ	٠.
		= Low	٠.
		= High	
RCVPRT	Partner <i>type</i> of receiver	= Sign: I	٠.
		= Opt: CP, EQ	٠.
		= Low	
		= High	
SNDPFC	Partner function	= Sign: I	
	of sender	= Opt: CP, EQ	
		= Low	٠.
		= High	٠ ،
SNDPRN	Partner number	= Sign: I	٠.
	of sender	= Opt: CP, EQ	٠ ،
		= Low	٠.
		= High	٠.

Table 24 IDOC_CURRENT_STATUS Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
SNDPRT	Partner type of sender	= Sign: I	٠.
		= Opt: CP, EQ	
		= Low	
		= High	
STATUS a	Status of iDOC	= Sign: I, E	
		= Opt: GE, GT, LE, LT, BT	
		= Low	"
		= High	"

a. Possible values: CHECK_INBOUND, CHECK_OUTBOUND, MAX_ENTRIES, TIME_LIMIT



The iDOC changes listed here are applicable only to SAP versions 6.20 and above.

In Remote Monitoring, the r3monale alert checks the status of inbound iDOCs. An event generating an alert occurs if the number of in-bound iDOCS specified in IDOC_CURRENT_STATUS is greater than (GT) the value 4 (four) defined in MAX_ENTRIES. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

IDOC_CURRENT_STATUS Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =1 \
=WARNING =ALE =R3_IDOC_STATUS \
=IDOC_CURRENT_STATUS =STATUS =I =EQ =CHECK_INBOUND \
=MAX ENTRIES =I =GT =4
```

Checking the iDOC Status

Using the IDOC_CURRENT_STATUS alert type in conjunction with the STATUS parameter allows you to check any one of the different iDOC statuses that are registered in SAP NetWeaver or a range of statuses defined in a group. Table 25 lists all the statuses that the SPI for SAP recognizes.

In addition, the SPI for SAP provides two pre-defined groups that you can use to check for a range of errors relating to incoming or outgoing iDOCs. For example, you can use the values CHECK_INBOUND and CHECK_OUTBOUND to monitor a range of values:

- CHECK_OUTBOUND
 monitors iDOCs with status: 02, 04, 05, 25, 26, 29, 30, 32
- CHECK_INBOUND
 monitors iDOCs with status: 51, 56, 60, 61, 62, 63, 64, 65, 66, 69

If you want to use the r3monale alert monitor to check for a specific iDOC status, replace the value <code>=CHECK_INBOUND</code> shown in <code>IDOC_CURRENT_STATUS</code> Configuration on page 115 with the iDOC status number listed in Table 25 that corresponds to the iDOC status you want to monitor. For example, to monitor the number of existing iDOCS, use <code>=01</code>. Note that it is not currently possible to define your own ranges similar to the pre-defined ranges <code>CHECK_INDOUND</code> and <code>CHECK_OUTBOUND</code>. Instead, you have to define a separate <code>AlertMonFun</code> entry for <code>each</code> additional value, which you want to monitor.

Table 25 Possible iDOC Status

iDOC Status	Description	Check Inbound	Check Outbound
00	Not used, only for R/2		
01	IDoc created		
02	Error passing data to port		✓
03	Data passed to port OK		
04	Error within control information of EDI subsystem		✓
05	Error during translation		✓
06	Translation OK		
07	Error during syntax check		
08	Syntax check OK		
09	Error during interchange handling		
10	Interchange handling OK		
11	Error during dispatch		
12	Dispatch OK		
13	Retransmission OK		
14	Interchange Acknowledgement positive		
15	Interchange Acknowledgement negative		
16	Functional Acknowledgement positive		
17	Functional Acknowledgement negative		
18	Triggering EDI subsystem OK		
19	Data transfer for test OK		
20	Error triggering EDI subsystem		
21	Error passing data for test		

Table 25 Possible iDOC Status (cont'd)

iDOC Status	Description	Check Inbound	Check Outbound
22	Dispatch OK, acknowledgement still due		
23	Error during retransmission		
24	Control information of EDI subsystem OK		
25	Processing despite syntax error (outbound)		1
26	Error during syntax check of IDoc (outbound)		1
27	Error in dispatch level (ALE service)		
28	Not used		
29	Error in ALE service		1
30	IDoc ready for dispatch (ALE service)		1
31	Error - no further processing		
32	IDoc was edited		√
33	Original of an IDoc which was edited		
34	Error in control record of IDoc		
35	IDoc reloaded from archive		
36	Electronic signature not performed (time-out)		
37	IDoc added incorrectly		
38	IDoc archived		
39	IDoc is in the receiving system (ALE service)		
40	Application document not created in receiving system		
41	Application document created in receiving system		
42	IDoc was created by test transaction		
50	IDoc added		
51	Error: Application document not posted	1	

Table 25 Possible iDOC Status (cont'd)

iDOC Status	Description	Check Inbound	Check Outbound
52	Application document not fully posted		
53	Application document posted		
54	Error during formal application check		
55	Formal application check OK		
56	IDoc with errors added	1	
57	Test IDoc: Error during application check		
58	IDoc-Copy from an R/2 connection		
59	Not used		
60	Error during syntax check of IDoc (Inbound)	1	
61	Processing despite syntax error (Inbound)	✓	
62	IDoc passed to application	1	
63	Error passing IDoc to application	1	
64	IDoc ready for transfer to the application	1	
65	Error in ALE service		
66	IDoc is waiting for predecessor IDoc (serialization)		
67	Not used		
68	Error - no further processing		
69	IDoc was edited	1	
70	Original of an IDoc which was edited		
71	IDoc reloaded from archive		
72	Not used, only for R/2		
73	IDoc archived		
74	IDoc was created by test transaction		

r3monchg: The System-Change-Option Monitor

The SAP System-change-option alert monitor r3monchg double-checks the SAP system change options using the SAP NetWeaver transaction **SE06** as a reference.

Note that if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3monchg monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The SPI for SAP monitor for SAP System-change-option alerts has only one alert type:

CHANGE OPT

Monitors and double-checks the SAP System change options and generates an alert if the option matches the configuration.

File Locations

The r3monchg alert monitor uses the files listed in this table.

Table 26 r3monchg Files

File	Description	
r3moncol(.exe)	Collector executable for the system change option monitor	
r3monchg.cfg	Configuration file for system change option monitor.	
r3monchg.log	Trace file for storing trace data.	

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monchg monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monchg monitor uses the command line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

Configuring SYSTEM CHANGE OPTION Monitor Alert Types

The general rules repeated below concern the use of exclude and include parameter values: the rules are particularly important for these alert types.

Parameter Values

This section describes how the SPI for SAP interprets *include* and *exclude* parameter values for an alert type entry. The SPI for SAP compares values in *different* parameters using 'and'; the SPI for SAP compares values in the *same* parameter as follows.

- **Include**: use 'or' to compare the parameters
- **Exclude**: use 'and' to compare the parameters

Note that the SPI for SAP evaluates *include* values before *exclude* values, as shown in Table 27.

Table 27 Comparing Include and Exclude Conditions for the Same Parameter

Select Options	Alert Type: CHANGE_OPT (SAP 4.6x) Example Configuration of Select Options	Comparison
1	=SYSTEM_CHANGE_OPTION =1 =WARNING =SystemChange =R3_Security =NSP_EDTFLAG =I = CP= /0* =	OR
2	=SYSTEM_CHANGE_OPTION =1 =WARNING =SystemChange = =R3_Security = NSP_EDTFLAG =I =EQ =/SAPQUERY/ =	OR
3	=SYSTEM_CHANGE_OPTION =1 =WARNING =SystemChange =R3_Security = NSP_EDTFLAG =E =EQ =LOCAL =	AND

CHANGE OPT

The CHANGE_OPT alert type monitors and double-checks the SAP- System change options and generates an alert if the settings for the flag parameters allow the editing you are trying to perform. Table 28 on page 121 lists the parameters that you can use to configure the CHANGE OPT alert type and shows the value assigned to the parameters by default.

The configuration of all parameters is mandatory. Multiple parameter entries on a single line are *not* allowed; use a new line to specify each one of any multiple configurations. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 28 CHANGE_OPT Configuration Parameters (SAP 4.6/6.x)

Parameter Name	Description	Query Conditions	Default Value
EDTFLAG	Flag indicating if an object can be edited.	= Sign: I	I
		= Opt: EQ	EQ
		= Low: ON, OFF, PATCH (PATCH=set to patch system)	PATCH
		= High:	
NSP_EDTFLAG	Flag indicating which specified name space(s) to set to ON.	= Sign: I	I
		= Opt: EQ, CP	СР
		= Low (See list of name space change options for SAP 4.6. X in Table 30.)	*
		= High:	
SWC_EDTFLAG	Flag indicating	= Sign: I	I
	which specified software	= Opt: EQ, CP	CP
-	components to set to ON.	= Low: <specified software<br="">component> (See list of name space change options for SAP 4.6. X in Table 30.)</specified>	*
		= High:	

In The Default CHANGE_OPT Configuration, an event generating an alert occurs when the global system change is OFF or the specified name space is Local Objects (/0LOCAL/), or the specified software component is Local Developments (no automatic transport).

$The \ Default \ CHANGE_OPT \ Configuration$

```
AlertMonFun =ALL =ALL =ALL =ALL
                                =SYSTEM CHANGE OPTION =1\
=WARNING
         =SystemChange =R3 Security \
=CHANGE OPT
             =NSP EDTFLAG =I =EQ =/OLOCAL/ =
AlertMonFun =ALL =ALL =ALL =SYSTEM CHANGE OPTION =1\
=WARNING
         =SystemChange =R3 Security \
                  =SWC EDTFLAG =I
=CHANGE OPT
                                     =EQ = LOCAL
AlertMonFun =ALL =ALL =ALL =SYSTEM CHANGE OPTION =1\
=WARNING
           =SystemChange =R3 Security \
=CHANGE OPT
                    =EDTFLAG
                                 =I
                                       =EQ =OFF =
```

The Customized CHANGE OPT Configuration

```
AlertMonFun =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1\
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =NSP_EDTFLAG =I =EQ =/SAPQUERY/ =

AlertMonFun =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1\
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =SWC_EDTFLAG =I =EQ = SAP_HR =

AlertMonFun =ALL =ALL =ALL =SYSTEM_CHANGE_OPTION =1 \
=WARNING =SystemChange =R3_Security \
=CHANGE_OPT =EDTFLAG =I =EQ =OFF =
```

In The Customized CHANGE_OPT Configuration, an event generating an alert occurs when the global change option is OFF or the system space change option ABAP query /SAP is ON, or the software component change option for Human Resources is ON. For more information about the change options for name system and software components, see Table 29 and Table 30.

Table 29 Software Components Change Options

Technical ID	Description	
HOME	Customer developments	
LOCAL	Local developments (no automatic transport)	
SAP_ABA	Cross-Application Component	
SAP_APPL	Logistics and Accounting	
SAP_BASIS	SAP Basis Component	
SAP_HR	Human Resources	

Table 30 Name System Change Options for SAP 6.x

Technical ID	Description	
/0CUST/	Customer name range	
/0SAP/	General SAP name range	
/1BCABA/	ABAP & GUI tools	
/1BCDWB/	Development Workbench	
/1BCDWBEN/	Enqueue function groups	
/1COPA/	Generated objects in CO-PA	
/1ISRWP/	IS-R merchandise and assortment controlling	
/1ISU/	Generation namespace for CIC (Customer Interaction Center)	
/1PAPA/	Personnel administration	
/1PAPAXX/	Personnel administration - general	
/1PSIS/	Project Information System - Logical database PSJ	
/1PYXXFO/	PY-XX Form tool: Generated objects	

Table 30 Name System Change Options for SAP 6.x (cont'd)

Technical ID	Description	
/1SAP1/	General SAP generation namespace	
/1SDBF12L/	Generation of pricing report	
/BI0/	Business Information Warehouse: SAP namespace	
/BIC/	Business Information Warehouse: Customer namespace	
/SAPQUERY/	ABAP query /SAP	
/SAPRRR/	Ready-to-Run SAP	
/SAPSMOSS/	Interface: SAP messages to the SAP Online Service System	
/SAPTRAIN/	SAP training	

r3moncts: The Correction and Transport System Monitor

The correction-and-transport (CTS) alert monitor r3moncts identifies and monitors the Correction and Transport System for important transport requests, tasks and objects. Data collection is application-server independent.

The alert monitor r3moncts uses the following SAP elements as a reference:

- Transport requests and object lists created using SAP NetWeaver transaction SE01
- Tasks created using SAP NetWeaver transaction SE09

Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3moncts monitor is of type *time frame*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The CTS monitor has the following alert types:

• REQUEST CREATED

Defines when new requests generate an alert

REQUEST RELEASED

Defines whether to generate an alert for a released request

TASK_CREATED

Defines if new tasks should generated an alert

• TASK RELEASED

Defines whether to generate an alert for released tasks

OBJECT_USED

Defines whether objects used by a task or a request generate an alert

• OBJECT_RELEASED

Defines whether to generate an alert when a request or task releases an object

File Locations

The r3moncts monitor uses the files listed in this table.

Table 31 r3moncts Files

File	Description	
r3moncol(.exe)	Collector executable for the CTS monitor	
r3moncts.cfg	Configuration file for the CTS monitor.	
r3moncts.log	Trace file for storing trace data.	

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3moncts monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3moncts monitor uses the command line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

Configuring CTS Monitor Alert Types

You should keep in mind the following rules when configuring the alert-type parameters for the CTS monitor, r3moncts:

- By default, the SPI for SAP selects *all* data for each parameter.
- You can restrict data by specifying some or all of the parameters for the alert type.
- The SPI for SAP only considers the named parameters if you change default values and overrides the default value ALL for the unspecified parameters.

Use the parameter TRFUNCTION to configure the REQUEST_CREATED, REQUEST_RELEASED, TASK CREATED and TASK RELEASED alert types. TRFUNCTION has request functions which you can specify using the letter codes indicated in Table 32.

Table 32 TRFUNCTION Request Functions

Letter Code	Function Description
A	Request: Unclassified request becomes K, L or W with first object
С	Transport with change authorization
D	Patch
K	Request: Change request with destination consolidation layer
L	Request: Local request without transport
R	Task: Repair
S	Task: Development/correction
Т	Request: Transport without originals
U	Dummy
W	Request: Customizing request with cons. layer destination
X	Task: Unclassified task becomes S or R with first object
Z	(task without request) SE09 memory usage



In the descriptions of the use of this parameter for each of the CTS alert types, only the letter code is shown. If you do not know what these letter codes represent, consult Table 32.

REQUEST_CREATED

Use the REQUEST_CREATED alert type to configure the correction-and-transport (CTS) alert monitor r3moncts to generate a message for any new request created within the last specified time frame. For example, adding a new (or modifying an existing) function module requires a change request. Table 33 on page 126 lists the parameters that you can use to configure the REQUEST_CREATED alert type and shows the value assigned to the

parameters by default. The configuration of any of these parameters is optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 33 REQUEST_CREATED Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRFUNCTION	The request	= Sign: I, E	I
	function.	= Opt: CP, EQ	СР
		= Low: A,K,L,W,C,T, U, D ^a	*
		= High:	
TARGET	The target system for which this request was created. Note: this must be a SID	= Sign I, E	
		= Opt: EQ, CP	
		= Low: <name of="" system=""></name>	
		= High	
USERNAME	The login name of the SAP NetWeaver user who created	= Sign I	
		= Opt: EQ, CP	
	the request.	= Low: <username created="" request="" this="" who=""></username>	
		= High	

a. You can only specify the listed functions (* means all).

In The Default REQUEST_CREATED Configuration, the monitor generates a message if a new request occurs within the last time frame.

The Default REQUEST_CREATED Configuration

REQUEST_RELEASED

Use the REQUEST_RELEASED alert type to configure the correction-and-transport (CTS) alert monitor r3moncts to generate a message for any new request released within the last specified time frame. Table 34 on page 127 lists the parameters that you can use to configure the REQUEST_RELEASED alert type and shows the value assigned to the parameters by

default. The configuration of the parameters below is optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 34 REQUEST_RELEASED Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRKORR	Request ID	= Sign: I, E	
		= Opt: EQ	
		= Low: <request id=""></request>	
		= High:	
TRFUNCTION	The request	= Sign: I, E	
	function.	= Opt: EQ	
		= Low: K,L, W,C,T, U, D. (You can only specify the listed functions (* means all).)	
		= High:	
TARGET	The target	= Sign I, E	I
	system for which this request was created. This must be a SID	= Opt: EQ, CP	СР
		= Low: <name of="" system=""></name>	*
		= High	
USERNAME	The login name of the SAP NetWeaver user who created the request.	= Sign I	
		= Opt: EQ,CP	
		= Low: <username created="" request="" this="" who=""></username>	
		= High	
	Customizing	= Sign I,E	
	Requests	= Opt: EQ	
		= Low (Any entry other than 'X' will be treated as space.)	
		= High	
WORKBENCH	Workbench	= Sign I, E	
	Requests	= Opt: EQ	
		= Low (Any entry other than 'X' will be treated as space.)	
		= High	

In The Default REQUEST_RELEASED Configuration, an event generating an alert occurs if any *customizing* request was released in the last time frame.

The Default REQUEST_RELEASED Configuration

```
AlertMonFun =ALL =ALL =ALL =CTS =1\
=WARNING =Request =R3_CTS\
=REQUEST RELEASED =CUSTOMIZING =I =EQ =X
```

TASK CREATED

Use the TASK_CREATED alert type to configure the correction-and-transport (CTS) alert monitor r3moncts to generate a message for any new task *created* within the last specified time frame. Table 35 on page 128 lists the parameters that you can use to configure the TASK_CREATED alert type and shows the value assigned to the parameters by default. The configuration of any of these parameters is optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 35 TASK_CREATED Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRFUNCTION	-	= Sign: I, E	I
	function.	= Opt: CP, EQ	СР
		= Low: X, S, R, Z ^a	*
		= High:	
USERNAME	The login name	= Sign: I	
	of the SAP NetWeaver	= Opt: EQ, CP	
	user who created the request.	= Low: <username created="" request="" this="" who=""></username>	
request.		= High:	

a. You can only specify the listed functions (* means all).

In The Default TASK_CREATED Configuration, r3moncts generates a message for any new task *created* within the last specified time frame.

The Default TASK_CREATED Configuration

```
AlertMonFun =ALL =ALL =ALL =CTS =1 \
=WARNING =Task =R3_CTS \
=TASK CREATED =TRFUNCTION =I =CP =*
```

TASK_RELEASED

Use the TASK_RELEASED alert type to configure the correction-and-transport (CTS) alert monitor r3moncts to generate a message for any new task released within the last time frame. Table 36 on page 129 lists the parameters that you can use to configure the TASK_RELEASED alert type and shows the value assigned to the parameters by default. The

configuration of the parameters below is optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 36 TASK_RELEASED Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRKORR	Request ID	= Sign: I, E	
		= Opt: EQ	
		= Low: <request id=""></request>	
		= High:	
TRFUNCTION	1	= Sign: I, E	I
	function.	= Opt: CP, EQ	СР
		= Low: R, S, Z ^a	*
		= High:	
USERNAME	The login name	= Sign: I	
	of the SAP NetWeaver user who created the request.	= Opt: EQ, CP	
		= Low: <username created="" request="" this="" who=""></username>	
	Toquosu.	= High	

a. You can only specify the listed functions (* means all).

In The Default TASK_RELEASED Configuration, r3moncts generates a message for any new task *released* in the last time frame.

The Default TASK_RELEASED Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =CTS =1\
=WARNING =Task =R3_CTS\
=TASK_RELEASED =TRFUNCTION =I =CP =* =
```

OBJECT_USED

Use the OBJECT_USED alert type to configure the correction-and-transport (CTS) alert monitor r3moncts to generate a message if a task or a request uses an object matching the defined configuration within the last time frame. Table 37 on page 130 lists the parameters that you can use to configure the OBJECT_USED alert type and shows the value assigned to the parameters by default.

The configuration of the parameters below is optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 37 OBJECT_USED Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
PGMID	Program ID	= Sign: I, E	
		= Opt: EQ, CP	
		= Low: <program id=""></program>	
		= High:	
OBJECT	Object type of	= Sign I, E	
	element	= Opt: EQ, CP	
		= Low: <object type=""></object>	
		= High	
OBJ_NAME	Object Name in	= Sign I, E	I
	object directory	= Opt: EQ, CP	СР
		= Low: <object name=""></object>	*
		= High	
OBJ_FUNC	Special function for an object entry: D = Delete, or M = Delete and recreate.	= Sign I, E	
		= Opt: EQ, CP	
		= Low	
		= High	
IN_REQUEST	Alert	= Sign I,E	
	generated if object	= Opt: EQ	
	container is a request	= Low	
	request	= High	
IN_TASK	Alert	= Sign I, E	
	generated if object	= Opt: EQ	
	container is a task.	= Low	
	CADII.	= High	

In The Default OBJECT_USED Configuration, an event generating an alert occurs if any object with Object Type "LIMU" is used by a task or a request.

The Default OBJECT_USED Configuration

```
AlertMonFun =ALL =SD1 =ALL =ALL =CTS =1\
=WARNING =Object =R3_CTS\
=OBJECT_USED =PGMID =I =EQ =LIMU =
```

OBJECT_RELEASED

Use the OBJECT_RELEASED alert type to configure the correction-and-transport (CTS) alert monitor r3moncts to generate a message if a request or a task released the specified object. Table 38 on page 131 lists the parameters that you can use to configure the OBJECT_USED alert type and shows the value assigned to the parameters by default.

The configuration of the parameters below is optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

 Table 38
 OBJECT_RELEASED Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
TRKORR	Request ID	= Sign: I, E	
		= Opt: EQ, CP	
		= Low: <request id=""></request>	
		= High:	
PGMID	Program ID	= Sign: I, E	
		= Opt: EQ, CP	
		= Low: <program id=""></program>	
		= High:	
OBJECT	Object type of	= Sign I, E	
	element	= Opt: EQ, CP	
		= Low: <object type=""></object>	
		= High	
OBJ_NAME	Object Name in object directory	= Sign I	I
		= Opt: EQ, CP	СР
		= Low: <object name=""></object>	*
		= High	
IN_REQUEST	Alert	= Sign I,E	
	generated if object	= Opt: EQ	
	container is a request	= Low (Any entry other than 'X' will be treated as space.)	
		= High	

Table 38 OBJECT_RELEASED Configuration Parameters (cont'd)

Parameter Name	Description	Query Conditions	Default Value
IN_TASK	Alert	= Sign I, E	
	generated if object container is a task.	= Opt: EQ	
		= Low (Any entry other than 'X' will be treated as space.)	
		= High	

In The Default OBJECT_RELEASED Configuration, an event generating an alert occurs if any object is released by a task.

The Default OBJECT RELEASED Configuration

```
AlertMonFun =ALL =ALL =ALL =CTS =1\
=WARNING =Object =R3_CTS\
=IN TASK =I =EQ =X =
```

r3mondmp: The ABAP-Dump Monitor

The ABAP-dump alert monitor, r3mondmp, reports ABAP dumps in the SAP NetWeaver system which have occurred within the last, defined, time frame. The check is performed once per monitor run for all application servers.

Dumps are usually runtime errors and hence they cannot always be detected by a static syntax check. They can occur for many reasons and may indicate serious problems. No dumps should occur on a production system.

Here are two examples of actions which cause dumps to occur:

- division by zero
- a called function model is not enabled

Since the system administrator generally has to do something to resolve problems associated with an ABAP dump, the messages generated by the r3mondmp alert monitor include an operator-initiated action that calls an ABAP program to display details of the dump.

The alert monitor r3mondmp references the SAP NetWeaver transaction **ST22**. Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The ABAP-dump alert monitor is of type *time frame*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The ABAP-dump monitor has the following alert types:

ABAP4_ERROR_EXIST

Each ABAP dump generates one alert.

File Locations

The r3mondmp monitor uses the files listed in this table.

Table 39 r3mondmp Files

File	Description	
r3moncol(.exe)	Collector executable for ABAP-dump monitor	
r3mondmp.cfg	Configuration file for monitored application servers.	
r3mondmp.log	Trace file for storing trace data.	

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3mondmp monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3mondmp monitor uses the command line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

ABAP4 ERROR EXIST

Use the ABAP4_ERROR_EXIST alert type to configure the ABAP-dump alert monitor, r3mondmp, to generate an alert for each dump that occurred in the last time frame. The Default ABAP4_ERROR_EXIST Configuration shows how you can use =MAX_ENTRIES to count the number of dumps that have to occur before the SPI for SAP generates a message. In addition, you can specify a period of time in hours (=TIME_LIMIT) within which the defined number of dumps must occur. In this example, the SPI for SAP generates a message if ten dumps occur within twenty four hours.

The Default ABAP4 ERROR EXIST Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =ABAP4 =1\
=WARNING =ABAP_Dump =R3_ABAP-4\
=ABAP4_ERROR_EXIST

# New feature in SPI for SAP version 8.0
```

```
#AlertMonFun
                =ALL
                       =ALL
                             =ALL
                                  =ALL
                                        =ABAP4 = 1
     =WARNING
               =ABAP Dump =R3 ABAP-4
                                        =ABAP4 ERROR EXIST\
                =MAX ENTRIES =I
                                    =GT
                                          =10
                                                =
                =TIME LIMIT
                             =I
                                    =LT
                                          =24
```

The SPI for SAP's optional test transport includes a program that generates an ABAP dump which you can use to verify that the r3mondmp monitor correctly reports dumps to HPOM in the form of a message. If the test completes successfully, a message about the test dump appears in the HPOM message browser. For more information about SPI for SAP transports, see the transports read-me file /usr/sap/trans/readme on the HPOM managed node; for more information about importing and applying SPI for SAP transports, see the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*. After importing the transport, you can view the test programs installed by using the SAP transaction **SE80** to open the ABAP object navigator and browsing to the report (or program) /HPOV/YSPI0004.

r3monjob: The Job-Report Monitor

The job-report alert monitor r3monjob identifies and reports on batch jobs for the following conditions:

- A batch job's run time is either less than or has exceeded a specified limit.
- A specified period of time passes between a batch job's scheduled and actual start time (and date).
- A batch job has aborted.



You cannot configure r3monjob to send multiple messages, for example, first send a WARNING message if the run time for a batch job exceeds 5 minutes and then send a CRITICAL message if the run time for the same batch job exceeds 10 minutes.

The alert monitor r3monjob references:

- Reports created using SAP NetWeaver transaction SM36 or SM38
- Job details including ID number using SAP NetWeaver transaction sm37

Messages generated by this alert monitor include an operator-initiated action that displays the list of current SAP batch jobs.

Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The job-report monitor is of type *time frame*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The Job-report monitor has the following alert types. Note that if you want to use the r3monjob monitor, you *must* configure the alert types listed below:

• JOB_MAX_RUN_TIME

defines the *maximum* allowed run time for a job. r3monjob sends an alert if the defined job runs for longer than the maximum defined time, specified in minutes.

JOB MIN RUN TIME

defines the *minimum* allowed run time for a job. r3monjob sends an alert if the defined job does not run for at least as long as the defined time, specified in minutes.

• START_PASSED

is the maximum allowed delay between scheduled and actual start time for a defined job. r3monjob triggers an alert if the job does not start within the defined time, specified in minutes.

• JOB ABORTED

r3monjob sends an alert whenever the jobs specified in its configuration fail to complete successfully.

First Time Monitoring

When monitoring batch job alerts for a particular alert type for the first time, the Job-report monitor r3monjob checks for the following conditions in SAP:

- · Jobs which are not yet scheduled to run
- Jobs which ended within the previous two days
- Jobs which are still running

Performance Aspects

On a production system the table tbtco is usually very big. To speed up the database selection you should specify the job names in as much detail as possible. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

The runtime cost of a job selection grows in the order shown in Table 40.

Table 40 Order of Runtime Cost of Job Selection Criteria

Specified Jobname	Sign	Option	Selection
JOBNAME	I	EQ	Z5_CRITICAL_JOB_1> select via index
JOBNAME	I	СР	Z5_CRITICAL_JOB*> select via index
JOBNAME	Е	СР	Z5_CRITICAL_JOB*> sequential scan

Note that exclude options tend to be more expensive than include options in performance terms. Using wild cards such as "*" in general database queries is more expensive than in explicit queries.

File Locations

The r3monjob monitor uses the files listed in this table

Table 41 r3monjob Files

File	Description	
r3moncol(.exe)	Collector executable for the batch job monitor	
r3monjob.cfg	Configuration file for monitored jobs and job conditions.	
r3monjob.log	Trace file for storing trace data.	

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monjob monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monjob monitor uses the command-line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

Configuring Job-Report Monitor Alert Types

You can configure r3monjob, the job-report monitor, for each of the listed alert types for a specific job, a combination of jobs, or for *all* jobs. You can also define exceptions for jobs that need different monitoring conditions. For more detailed information, see the alert-type tables which list the parameters and configuration options for each alert type. Note that the general rules for using exclude and include parameter values, which are of particular importance for these alert types.

Try to avoid using select option CP with the JOBNAME parameter because CP slows down the selection process. If you do use CP, try to limit its scope, for example, instead of specifying CP*, specify CP SAP*.

Parameter Values

This section describes how the SPI for SAP interprets *include* and *exclude* parameter values for an alert type entry. The SPI for SAP compares values in *different* parameters using 'and'; the SPI for SAP compares values in the *same* parameter as follows.

- **Include**: use 'or' to compare the parameters
- **Exclude**: use 'and' to compare the parameters

The SPI for SAP evaluates include values before exclude values, as shown in Table 42.

Table 42 Comparing Include and Exclude Conditions for the Same Parameter

Select Options	AlertType:JOB_MAX_RUN_TIME Example Configuration of Select Options	Comparison
1	=JOBNAME =I =CP =ZREP* = =MAX_RUNTIME =I =GT =10 =	OR
2	=JOBNAME =I =CP =SAP* = =MAX_RUNTIME =I =GT =20 =	OR
3	=JOBNAME =E =CP =SAP_ZREP* =	AND

JOB_MAX_RUN_TIME

The JOB_MAX_RUN_TIME alert type defines the maximum allowed run time for a job. Use the JOB_MAX_RUN_TIME alert type to configure the job-report alert monitor r3monjob to generate an alert when a job exceeds the value configured in the parameter MAX_RUNTIME. Table 43 on page 137 lists the parameters that you can use to configure the JOB MAX RUN TIME alert type and shows the value assigned to the parameters by default.

The configuration of any of the parameters listed in Table 43 is optional. If both parameters are omitted, r3monjob reports all jobs running in the specified time. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 43 JOB_MAX_RUN_TIME Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
JOBNAME	DBNAME Name of the jobs to monitor	= Sign: I, E	I
		= Opt: EQ, CP, BT	СР
		= Low <name job="" of=""></name>	*
		= High (Only for use with a range)	

Table 43 JOB_MAX_RUN_TIME Configuration Parameters (cont'd)

Parameter Name	Description	Query Conditions	Default Value	
MAX_RUNTIME	Job run time in	= Sign I, E	I	
	minutes which, if exceeded, generates an alert.	· ·	= Opt: EQ, GE, GT, BT	GT
		= Low (Specify this parameter as a number. Otherwise the monitor ends with a dump.)	5	
		= High (Only for use with a range)		

The following examples illustrates both the default and a customized configuration for the JOB_MAX_RUN_TIME alert type.

In The Default JOB_MAX_RUN_TIME Configuration, an event generating an alert occurs if any report named < jobname>* has a runtime exceeding five minutes.

The Default JOB_MAX_RUN_TIME Configuration

```
AlertMonFun =ALL =ALL =ALL =JOBREPORT =1 \
=WARNING =MaxRunTime =R3_Jobs\
=JOB_MAX_RUN_TIME =JOBNAME =I =CP =<jobname>* =\
=MAX_RUNTIME =I =GT =5 =
```

In A Customized JOB_MAX_RUN_TIME Configuration, an event generating an alert occurs if all reports named SAP*, except reports SAPZ*, have a runtime exceeding ten minutes

A Customized JOB_MAX_RUN_TIME Configuration

```
AlertMonFun =ALL =ALL =ALL =JOBREPORT =1\
=WARNING =MaxRunTime =R3_Jobs \
=JOB_MAX_RUN_TIME =JOBNAME =I =CP =SAP* = \
=MAX_RUNTIME =I =GT =10 =

AlertMonFun =ALL =ALL =ALL =JOBREPORT =1\
=WARNING =MaxRunTime =R3_Jobs \
=JOB_MAX_RUN_TIME =JOBNAME =E =CP =SAPZ* = \
=MAX_RUNTIME =I =GT =10 =
```

The SPI for SAP's optional test transport includes a program that you can run to start a long-running job. You can use the job to verify that the r3monjob monitor is correctly configured to send a message to HPOM if a job runs for more than a defined amount of time. If the test completes successfully, a message about the test job appears in the HPOM message browser. For more information about SPI for SAP transports, see the transports read-me file / usr/sap/trans/readme on the HPOM managed node; for more information about importing and applying SPI for SAP transports, see the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*. After importing the transport, you can view the test programs installed by using the SAP transaction **SE80** to open the ABAP object navigator and browsing to the report (or program) /HPOV/YSPI0002.

JOB MIN RUN TIME

The JOB_MIN_RUN_TIME alert type defines the minimum allowed run time for a job. Use the JOB_MIN_RUN_TIME alert type to configure the job-report alert monitor r3monjob to generate an alert when a job does not run for at least as long as the time specified in the parameter MIN_RUNTIME. Table 44 on page 139 lists the parameters that you can use to configure the JOB_MAX_RUN_TIME alert type and shows the value assigned to the parameters by default.

The configuration of any of the parameters below is optional. If both parameters are omitted, all jobs running in the specified time frame are reported. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Parameter Name	Description	Query Conditions	Default Value
JOBNAME	Name of the jobs to monitor	= Sign: I, E	I
		= Opt: EQ, CP, BT	СР
		= Low <name job="" of=""></name>	*
		= High: ^a	
MIN_RUNTIME	This defines the minimum allowed run time Alerts are triggered for jobs which did not run for at least as long as the time specified (in minutes).	= Sign I, E	I
		= Opt: EQ,LE, LT, BT	LT
		=Low <min. in="" minutes="" value=""> b</min.>	1
		= High	

Table 44 JOB_MIN_RUN_TIME Configuration Parameters

The following examples illustrate both the default and a customized configuration for the JOB_MIN_RUN_TIME alert type.

In The Default JOB_MIN_RUN_TIME Configuration, an event generating an alert occurs if any report named <jobname>* has a runtime of less than one minute.

The Default JOB MIN RUN TIME Configuration

```
AlertMonFun =ALL =ALL =ALL =JOBREPORT =1 \
=WARNING =MinRunTime =R3_Jobs\
=JOB_MIN_RUN_TIME =JOBNAME =I =CP =<jobname>* = \
=MIN_RUNTIME =I =LT =1 =
```

In Customized JOB_MIN_RUN_TIME Configuration, an event generating an alert occurs if all reports named SAP*, except reports SAPZ*, have a runtime of less than two minutes

Customized JOB_MIN_RUN_TIME Configuration

a. Only for use with a range

b. Specify this parameter as a number, otherwise the monitor ends with a dump.

```
=JOBREPORT =1
AlertMonFun
             =ALL =ALL
                         =ALL
                               =ALL
=WARNING
            =MinRunTime
                           =R3 Jobs
=JOB MIN RUN TIME =JOBNAME
                                  =I
                                        =CP
=MIN RUNTIME =I =LT =2 =
AlertMonFun =ALL =ALL =ALL
                            =ALL =JOBREPORT =1
=WARNING
                           =R3 Jobs
            =MinRunTime
=JOB MIN RUN TIME =JOBNAME
                                  =E
                                         =CP
                                                 =SAPZ*
=MIN RUNTIME
               =I
                   =LT
```

The SPI for SAP's optional test transport includes a program that you can run to start a short job. You can use the job to verify that the r3monjob monitor is correctly configured to send a message to HPOM if a job runs for less than a defined amount of time. If the test completes successfully, a message about the test job appears in the HPOM message browser. For more information about SPI for SAP transports, see the transports read-me file /usr/sap/trans/readme on the HPOM managed node; for more information about importing and applying SPI for SAP transports, see the HP Operations Smart Plug-in for SAP Installation and Configuration Guide. After importing the transport, you can view the test programs installed by using the SAP transaction SE80 to open the ABAP object navigator and browsing to the report (or program) /HPOV/YSPI0005.

START PASSED

The START_PASSED alert type defines the maximum allowed delay between a job's scheduled and actual start times. Use the START_PASSED alert type to configure the job-report alert monitor r3monjob to generate an alert if the specified jobs do not start within the configured TIME_SPAN after the scheduled start time. Table 45 on page 140 lists the parameters that you can use to configure the START_PASSED alert type and shows the value assigned to the parameters by default.

If a job is scheduled but does not have a start time, r3monjob cannot monitor it until and unless an assigned start time is visible in the SAP database. SAP associates a start time with a job only when the job assumes a particular status. The following SAP job statuses have a start time which means you can monitor them with r3monjob: Released, Ready, Active, Finished, and Canceled.

The configuration of any of the parameters below is optional. If both parameters are omitted all jobs running in the specified time frame are reported. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 45	START_PASSED	Configuration 1	Parameters
----------	--------------	-----------------	------------

Parameter Name	Description	Query Conditions	Default Value
JOBNAME	AME Name of the jobs to monitor	= Sign: I, E	I
		= Opt: EQ, CP, BT	CP
		= Low <name job="" of=""></name>	*
		= High ^a	

Table 45 START_PASSED Configuration Parameters (cont'd)

Parameter Name	Description	Query Conditions	Default Value
TIME_SPAN	The job run time	= Sign I, E	I
	in minutes that specifies when an alert should be raised. Note that it is not necessary to use	= Opt: EQ, GT, GE, BT	GT
		=Low b < low_value_of_range _in_minutes_past_ scheduled_start_time>	1
a time range. You can specify a particular time instead.	=High <high_value_of_ range_in_minutes_past_ scheduled_start_time></high_value_of_ 		

a. Only for use with a range

In The Default START_PASSED Configuration, an event generating an alert occurs if any report named <jobname>* does not start more than one minute after the scheduled start time.

The Default START_PASSED Configuration

```
AlertMonFun =ALL =ALL =ALL =JOBREPORT =1\
=WARNING =StartPassed =R3_Jobs \
=START_PASSED =JOBNAME =I =CP =<jobname>* =\
=TIME SPAN =I =GT =1 =
```

JOB_ABORTED

The JOB_ABORTED alert type defines the names of the jobs, which fail to complete successfully. Use the JOB_ABORTED alert type to configure the job-report alert monitor r3monjob to generate an alert whenever the jobs specified in its configuration file fail to complete successfully. Table 46 on page 141 lists the parameters that you can use to configure the JOB_ABORTED alert type and shows the value assigned to the parameters by default.

The configuration of the parameter below is optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 46 JOB ABORTED Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
JOBNAME	Name of the	= Sign: I, E	Ι
	jobs to monitor	= Opt: EQ, CP, BT	CP
		= Low <name job="" of=""></name>	*
		= High ^a	

a. Only for use when specifying a range

b. Specify this parameter as a number. Otherwise the monitor ends with a dump

In The Default JOB_ABORTED Configuration, an event generating an alert occurs if any report named < jobname>* aborts.

The Default JOB_ABORTED Configuration

```
AlertMonFun =ALL =ALL =ALL =JOBREPORT =1\
=WARNING =Aborted =R3_Jobs \
=JOB ABORTED =JOBNAME =I =CP = <jobname>*
```

In A Customized JOB_ABORTED Configuration, an event generating an alert occurs if jobs named SAP REORG ABAPDUMPS or ITOTEST are aborted.

A Customized JOB_ABORTED Configuration

```
AlertMonFun =ALL =ALL =ALL =JOBREPORT =1\
=WARNING =Aborted =R3_Jobs \
=JOB_ABORTED =JOBNAME =I =EQ =SAP_REORG_ABAPDUMPS =

AlertMonFun =ALL =ALL =ALL =JOBREPORT =1 \
=WARNING =Aborted =R3_Jobs\
=JOB_ABORTED =JOBNAME =I =EQ =ITOTEST =
```

The SPI for SAP's optional test transport includes a program that you can run to generate an ABAP dump. You can use the generated dump to verify that the r3monjob monitor is correctly configured to send a message to HPOM if a job aborts. For more information about SPI for SAP transports, see the transports read-me file /usr/sap/trans/readme on the HPOM managed node; for more information about importing and applying SPI for SAP transports, see the HP Operations Smart Plug-in for SAP Installation and Configuration Guide. After importing the transport, you can view the test programs installed by using the SAP transaction SE80 to open the ABAP object navigator and browsing to the report (or program) / HPOV/YSPI0004.

r3monlck: The Lock-Check Monitor

The lock-check alert-collector monitor r3monlck references the enqueue process which manages logical locks for SAP NetWeaver transactions and reports on obsolete locks. Obsolete locks are defined as locks which are older than the time period you specify. The check is performed once per monitor run for all application servers.

An object which is locked cannot be changed by anyone other than the user associated with it and can cause severe problems. The operator can check the locks set for a specific instance in **SM12**. Here are two examples of actions which cause locks to occur:

- Users switch off their computers without first logging off the SAP NetWeaver system this is the most common cause of locked objects.
- An entire SAP instance fails.

The alert monitor r3monlck references the SAP NetWeaver transaction SM12.

Messages generated by this alert monitor include an operator-initiated action that calls the **SM12** Locks Overview module. The operator can then check the locks set for a specific instance in **SM12**.

Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the

messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3monlck monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The lock-check monitor has only one alert type:

OLD LOCKS

Specifies when to define a lock as "old", using the time period you specify in the parameter LOCK TIME.

File Locations

The r3monlck monitor uses the files listed in this table.

Table 47 r3monlck Files

File	Description	
r3moncol(.exe)	Collector executable for the lock_check monitor	
r3monlck.cfg	Configuration file for the lock_check monitor.	
r3monlck.log	Trace file for storing trace data.	

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monlck monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monlck monitor uses the command-line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

OLD LOCKS

The LOCK_TIME alert type specifies when to define a lock as "old", using the time period you specify in the parameter LOCK_TIME. Use the LOCK_TIME alert type to configure r3monlck to generate an alert when a job exceeds the time span defined in the parameter LOCK_TIME. Table 48 on page 144 lists the parameters that you can use to configure the LOCK_TIME alert type and shows the value assigned to the parameters by default.

The configuration of the parameter below is mandatory. Note that you can have more than one configuration in the .cfg file. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 48 LOCK_TIME Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
		= Sign: I,E	I
		= Opt: EQ, GT, GE, LE, LT, BT	GT
	The time span (in hours) after	= Low: <time hours="" in=""> a</time>	
LOCK_TIME	which a lock is considered old	= High: ^b	

- a. Specify this parameter as a number. Otherwise the monitor ends with a dump.
- b. Only for use when specifying a range

In The Default OLD_LOCKS Configuration, an event generating an alert occurs if any lock exceeds a time span of 24 hours.

The Default OLD_LOCKS Configuration

```
AlertMonFun =ALL =ALL =ALL =LOCK_CHECK =1\
=WARNING =Enqueue =R3_Enqueue\
=OLD LOCKS =LOCK TIME =I =GT =24 =
```

r3monoms: The Operation-Mode Monitor

The operation-mode alert monitor r3monoms checks each application server for the following conditions:

- A scheduled operation-mode switch occurs later than the time specified
- A scheduled operation-mode switch has not occurred at all

The alert monitor r3monoms references the following SAP objects:

- Scheduled operation modes in SAP NetWeaver transaction SM63
- Configuration modes in SAP NetWeaver transaction RZ04



The operation-mode monitor r3monoms does not support the monitoring of WebAS 7.0/ Netweaver04s (kernel 7) environments; changes in SAP mean there are no operation-mode switch errors to monitor.

Operation-mode switch failures influence the performance of the SAP NetWeaver system and can cause problems. Operation-mode switches might occur for a number of reasons, for example, work processes that must be switched are still occupied in a process while the operation-mode switch is running. The system administrator usually needs to intervene to fix the problem, for example, by forcing and testing the operation mode's state.

If an operations-mode switch generates an alarm because the switch is not enabled in time, but then successfully occurs later without any intervention, the SPI for SAP sends a message indicating that the switch, although late, has now gone ahead as planned.

If you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3monoms monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The operation-mode, r3monoms, alert monitor has only one alert type:

• OM SWITCH OVERDUE

This defines when an operation mode switch is overdue.

File Locations

The r3monoms monitor uses the files listed in this table

Table 49 r3monoms Files

File	Description
r3moncol(.exe)	Collector executable for the operation mode monitor
r3monoms.cfg	Configuration file for the operation mode monitor.
r3monoms.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monoms monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monoms monitor uses the command-line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

OM_SWITCH_OVERDUE

The OM_SWITCH_OVERDUE alert type defines the period of time in which an operation-mode switch must occur. Use the OM_SWITCH_OVERDUE alert type to configure r3monoms to generate an alert if an operation-mode switch does not occur within the defined period of time. Table 50 lists the parameters that you can use to configure the OM_SWITCH_OVERDUE alert type and shows the value assigned to the parameters by default.

The configuration of the parameters in Table 50 is optional. By default, an alert is triggered if an operation-mode switch is more than three minutes late.

The APSERVER parameter allows you to set the application-server- dependent monitors, r3monwpa, r3monusr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where <hostname> is the name of the application server to monitor as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER =I =CP =<hostname>_<SID>_<Instance_Number> =
```

It is also recommended that you explicitly define the host name of the SAP NetWeaver central instance whose application server(s) you want to specify with APSERVER, as illustrated in the Specifying an Application Server.

Specifying an Application Server

```
AlertMonFun =<hostname> =ALL =ALL =ALL =OM =1 \
=WARNING =OperationMode =R3_WP \
=OM_SWITCH_OVERDUE =OVERDUE_TIME =I =GT =15 = \
=APSERVER =I =CP =hpdev01 MP3 00 =
```

The <hostname> in Specifying an Application Server is the name of the host where the r3monoms monitor is running. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 50 OM_SWITCH_OVERDUE Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	PSERVER specifies an application server to monitor	= Sign: I, E	
		= Opt: CP	
		= Low: <appserver_id></appserver_id>	
		= High:	
OVERDUE_TIME	OVERDUE_TIME The time in minutes, after which a scheduled mode switch is considered	= Sign: I, E	I
		= Opt: GT, GE, LE, LT, BT	GT
considered		= Low: <time in="" minutes=""> a</time>	3
	= High: ^b		

- Mandatory; if the query condition is not present, the monitor does not perform any check.
- b. Only for use when specifying a range

In The Default OM_SWITCH_OVERDUE Configuration, an event generating an alert occurs if a scheduled operation mode switch is more than three minutes late.

The Default OM SWITCH OVERDUE Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL=OM =1\
=WARNING =OperationMode =R3_WP\
=OM SWITCH OVERDUE =OVERDUE TIME =I =GT =3 =
```

r3monrfc: The RFC-Destination Monitor

The RFC-destination monitor r3monrfc is application-server independent and checks RFC destinations in an SAP environment. SAP uses RFC destinations to remotely execute function modules, which reside on other SAP Systems. The alert-collector monitor, r3monrfc, references the RFC destinations, which you can display, create, and maintain by means of the SAP NetWeaver transaction **SM59**.

Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3monrfc monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The RFC-destination alert monitor has the following alert type, which uses a snapshot report type:

CHECK

Defines alert conditions for failed SAP-RFC connections

File Locations

The r3monrfc monitor uses the files listed in this table.

Table 51 r3monrfc Files

File	Description
r3moncol(.exe)	Collector executable for the SAP-RFC monitor
r3monrfc.cfg	Configuration file for the SAP-RFC monitor.
r3monrfc.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monrfc monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monrfc monitor uses the command-line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

Limitations

You can use r3monrfc to monitor the following RFC destinations as long as they are listed in SAP transaction SM59 (SAP 6.40 and later):

- HTTP Connection to External Server
- HTTP Connection to SAP NetWeaver System

Configuring RFC-destination Alert Types

You must configure the parameters CONNECTION_TYPE and NAME for all alert types for r3monrfc, the RFC-destination monitor. Note the general rules below on exclude and include parameters for r3monrfc.

Parameter Values

This section describes how the SPI for SAP interprets *include* and *exclude* parameter values for an alert type entry. The SPI for SAP compares values in *different* parameters using 'and'; the SPI for SAP compares values in the *same* parameter as follows.

- Include: use 'or' to compare the parameters
- **Exclude**: use 'and' to compare the parameters

The SPI for SAP evaluates *include* values before *exclude* values.

CHECK

CHECK is a snapshot alert type for r3monrfc, the SPI for SAP's RFC-destination monitor. Snapshot alert types take a picture of the SAP System at the moment the monitor runs.

The CHECK alert type defines alert conditions for failed SAP-RFC connections. Use the CHECK alert type to configure r3monrfc to generate an alert if the RFC connection test for the target system fails. Table 52 on page 149 lists the parameters that you can use to configure the CHECK alert type and shows the value assigned to the parameters by default.

The parameter CHECK is required. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 52.

Table 52 CHECK Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
CONNECTION_TYPE	Type of SAP RFC	= Sign I, E	I
	connection to monitor, for example: 1, 3, M, T	= Opt: EQ	EQ
	Type 1= App. Server, 3= SAP NetWeaver System,	= Low	3
M= CMC, T=TCP/IP, G= HTTP connection to external server, H= HTTP connections to SAP NetWeaver system.	= High		
NAME	Name you assigned to	= Sign: I, E	I
	the SAP-RFC connection as shown in the transaction /NSM59.	= Opt: EQ, CP	EQ
		= Low: <sid></sid>	,,
		= High:	

In The Default Check-RFC_DESTINATION Configuration, an event generating an alert occurs whenever the RFC_DESTINATION test fails for any *one* of the type 3 SAP-RFC destinations.

The Default Check-RFC_DESTINATION Configuration

```
AlertMonFun =ALL =ALL =ALL =RFC_DESTINATION =1 \
=WARNING =RFC_Destinations =R3_RFC \
=CHECK =CONNECTION TYPE =I =EQ =3 =
```

In An Example Check-RFC_DESTINATION Configuration, an event generating an alert occurs whenever RFC_DESTINATION test fails for the single SAP-RFC destination named OV_C01_099.

An Example Check-RFC_DESTINATION Configuration

```
AlertMonFun =ALL =ALL =ALL =RFC_DESTINATION =1 \
=WARNING =RFC_Destinations =R3_RFC \
=CHECK =NAME =I =CP =OV C01 099 =
```

r3monspl: The Spooler Monitor

The spooler alert monitor r3monspl is application-server independent and monitors spooler entries for the following conditions:

- The number of spool requests which would generate an alert
- The number of error-generating spool requests that would generate an alert
- A specified printer has received erroneous spool requests.

The alert monitor r3monspl references output tasks in SAP NetWeaver transaction **sp01** and report sources in SAP NetWeaver transaction **se38**.Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3monsp1 alert monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The spooler alert monitor has the following alert types:

SPOOL ENTRIES RANGE

This defines the number of spool requests which, if exceeded, would cause an alert.

SPOOL ERROR RANGE

This defines the number of error-generating spool requests which, if exceeded, would cause an alert.

PRINT ERROR EXISTS

This specifies the name(s) of printers for which an alert would be generated if a spool error exists.

File Locations

The r3monsp1 monitor uses the files listed in this table.

Table 53 r3monspl Files

File	Description	
r3moncol(.exe)	Collector executable for the spooler monitor	
r3monspl.cfg	Configuration file for the spooler monitor.	
r3monspl.log	Trace file for storing trace data.	

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monspl monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monsp1 monitor uses the command line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

Configuring Spooler-Monitor Alert Types

You can configure r3monspl, the spooler monitor, for each of the alert types and then define exceptions for different monitoring conditions. For more detailed information, see the alert-type tables which give the parameters and configuration for each alert type.

SPOOL_ENTRIES_RANGE

The SPOOL_ENTRIES_RANGE alert type defines the number of spool requests which, if exceeded, would generate an alert. Use the SPOOL_ENTRIES_RANGE alert type to configure r3monspl to generate an alert if the number of spool entries exceeds the range specified. Table 54 lists the parameters that you can use to configure the SPOOL_ENTRIES_RANGE alert type and shows the value assigned to the parameters by default.

The configuration of the RANGE parameter is mandatory. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 54 SPOOL ENTRIES RANGE Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
RANGE	The number of spool	= Sign: I, E	I
	entries outside of which an alert will be generated. Note that, despite its name, you do not need to specify this	= Opt: EQ, GT, GE, LE, LT, BT	GT
		= Low: ^a	50
	= High:		

a. Specify this parameter as a number. Otherwise the monitor ends with a dump.

In The Default SPOOL_ENTRIES_RANGE Configuration, an event generating an alert occurs if there are more than 50 spooler entries.

The Default SPOOL ENTRIES RANGE Configuration

```
AlertMonFun =ALL =ALL =ALL =SPOOLER =1\
=CRITICAL =Spool =R3_Spooler \
=SPOOL ENTRIES RANGE =RANGE =I =GT =50 =
```

SPOOL ERROR RANGE

The SPOOL_ERROR_RANGE alert type defines the number of *erroneous* spool requests which, if exceeded, would generate an alert. Use the SPOOL_ERROR_RANGE alert type to configure r3monspl to generate an alert if the number of *erroneous* spool entries exceeds the range specified. Table 55 lists the parameters that you can use to configure the SPOOL_ERROR_RANGE alert type and shows the value assigned to the parameters by default.

The configuration of the RANGE parameter is mandatory. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 55 SPOOL_ERROR_RANGE Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
RANGE	The number of erroneous spool requests outside of which an alert will be generated. Note that, despite its name, you do	= Sign: I, E	I
		= Opt: EQ, GT, GE,LE, LT, BT	GT
		= Low: a	50
	= High:		

a. Specify this parameter as a number; otherwise the monitor ends with a dump.

In The Default SPOOL_ERROR_RANGE Configuration, an event generating an alert occurs if there are more than 50 erroneous spool requests.

The Default SPOOL_ERROR_RANGE Configuration

```
AlertMonFun =ALL =ALL =ALL =SPOOLER =1\
=CRITICAL =Spool =R3_Spooler \
=SPOOL_ERROR_RANGE =RANGE =I =GT =50 =
```

PRINT_ERROR_EXISTS

The PRINT_ERROR_EXISTS alert type defines the printers to monitor for spool errors. Use the PRINT_ERROR_EXISTS alert type to configure r3monspl to generate an alert if a spool error exists for the specified printer. Table 56 lists the parameters that you can use to configure the PRINT_ERROR_EXISTS alert type and shows the value assigned to the parameters by default.

r3monspl generates an alert if a spool error exists for a specified printer. The configuration of the PRINTER parameters is mandatory. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 56 PRINT_ERROR_EXISTS Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
PRINTER	The printer(s) which should be checked for spool entries of state error.	= Sign: I, E	I
		= Opt:	СР
		= Low:	*
		= High:	

In The Default PRINT_ERROR_EXISTS Configuration, r3monspl generates an alert if any printer has a spool entry-state error.

The Default PRINT_ERROR_EXISTS Configuration

```
AlertMonFun =ALL =ALL =ALL =SPOOLER =1\
=WARNING =Spool =R3_Spooler \
=PRINT ERROR EXISTS =PRINTER =I =CP =* =
```

r3montra: The Transport Monitor

The transport monitor r3montra is application-server independent and is used to check the following parts of the transport system:

- Successful or failed imports and exports for the monitored system
- The presence of confirmed and unconfirmed repairs in the monitored system
- Connections that use a connection test (PING) to the configured systems
- TP-Tests of the configured systems

The alert monitor r3montra references transport routes in SAP NetWeaver transactions **STMS** and **SE01**.

If you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3montra monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The transport alert monitor has the following alert types, which use a mixture of snapshot and time-frame report types:

TRANS

Defines alert conditions for successful and failed transport exports and imports

REPAIR

Defines alert conditions for confirmed and unconfirmed repairs

• RFCONNECT

Defines alert conditions for the RFC connections between the systems

TPTEST

Defines alert conditions concerning the TP interface with the database. It includes a connection test (PING), a TP call to the connected database, a check of the TP interface (version, transport directory, TPPARAM path, a file check and a TPLOG check).

File Locations

The r3montra monitor uses the files listed in this table.

Table 57 r3montra Files

File	Description
r3moncol(.exe)	Collector executable for the transport monitor
r3montra.cfg	Configuration file for the transport monitor.
r3montra.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3montra monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3montra monitor uses the command-line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

Configuring Transport-Monitor Alert Types

You must configure the parameter ALERT_THRESHOLD for all alert types for r3montra, the transport monitor. All other parameters are optional. Note the general rules below on exclude and include parameters for r3montra.

Parameter Values

This section describes how the SPI for SAP interprets include and exclude parameter values for an alert type entry. the SPI for SAP compares values in different parameters using 'and;' the SPI for SAP compares values in the same parameter as follows.

- **Include:** Use 'or' to compare the parameters
- **Exclude:** Use 'and' to compare the parameters

The SPI for SAP evaluates *include* values before *exclude* values.

TRANS

TRANS is a time-frame based alert type for r3montra, the SPI for SAP's transport monitor. r3montra generates an alert if the number of failed or successful transport imports and exports exceeds a defined threshold. Note that the parameter USERNAME is mandatory for the TRANS alert type.

Table 58 on page 155 lists the parameters that you can use to configure the TRANS alert type and shows the value assigned to the parameters by default. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 58 TRANS Configuration Parameters

Parameter Name	Description	query conditions	Default Value
ALERT_THRESHOLD	The return code of the transport state above which	= Sign: I, E	I
		= Opt: GT, GE, LT, LE	GT
	an alert occurs for example, 4	= Low: ^a	4
	(warning).	= High:	
E_SUCCESS	Filtering option to	= Sign: I, E	I
	include all successfully	= Opt: EQ	EQ
	exported transports	= Low: b	X
		= High:	
E_FAILURE	Filtering option to include all failed exported transports	= Sign: I, E	I
		= Opt: EQ	EQ
		= Low: b	X
		= High:	
I_SUCCESS	Filtering option to include all successfully imported transports	= Sign: I, E	I
		= Opt: EQ	EQ
		= Low: b	X
		= High:	

Table 58 TRANS Configuration Parameters (cont'd)

Parameter Name	Description	query conditions	Default Value
I_FAILURE	Filtering option to	= Sign: I, E	I
	include all <i>failed</i> imported	= Opt: EQ	EQ
	transports	= Low ^b	X
		= High:	
USERNAME	the SAP NetWeaver user ^c . This parameter is mandatory.	= Sign I, E	I
		= Opt: EQ,CP	EQ
		= Low: <username></username>	ddic ^d
		= High:	

- a. Specify as a number, otherwise the monitor ends with a dump
- b. Any entry other than the default is treated as space
- c. Since requests/tasks are user dependent, you can use it to restrict data.
- d. SAP user name for database-administration tasks

In The Default TRANS Configuration, an event generating an alert occurs if the threshold for imported or exported transports is greater than four (4). Note that the number "4" defined in the threshold for the parameter ALERT_THRESHOLD does not refer to the total number of imports it refers to the SAP return code associated with the import. In this example, transport imports with return codes of 4 (warning) and above (GT =4) would generate an alert. For more information about import return codes, refer to the SAP product documentation.

The Default TRANS Configuration

```
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1\
=WARNING =Trans =R3 Transport\
=TRANS =I FAILURE =I =EQ =X =\
=USERNAME =I =EQ =ITOUSER =\
=ALERT THRESHOLD =I =GT =4 =
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1\
=WARNING =Trans =R3 Transport\
=TRANS =I SUCCESS =I =EQ =X =\
=USERNAME =I =EQ =ITOUSER =\
=ALERT THRESHOLD =I =GE =4 =
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1\
=WARNING =Trans =R3 Transport\
=TRANS =E FAILURE =I =EQ =X =\
=USERNAME =I =EQ =ITOUSER =\
=ALERT THRESHOLD =I =GT =4
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1\
=WARNING =Trans =R3 Transport\
=TRANS =E SUCCESS =I =EQ =X =\
=USERNAME =I =EQ =ITOUSER =\
=ALERT THRESHOLD = I = GT = 4 =
```

REPAIR

REPAIR is a time-frame based alert type for r3montra, the SPI for SAP's Transport Monitor. r3montra generates an alert if the number of confirmed or unconfirmed repairs exceeds a specified threshold.

Table 59 on page 157 lists the parameters that you can use to configure the REPAIR alert type and shows the value assigned to the parameters by default. Note that the parameter ALERT_THRESHOLD is mandatory. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 59 REPAIR Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
R_CONFIRM	Filtering option	= Sign: I, E	I
	to include all confirmed	= Opt: EQ	EQ
	repairs.	= Low: a	X
		= High:	
R_UNCONFIR	Filtering option	= Sign: I, E	I
	to include all unconfirmed	= Opt:	EQ
	repairs.	= Low: ^a	X
		= High:	
USERNAME	The login name of the SAP NetWeaver user ^b . This parameter is mandatory.	= Sign I, E	I
		= Opt: EQ,CP	EQ
		= Low: <username></username>	ddic ^c
		= High:	
ALERT_THRESHOLD	The number of	= Sign I, E	I
	the allowed repair state	= Opt: GT, GE, LT, LE	GT
	above which an alert occurs	= Low: d	4
		= High:	

- a. Any entry other than the default is treated as space
- b. Since requests/tasks are user dependent, you can use it to restrict the data.
- c. SAP user name for database-administration tasks
- d. Specify the parameter as a number or the monitor ends with a dump

In The Default REPAIR Configuration, an event generating an alert occurs if the alert threshold of four (=GT =4) R_{ONFIRM} or $R_{UNCONFIR}$ errors is exceeded for the specified target System.

The Default REPAIR Configuration

```
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1
=WARNING =Repair =R3 Transport \
=REPAIR =R CONFIRM =I =EQ =X = \
=ALERT THRESHOLD =I
                       =GT
                                =4
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1
=WARNING
           =Repair =R3 Transport \
=REPAIR =R UNCONFIR =I =EQ =X = \
=ALERT THRESHOLD =I
                        =GT
                                =4
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1 \
=WARNING
           =Repair =R3 Transport
=REPAIR =USERNAME =I =CP =* =\
=ALERT THRESHOLD =I
                   =GT = 4
```

RFCONNECT

RFCONNECT is a snapshot alert type for r3montra, the SPI for SAP's Transport Monitor. Snapshot alert types take a picture of the System at the moment the monitor runs. r3montra generates an alert if the number of RFC-connect errors to the target system exceeds the specified alert threshold.

Table 60 on page 159 lists the parameters that you can use to configure the RFCONNECT alert type and shows the value assigned to the parameters by default. Note that the parameter ALERT_THRESHOLD is mandatory. All other parameters are optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 60 RFCONNECT Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
ALERT_THRESHOLD	Number of reconnect errors above which an alert occurs	= Sign I, E	I
		= Opt: GT, GE, LT, LE	GT
:		= Low: ^a	4
		= High:	
CHECKSYSTEM	System ID of the	= Sign: I, E	I
	systems you are monitoring.	= Opt: EQ, CP	EQ
		= Low: <sid></sid>	, *,
		= High:	

a. Specify this parameter as a number; otherwise the monitor ends with a dump.

In The Default RFCONNECT Configuration, an event generating an alert occurs if the alert threshold of four RFC-connect errors is exceeded for the specified target system.

The Default RFCONNECT Configuration

```
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1\
=WARNING =RfcConnect =R3_Transport\
=RFCCONNECT =CHECKSYSTEM =I =CP =* =\
=ALERT THRESHOLD =I =GT =4 =
```

TPTEST

TPTEST is a snapshot alert type for r3montra, the SPI for SAP's Transport Monitor. Snapshot alert types take a picture of the System at the moment the monitor runs. r3montra generates an alert if the number of TPTEST errors to the target system exceeds a defined threshold.

Table 61 on page 160 lists the parameters that you can use to configure the TPTEST alert type and shows the value assigned to the parameters by default. Note that the parameter ALERT_THRESHOLD is mandatory. All other parameters are optional. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Parameter Name	Description	Query Conditions	Default Value
ALERT_THRESHOLD	Number of	= Sign I, E	I
	TPTEST errors above which an	= Opt: GT, GE, LT, LE	GT
	alert occurs	= Low: a	4
		= High:	
CHECKSYSTEM	ID of the System which you are testing or monitoring.	= Sign: I, E	I
		= Opt: EQ, CP	EQ
		= Low: <sid></sid>	,,
		= High:	

Table 61 TPTEST Configuration Parameters

In The Default TPTEST Configuration, an event generating an alert occurs if the alert threshold of four TPTEST errors is exceeded for the specified target system.

The Default TPTEST Configuration

```
AlertMonFun =ALL =ALL =ALL =TRANSPORT =1\
=WARNING =TpTest =R3_Transport\
=TPTEST =CHECKSYSTEM =I =EQ =<SID> =\
=ALERT THRESHOLD=I =GT =4 =
```

r3monupd: The Update Monitor

The update alert monitor identifies and reports the following update conditions:

- The update process is *inactive*
- Update-process errors

r3monupd monitors the status of both active updates and updates that have been stopped by a SAP user or by the System. The alert monitor r3monupd references update errors and update status in SAP NetWeaver transaction **SM13**.Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new

a. Specify this parameter as a number; otherwise the monitor ends with a dump.

configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3monupd monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The update monitor has the following alert types.

UPDATE ACTIVE

Get information about the status of update processes and sends an alert if a process is not active.

UPDATE ERRORS EXIST

Get information about update processes that have errors.

File Locations

The r3monupd monitor uses the files listed in this table.

Table 62 r3monupd Files

File	Description	
r3moncol(.exe)	Collector executable for the update monitor	
r3monupd.cfg	Configuration file for the update monitor.	
r3monupd.log	Trace file for storing trace data.	

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monupd monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monupd monitor uses the command-line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

Configuring Update-Monitor Alert Types

No parameters are used to configure alert types for r3monupd, the SPI for SAP's update monitor. You do not need to edit or customize the configuration file.

UPDATE_ACTIVE

UPDATE_ACTIVE is an alert type for r3monupd, the SPI for SAP's Update Monitor. r3monupd generates an alert if the UPDATE task is inactive. The following example illustrates the default configuration for the UPDATE_ACTIVE alert type.

In The Default UPDATE_ACTIVE Configuration, an event generating an alert occurs if any update is stopped.

The Default UPDATE_ACTIVE Configuration

```
AlertMonFun =ALL =ALL =ALL =UPDATE =1\
=CRITICAL =UpdActive =R3 Update =UPDATE ACTIVE
```

UPDATE_ERRORS_EXIST

UPDATE_ERRORS_EXIST is an alert type for r3monupd, the SPI for SAP's Update Monitor. r3monupd generates an alert if any update errors exist. The following example illustrates the default configuration for the UPDATE ERRORS EXIST alert type.

In The Default UPDATE_ERRORS_EXIST Configuration on page 162, an event generating an alert occurs if any update error occurs.

The Default UPDATE_ERRORS_EXIST Configuration

```
AlertMonFun =ALL =ALL =ALL =UPDATE =1\
=CRITICAL =UpdError =R3 Update =UPDATE ERRORS EXIST
```

r3monusr: The SAP-User Monitor

The SAP-user alert monitor r3monusr identifies and reports the number of logged-in users. The check is performed for each application server. A very high number of users could indicate that performance problems might occur. The alert can then be used to decide whether it is necessary to ask or even force users to log out.

The alert monitor r3monusr references the SAP NetWeaver transaction **SM04**. Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3monusr monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The SAP-user monitor has only one alert type:

USER_LOGGEDIN_MAX

Define the maximum number of logged in users.

File Locations

The r3monusr monitor uses the files listed in this table.

Table 63 r3monusr Files

File	Description	
r3moncol(.exe)	Collector executable for the user monitor	
r3monusr.cfg	Configuration file for the user monitor.	
r3monusr.log	Trace file for storing trace data.	

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monusr monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monusr monitor uses the command-line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

USER_LOGGEDIN_MAX

USER_LOGGEDIN_MAX is an alert type for r3monusr, the SPI for SAP's SAP-user monitor. r3monusr generates an alert if the maximum number of SAP users exceeds a defined threshold. Table 64 on page 164 lists the parameters that you can use to configure the USER_LOGGEDIN_MAX alert type and shows the value assigned to the parameters by default. The configuration of the parameter MAX is mandatory.

The APSERVER parameter allows you to set the application-server- dependent monitors, r3monwpa, r3monwsr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where <hostname> is the name of the application server you are monitoring as it appears in the list of application servers displayed in transaction SM51:

=APSERVER =I =CP =<hostname>_<SID>_<Instance_Number> =

We also recommend that you explicitly define the host name of the SAP NetWeaver central instance whose application server(s) you want to specify with APSERVER, as illustrated in Specifying an Application Server on page 146.

Specifying an Application Server

```
AlertMonFun =<Central_Inst_Hostname> =ALL =ALL =USER =1 \
=WARNING =Login =R3_WP \
=USER_LOGGEDIN_MAX =MAX =I =GT =30 = \
=APSERVER =I =CP =hpdev01 MP3 00 =
```

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see Alert-Collector Monitor Query Conditions on page 99. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 64 USER LOGGEDIN MAX Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	Specifies the application server to	= Sign: I, E	
		= Opt: CP	
monitor	monitor	= Low: <appserver_id></appserver_id>	
		= High:	
MAX	The number of logged in users before an alert occurs. ^a	= Sign: I, E	I
		= Opt: GT, GE	GT
		= Low:	5
		= High:	

a. You must specify the parameter value as a number, otherwise the monitor ends with a dump.

In The Default USER_LOGGEDIN_MAX Configuration, an event generating an alert occurs if the number of users logged in exceeds thirty.

The Default USER_LOGGEDIN_MAX Configuration

```
AlertMonFun =ALL =ALL =ALL =USER =1\
=WARNING =Login =R3_User\
=USER LOGGEDIN MAX =MAX =I =GT =30 =
```

r3monwpa: The Work-Process Monitor

The work-process alert monitor r3monwpa references the SAP NetWeaver transaction **sm50** and reports the following conditions for work processes running on each of the application servers, which the SPI for SAP is monitoring:

- Reports the number of *running* work processes for each work-process type configured in the profile of the current operation mode
- Reports the number of *waiting* work processes for each work-process type configured in the profile of the current operation mode
- Compares the number of *active* work processes with the number of *configured* work processes (of the same work process type) in the profile of the current operation mode.
- Checks the status of the work processes, as follows:

— D (Debug)

No processes run on live systems

- P (Private)

Processes run using maximum available system resources.

- R (No Restart)

Failed processes do not restart, which means that dependent jobs also fail.

The work-process monitor r3monwpa can only monitor alerts from an enqueue work process that is part of a central instance; it cannot monitor the alerts from an enqueue work process belonging to a stand-alone enqueue server. To monitor stand-alone enqueue work processes, use the r3monal monitor to check for SAP CCMS alerts generated by the enqueue server. For more information about using r3monal to monitor a stand-alone enqueue server, see r3monal: Monitoring Stand-alone Enqueue Servers on page 59.

Note that, if you use standard SPI for SAP tools to configure r3moncol alert collectors, the SPI for SAP checks the validity of the new configuration and will not allow you to save a file, which contains configuration errors. For more information about the validation tool and the messages it generates when it encounters a problem, see Validating the Alert-Collector Configuration Files on page 108 and Understanding Configuration-File Error Messages on page 108.

Monitor Type

The r3monwpa monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Alert Types

The work-process alert monitor has the following alert types.

WP AVAILABLE

The WP_AVAILABLE alert type defines alert conditions for the number of expected work processes running.

WP IDLE

The WP_IDLE alert type defines alert conditions for the number of idle work processes waiting.

WP CHECK CONFIGURED

The WP_CHECK_CONFIGURED alert type defines alert conditions for comparing the actual number of running work processes with the number of configured work processes in the profile of the current operation mode. The monitor check only compares work processes of the same type.

WP_STATUS

The WP_STATUS alert type defines alert conditions for work processes which the monitor finds in a problematic state, for example: D (Debug), P (Private) or R (No Restart).

File Locations

The r3monwpa monitor has the files listed in this table.

Table 65 r3monwpa Files

File	Description
r3moncol(.exe)	Collector executable for the WorkProcess monitor
r3monwpa.cfg	Configuration file for the WorkProcess monitor.
r3monwpa.log	Trace file for storing trace data.

The alert-collector monitors do not write history information to a specific history file. For more information, see Alert-Collector Monitor History on page 98.

Environment Variables

The r3monwpa monitor uses the environment variables described in Table 21 on page 101.

Command-Line Parameters

The r3monwpa monitor uses the command-line parameters described in Table 22 on page 102.

Remote Monitoring

For more information about configuring the alert-collector monitors to monitor another SAP System remotely, see Remote Monitoring with the Alert-Collector Monitors on page 102.

Configuring Work-Process Monitor Alert Types

This section helps you to configure alert types for r3monwpa, the SPI for SAP's work-process monitor. Note the general rules below concerning the use of the *exclude* and *include* parameter values; the rules are of particular importance for these alert types.

Parameter Values

This section describes how the SPI for SAP interprets *include* and *exclude* parameter values for an alert type entry. The SPI for SAP compares values in *different* parameters using 'and'; the SPI for SAP compares values in the *same* parameter as follows.

- **Include:** use 'or' to compare the parameters
- **Exclude:** use 'and' to compare the parameters

The SPI for SAP evaluates include values before exclude values, as shown in the Table 66.

Table 66 Comparing Include and Exclude Conditions for the Same Parameter

Select Options	Alert Type: WP_AVAILABLE Example Configuration of Select Options	Comparison
1	=DIA =I =BT =50 =100 =OPMODE =I =CP =DAY	OR
2	=DIA =I =GT =5 =OPMODE =I =CP =NIGHT	OR
3	=DIA = E =LT =60	AND

WP AVAILABLE

WP_AVAILABLE is an alert type for r3monwpa, the SPI for SAP's work-process monitor. r3monwpa generates an alert if the number of running work processes for each, selected work-process type is outside the specified maximum (or minimum) threshold.

Table 67 on page 168 lists the parameters that you can use to configure the WP_AVAILABLE alert type and shows the value assigned to the parameters by default. The configuration of the parameters listed for the WP_AVAILABLE alert type is mandatory. You must specify all threshold parameters as a number otherwise the monitor ends with a dump.

The APSERVER parameter allows you to set the application-server- dependent monitors, r3monwpa, r3monwsr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where <hostname> is the name of the application server to monitor as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER =I =CP =<hostname> <SID> <Instance Number> =
```

We also recommend that you explicitly define the host name of the SAP NetWeaver central instance whose application server(s) you want to specify with APSERVER, as illustrated in the Specifying an Application Server.

Specifying an Application Server

```
AlertMonFun =<Centr_Instance_Hostname> =ALL =ALL =WP =1 \
=WARNING =Availability =R3_WP \
=WP_AVAILABLE =DIA =I =GT =50 = \
=APSERVER =I =CP =hpdev01 MP3 00 =
```

The remainder of this section describes the specific configuration requirements for this alert monitor. If you are unsure about the general configuration query rules which apply to all alert collector monitors, see Alert-Collector Monitor Query Conditions on page 99. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 67 WP_AVAILABLE Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	specifies an application server	= Sign: I, E	
	to monitor	= Opt: CP	
		= Low : <appserver_id></appserver_id>	
		= High:	
BTC	Threshold for batch work	= Sign: I, E	
	processes	= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	
DIA	Threshold for dialog work	= Sign: I, E	
	processes	= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	
ENQ	Threshold for enqueue work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	
OPMODE	Defines the operation mode	= Sign I, E	I
	for this parameter ^a	= Opt: CP, EQ	EQ
		= Low: <operation_ mode=""></operation_>	current
		= High:	
SPO	Threshold for spool work	= Sign: I, E	
	processes	= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	

Table 67 WP_AVAILABLE Configuration Parameters (cont'd)

Parameter Name	Description	Query Conditions	Default Value
UPD	Threshold for update work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	
UP2	Threshold for update2 work	= Sign: I, E	
	processes	= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	

a. A critical alert occurs if you specify a non-existent mode.

In The Default WP_AVAILABLE Configuration, an event generating an alert occurs if the number of available Dialog work processes is less than fifty.

The Default WP_AVAILABLE Configuration

```
AlertMonFun =ALL =ALL =ALL =WP =1\
=WARNING =Availability =R3_WP\
=WP AVAILABLE =DIA =I =LT =50 =
```



Check that the work-process types you want to monitor with r3monwpa are correctly configured in the SAP instance profile.

The r3monwpa monitor can only monitor work-process types that are configured in the SAP instance profile. If the DIA work-process type is not configured in the SAP instance profile (or "rdisp/wp_no_dia = 0"), then no DIA work processes are started. Since zero (0) DIA work processes is clearly less than the minimum allowed (50) specified in the default configuration for the WP_AVAILABLE alert type shown in The Default WP_AVAILABLE Configuration, this would, under normal circumstances, generate an alert.

However, if the DIA work-process type is not configured in the SAP instance profile, r3monwpa cannot monitor the number of DIA work processes that are running at any given point in time and, as a consequence, does not generate an alert. You can check discrepancies between the SAP instance profile and the r3monwpa configuration file with the alert type WP_CHECK_CONFIGURED on page 172.

WP_IDLE

WP_IDLE is an alert type for r3monwpa, the SPI for SAP's work-process monitor. r3monwpa generates an alert if the number of waiting work processes for each, selected work-process type is outside the specified max (or min) threshold.

Table 68 on page 170 lists the parameters that you can use to configure the WP_IDLE alert type and shows the value assigned to the parameters by default. The configuration of the parameters for the WP_IDLE alert type is mandatory. You must specify all threshold parameters as a number otherwise the monitor ends with a dump.

The APSERVER parameter allows you to set the application-server- dependent monitors, r3monwpa, r3monwsr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where <hostname> is the name of the application server to monitor as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER =I =CP =<hostname> <SID> <Instance Number> =
```

It is also recommended to define explicitly the host name of the SAP NetWeaver central instance whose application server(s) you want to specify with APSERVER, as illustrated in the Specifying an Application Server.

Specifying an Application Server

```
AlertMonFun =<Centr_Instance_Hostname> =ALL =ALL =ALL =WP =1 \
=WARNING =Idle =R3_WP \
=WP_IDLE =BTC =I =GT =20 = \
=APSERVER =I =CP =hpdev01 MP3 00 =
```

If you are unsure about the general configuration query rules which apply to all alert collector monitors, see Alert-Collector Monitor Query Conditions on page 99. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 68 WP IDLE Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	specifies an application	= Sign: I, E	
	server to monitor	= Opt: CP	
		= Low : <appserver_id></appserver_id>	
		= High:	
BTC	Threshold for batch work	= Sign: I, E	
	processes	= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	
DIA	Threshold for dialog work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	
ENQ	Threshold for enqueue work	= Sign: I, E	
	processes	= Opt: GT, GE, LT, LE	
		= Low:	
		= High:	

Table 68 WP_IDLE Configuration Parameters (cont'd)

Parameter Name	Description	Query Conditions	Default Value
OPMODE	Defines the operation mode	= Sign I, E	I
	for this parameter. ^a	= Opt: CP, EQ	EQ
		= Low: <operation_mode></operation_mode>	current
		= High:	
SPO	Threshold for spool work	= Sign: I, E	
	processes	= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	
UPD	Threshold for update work processes	= Sign: I, E	
		= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	
UP2	Threshold for update 2 work	= Sign: I, E	
	processes	= Opt: GT, GE, LT, LE	
		= Low: <number></number>	
		= High:	

a. If a non-existent mode is specified, a critical alert occurs.

In The Default WP_IDLE Configuration, an event generating an alert occurs if the number of idle Dialog work processes is less than ten.

The Default WP_IDLE Configuration

```
AlertMonFun =ALL =ALL =ALL =ALL =WP =1\
=WARNING =Idle =R3_WP\
=WP IDLE =DIA =I =LT =10 =
```



Check that the work-process types you want to monitor with r3monwpa are correctly configured in the SAP instance profile.

The r3monwpa monitor can only monitor work-process types that are configured in the SAP instance profile. If the DIA work-process type is not configured in the SAP instance profile (or "rdisp/wp_no_dia = 0"), then no DIA work processes are started. Since zero (0) DIA work processes is clearly less than the minimum allowed (10) specified in the default configuration for the WP_IDLE alert type shown in The Default WP_IDLE Configuration, this would, under normal circumstances, generate an alert.

However, if the DIA work-process type is not configured in the SAP instance profile, r3monwpa cannot monitor the number of DIA work processes that are running at any given point in time and, as a consequence, does not generate an alert. You can check discrepancies between the SAP instance profile and the r3monwpa configuration file with the alert type WP_CHECK_CONFIGURED on page 172.

WP_CHECK_CONFIGURED

WP_CHECK_CONFIGURED is an alert type for r3monwpa, the SPI for SAP's work-process monitor. The WP_CHECK_CONFIGURED alert type makes a comparison between the actual number of running work processes and the number of configured work processes in the profile of the current operation mode. Note that the monitor only compares work processes of the same type, for example: DIA, BTC. Table 69 on page 172 lists the parameters that you can use to configure the WP_CHECK_CONFIGURED alert type and shows the value assigned to the parameters by default.

The APSERVER parameter allows you to set the monitors, r3monwpa, r3monusr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where *<hostname>* is the name of the application server to monitor as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER =I =CP =<hostname>_<SID>_<Instance_Number> =
```

We also recommend that you explicitly define the host name of the SAP NetWeaver central instance whose application server(s) you want to specify with APSERVER, as illustrated in the Specifying an Application Server.

Specifying an Application Server

```
AlertMonFun =<Centr_Instance_Hostname> =ALL =ALL =WP =1 \
=WARNING =Check =R3_WP \
=WP_CHECK_CONFIGURED \
=APSERVER =I =CP =hpdev01 MP3 00 =
```

If you are unsure about the general configuration query rules which apply to all alert collector monitors, see Alert-Collector Monitor Query Conditions on page 99. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 69 WP CHECK CONFIGURED Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
	specifies an application server	= Sign: I, E	
	to monitor	= Opt: CP	
		= Low: <appserver_id></appserver_id>	
		= High:	

In Default WP_CHECK_CONFIGURED Configuration, r3monwpa generates an alert if the number of running work processes does not match the number of configured work processes for a given work-process type.

Default WP_CHECK_CONFIGURED Configuration

```
AlertMonFun =ALL =ALL =ALL =WP =1\
=WARNING =Check =R3_WP\
=WP_CHECK_CONFIGURED \
=APSERVER =I =CP =ALL =
```

WP_STATUS

WP_STATUS is an alert type for r3monwpa, the SPI for SAP's work-process monitor. WP_STATUS defines alert conditions for work processes which the monitor finds in a problematic state, for example: D (Debug), P (Private), or R (No Restart). r3monwpa generates an alert if the work processes running in the SAP Systems you are monitoring with the SPI for SAP match the conditions defined in the parameters below. The configuration of the parameter below is optional.

The APSERVER parameter allows you to set the application-server- dependent monitors, r3monwpa, r3monwsr, and r3monoms to monitor a specific application server. You need to configure APSERVER in the following manner, where <hostname> is the name of the application server to monitor as it appears in the list of application servers displayed in transaction SM51:

```
=APSERVER =I =CP =<hostname> <SID> <Instance Number> =
```

We also recommend that you explicitly define the host name of the SAP NetWeaver central instance whose application server(s) you want to specify with APSERVER, as illustrated in the Specifying an Application Server.

Specifying an Application Server

```
AlertMonFun =<Centr_Instance_Hostname> =ALL =ALL =WP =1 \
=WARNING =WP_Status =R3_WP \
=WP_STATUS =STATUS =I =GT =30 = \
=APSERVER =I =CP =hpdev01 MP3 00 =
```

If you are unsure about the general configuration query rules which apply to all alert collector monitors, see Alert-Collector Monitor Query Conditions on page 99. For more information about the meaning of the query conditions in the alert-collector monitor configuration files, see Table 19 on page 100.

Table 70 Configuration Parameters

Parameter Name	Description	Query Conditions	Default Value
APSERVER	Specifies an application server to monitor	= Sign: I, E	
		= Opt: CP	
		= Low: <appserver_id></appserver_id>	
		= High:	
STATUS ^a	The status which is monitored	= Sign: I, E	
		= Opt:	
		= Low: b	
		= High:	

a. Possible additional values: MAX_ENTRIES

b. Possible values: D=Debug, P=Private, R=Restart (no alert).

In The Default WP_STATUS Configuration, an event generating an alert occurs if the status of a running workprocess is *critical*. The Default WP_STATUS Configuration also shows how you can use =MAX_ENTRIES to define the number of work processes with a defined status that have to exist before the SPI for SAP generates a message.

The Default WP_STATUS Configuration

```
AlertMonFun =ALL =ALL =ALL =WP =1\
=CRITICAL =WP_Status =R3_WP\
=WP_STATUS =STATUS =I =CP =* =
```

Monitoring the TemSe file

To save runtime costs, the SPI for SAP monitors the consistency of SAP's Temporary Sequential file (TemSe) not by means of one of the SPI for SAP alert monitors, but by means of a report you set up in SAP. However, you still need to assign the SPI for SAP r3monaco monitor to the managed nodes.

Monitor Type

The TemSe monitor is of type *snapshot*. One monitor run gathers only one value set. For more information, see Report Types for the Alert-Collector Monitors on page 97.

Report Description

The TemSe report references the SAP NetWeaver transaction **sp12**. Any inconsistency found in the TEMSE database is serious; you must use the log in **sp12** to correct the cause of the inconsistency, for example a disk failure.

Running the TemSe Monitor

To run the TemSe monitor, you need to set up a job in SAP NetWeaver which references a report named /HPOV/ZHPSPIT1. Note that you can only use the report with SAP version 4.6 and later.

To set up the report:

- 1 Login to SAP NetWeaver.
- 2 Set up a job using transaction **SM36**.
- 3 In the job, specify the following details:
 - the date on which the report should start
 - the frequency with which the report should run

5 Understanding Message Flow

This chapter describes how to use HPOM functionality and CCMS to control the flow of messages between SAP NetWeaver and HPOM.

In this Section

The information in this section describes how to control message flow between SAP NetWeaver and HPOM and includes the following topics:

- HPOM Message Customization on page 177
 Customize HPOM message policy conditions.
- Customizing CCMS Message Flow in SAP on page 180
 Use SAP NetWeaver features to control how CCMS alert monitors generate specific messages.
- SAP Solution-Manager Integration on page 184
 - Use the r3ovo2ccms command to write HPOM messages directly into the CCMS tree, where they can be viewed and used by the SAP Solution Manager in the same way as any other SAP message alert. You can also use r3monal to forward messages directly from CCMS to HPOM.
- Monitoring CCMS Alerts in the CEN on page 189
 Monitor alerts and analyze data collected by the SAP central monitoring system (CEN).
- The methods for setting thresholds in the CCMS monitor do not apply if you are using the new CCMS monitoring architecture, where thresholds can be set globally within SAP NetWeaver.

For details about the procedures outlined in these sections, refer to your SAP NetWeaver documentation and to the manuals supplied with HPOM.

HPOM Message Customization

With the aid of standard HPOM functionality, you can modify important aspects of the messages generated by the SPI for SAP monitors and in addition, specify which of the generated messages you want to be displayed. This section provides information about the following tasks:

Setting up message views

Use the view message browser to set up views that show you only those messages which fit specified criteria, for example, messages with the severity level "critical". For more information, see Setting Up the Message Views on page 178.

Changing severity levels

Change the severity level of messages. For more information, see Changing the Message Severity on page 179.

Suppressing messages

Suppress specific messages by setting a suppress condition in the opensg template. For more information, see the HP Operations Smart Plug-in for SAP Installation and Configuration Guide.

Setting Up the Message Views

The Browser Pane is your own customized presentation of a selection of the messages displayed in your message browser. The message browser displays every message belonging to the managed nodes and message groups assigned to you.

You can configure the view so that only the most important messages are displayed and, as a consequence, concentrate on messages needing immediate attention.


You can set up simple or complex views, select specific messages to be displayed, or define a filter to display only a subset of the incoming messages. For example, if you want to display messages with a severity level of critical, you can specify that messages of all other severity levels are not displayed.

To view all messages belonging to a node and a particular group, first use the view message browser to view all of the messages on the specified node. Then use the view message browser again to narrow the view down to only the messages from the specified group.

To define your customized message-browser view:

- 1 On the Browser pane window, right-click on the Severity tab.
- 2 Select **Message View Filter** → **Custom**. The Message View Filter window opens.

Figure 10 Message Browser View

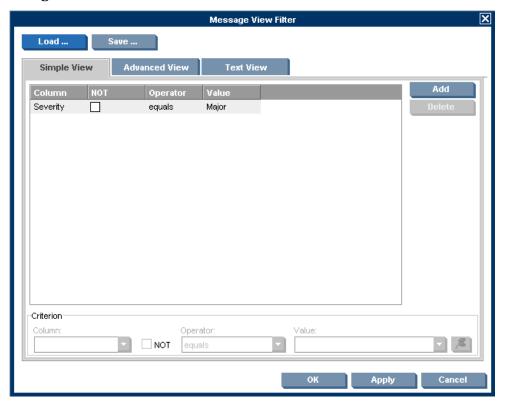


- 3 Define the filtering patterns to be used.
 - For example, if you select Critical value, all messages other than those marked Critical are not displayed in the Message Browser window.
- 4 Click OK to implement your filtering pattern(s).
 - If a critical event occurs on one of your managed nodes after you have defined a new message-browser view, the Message Groups window is immediately moved into the foreground.

Changing the Message Severity

To change the severity of specific SAP NetWeaver-generated messages in the message browser:

- 1 Log on to HPOM as user opc_adm.
- 2 Select a message from the Browser Pane.
- 3 Right-click on the message and click Modify. The Modify Message Attributes window appears.

Figure 11 Modify Message Attributes

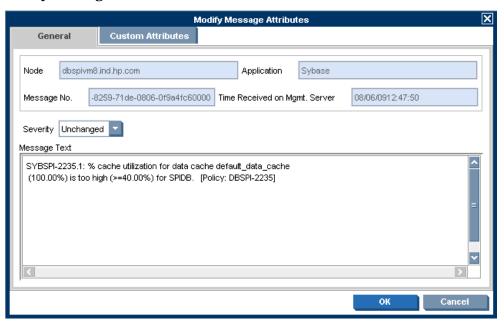

- 4 Select the severity level from the drop-down list.
- 5 Click **OK** to apply the new changes.

Customizing CCMS Message Flow in SAP

SAP CCMS provides a range of features enabling you to allow or prevent the inclusion of specific messages in its alert monitor. This section includes information about the following topics:

- Disabling Messages on page 180
- Setting Thresholds for SAP CCMS Alert Monitor Messages on page 182
- Obtaining a Message ID from the SAP NetWeaver Syslog File on page 183

Disabling Messages

To disable messages in SAP NetWeaver:

1 Browse to the following location using the SAP Easy-Access menu:

```
Tools > CCMS > Control/Monitoring > Control Panel
```

Alternatively, enter the following transaction code in the command field: RZ03


- 2 Select Edit Choose.
- 3 Select your SAP instance.

- Click the Alert Monitor button in the menu bar to display the CCMS alert-monitor dialog. Alternatively, enter the following transaction code in the command field: RZ20
- 5 Select the following menu items from the SAP NetWeaver menu bar:

Extras > activate maintenance function

6 In the list of monitors displayed, select the node or monitor-tree element whose messages you want to disable, for example: short- dump messages.

Figure 12 Deactivate Monitor Messages

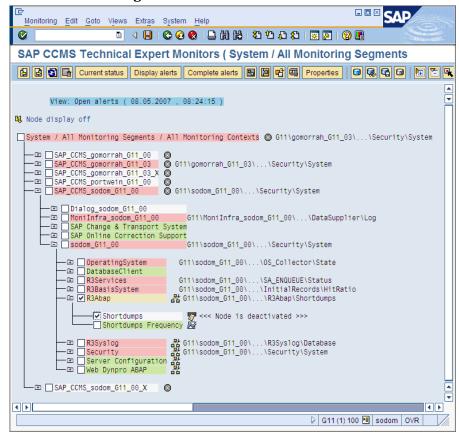

- 7 To disable, for example, short-dump messages from the R3Abap monitor:
 - a Click: SAP CCMS Technical Expert Monitors > System / All monitoring segments / all monitoring contexts > SAP_CCMS_<host>_<SID>_<Instance number> > R3Abap
 - b In the SAP NetWeaver menu bar, select the following menu items:

```
Edit > Nodes(MTE) > Deactivate
```

The selected item and the suppressed message type are now marked as "deactivated" in the SAP GUI.

- 8 Save your settings and return to the CCMS Monitor Sets screen.
- 9 Check the HPOM message browser. You should not receive any more short-dump messages.

Since disabling messages will result in inconsistencies with the settings previously defined in the SPI for SAP configuration file, you must only perform this operation if you do *not* want to have a central configuration.

Setting Thresholds for SAP CCMS Alert Monitor Messages

To set thresholds for SAP NetWeaver CCMS alert monitor messages:

1 Browse to the following location using the SAP Easy-Access menu:

```
Tools > CCMS > Control/Monitoring > Control Panel
```

Alternatively, enter the following transaction code in the command field: RZ03

Select the SAP NetWeaver instance (under Server name) for which you want to define a performance limit value.

Click the Alert Monitor button in the menu bar to display the CCMS alert-monitor dialog. Alternatively, enter the following transaction code in the command field: RZ20

3 Browse to the CCMS monitor set which contains the monitor whose alert thresholds you want to modify:

SAP CCMS Technical Expert Monitors > System / All monitoring segments / all monitoring contexts

- 4 To display alert details for a selected monitor:
 - a Click Open alerts in the tool bar.
 - b Click Display alerts in the tool bar.

Note that you can display alerts for a desired SAP instance or for all monitored instances.

- c Select the alert whose details you want to display and click Properties in the tool
- 5 Click the Performance Attribute tab to display the threshold values for the selected CCMS alert.
- 6 Click the Display/Change button (or the keyboard combination Shift+F6) and enter edit mode and change the threshold values as appropriate.
- 7 Save the changes to the threshold values; click the Save button in the menu bar, or use the following menu option:

```
Properties > Save
```

When the new threshold is reached, the SPI for SAP sends a warning or a critical Dialog performance message (similar to Figure 13).

Monitoring: Properties and Methods G11\sodom_G11_00\R3Services\Dialog\FrontendResponseTime Properties of MTE class R3DialogFrontendResponseTime PerformanceAttribute Methods Addnl info Performance properties assigned from group R3DialogFrontendResponseTime Comparison Value Last reported value O Smoothing over last 1 min. Average in the last hour O Smoothing over last 5 min. O Average in the last quarter of an hour Smoothing over last 15 mins Threshold values Change from GREEN to YELLOW msec Change from YELLOW to RED 3.000 msec 2.000 Reset from RED to YELLOW msec Reset from YELLOW to GREEN 1.000 msec Alert is triggered if the comparative value falls below threshold value exceeds the threshold value Alert text Message class 257 Message number &1 &3 > &2 &3 Frontend response time exceeds threshold (&4 dialog steps)

Figure 13 Performance Alert Thresholds

Obtaining a Message ID from the SAP NetWeaver Syslog File

Any messages recorded in the SAP NetWeaver system log file can be defined to trigger an alert in CCMS. This alert can be picked up and used to display an associated message in the HPOM message browser with instructions for any appropriate actions, which are required.

To obtain the message ID of a critical message:

1 Browse to the following location using the SAP Easy-Access menu to read the system log file:

```
Tools > Administration > Monitoring > System Log
```

2 Double-click System Log to display system-log details in the System Log:Local Analysis screen.

You can apply time restrictions to limit the contents of the syslog file to the currently relevant entries.

- 3 Click Reread System Log to display the system log file of your SAP NetWeaver system.
- 4 Double-click the message that you want to use to trigger an alert. The system displays details of the selected message.

- Make note of the message ID including group (for example: AB) and number (for example: 0); AB0 indicates a run-time error (RFC_NO_AUTHORITY).
- 6 To display the ID numbers of all SAP NetWeaver syslog messages, enter the transaction code SE92 into the SAP NetWeaver command field and click All numbers.
- 7 Use the ID number to set up a filter in the SPI for SAP r3monal.cfg configuration file, for example:

```
# Syslog filtering
#------
# Alert Classes SAP SAP SyslogId Enabled=1
# System Number From To Disabled=0
AlerMonSyslog =ALL =ALL =ABO =AB1 =1
```

SAP Solution-Manager Integration

The information in this section explains how you can set up the SPI for SAP to enable bi-directional communication between the SAP Solution Manager and HPOM. With the SPI for SAP's Solution-Manager integration, you can configure the SPI for SAP to inform HPOM when a Solution Manager business process fails: you can also set up the SPI for SAP in such a way as to enable it to populate the CCMS tree with managed objects from HPOM, for example, by means of an automatic or operator-initiated action attached to a message condition in a template. The information in this section is split into the following topics:

- Pre-requisites on page 184
- Integration Overview on page 185
- Sending Messages from SAP to HPOM on page 186
- Sending Messages from HPOM to SAP on page 186
- The r3ovo2ccms Command on page 188

Pre-requisites


If you want to take advantage of the SPI for SAP's Solution-manager integration, note that the target system, that is; the SAP server to which the SPI for SAP writes the CCMS alerts, must meet the following pre-requisites:

- Satellite Systems that are monitored by the Solution Manager must have SAP Version 4.6 or higher
- The SPI for SAP supports the BC-XMW interface for 6.40 of the SAP_BASIS package.
 - Release 6.40:
 - The BC-XMW interface is available and fully supported with the initial support package; no additional support packages are required.
- Have a look at SAP notes 645353 and 608384, too.

Integration Overview

The SPI for SAP's Solution-manager integration uses the CCMS XMW and XAL interfaces to improve communication between SAP and HPOM. Using the CCMS interfaces, the SPI for SAP ensures that the power of both SAP and HPOM can be used to enhance and improve the information available to system administrators in both areas.

Figure 14 Choosing CCMS Alerts to Monitor

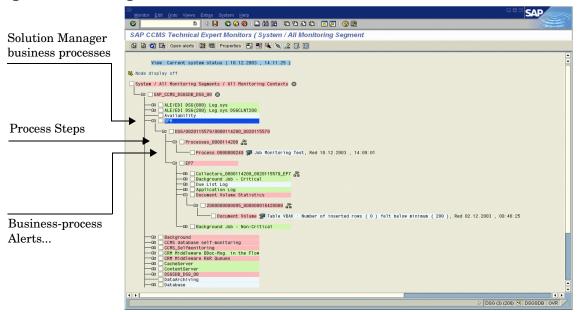

For example, you can now configure the SPI for SAP to write directly to CCMS and populate the CCMS tree with messages and alerts, which are discovered by HPOM and relate to problems not normally of particular interest to SAP, such as hardware and network performance. Conversely, Figure 14 on page 185 shows how you can use the Solution-manager integration to monitor specific CCMS alerts and, by linking the generated HPOM messages to a defined service ID, monitor the status of specific services. In this way, it is possible to ensure not only that HPOM knows as soon as a Solution-manager business process fails but also that the status of the service associated with the business process you are monitoring is immediately reflected in the service map in the HP Service Navigator.

To summarize how the SPI for SAP's Solution-manager integration enhances communication in both directions between SAP and HPOM:

• SAP -> HPOM

By defining message conditions for r3monal, the SPI for SAP's CCMS alert monitor, you can keep an eye on specific CCMS alerts, for example, the alerts you have assigned to Business Processes. For more information about setting up r3monal, the CCMS alert monitor, see Sending Messages from SAP to HPOM on page 186.

HPOM -> SAP

You can attach an action to an HPOM message condition, which calls the r3ovo2ccms command and uses it to populate the CCMS tree with messages and objects monitored by HPOM. For more information about using the r3ovo2ccms command, see The r3ovo2ccms Command on page 188.

Sending Messages from SAP to HPOM

By defining message conditions for r3monal, the SPI for SAP's CCMS alert monitor, you can keep an eye on specific alerts in the CCMS tree. When the message condition for the specified CCMS alert matches, you can associate the HPOM message the condition generates with a known Service ID and, in this way, link the message directly to a service in the HPOM service tree. For more information about setting up r3monal, the CCMS alert monitor, see r3monal: the CCMS 4.x Alert Monitor on page 47.

To set up communication between the SAP Solution Manager and HPOM, you need to carry out the following high-level steps:

- In SAP, open up the CCMS alert tree for the Solution-manager business process which you want to monitor.
- 2 Expand the CCMS alert tree and browse to the alerts associated with individual steps in the selected business process.



If CCMS alerts are not already assigned to individual steps in the business process you want to monitor, you will have to use SAP to locate the CCMS monitor which generates the alerts you require (transaction RZ20) and then assign the alert(s) to the business-process step.

- 3 Assign the desired CCMS alert(s) to the step in the business process, which you want to link to service objects in HPOM.
- 4 If you want to link the HPOM messages to services in HPOM, you will need to assign a service ID at this point, too. The service ID must match the service name defined in the service-configuration file and take the following form:

```
SAP_SPI:<SID>:<service_instance_name>
```

5 Remember to (re)distribute the SPI for SAP opcmsg template with the new (or modified) conditions.

Sending Messages from HPOM to SAP

The first and most important thing you need to do is to inform HPOM which of the incoming HPOM messages it should forward to SAP and write into the CCMS tree. The message-forwarding task is triggered by means of an action attached to the policy condition, which generates the original message. The action you configure can be either automatic or operator-initiated. For more information about the command you use and the parameters and options that are allowed, see The r3ovo2ccms Command on page 188.

To set up an automatic action in an HPOM policy, follow the instructions below. Note that the names and titles of the windows can sometimes vary according to the type of template you select. The example described here uses a performance-threshold policy.


- 1 Open the All Policy Groups window.
- 2 Locate and click the policy which generates the HPOM message you want to forward to SAP and write into the CCMS tree. For example, you might choose a message from a performance monitor, which is configured to monitor CPU load on the SAP server.
- 3 In the Message and Suppress Conditions window, locate and click the condition, which generates the message you want to forward to SAP. Note that not all messages need to be forwarded. For example, the rules which generate a critical message are probably of more interest than the rules which generate messages with severity level "warning" or "normal".

4 In the Actions field of the Condition No. window which appears, enter the r3ovo2ccms command in the command box along with the parameters and options you need to perform the desired action, including the location in the CCMS tree, where you want the message to appear. If the location you specify in the CCMS tree does not already exist, it is created for you when the message is forwarded to SAP. Note that the default name of the root element for the SPI for SAP in the CCMS monitor tree is ZSAPSPI.

Note too that, providing you have not modified the default settings, you do not need to supply an absolute path with the command. On Microsoft Windows nodes, you do not need the .exe file extension, either. For more information about the r3ovo2ccms command, see The r3ovo2ccms Command on page 188.

The Node field defines the name of the node where the policy you are modifying is assigned and the r3ovo2ccms command runs. If you use the \$MSG_NODE_NAME variable in conjunction with the -host option in the Command field, the SPI for SAP assumes the name of the node associated with the original message. Assuming the remote-monitoring feature is enabled, this is true even for nodes, which the SPI for SAP is monitoring remotely.

Figure 15 Configuring an Automatic Action



- 5 The CCMS alert (Monitor-Tree Element or MTE) that r3ovo2ccms writes to the CCMS monitor tree must be assigned to a specific step in the business process, for example, "Create Invoice", which you have defined in SAP Solution Manager.
 - a In SAP, enter the following transaction: /dswp
 - The /dswp transaction displays the page:

Change Mode: Setup Business Process Monitoring

- b Select the process step to which you want to assign the CCMS alert for HPOM.
- c Manually enter the name of the CCMS monitor element, which you want to assign to the business-process step.
- The name of the monitor that you enter must match the entry created by the r3ovo2ccms command as it appears in the CCMS tree. You do *not* need to include either the monitor context (ZSAPSPI) or the name of the CCMS Monitor *Set*, to which the monitor belongs.
- 6 Next, you need to create a CCMS monitor set, for example, HPOM, and generate a CCMS monitor, for example, SAPSPI, to host the HPOM alerts sent by the r3ovo2ccms command. Remember to use only ASCII characters when defining the name of a CCMS monitor set; the SPI for SAP cannot currently interpret non-ASCII characters in monitor-set names.

Then you can select the new monitor and, using the Change button, display a list of the CCMS alerts and alert groups, which you want to associate with the new monitor (SAPSPI) in order to make them visible to the Solution Manager. Scroll down the list of contexts displayed and select "ZSAPSPI".



The context ZSAPSPI is only visible for selection in the list of contexts displayed *after* the first HPOM message sent by the r3ovo2ccms command appears in the CCMS tree. The r3ovo2ccms Command on page 188 explains how to use the r3ovo2ccms command to send a dummy message to CCMS, which creates the ZSAPSPI context.

The r3ovo2ccms Command

The mechanism which the SPI for SAP uses to forward HPOM messages to SAP and write them directly into the CCMS tree is the r3ovo2ccms command, which the SPI for SAP installs in the default HPOM actions directory on the HPOM managed node.

You can use the r3ovo2ccms command directly on the command line or start it either automatically (as an automatic action) or manually (as an operator-initiated action). If you want to use the r3ovo2ccms command in a configured action, you need to modify each template that generates an HPOM message, which you want to forward to CCMS. The SPI for SAP uses the configured action to forward the HPOM message to SAP, where it will appear in the CCMS tree in the location defined by the parameters and options you specify.

The r3ovo2ccms command accepts the following parameters and parameter options, which are displayed in the command shell if no parameters are specified:

 $r3ovo2ccms - level1_element < level1_element > - level2_element < level2_element > - text < text > - host < SAP_hostname > [-root_element < root element >] [-sid < SID >] [-number < SAP_instance_number >] [-severity < NORMAL | WARNING | CRITICAL >]$

Command Parameters

The r3ovo2ccms command accepts the following command parameters:

-level1 element <level1 element>

This parameter identifies first-level branch in the CCMS tree structure

-level2 element <level2 element>

This parameter identifies the second-level branch in the CCMS tree structure

-text <text>

Descriptive text explaining the event/problem in more details.

-host <SAP hostname>

The name of the SAP System on which the event/problem was originally detected by HPOM.

Optional Parameters

The following optional parameters can be used with the r3ovo2ccms command:

-root element <root element>

The name of the root element of the branch of the CCMS tree into which you want to insert the message. The default value is "ZSAPSPI".

-sid <SID>

The System ID (SID) of the SAP System, where the original event/problem was detected when found by HPOM.

-number <SAP_instance_number>

The instance number of the SAP System, where the original event/problem was detected by HPOM.

-severity <NORMAL|WARNING|CRITICAL>

The severity of the CCMS alert message. The default value is "CRITICAL"

Examples

The following example shows how you can use the r3ovo2ccms command to forward to SAP an HPOM message relating to a problem with CPU load on the SAP server "example" and write it directly into a defined location in the CCMS tree. You can configure the HPOM template which generates the message to execute the command either automatically by means of an automatic action or manually by means of an operator-initiated action.

Writing HPOM Messages into the CCMS Tree

```
r3ovo2ccms -root_element HPOM -level1_element Performance -level2_element CPU -text "CPU load: bottleneck situation 90%" -host example
```

In the example above, the HPOM message will appear in the HPOM > Performance > CPU branch of the SAP CCMS tree when a critical problem with the CPU load occurs and is reported by the SPI for SAP. The problem to which the message relates was originally reported on the SAP server, "example".

Monitoring CCMS Alerts in the CEN

If your SAP landscape includes multiple systems and numerous instances, you can reduce management overheads by using the SAP Computing Center Management System (CCMS) to monitor the entire landscape from one system, which SAP calls the central monitoring system (CEN), and then configuring the SPI for SAP to monitor the CEN. The SPI for SAP can then map alerts identified in the CCMS subsystem to messages that it sends to the HPOM message browser.

This section provides a brief overview of the things you need to look out for when considering the idea of using the SPI for SAP to monitor CCMS alerts in a SAP central monitoring system.

CEN-Integration Overview

The central monitoring system (CEN) is a single SAP system that you designate as the central point of control for CCMS alerts originating from all over the monitored SAP landscape. The CEN concept allows you to reduce the overhead of monitoring and managing multiple SAP systems by making essential information concerning problem alerts available in one, central location.

After you configure SAP to use the CEN for the central management of CCMS alerts, you can use the SPI for SAP's r3monal monitor to intercept the CCMS alerts destined for the CEN and use the alerts to generate messages, which it forwards to the HPOM message browser.

For more information about configuring SAP to use a central monitoring system (CEN) to manage CCMS alerts for a complete SAP landscape, see the SAP documentation; for more information about setting up the SPI for SAP to monitor CCMS alerts, see r3monal: the CCMS 4.x Alert Monitor on page 47.

Configuring the SAP CEN

The SPI for SAP supports the monitoring of CCMS alerts in a CEN provided you configure SAP to use the CEN as a central alert-monitoring location. Setting up the CEN as the central location for the collection and monitoring of alerts is straight forward but involves a number of steps. For example, you need to ensure (among other things) that you configure the required users, register and start the appropriate agents, and define the type of information you want to collect, such as: performance, statistical, or availability. The information in this section provides some pointers to what you need to consider when setting up the CEN for monitoring with the SPI for SAP.

For more information about configuring SAP to use a central monitoring system (CEN) to manage CCMS alerts for a complete SAP landscape, see the SAP documentation; you will need to find out in particular about the following high-level topics:

- SAP Central Monitoring System on page 190
- SAP ABAP Instances on page 191
- J2EE Instances on page 192

SAP Central Monitoring System

When you are setting up the SAP central monitoring system to collect, monitor, and analyze alert data, you need to consider the following important points:

Background Dispatching in the CEN

To ensure the correct and timely startup of all data collection methods by the background process, you have to enable the monitoring architecture. Enable background dispatching both in the CEN and in all monitored ABAP systems, as illustrated in Figure 16 on page 191.

• The CSMREG User

You need to create the CSMREG user both in the CEN and in all the ABAP systems you want the CEN to monitor remotely. CSMREG is a user with specific authorizations, which SAP uses to collect data from the remote systems and send it to the CEN. For more information about the configuring the CSMREG user, see the SAP documentation.

The CSMCONF file

The CSMCONF file is mandatory for the registration and startup of the CCMS agents; it contains all the connection data that you would otherwise have to supply during the normal registration process, for example: the system ID of the CEN, the client number, user name, and so on.

Data Collection and Analysis

If you want to use the CEN to collect, monitor, and analyze data from remote ABAP systems, you need to create two RFC destinations for each monitored ABAP system. CEN requires an entry in the CCMS alert monitor for each SAP system it monitors remotely.


Statistical Workload Data

If you want to monitor the work-load statistics from the ABAP system in the CEN, use transaction ST03G (Global System Workload Analysis) to enter the RFC destination of each ABAP system in the workload monitor, as illustrated in Figure 17 on page 192.

The CCMSPING Availability Agent

Make sure the CCMS availability agent, CCMSPING, is available so that CCMS can monitor the status and availability of remote SAP systems. See the SAP documentation for more information about the pre-requisites for (and configuration of) the CCMSPING agent.

Figure 16 Enabling Background Dispatching

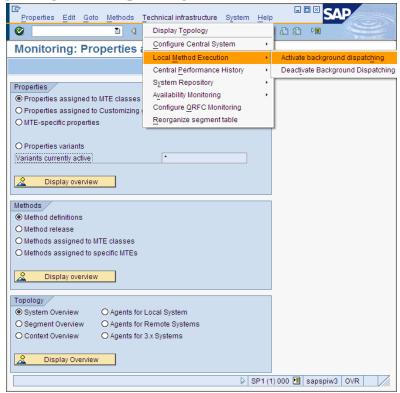

SAP ABAP Instances

When you are setting up the SAP central monitoring system to collect, monitor, and analyze alert ABAP data, you need to consider the following important points for each monitored ABAP instance:

The SAPCCM4X Agent

To avoid communication problems when using the CEN to monitor an ABAP instance, you need to register the CCMS agent SAPCCM4X; registering the SAPCCM4X agent establishes a communication channel between the CEN and the monitored ABAP instances. Since the SAPCCM4X agent does not requires a free work process, it is not affected by any error states in any of the monitored ABAP instances.

Note that you need to register the SAPCCM4X agent on each of the ABAP instances monitored with the CEN.

SAP Load display Goto System Help **@ Global System Workload Analysis** Fullscreen On/Off Component sapspiwb.ind.hp_TST_132249150 ServiceType SAP R/3 SP1
SAPJ2ENode TST Component Type SAPJ2ENode First Record 13.06.2007 13.06.2007 13.06.2007 sapspiwb.ind.hp_TST_13224 Last Minute's Load □ Day Average Values per Step / Average Values per Transaction Today 🔷 14.06.2007 Thu 13.06.2007 Wed
12.06.2007 Tues System Workload Overview: Average Times per Transaction in ms Service Type # Steps # Transact ØResp.Tim Ø CPU Tim ØWait Tim Ø CallTim Ø LoadTim Ø Gen.Tim This Week 574 574 0.1 ▽ 📵 Month 1.104 0,0 EJB Request 1,104 60.0 36.8 15.9 0.0 0.0 This Month 574 574 TOTAL> Web Service 1,1 0,1 0,0 0,0 561 0.0 0.0 0.0 0.0 0.0 Detailed Analysis Business Transaction Analysis Functional Trace Ø Co 4 B 4 b ▶ ■ Analyses 4 1 4 b

Figure 17 Monitoring ABAP Statistics in the CEN

J2EE Instances

When you are setting up the SAP central monitoring system to collect, monitor, and analyze alert data from SAP Java instances, you need to consider the following important points for each monitored J2EE instance:

The SAPCCMSR Agent

If you want to use CCMS to monitor J2EE instances with the CEN, you need to register the CCMS agent SAPCCMSR in the CEN since monitored data from the Java instances are transferred through the CCMS agent. Note that the installation of the J2EE engine configures the SAPCCMSR by default; you just need to register the SAPCCMSR agent with CEN for each J2EE instance and start the agent.

Java DSRs in the CEN

You can configure the global workload monitor to display distributed statistical records (DSR) for Java instances in the CEN. Figure 17 on page 192 shows the output for the Global System Workload Analysis transaction.

Availability monitoring with GRMG

To monitor the availability of a J2EE instance in SAP, you need to customize the configuration files for the General Request and Message Generator (GRMG) and upload the modified configuration files to the CCMS agent; the J2EE engine's Network Administrator (NWA) displays example XML files that are available for modification and upload to CCMS, as illustrated in Figure 18 on page 193. You can also use the transaction GRMG to display a list of active GRMG configuration scenarios that are available in the SAP central monitoring system.

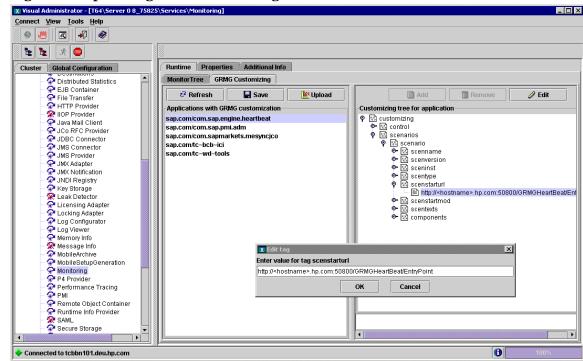


Figure 18 Uploading the GRMG Configuration File to CCMS

Configuring the SPI for SAP

After you configure SAP to use the CEN for the central management of CCMS alerts, you can use the SPI for SAP's r3monal monitor to intercept the CCMS alerts destined for the CEN and generate a message that it forwards to the HPOM message browser.

For more information about configuring SAP to use a central monitoring system (CEN) to manage CCMS alerts for a complete SAP landscape, see the SAP documentation; for more information about setting up the SPI for SAP to monitor CCMS alerts, see r3monal: the CCMS 4.x Alert Monitor on page 47.

The following list provides a high-level overview of the steps you need to perform to configure the SPI for SAP to monitor CCMS alerts in the CEN:

- Install the SPI for SAP on the SAP system you assign as the central monitoring system (CEN).
 - Note that if you are already using the SPI for SAP to monitor the SAP System nominated as the CEN, you do not have to perform this step.
- 2 Import the SPI for SAP transports for CCMS into the SAP system nominated as the central monitoring system (CEN):
 - The SPI for SAP's CCMS transport (SAPSPI_CCMS_Monitors.car) provides a CCMS monitor set (HP OV SAP-SPI) that includes monitors for the following SAP components: the J2EE engine, SAP security, stand-alone enqueue servers, enterprise-portal performance and availability, and XI monitoring.



You can define new (or expand existing) monitor sets to include new CCMS monitors, whose alerts you want to display. For more information about defining CCMS monitor sets in the context of the SPI for SAP, see r3monal: CCMS Monitor Sets on page 48 and r3monal: CCMS Alert Monitors on page 51.


- 3 Import the SPI for SAP monitor transports:
 The SPI for SAP monitor transport (R3Trans.car) contains all the SPI for SAP's ABAP monitors and their default configuration settings. You must import the monitor transport into the central monitoring system which monitors all the ABAP and ABAP/JAVA (dual stack) systems connected to it.
- 4 Register and start the appropriate CCMS agent on each instance of the J2EE engine and ABAP that you want to monitor with the SPI for SAP through the CEN.
 - For a brief description of the SAPCCMSR agent (for J2EE) and the SAPCCM4X agent (for ABAP) in the context of the SPI for SAP, see J2EE Instances on page 192 and SAP ABAP Instances on page 191 respectively. For more detailed information about installing, registering, and starting the agents, see the SAP product documentation.
- If not already present, deploy the SPI for SAP's CCMS-alert monitor r3monal to the system hosting the CEN and modify the r3monal.cfg configuration file to enable the monitoring of CCMS monitor sets. For more information about enabling CCMS monitor sets in the r3monal.cfg configuration file, see CCMS Monitor Set on page 31.
- 6 Make sure the SPI for SAP is aware of the CEN.
 - If not already present, add an entry for the CEN to the SPI for SAP's central configuration file, r3itosap.cfg, on the system hosting the CEN instance.
 - For more information about the contents of the r3itosap.cfg file and an explanation of the syntax required with the HostSapAssign keyword used to define a new SAP instance to monitor, see the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.
- 7 If you previously used the SPI for SAP to monitor individual SAP Systems locally (and independently) and now want to change the configuration so that you can monitor all the individual SAP Systems remotely in the CEN, you will have to take note of the following points:
 - The r3monal monitor must not run on both the local SAP System and on the CEN System, too; this will lead to the duplication of messages.
 - To avoid message duplication, disable both the r3monal monitor and the r3itosap.cfg file on each of the individual SAP Systems whose CCMS alerts you were previously monitoring independently with the SPI for SAP.
 - b Configure the CEN to monitor CCMS alerts remotely from all the individual SAP Systems that you were monitoring locally.
 - c Configure r3monal on the CEN to intercept CCMS alerts arriving on the CEN from all the individual SAP Systems that you were monitoring locally.
 - To ensure that the CCMS alerts from the individual, remote SAP Systems now appear in the Solution Manager on the CEN, use transaction RZ20 to set up a CCMS monitor tree (on the CEN) for each SAP System ID that you previously monitored locally. The new monitor trees should specify which CCMS alerts you want to monitor and intercept with the SPI for SAP.

In this way, one instance of r3monal on the CEN can monitor CCMS alerts from all the SAP Systems monitored remotely by the CEN.

8 By default, the MTE rule nodes for J2EE monitoring installed with the SPI for SAP CCMS transport are set to monitor the "Current" System on which the transport is imported. This setting should be changed to "all" when imported into a CEN, so that alerts from remote Systems reporting to the CEN are monitored, as illustrated in Figure 19 on page 195.

9 If you were *not* already monitoring the CEN with the SPI for SAP, add the system hosting the CEN to the HPOM node bank so that messages generated by the SPI for SAP are visible in the HPOM message browser.

Figure 19 MTE Rule-Node Settings for CEN Monitoring

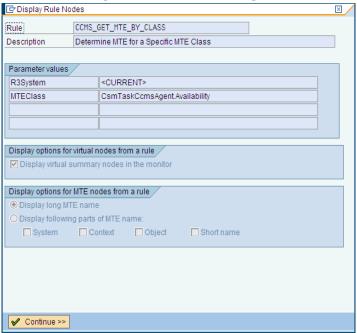

6 The SPI for SAP Performance Monitors

This chapter describes in detail how to install, set up, and use the SPI for SAP R/3 Performance Agent. It also provides information about how to put the performance monitors included in the SPI for SAP R/3 Performance Agent to best use and supplement the information collected by the SPI for SAP performance monitors with information supplied by the HP Performance Agent.

Performance Monitors Overview

The SPI for SAP R/3 Performance Agent uses a selection of performance monitors to collect SAP performance data and store them either in the HP Software Embedded Performance Component (CODA) or the Performance Agent (Unix/Windows). You can use the Performance Manager to monitor, manage, and correlate these data, together with data collected by any other application, database, system and network Performance Agent. The data can then be used to compare trends between SAP business transactions and other system metrics. This section provides information about the following topics:

- Performance monitoring with the SPI for SAP
- Using HPOM to install the SPI for SAP R/3 Performance Agent
- Configuring the performance monitors

Implemented ABAP-function modules inside SAP NetWeaver are accessed by means of an RFC-call. The performance monitors gather a snapshot of SAP-runtime performance data.

The SPI for SAP R/3 Performance Agent can collect more than 130 metrics in *addition* to those collected by the SAP NetWeaver Performance alert monitor (ST03), which is part of the SAP NetWeaver CCMS subsystem.

You can configure the SPI for SAP R/3 Performance Agent to specify which monitors should be run on specified SAP NetWeaver instances and how frequently. For more information, see Configuring the SPI for SAP R/3 Performance Agent on page 206.

The Performance Agent runs in Windows operating systems as a service and in UNIX operating systems as a daemon (background) process that runs independently of the HPOM agent processes. To start or stop the SPI for SAP R/3 Performance Agent processes, use the appropriate HPOM tool in the Tool Bank window. For more information, see Managing the SPI for SAP R/3 Performance Agent on page 216.

Upgrading the SPI for SAP R/3 Performance Agent

You cannot always use the data sources you defined in previous versions of the SPI for SAP R/3 Performance Agent with the latest version of the SPI for SAP. The upgrade strategy you adopt depends on the version of the SPI for SAP R/3 Performance Agent you want to upgrade.

If you are upgrading a recent version of the SPI for SAP R/3 Performance Agent such as 12.00 or 11.00, you can continue to use all existing data and data sources. If you are using an older version such as 10.x or 9.x, you can re-use the data and data sources, but you have to migrate the data to the new format required by the latest SPI for SAP R/3 Performance Agent. If you are using a version of the SPI for SAP R/3 Performance Agent such as 8.x or earlier, you will not be able to reuse any of the existing data and data sources.

To upgrade the SPI for SAP R/3 Performance Agent, perform the following high-level steps:

1 Remove the existing SPI for SAP R/3 Performance Agent

For more information about removing the SPI for SAP R/3 Performance Agent, see Removing the SPI for SAP R/3 Performance Agent on page 237.

2 Remove existing SPI for SAP R/3 Performance Agent data and data sources

SPI for SAP 10.x or 9.x - If you are upgrading from versions 10.x or 9.x to the current version of the SPI for SAP, you do not need to perform this step; you can continue to use existing data and data sources.

3 Upgrade the SPI for SAP

For more information, refer to the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

4 Install the new SPI for SAP R/3 Performance Agent

For more information about installing the SPI for SAP R/3 Performance Agent, see Installing the SPI for SAP R/3 Performance Agent on page 202.

5 Configure the new SPI for SAP R/3 Performance Agent

For more information about installing the SPI for SAP R/3 Performance Agent, see Configuring the SPI for SAP R/3 Performance Agent on page 206.

6 Upgrade the SPI for SAP/Reporter Integration

For more information about upgrading the SPI for SAP Reporter integration, see Upgrading the SPI for SAP Reports on page 350.

Migrating the SPI for SAP R/3 Performance Agent with the HP Performance Agent

If you are using the HP Performance Agent as your performance data source and want to upgrade the SPI for SAP R/3 Performance Agent from a previous to the most recent version, it is extremely important that you migrate (or in some cases remove) cleanly and completely the data and data sources associated with the old version of the SPI for SAP R/3 Performance Agent before you start the installation of the new version.

To migrate the SPI for SAP R/3 Performance Agent, you need to perform the following steps:

1 Stop the Performance Agent

On the node where you perform the upgrade, stop the Performance Agent:

• AIX operating systems:

/usr/lpp/perf/bin/mwa stop

HP-UX/Solaris operating systems:

/opt/perf/bin/mwa stop

Windows operating systems:

mwacmd stop

2 Remove the old SPI for SAP R/3 Performance Agent

Remove the old version of the SPI for SAP R/3 Performance Agent from the managed node as described in Removing the SPI for SAP R/3 Performance Agent on page 237.

3 Clean up data sources

If you are upgrading from versions 08.71or later to the current version of the SPI for SAP, you do not need to perform this step: you can continue to use existing data and data sources with the new SPI for SAP Performance Agent.

The configuration of the new SPI for SAP Performance Agent walks you through the migration process and locates and updates the old data to the new format for you. For more information, see Configure the SPI for SAP R/3 Performance Agent on page 207.

If you are upgrading from version A.08.10 or earlier of the SPI for SAP, you need to remove all existing SPI for SAP R/3 Performance Agent performance data sources from the managed nodes as follows:

- a On the HPOM managed node, locate and, using text editor, open the following file, whose location differs according to operating system:
 - AIX operating systems:

/usr/lpp/perf/data/perflbd.rc

HP-UX/Solaris operating systems:


/var/opt/perf/data/perflbd.rc

Windows operating systems:

<OvPerfAgtInstallDir>\data\perflbd.mwc

b Remove any entries relating to the SPI for SAP R/3 Performance Agent present in the perflbd file, as illustrated in Figure 20 on page 199. Entries in the perflbd file relating to the SPI for SAP R/3 Performance Agent start with: DATASOURCE=R3 *.

Figure 20 Cleaning up the perflbd file



- c Remove the data-source files from the following directories:
 - AIX operating systems:

/var/lpp/OV/bin/R3PerfAgent/data

HP-UX/Solaris operating systems:

/var/opt/OV/bin/R3PerfAgent/data

Windows operating systems:

%OvDataDir%\bin\R3PerfAgent\data

4 Remove the old version of the SPI for SAP

If you have not already done so, remove the old version of the SPI for SAP from the management server. For more information see *Removing the SPI for SAP* in the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

5 Install the new version of the SPI for SAP

Install the new version of the SPI for SAP on the HPOM management server. For more information, see *Installing the SPI for SAP* in the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

6 Install the new SPI for SAP R/3 Performance Agent

Install the new version of the SPI for SAP R/3 Performance Agent as described in Installing the SPI for SAP R/3 Performance Agent on page 202.

7 Configure the new SPI for SAP R/3 Performance Agent

Configure the SPI for SAP R/3 Performance Agent. For more information, see Configuring the SPI for SAP R/3 Performance Agent on page 206.

Note that after finishing the migration described here, you do not need to execute steps 1 and 2 specified in Configure the SPI for SAP R/3 Performance Agent on page 207. You can proceed directly to step 3 and adapt the configuration file before starting the SPI for SAP R/3 Performance Agent in steps 4 and 5.

Upgrading the SPI for SAP R/3 Performance Agent with CODA

If you are using the HP Software Embedded Performance Component (CODA) as your performance data source and want to upgrade the SPI for SAP R/3 Performance Agent from a previous to the most recent version, it is extremely important that you migrate (or in some cases remove) cleanly and completely the data and data sources associated with the old version of the SPI for SAP R/3 Performance Agent before you start the installation of the new version.

To migrate the SPI for SAP R/3 Performance Agent, you need to perform the following steps:

1 Remove the old SPI for SAP R/3 Performance Agent

Remove the old version of the SPI for SAP R/3 Performance Agent from the managed node as described in Removing the SPI for SAP R/3 Performance Agent on page 237.

2 Clean up SPI for SAP R/3 Performance Agent data sources

If you are upgrading from version 9.x or later to the current version of the SPI for SAP, you do not need to perform this step: you can continue to use existing data and data sources with the new SPI for SAP performance agent. The configuration of the new SPI for SAP performance agent walks you through the migration process and locates and updates the old data to the new format for you. For more information, see Configure the SPI for SAP R/3 Performance Agent on page 207.

If you are upgrading from version A.08.10 or earlier of the SPI for SAP, you need to check for (and delete) entries relating to the old SPI for SAP R/3 Performance Agent present in the ddflbd file. Note that the location of the ddflbd file and the file extension differ according to platform, namely:

AIX operating systems:

/var/lpp/OV/conf/dsi2ddf/ddflbd.rc

HP-UX/Solaris operating systems:

/var/opt/OV/conf/dsi2ddf/ddflbd.rc

Windows operating systems:

%OvAgentDir%\conf\dsi2ddf\ddflbd.mwc

Entries in the ddflbd file relating to the SPI for SAP R/3 Performance Agent typically start with the following string: DATASOURCE=R3_* as illustrated in Figure 21 on page 201. The value of LOGFILE= defined for the SPI for SAP R/3 Performance Agent entries is important: you use it (including the complete path) as an argument with the command-line utility ddfutil -rm all to remove the entries one by one, as follows:

ddfutil \ %OvDataDir%\bin\r3perfagent\data\R3_MARTI_WA4_00_DATA \ -rm all

After you remove from the ddflbd file all the entries you can find relating to the SPI for SAP R/3 Performance Agent, check that the entries are no longer present by closing the ddflbd file and opening it again.

3 Remove the old version of the SPI for SAP

If you have not already done so, remove the old version of the SPI for SAP from the management server. For more information see "Uninstalling the SPI for SAP" in the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

4 Install the new version of the SPI for SAP

Install the new version of the SPI for SAP on the HPOM management server. From more information, see *Installing the SPI for SAP* in the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

5 Install the new SPI for SAP R/3 Performance Agent


Install the new version of the SPI for SAP R/3 Performance Agent as described in Installing the SPI for SAP R/3 Performance Agent on page 202.

6 Configure the new SPI for SAP R/3 Performance Agent

Configure the SPI for SAP R/3 Performance Agent. For more information, see Configuring the SPI for SAP R/3 Performance Agent on page 206.

Note that after finishing the migration described here, you do not need to execute steps 1 and 2 specified in Configure the SPI for SAP R/3 Performance Agent on page 207. You can proceed directly to step 3 and adapt the configuration file before starting the SPI for SAP R/3 Performance Agent in steps 4 and 5.

Figure 21 The ddflbd.mwc File

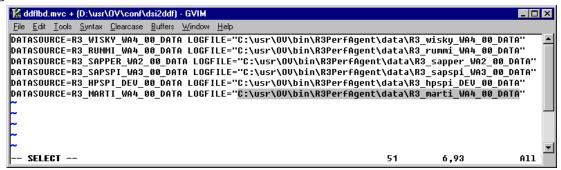

Installing the SPI for SAP R/3 Performance Agent

This section describes how to use the HPOM GUI to install the SPI for SAP functionality for the performance-agent on the SAP servers you want to manage with HPOM and the SPI for SAP. Note that the instructions in this section assume the following is true:

- The HP Operations agent is already installed and running on the selected SAP servers.
- The dsi2ddf wrapper is present on the HP Operations management server and, in addition, you have selected the source you want the performance monitor subagent to use for performance data. For more information about installation pre-requisites and selecting the performance-data source, see the HP Operations Smart Plug-in for SAP Installation and Configuration Guide.
- Either the HP Performance Agent or the HP Software Embedded Performance Component (CODA) is running on the selected SAP servers.

To install the SPI for SAP R/3 Performance Agent package, follow these steps:

1 Stop the Performance Agent

On the node where you want to install the SPI for SAP R/3 Performance Agent, stop the Performance Agent by entering the following command in a shell:

• AIX operating systems:

/usr/lpp/perf/bin/mwa stop

HP-UX/Solaris operating systems:

/opt/perf/bin/mwa stop

Microsoft Windows operating systems:

mwacmd stop

2 Select the Managed Nodes for SPI for SAP R/3 Performance Agent installation

Start HPOM and, in the Node Bank window, select the managed node(s) where you want to install the SPI for SAP R/3 Performance Agent.

3 Install Actions, Monitors, and Commands on the managed node


In the HPOM Node Bank window, select a node and from the **Choose an action** drop-down box, click **Deploy Configuration**. Select Distribute Actions, Distribute Monitors, and Distribute Commands, and then click **OK**.



Make sure that the managed node is selected in the Target Nodes section.

4 Open the Tool Bank window

From the Window menu, select Tool Bank. The Tool Bank window opens.

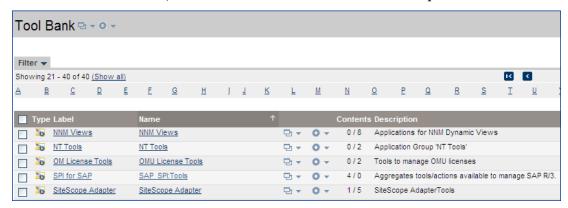

5 Select the tool to install the SPI for SAP R/3 Performance Agent

From the Tool Bank window, go to the SPI for SAP group, click **SAP R/3 Admin**, and then run one of the following tools on the node where you want to install the SPI for SAP R/3 Performance Agent:

- Run the Install Performance Package (UNIX) tool on UNIX nodes
- Run the Install Performance Package (Windows) tool on Windows nodes

The SPI for SAP R/3 Performance Agent installation writes general information and errors to stdout. Further information can be found in the following log files on the HP Operations management server:

- /var/opt/OV/log/OpC/mgmt sv/product inst.log
- /var/opt/OV/log/OpC/mgmt_sv/product_inst_err.log
- /var/opt/OV/log/OpC/mgmt sv/product inst sum.log

Locating the SPI for SAP R/3 Performance Agent Files

The information in this section describes the location of the files which the SPI for SAP installs as part of the SPI for SAP R/3 Performance Agent package for the following platforms:

- SPI for SAP R/3 Performance Agent: AIX
- SPI for SAP R/3 Performance Agent: HP-UX, Solaris, and Linux
- SPI for SAP R/3 Performance Agent: Windows

The performance-related files listed in this section belong to the following categories: binaries and executable, configuration files, the dsilog files required by the HP Performance Agent, and templates.



The dsilog files are only required by the HP Performance Agent; the HP Software Embedded Performance Component does not require or make use of the dsilog files.

SPI for SAP R/3 Performance Agent: AIX

This section lists the files which the SPI for SAP installs as part of the SPI for SAP R/3 Performance Agent package for AIX.

- Binaries: /var/[lpp | opt]/OV/bin/R3PerfAgent/bin
 - r3perfconfig

SPI for SAP performance-monitor configuration tool

— r3perfagent

SPI for SAP performance-monitor agent

Configuration files:

HTTPS: /var/opt/OV/conf/sapspi/

— r3perfagent.cfg

Configuration file for the performance monitors if you use the **Distribute Local Config** tool in the SPI for SAP > SAP R/3 Admin Local Tool group.

If you use the **Deploy Configuration** the location is:

/var/opt/OV/conf/sapspi

- Dsilog files: /var/[lpp |opt]/OV/bin/R3PerfAgent/data
 - R3_<HOSTNAME>_<SID>_...

Immediately after installation, this directory is empty; the SPI for SAP uses the directory to store the dsilog files, which r3perfconfig and compdsifile.sh compile for the HP Performance Agent.

- Templates: /var/[lpp | opt]/OV/bin/R3PerfAgent/template
 - R3statistics.<PERF-MONITOR>

Files the SPI for SAP uses to compile the dsilog files

— Parm.UX

Template for the performance agent parameter file.

SPI for SAP R/3 Performance Agent: HP-UX, Solaris, and Linux

This section lists the files which the SPI for SAP installs as part of the SPI for SAP R/3 Performance Agent package for HP-UX, Solaris, and Linux:

- Binaries: /var/opt/OV/bin/R3PerfAgent/bin
 - r3perfconfig

SPI for SAP performance-monitor configuration tool

- r3perfagent

SPI for SAP performance-monitor agent

- Configuration files: /var/opt/OV/conf/sapspi/[global | local]
 - r3perfagent.cfg

Configuration file for the performance monitors if you use the Distribute Local Config tool in the SPI for SAP > SAP R/3 Admin Local Tool group.

If you use the Deploy Configuration.../var/opt/OV/conf/sapspi

- Dsilog files: /var/opt/OV/bin/R3PerfAgent/data
 - R3 <HOSTNAME> <SID> ...

Immediately after installation, this directory is empty; the SPI for SAP uses the directory to store the dsilog files, which r3perfconfig and compdsifile.sh compile for the HP Performance Agent.

• Templates: /var/opt/OV/bin/R3PerfAgent/template

```
R3statistics.<PERF-MONITOR>
```

Files the SPI for SAP uses to compile the dsilog files

— parm.UX

Template for the performance agent parameter file.

SPI for SAP R/3 Performance Agent: Windows

This section lists the files which the SPI for SAP installs as part of the SPI for SAP R/3 Performance Agent package for Windows:

- Binaries: %OVDATADIR%\bin\r3perfagent\bin
 - r3perfconfig

SPI for SAP performance-monitor configuration tool

- r3perfagent

SPI for SAP performance-monitor agent

— r3perfagent service

Starts the performance-monitor agent as a service under Windows

- Configuration files: %OVDATADIR%\conf\sapspi\
 - r3perfagent.cfg

Configuration file for the various performance monitors.

- Dsilog files: %OVDATADIR%\bin\r3perfagent\data
 - R3 <HOSTNAME> <SID> ...

Immediately after installation, this directory is empty; the SPI for SAP uses the directory to store the dsilog files, which r3perfconfig.bat and compdsifile.bat compile for the HP Performance Agent.

- Templates: %OVDATADIR%\bin\r3perfagent\template
 - R3statistics.<PERF-MONITOR>

Files the SPI for SAP uses to compile the dsilog files

— parm.UX

Template for the performance-agent parameter file.

Configuring the SPI for SAP R/3 Performance Agent

The information in this section takes you through the process of setting up and configuring the SPI for SAP R/3 Performance Agent.

Selecting the Performance-data Source

The HP Software Embedded Performance Component is, as the name suggests, embedded in the HPOM software and available, by default, in any HPOM for UNIX installation. However, you can use the HPOM GUI to deploy the HP Performance Agent (previously MeasureWare) to the managed nodes, too. Note that HPOM Smart Plug-ins use the HP Performance Agent as the default source for the performance data required for graphing in HP Performance Manager and HP Reporter. If both performance agents are installed on a managed node, then you have to configure the SPI for SAP for which performance agent it should use for the collection of performance data so that it knows where and in what format to write the performance data it collects with its own performance monitors. Note that previously installed HP Software products that use the HP Performance Agent will continue to use Performance Agent as the data source.

The information in this section explains what to do if you are using the HP Software Embedded Performance Component as the data source on the managed node and wish to switch to the Performance Agent. You can override the use of the HP Software Embedded Performance Component by setting up a small text file, nocoda.opt, which changes the data source from CODA to the Performance Agent.

After you configure the nocoda.opt file, you must store it in a specific location on each managed node, whose performance-data source you want to change. The location of the nocoda.opt file on the managed node varies according to the operating system running on the HPOM management server and managed node. Table 71 shows the location of the nocoda.opt file on nodes managed by an HPOM management server.

Table 71 HPOM for UNIX Management Servers

Managed-Node Operating System	Location of the nocoda.opt File	
AIX	/var/lpp/OV/conf/dsi2ddf/nocoda.opt	
HP-UX / Solaris	/var/opt/OV/conf/dsi2ddf/nocoda.opt	
Windows	%OVDATADIR%\conf\dsi2ddf\nocoda.opt	

To change the default setting for the data source, open the nocoda.opt file in a text editor and manually enter the appropriate information using the format and syntax illustrated in An Example of the nocoda.opt File.

To change the performance-data source, follow these steps:

1 Open the nocoda.opt file

Open the (or create a new) nocoda.opt file in a text editor and manually enter the appropriate information using the format and syntax illustrated in An Example of the nocoda.opt File.

2 Specify a generic data source

To designate the Performance Agent as the agent for all data sources, enter the key word ALL at the top of the file.

3 Specify individual data sources

To designate Performance Agent as the agent for a data source tied to a specific SAP NetWeaverinstance, include a reference to each instance on a separate line of the nocoda.opt file, as shown in An Example of the nocoda.opt File and using the following format:

```
R3 <Virtual SAPR/3 Instance Name> <SAPR/3 Hostname> DATA
```

4 Save the changes to the nocoda.opt file

Save the changes to the nocoda.opt file.

5 Restart the HP Operations agent

Restart the HP Operations agent on the managed node where the nocoda.opt file has been modified.

An Example of the nocoda.opt File

```
#-----#
Add to (or modify) the contents of this file to change the
# data-source from the default CODA to the Performance Agent
#------
# All hosts:
# ALL
# SAP R/3 hosts/instances:
R3_ovsdsap_DEV_00_DATA
```

Configure the SPI for SAP R/3 Performance Agent

You need to complete the following steps to configure the SPI for SAP R/3 Performance Agent:



Make sure that the OVDATADIR environment variable is set for all UNIX nodes.

1 Start the SPI for SAP R/3 Performance Agent configuration

On the node where you installed the SPI for SAP R/3 Performance Agent, switch to the appropriate directory and enter the following command to run the SPI for SAP R/3 Performance Agent configuration scripts:

- Windows operating systems: r3perfconfig
- UNIX operating systems: ./r3perfconfig

Follow the instructions which appear on screen. The script lists the SIDs that it finds and prompts you to choose one of the associated numbers to indicate which SAP NetWeaver instance you want to configure. For example:

Installed SAP Instances:

	SID	SapNr	HostName
(0)	AST	45	sapper
(1)	DEV	50	sapper

```
(2) SP1 80 sapper
(3) to configure Netweaver Datasource
Choose:
(x) to configure shown system
888 to manually configure a SAP system
999 to quit
```

ABAP datasource is created by default. If you need to create a Netweaver datasource, select the appropriate options and click confirm for the datasource creation.

Enter the appropriate SAP-SID identification number, for example, 0 for AST, 1 for DEV, 2 for SP1, 3 for Netweaver Datasource, or 888 to configure a new SAP System:

a If *no* data source exists for the given SAP System ID, r3perfconfig creates one and configures it, as follows:

```
Choose:
(x) to configure shown system
888 to manually configure a SAP system
999 to quit
0
Creating new datasource: R3_sapper_AST_45_DATA
...Datasource successfully created
```

b If a valid data source already exists for the given SAP System ID, r3perfconfig lists the data source and prompts you to continue, as follows:

```
Choose:
(x) to configure shown system
888 to manually configure a SAP system
999 to quit
0
Valid datasource already exists: R3 sapper AST 45 DATA
```

c If r3perfconfig finds an existing data source, which it can migrate to the required *new* format, it lists the old data source and asks you what to do:

```
Choose:
(x) to configure shown system
888 to manually configure a SAP system
999 to quit
1
Found an old datasource: R3_sapper_DEV_50_DATA
Should the existing datasource be migrated <yes/no>?
```

Bear in mind the following before you respond:

yes

automatically migrates the old data source to the format required by the new version of the SPI for SAP R/3 Performance Agent

- no

leaves the existing data source unchanged: the old data source *cannot* be used with the new version of the SPI for SAP R/3 Performance Agent

d If r3perfconfig finds an existing data source, which *cannot* be migrated to the new format, for example, because it belongs to a version of the SPI for SAP that is older than 08.71, it lists the old, *invalid* data source and prompts you to continue, as follows:

```
Choose:
(x) to configure shown system
888 to manually configure a SAP system
999 to quit
2
Found an invalid datasource: R3_sapper_SP1_80_DATA
Existing datasource cannot be migrated
```

- e If you choose 888 to configure a SAP SID from scratch, you are required to answer a series of questions concerning the SAP SID you want to configure.
- Since r3perfagent will always use the physical hostname in a cluster environment, you must specify the clustered SAP-system details by configuring r3perfagent with the manual mode (888). If you are configuring r3perfagent on a physical cluster node, r3perfconfig may offer you the option (x) on the SAP system with the virtual node. In this case, use the manual configuration (888) by specifying the physical cluster node name.

When you are finished, the data sources are created and added to the following file, which differs according to whether you are using HP Performance Agent or the HP Software Embedded Performance Component:

— Windows operating systems:

```
perflbd.mwc / ddflbd.mwc
```

— UNIX operating systems:

```
perflbd.rc / ddflbd.rc
```

It is a good idea to update the parm.mwc file as described in the next step before you restart the performance agent.

2 Update the performance-agent parameter file



This step does not apply to the HP Software Embedded Performance Component.

If you are using the performance agent, append the template file parm.NT (or Parm.UX, depending on the installed operating system on the managed node) to the parm file of the performance agent, as follows:

— UNIX operating systems:

```
cat parm.UX >> parm
```

In UNIX operating systems, the parm file is located in: /var/opt/perf/parm

— Windows operating systems:

```
type parm.NT >> parm.mwc
```

The parm.mwc file is located in the following directory: <drive letter>\rpmtools\data\parm.mwc



You can represent several SAP NetWeaver instances in the parm file by using the asterisk (*) wild card.

3 Configure the performance monitors

Configure the monitors in the r3perfagent.cfg file. If you do not do this, all monitors will run with the default settings as illustrated in the following example. There are two possible configurations:

— Global:

Global SPI for SAP R/3 Performance Agent settings for all SAP managed nodes

— Local:

Local SPI for SAP R/3 Performance Agent settings for individual SAP managed nodes.

To open the r3perfagent.cfg file click the **PerfAgt** icon in the SAP R/3 Admin Tool group (for global configuration) or in the SAP R/3 Admin Local Tool group (for local configuration; this also requires that the SAP server is selected in the Node Bank first).

The default configuration is:

- All performance monitors are enabled for all SAP host names, systems, numbers and clients.
- The default polling intervals are set for each performance monitor in minutes.
- Hold Connections is disabled.

Change any values as required and save the file. You will have to restart the HP Performance Agent to upload the latest configurations.

4 Start the HP Performance Agent

Start the HP Performance Agent on the managed node by entering the following command in a shell:

- UNIX operating systems: mwa start
- Windows operating systems: mwacmd start

5 Start the SPI for SAP R/3 Performance Agent

On the managed node, switch to the directory in which the r3perfagent command resides and start the SPI for SAP R/3 Performance Agent by entering the following command in a shell:

— UNIX operating systems:

```
./r3perfagent [stop | start]
```

— Windows operating systems:

```
r3perfagent_service [-e | -s]
```

Or, alternatively, in the HPOM GUI, use the following SPI for SAP tool


— UNIX operating systems:

```
SPI for SAP > SAP R/3 UN*X > PerfAgt Start
```

— Windows operating systems:

SPI for SAP > SAP R/3 NT > PerfAgt Start

Figure 22 r3perfagent.cfg File Example

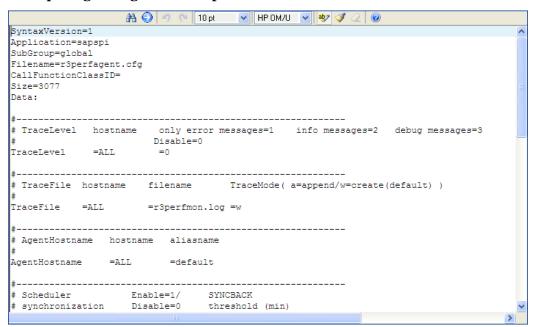

Remote Performance Monitoring

The current version of the SPI for SAP includes a feature, which allows you to extend the scope of the performance monitor to remotely monitor the health of an additional SAP server (which is *not* a managed node) from an SAP server, which *is* already configured as an HPOM managed node.



Although the remote host is not an HPOM managed node, it must nonetheless be present in the HPOM Node Bank. If you do not add the remote host to the HPOM Node Bank, HPOM cannot resolve the host name associated with the remote host and, as a consequence, any messages from the remote host will not appear in the message browser.

In addition, the SAP Server defined in RemoteHost must appear in the r3itosap.cfg file to ensure that the SPI for SAP can login to and extract information from the SAP instances it is monitoring on the remote host. For more information about the r3itosap.cfg file, refer to the HP Operations Smart Plug-in for SAP Installation and Configuration Guide.

To make use of the remote-monitoring feature provided by the SPI for SAP, for example, to collect SAP performance metrics from a SAP System running an operating system that is not supported by the SPI for SAP, you need to use the r3perfconfig command to manually add an additional data source for each system you plan to monitor remotely and then enable the new RemoteMonitoring keyword (by removing the leading hash symbol "#") in the *global* r3perfagent.cfg file.

On the same line in the <code>global</code> r3perfagent.cfg file, tell the SPI for SAP performance agent the name of the local SAP server which you want to perform the monitoring and, in addition, the name of the remote SAP server, which you want to monitor. Note that you must add a new line for each <code>additional</code> server that you want to monitor remotely. Specifying Remotely <code>Monitored Hosts</code> in the r3perfagent.cfg File on page 212, shows an excerpt from the <code>global</code> r3perfagent.cfg file with the remote-monitoring feature enabled; the <code>local</code> r3perfagent.cfg file, if present, would only contain references to the managed node on which the local configuration file is located.

The performance-monitoring conditions defined in the *Perfmon* section at the end of the r3perfagent.cfg file apply by default to all SAP instances running on all the servers listed in the configuration file, that is: all SAP instances running on both the local and remote servers defined in the RemoteMonitoring section. For more information about the keywords and parameters used to define remote monitoring in the r3perfagent.cfg file, see The r3perfagent.cfg Configuration File on page 213.

Specifying Remotely Monitored Hosts in the r3perfagent.cfg File

# Remote # Monitoring	LocalHost	RemoteHost
RemoteMonitoring RemoteMonitoring RemoteMonitoring #	=sapwolf2 =sapwolf3 =sapper	=sapprod1 =sapprod2 =sapprod3

The Performance-Monitor Scheduler

An internal scheduler ensures that the performance monitors run according to the desired schedule. The scheduler keeps track of time and the number of runs that have been completed and uses this information to ensure that the performance monitors run at the correct time and collect the appropriate performance-related data.

If the performance monitor encounters any problems during its run and cannot complete its task before the start of the next scheduled run, it does not stop and leave tasks incomplete; the performance monitor continues to run until it has completed its task. However, the scheduler tracks the progress of the performance monitor and tries to synchronize the run schedules so that the time lost can be regained without affecting the collection of the performance data.

If the performance-monitor scheduler falls ten minutes behind schedule, it sends a message to the HPOM management server with the warning that the scheduler is out of synchronization. If the performance-monitor scheduler falls thirteen minutes behind schedule, it resets—ignoring all outstanding jobs. For more information about the keywords you can use to control the performance-monitor scheduler and the messages it generates, see The r3perfagent.cfg Configuration File on page 213.

The performance monitor has problems with synchronization if it is not able to complete all its scheduled tasks in the allowed time between each monitor run. To troubleshoot scheduler-synchronization problems:

1 Check the Polling Interval

Check that the polling interval for the individual r3perfagent monitors has not been changed in the r3perfagent.cfg file to a value that is too small. You can define the polling interval for individual monitors in the "Polling Interval" column of the r3perfagent.cfg file, as shown in Specifying Remotely Monitored Hosts in the r3perfagent.cfg File on page 212. The default polling intervals for the performance monitors are, with one or two exceptions, between 15 and 60 minutes.

For example, if you reduce the polling interval of *all* the performance monitors to one (1) minute, the performance-monitor scheduler tries to start *all* the performance monitors *each* time it runs. If there are ten monitors and each monitor takes ten seconds to respond,

then the scheduler will already be out of synchronization by the time the scheduler starts its second run. You will have to increase the polling interval for the various performance monitors accordingly.

2 Disable Remote Monitoring

If you have enabled remote monitoring for the r3perfagent performance monitor, network problems could mean that requests for information from the remote server are not being answered in a timely fashion. Try disabling remote monitoring for a short while to test if this is the reason the r3perfagent performance monitor is having problems. You can do this for one individual remote host, or all remote hosts (if there are more than one). For more information about remote monitoring with the SPI for SAP performance monitor, see Remote Performance Monitoring on page 211.

The r3perfagent.cfg Configuration File

The SPI for SAP provides a default configuration for the r3perfagent monitor; the default file works without modification immediately after installation. However, if you want to set up the r3perfagent monitor for your particular SAP environment, you can modify the r3perfagent.cfg file by enabling or disabling the keywords in the following list and, where necessary, setting or modifying the appropriate parameters:

TraceLevel

The TraceLevel keyword accepts the following parameters:

TraceLevel =<Hostname> =<TraceLevel>

— Hostname:

=ALL Monitor all hosts with the SPI for SAP. This is the default

setting.

=<SAP host> The name of an SAP server, where you want to specify a trace

level. Use a new line for each individual host.

— TraceLevel:

- =0 Disable. This is the default setting.
- =1 Log only error messages
- =2 Log all messages
- =3 Log only debug messages. Note that this trace level logs a lot of information and could very quickly lead to a very large trace file.

TraceFile:

The TraceFile keyword accepts the following parameters:

Tracefile =<Hostname> =<Filename>

— Hostname:

=ALL Monitor all SAP servers with the SPI for SAP. This is the default setting

=<SAP_host> The name of a specific host where tracing is enabled and you want to specify a trace level.

— Filename:

=r3perfmon.log - This is the default setting, which writes the log file to the default log file directory. Alternatively, you can specify the name of the file to which you want to write the trace log and, if necessary, the path. The path can be either absolute or relative to the working directory.

If you use standard SPI for SAP tools to start the r3perfagent, the working directory is the directory where the r3perfagent binary resides, for example in UNIX operating systems: /var/opt/OV/bin/R3PerfAgent/bin. For more information about the location of the r3perfagent binaries, see Locating the SPI for SAP R/3 Performance Agent Files.

AgentHostname

Make sure that the AgentHostname keyword set to ALL.

SyncBack

The SyncBack keyword accepts the following parameters:

SyncBack =<Enable|Disable> =<SyncBack Threshold>

— Enable/Disable:

=0 Disable the scheduler synchronization

=1 Enable the scheduler synchronization. This is the default setting.

— SyncBack Threshold:

=< n > mins

The difference in minutes between defined and actual schedules. If the SyncBack threshold is reached, for example, when the scheduler is "n" minutes behind schedule, the scheduler restarts to return to the defined schedule. The SyncBack threshold should be *higher* than the Message Threshold value set in association with the BehindSyncMessage keyword so that you receive a message warning about schedule problems *before* the scheduler restarts.

BehindSyncMessage

The BehindSyncMessage keyword accepts the following parameters:

```
BehindSyncMessage =<Enable|Disable> =<OpC Severity> \
=<OpC Object> =<OpC MsgGroup> =<Message Threshold>
```

— Enable/Disable:

=0 Disable the sending of a behind-schedule message.

=1 Enable the sending of a behind-schedule message. This is the default setting.

— OpC Severity:

=WARNING The severity of the behind-schedule message sent. This is the default value.

— OpC Object:

=r3perfagent The HPOM for Windows object to associate with the behind-schedule message. This is the default value.

— OpC MsgGroup:

=R3_General The HPOM for Windows message group to which the behind-schedule message belongs. This is the default value.

— Message Threshold:

=< n> mins

The elapsed time in minutes before a behind-schedule message is sent to the HPOM management server. The message-threshold value should be *less* than the <code>SyncBack</code> Threshold value set in association with the <code>SyncBack</code> keyword so that you receive a message warning about schedule problems *before* the scheduler restarts.

RemoteMonitoring

The RemoteMonitoring keyword accepts the following parameters:

RemoteMonitoring =<LocalHost> =<RemoteHost>

LocalHost

This is the name of the host where the SPI for SAP software is running and whose performance agent will be used to remotely monitor the SAP server defined in "Remotehost".

- RemoteHost

This is the name of the *remote* SAP server that you want to monitor using the SPI for SAP on the SAP server defined in "Localhost". Although the remote host does not have the SPI for SAP software installed and is *not usually* an HPOM managed node, it must appear in the HPOM node bank.

For more information, see Remote Performance Monitoring on page 211.

PerfMon

The Perfmon keyword *requires* a value for the following parameters:

```
PerfMon =<SAP Hostname> =<SAP System> =<SAP Number> \
=<SAP Client> =<RFC FUNCTION> =<Enable|Disable> \
=<Polling Interval> =<Hold Connection>
```

— SAP Hostname:

=ALL Monitor all SAP hosts with the SPI for SAP. This is the default setting.

=<*SAP_host>* The host name of a specific SAP server whose performance you want to monitor. Use a new line for each individual host

— SAP System:

=ALL Monitor all SAP Systems with the SPI for SAP. This is the default setting.

=<*SAP_SID*> The ID of a SAP System whose performance you want to monitor, for example, DEV. Use a new line for each individual SID.

— SAP Number:

=ALL Monitor all SAP numbers with the SPI for SAP. This is the default

setting.

=<Instance> The number of a specific SAP instance whose performance you want

to monitor, for example, 00, 99. Use a new line for each new SAP

number.

— SAP Client:

=ALL Monitor all SAP clients with the SPI for SAP. This is the default

setting.

=<*ClientID>* The number of a specific SAP client whose performance you want to

monitor, for example, 099. Use a new line for each SAP client.

— RFC FUNCTION:

=<metricname>_PERF, where metricname refers to the specific metric list you want the performance monitor to use, for example, DBINFO_PERF or SAPMEMORY_PERF. For more information about the possible values you can use, see The SPI for SAP Performance Monitors on page 218.

— Enable/Disable:

=0 Disable the performance monitor

=1 Enable the performance monitor. This is the default setting.

— Polling Interval:

=nn nn is the time in minutes between each run of the performance monitor

— Hold Connection:

=0 Disable: close the RFC connection after the call has completed. This is the default setting.

=1 Enable: keep the RFC connection open after the call has completed

Managing the SPI for SAP R/3 Performance Agent

You can control the SPI for SAP R/3 Performance Agent using command-line options, which differ according to the platform and operating system. You can manage the SPI for SAP R/3 Performance Agent either by using command-line options or the tools that are installed by the SPI for SAP.

SPI for SAP R/3 Performance Agent Command Line Syntax

You an use the following options with the r3perfagent command on UNIX managed nodes to control the SPI for SAP R/3 Performance Agent from the command line:

- r3perfagent start
- r3perfagent stop
- r3perfagent status

You can use the following syntax with the r3perfagent command on Windows managed nodes to control the SPI for SAP R/3 Performance Agent from the command line:

- r3perfagent_service -i
 registers the r3perfagent service
- r3perfagent_service -u

 deregisters the r3perfagent service
- r3perfagent_service -s starts the r3perfagent service
- r3perfagent_service -e stops the r3perfagent service

You can also use the Services option in the Windows Control Panel to control Windows services.

SAP Logins for the SPI for SAP R/3 Performance Agent

The SPI for SAP R/3 Performance Agent requires access to SAP to collect SAP-related metrics, which it then uses to generate reports and graphs. You define the SAP login for the SPI for SAP R/3 Performance Agent during the installation and configuration of the SPI for SAP. You also need to copy the combination of SAP user-name and password to the central SPI for SAP configuration file, r3itosap.cfg, which the SPI for SAP monitors and agents use to login to SAP.

This is particularly important for the SPI for SAP R/3 Performance Agent, which reads the SAP log-in information in the r3itosap.cfg *once only*, on startup, and will not start if it cannot log in to SAP. The SPI for SAP R/3 Performance Agent attempts to log in to SAP and, if it fails, sends a message to HPOM indicating that it was unable to start as a result of authorization problems.



Note that SAP has a security mechanism which blocks further logins from a user who tries (and fails) to login to SAP a given number of times. This number of failed logins could quickly be reached by the SPI for SAP R/3 Performance Agent if the SAP username/password for the SPI for SAP is changed in SAP but the changes to the SAP log-in details are not updated in the r3itosap.cfg file.

If you change the SAP user name-password combination that the SPI for SAP uses to log in to SAP, you need to make sure that the changes are reflected in the r3itosap.cfg file and, in addition, that the SPI for SAP components which use the information in the r3itosap.cfg are restarted to make them aware of the changes.

Best of all, stop the SAP/Performance Agent *before* you change the SAP user/password which the SPI for SAP needs for access to SAP, as follows:

1 Stop the SAP/Performance Agent

Stop the SAP/Performance Agent on all HPOM managed nodes where it is running. On each managed node, enter:

r3perfagent stop

2 Login to SAP

Login to SAP as the administrator and change the user-password combination that SPI for SAP uses to log in to SAP, as required.

Note that SAP requires you to change the password for dialog users more frequently than other types of SAP users.

3 Update the configuration file

Update the SPI for SAP configuration file, r3itosap.cfg, with the changes you have made to the SAP user and password and redistribute to the managed nodes.

4 Restart the SAP/Performance Agent

Restart the SAP/Performance Agent on each of the HPOM managed nodes where the SAP/Performance Agent is running. On each managed node, enter:

r3perfagent start



The SPI for SAP cannot collect performance metrics during the period when the SAP/Performance Agent is not running.

SAP/Performance Agent Tools

Table 72 shows which tools are available for the SAP/Performance Agent in the appropriate SPI for SAP tool group—SAP R/3 NT or SAP R/3 UN*X.

Table 72 Performance Agent Tools

Tool Name	SAP R/3 NT	SAP R/3 UN*X
PerfAgt Start	✓	✓
PerfAgt Stop	✓	✓
PerfAgt Status	✓	✓

The SPI for SAP Performance Monitors

The SPI for SAP performance monitors can be one of two types: **snapshot** or **time-frame**. A snapshot monitor runs once and gathers only one set of values. Snapshot monitors need to run on a regular basis to create a comprehensive picture of the performance of the SAP NetWeaver environment. Time-frame monitors run, as the name suggests, over a period of time. Most SPI for SAP performance monitors do not make use of alert types or parameters.

The following SPI for SAP performance monitors are available with the SPI for SAP and are explained in greater detail in the individual sections that follow:

DBINFO_PERF

Monitors database-performance analysis values

DOCSTAT_PERF

Collects the document volume statistics for the last full hour

EP PERF

Monitors the status and performance of the SAP Enterprise Portal

ICMSTAT PERF

Monitors the status and performance of the SAP Internet Communication Manager

JOBREP_PERF

Counts the number of jobs per state (scheduled, running)

SAPBUFFER_PERF

Returns values for the use of SAP buffers for an SAP instance

SAPMEMORY PERF

Monitors SAP memory use by SAP users for an SAP instance

• SPOOL_PERF

Counts the number of spool requests in different states

• STATRECS_PERF

Returns the response/net times of defined transactions

SYSUP_PERF

Monitors the status of the SAP NetWeaver instances

• UPDATE PERF

Monitors the number of update processes

• USER PERF

Monitors the number of users and user sessions per SAP client

WLSUM_PERF

Collects the performance-workload statistics hourly

WP_PERF

Monitors the number of users/sessions per SAP client for an SAP application server



The name of the SPI for SAP performance monitor is often the same as the name of the metric list that the monitor uses to gather data for reports. For example: the SPI for SAP performance monitor DBINFO_PERF uses the metric list DBINFO_PERF. However, the names of some performance metrics have the prefix "SAP_". For example, the SPI for SAP performance monitor ICMSTAT_PERF uses the metric list SAP_ICMSTAT_PERF. For more information about SPI for SAP metric lists, see SPI for SAP Report Metrics on page 361.

DBINFO PERF

The DBINFO_PERF performance monitor returns a set of values as they are displayed in the SAP database-performance analysis page. This information can be used to detect database performance problems and assess whether database tuning could improve database performance.



The DBINFO_PERF performance monitor works *only* with Oracle database data structures. It does *not* work with data structures from other database products.

Type

The DBINFO_PERF performance monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. The DBINFO_PERF performance monitor collects SID-related metrics and should run only once per monitored SID, that is: either on the SAP central instance or on *one* application server.

Frequency

It is recommended to run the DBINFO_PERF performance monitor once every 15 minutes.

Datasource

The DBINFO_PERF performance monitor uses the SAP transaction ST04 (DB performance overview) as its data source.

Metrics

Table 73 shows the values in the performance table returned by the DBINFO_PERF performance monitor.

Table 73 DBINFO_PERF Performance Monitor Metrics

Order	Metric Name	Description	% Value	Cumul- ation
1	CPUUSAGE	Database CPU usage		No
2	BUFPREADS	Physical reads		Yes
3	BUFPWRITES	Physical writes		Yes
4	BUFQUAL	Quality of data base buffer pool	%	No
5	BUFSIZE	Database buffer pool size		Static
6	BUFWAITS	Buffer busy waits		Yes
7	BUFWTIME	Buffer busy wait time		Yes
8	DICTSIZE	Dictionary cache size		Static
9	DDQUAL	Quality of Data Dictionary cache	%	No
10	LOGBLOCKS	Redo log blocks written		Yes

Table 73 DBINFO_PERF Performance Monitor Metrics (cont'd)

Order	Metric Name	Description	% Value	Cumul- ation
11	LOGENTRIES	Redo log buffer entries		Yes
12	LOGSIZE	Redo log buffer size		Static
13	LOGFAULT	Allocation error rate of redo log buffer	%	No
14	LOGALLOC	Redo log buffer allocation retries		Yes
15	ROLLBACKS	Rollbacks		Yes
16	SCANLONG	Long table scans		Yes
17	SORTDISK	Sort disk		Yes
18	SORTMEM	Sort memory		Yes
19	SORTROWS	Sort rows		Yes

DOCSTAT PERF

The performance monitor, DOCSTAT_PERF, collects statistics relating to the volume of documents generated and processed for the last full hour. You can only configure this monitor once for every SAP NetWeaver System that you want to monitor.

Type

The DOCSTAT_PERF performance monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. The DOCSTAT_PERF performance monitor collects SID-related metrics and should run only once per monitored SID, that is: either on the SAP central instance or on *one* application server.

Frequency

It is recommended to run the DOCSTAT_PERF performance monitor hourly.

Data Source

The DOCSTAT_PERF performance monitor uses the SAP transaction ST07 (quantity structure) as its data source.

Metrics

Table 74 shows the values in the performance table returned by the DOCSTAT_PERF performance monitor.

Table 74 DOCSTAT_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	SID	The SAP System ID
2	DESCRIPTION	Description of an application-monitor object
3	CNTHEADER	Document headers
4	CNTITEM	Document items
5	CNTDIV	Document Division
6	CNTTOTAL	Total number of records
7	CNTLINE	Number of line items
8	CNTCHGDOC	The number of changed documents
9	CNTTEXT	Text

EP_PERF

The performance monitor, EP_PERF, monitors the status and performance of the SAP Enterprise Portal (EP) including (but not limited to) all the J2EE components on which it relies. For more information about the SPI for SAP's dedicated monitor for the SAP Enterprise Portal, see The SAP Enterprise-Portal Monitor on page 85.



EP_PERF is applicable wherever Enterprise Portal is available.

Type

The EP_PERF performance monitor is of type *time-frame* and does not make use of alert types or parameters. One monitor run gathers only one value set. The EP_PERF performance monitor collects SID-related metrics and should run only once per monitored SID, that is: either on the SAP central instance or on *one* application server.

Frequency

It is recommended to run the EP_PERF performance monitor approximately once every fifteen minutes.

Datasource

The EP_PERF monitor uses the SAP function $/ \text{HPOV/OV}_\text{EP}_\text{PERF}_\text{MONITOR}_2$ as its data source.

Metrics

Table 75 shows the values in the performance table returned by the EP_PERF performance monitor.

Table 75 EP_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	SID_EP	ID of the SAP System hosting the Enterprise Portal
2	HOSTNAME_EP	Name of the system hosting the Enterprise Portal
3	START_TIME_EP	The time at which the EP-monitor run starts
4	NO_REQ_EP	Number of requests to the Enterprise Portal
5	AVG_RESP_TIME_EP	Average time to respond to requests to the Enterprise Portal
6	AVG_CPU_TIME_EP a	Average CPU time required to respond to requests to the Enterprise Portal
7	REQ_PER_SEC_EP	Number of requests per second to the Enterprise Portal
8	AVG_OUTBND_DATA_EP	Average amount of out-bound data per request to the Enterprise Portal
9	ACC_RESP_TIME_EP	Accumulated response time of requests to the Enterprise Portal
10	ACC_CPU_TIME_EP (a)	Accumulated CPU time required to respond to EP requests
11	OUTBND_DATA_REQ_EP	Requests providing outbound data
12	ACC_OUTBND_DATA_EP	Amount of accumulated outbound data (in bytes)
13	NO_COMPCALLS_REQ_EP	Number of component calls by all requests to the Enterprise Portal
14	AVG_CMPCALLPERREQ_EP	Average number of component calls per EP request
15	VALID_MONDATA_REQ_EP	EP requests providing correct monitor data
16	REQ_NOT_CORR_CLSD_EP	EP requests with components that were not correctly closed
17	REQCLSD_TOOMNYCMP_EP	Number of EP requests that were closed because of too many components

Table 75 EP_PERF Performance Monitor Metrics (cont'd)

Order	Metric Name	Description
18	REQS_RUNLEVEL_0_EP	EP requests running with level 0
19	REQS_RUNLEVEL_1_EP	EP requests running with level 1
20	REQS_RUNLEVEL_2_EP	EP requests running with level 2
21	USRS_SINCE_1_REQ_EP	Number of users making EP requests since the first request
22	USRS_SINCE_LSTRST_EP	Number of users making EP requests since the last user reset
23	LST_REQ_RST_TSTMP_EP	Time of the last EP-request reset
24	LST_CMPREQ_TSTMP_EP	Time of the last component reset
25	LST_USRREQ_TSTMP_EP	Time of the last EP-user reset

a. Only for SAP NetWeaver portal version 7.0



If the performance monitor EP_PERF cannot find any data or it encounters a null string in SAP CCMS, it logs some performance metrics as '0' (zero); this behavior is expected.

ICMSTAT PERF

The performance monitor, ICMSTAT_PERF, monitors the status and performance of the SAP Internet Communication Manager (ICM).

Type

The ICMSTAT_PERF performance monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. The ICMSTAT_PERF performance monitor collects application-server-specific metrics; it should run on each application server whose performance you want to monitor.



ICMSTAT_PERF monitor is applicable till 6.40.

Frequency

It is recommended to run the ICMSTAT_PERF performance monitor approximately once every fifteen minutes.

Datasource

The ICMSTAT_PERF monitor uses the SAP transaction ${\tt SMICM}\,(ICM$ monitor) as its data source.

Metrics

Table 76 shows the values in the performance table returned by the ICMSTAT_PERF performance monitor.

Table 76 ICMSTAT PERF Performance Monitor Metrics

Order	Metric Name	Description
1	ICM_Status	The status of the Internet Communication Manager
2	Max_Threads	The defined max. number of open threads allowed by the ICM
3	Peak_Threads	Peak number of open threads in the ICM in a given period
4	Cur_Threads	Number of currently open threads in the ICM
5	Max_Connections	The defined max. number of open connections allowed by the ICM
6	Peak_Connections	Peak number of connections in the ICM in a given period
7	Cur_Connections	Number of current connections in the ICM
8	Max_QueueEntries	The max. number of queued requests allowed by the ICM defined in: icm/req_queue_len
9	Peak_QueueEntries	Peak number of queued requests in the ICM in a given period
10	Cur_QueueEntries	Number of currently queued requests in the ICM
11	Running_Threads	Number of work threads waiting for a request (idle)
12	Dead_Threads	Number of work threads in a problematic state, for example, dead or hanging
13	Processed_Threads	Number of work threads currently processing a request

JOBREP_PERF

The JOBREF_PERF performance monitor counts the jobs per state in the time period between the end date and time of the last monitor run and the start date and time of the actual monitor run.

Type

The JOBREF_PERF monitor is of type *time-frame* and does not make use of alert types or parameters. One monitor run gathers only one value set. The JOBREF_PERF performance monitor collects SID-related metrics and should run only once per monitored SID, that is: either on the SAP central instance or on *one* application server.

Frequency

It is recommended to run the JOBREF_PERF performance monitor between once an hour and once a day.

Datasource

The JOBREF_PERF monitor uses the SAP transaction SM37 (background job overview) as its data source.

Metrics

Table 77 shows the values in the performance table returned by the JOBREF_PERF performance monitor.

Table 77 JOBREF_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	RUNNING	The number of jobs with status <i>running</i> since the last monitor run
2	READY	The number of jobs with status <i>ready</i> since the last monitor run
3	SCHEDULED	The number of jobs with status $scheduled$ since the last monitor run
4	RELEASED	The number of jobs with status <i>released</i> since the last monitor run
5	ABORTED	The number of jobs with status <i>aborted</i> since the last monitor run
6	FINISHED	The number of jobs with status <i>finished</i> since the last monitor run
7	PUT_ACTIVE	The number of jobs with status put_active since the last monitor run
8	UNKNOWN_STATE	The number of jobs with status $unknown$ since the last monitor run

SAPBUFFER_PERF

The SAPBUFFER_PERF performance monitor returns values for the use of SAP memory *buffers* by SAP users for a given instance, for example, hit ratios, buffer quality, free space available and so on in the NetWeaver repository, programs, and database tables.

Type

The SAPBUFFER_PERF monitor is of type *time frame*. The SAPBUFFER_PERF performance monitor collects application-server-specific metrics; it should run on each application server whose performance you want to monitor.

Frequency

It is recommended to run the SAPBUFFER_PERF performance monitor once every fifteen minutes.

Data Source

The SAPBUFFER_PERF monitor reads information from the SAP- buffers transaction ST02.

Metrics

Table 78 shows the values in the performance table returned by the SAPBUFFER_PERF performance monitor.

Table 78 SAPBUFFER_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	BUFFER_NAME	The name of the buffer
2	HITRATIO	Buffer object reads / logical requests. The buffer hit ratio appears as a percentage
3	ALLOCATED_SIZE	The amount of space allocated to the buffers a
4	FREE_SPACE	The amount of free space (KB) available in the buffer
5	FREE_SPACE_PERCENT	Available free buffer space as a percentage of total
6	MAXDIR_ENTR	The number of directories available for the buffer ^b
7	FREEDIR_ENTR	Number of free directories available for the buffer
8	FDIR_ENTR_PERCENT	Free directories available for the buffer as a percentage
9	BUFFER_SWAPS	Swap activity both inwards and outwards since System start ^c
10	BUFFER_SWAPS_DELTA	Difference between the number of buffer swaps measured in the current and previous monitor runs
11	DB_ACCESSES	The number of database accesses since System start $^{\rm d}$
12	DB_ACCESSES_DELTA	Difference between the number of database accesses measured in the current and previous monitor runs

a. Buffer size and "available buffer size" differ, because part of the buffer space is used for buffer management.

b. The buffer directories point to the location of the objects stored in the buffer.

c. Buffers swap objects out of the buffer to load a new object in, if insufficient free space or free directories exist.

d. Database access occurs when an object cannot be read from the buffer.

SAPMEMORY PERF

The SAPMEMORY_PERF performance monitor returns values for SAP memory use by SAP users for a given instance, for example, roll and paging areas, and extended memory.

Type

The SAPMEMORY_PERF monitor is of type *snapshot*: one monitor run gathers one value set. The SAPMEMORY_PERF performance monitor collects application-server-specific metrics; it should run on each application server whose performance you want to monitor.

Frequency

It is recommended to run the SAPMEMORY_PERF performance monitor once every fifteen minutes.

Data source

The SAPMEMORY_PERF monitor reads information from the SAP- buffers transaction ST02.

Metrics

Table 79 shows the values in the performance table returned by the SAPMEMORY_PERF performance monitor.

Table 79 SAPMEMORY_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	MEMORY_AREA	The type of memory buffer
2	CURRENT_USE_PERCENT	The amount of space currently used expressed as a percentage of the total available
3	CURRENT_USE	The amount of space currently used in KB
4	MAX_USE	The maximum value (max. use) since system startup
5	IN_MEMORY	The amount of space used in shared memory
6	ON_DISK	The amount of space used on the disk

SPOOL PERF

The SPOOL_PERF performance monitor counts the number of spool requests present in different states.

Type

The SPOOL_PERF performance monitor is of type *time frame* and does not make use of alert types or parameters. One monitor run gathers only one value set. The SPOOL_PERF performance monitor collects SID-related metrics and should run only once per monitored SID, that is: either on the SAP central instance or on *one* application server.

Frequency

It is recommended to run the SPOOL_PERF performance monitor once every 10 to 30 minutes.

Data Source

The $SPOOL_PERF$ performance monitor uses the SAP transaction SPO1 (output controller) as its data source.

Metrics

Table 80 shows the values in the performance table returned by the SPOOL_PERF performance monitor.

Table 80 SPOOL_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	ALL_SJ	Total number of spool jobs
2	SJ_ARCHIVE	Number of spool jobs in status archive
3	PRINT_REQ	Total number of print requests
4	OPEN_PR	Number of open print requests
5	SUCCESS_PR	Number of successfully processed print requests
6	ERROR_PR	Number of Print requests with errors
7	FAILED_PR	Number of failed print requests

STATRECS_PERF

The STATRECS_PERF performance monitor reads the statistical records and returns the average response time per transaction.

The STATRECS_PERF performance monitor uses the alert types RESPONSE_TIME and the parameter TRANSACTION to restrict the data selected. The transactions monitored are specified in the parameter TRANSACTION. If this parameter is not specified, the average response time is reported for each transaction in the local statistics file for the specified time frame.

Type

The STATRECS_PERF performance monitor is *time-frame* based. Each run gathers only one value set. To collect a set of values, the monitor must be scheduled on a regular basis. Since various monitors have different requirements, you have to specify the interval for each monitor individually. This monitor uses the time frame between the last start and the current start times and considers only those transactions which complete within the specified time-frame.

The STATRECS_PERF performance monitor collects application-server-specific metrics; it should run on each application server whose performance you want to monitor.

Frequency

It is recommended that you configure the STATRECS_PERF performance monitor to run once a minute

Data Source

The STATRECS_PERF performance monitor uses the following SAP transaction as its data source:

For SAP 7.0 and higher: STADFor SAP 6.40 version: STAT

Metrics

Table 81 shows the values in the performance table returned by the STATRECS_PERF performance monitor.

Order **Metric Name** Description Transaction code associated with the measured 1 SAP_TCODE transaction. This metric is only visible with the HP Performance Manager. 2 SAP RESPONSE TI Time SAP takes to respond ME SAP_NET_TIME Net Time 3 4 SAP_REC_COUNT The number of times the measured transaction

Table 81 STATRECS PERF Performance Monitor Metrics

Configuring and Uploading STATRECS_PERF

To enable the STATRECS_PERF monitor, you must configure the r3perfstat.cfg file and upload the results into SAP. There are two possible configurations:

occurs

- Global from SAP R/3 Admin
- Local from SAP R/3 Admin Local

To set and upload the STATRECS_PERF configurations:

Open and edit the r3perfstat.cfg configuration file

Open the r3perfstat.cfg file by double-clicking the **Statistical Records** icon from the **Tool Bank**. If you select the global configuration file, the settings will be used for all nodes except for those with local configurations.


2 Modify and save the r3perfstat.cfg configuration file

Change any values as required and save the file. This file is stored on the HPOM management server. It must be uploaded into SAP.

3 Upload the new configuration to SAP

To upload the configurations into SAP, select the SAP node(s) in the Node Bank window, and then double-click the Write STAT Rec Config application, which you can find in the SAP R/3 Admin tool group in the Tool Bank. The Write STAT Rec Config application—which resides only in the SAP R/3 Admin tool group—uses the local r3perfstat.cfg file (if present), or the global r3perfstat.cfg file.

Figure 23 Configuring Statistical Records

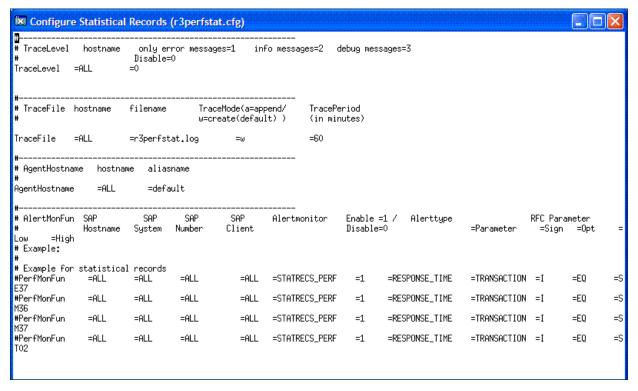

SYSUP_PERF

The SYSUP_PERF performance monitor is used to determine whether the SAP NetWeaver system is available or not.

Type

The SYSUP_PERF performance monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set.

Frequency

The SYSUP_PERF performance monitor runs once a minute; the run frequency cannot be modified.

Data Source

The SYSUP_PERF performance monitor uses internal SAP RFC calls as its data source.

Metrics

Table 82 shows the values in the performance table returned by the SYSUP_PERF performance monitor.

Table 82 SYSUP PERF Performance Monitor Metrics

Metric Name	Description
SYSTEM_STATUS	Status of the System (UP/DOWN) on the basis of the following values: SAP System available SAP System logon failure SAP System communication problems SAP System unknown Indicates that the performance agent was not running and could not collect any data.

UPDATE_PERF

The UPDATE_PERF performance monitor is used to determine whether update errors are occurring.

When the SAP NetWeaver system is behaving well, no update errors should occur. However, an update error can occur, if an update is performed on a database table record that has previously been deleted. A normal update process should not have to wait in status INIT for more than 5 minutes for an update task. If a greater number of work processes exist with the status INIT the reason could be that a table space is full.

Type

The UPDATE_PERF monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. The UPDATE_PERF performance monitor collects SID-related metrics and should run only once per monitored SID, that is: either on the SAP central instance or on *one* application server.

Frequency

It is recommended you configure the UPDATE_PERF performance monitor to run once a minute.

Data Source

The UPDATE_PERF monitor uses the SAP transaction ${\tt SM13}$ (update records) as its data source.

Metrics

Table 83 shows the values in the performance table returned by the UPDATE_PERF performance monitor.

Table 83 UPDATE_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	ALL	Number of all VB-update tasks
2	INITIAL	Number of initial VB-update tasks
3	ERRONEOUS	Number of erroneous VB-update tasks
4	VB1	Number of update tasks having V1 executed
5	VB2	Number of update tasks having V2 executed

USER_PERF

The USER_PERF performance monitor provides important information about the number of users and user sessions per SAP client for a given SAP application server.

Type

The USER_PERF monitor is of type *snapshot*: one monitor run gathers one value set. The USER_PERF performance monitor collects application-server-specific metrics; it should run on each application server whose performance you want to monitor.

Frequency

It is recommended to run the USER_PERF performance monitor once every five minutes.

Data source

The USER_PERF performance monitor the SAP transaction ${\tt SM04}$ (overview of users) as its data source.

Metrics

Table 84 shows the values in the performance table returned by the USER_PERF performance monitor.

Table 84 USER PERF Performance-Monitor Metrics

Order	Metric Name	Description
1	USER_CLIENT	The SAP client number associated with the users
2	USER_CNT	The number of users logged in per client
3	SESSION_CNT	The total number of user sessions per client

WLSUM_PERF

The performance monitor, WLSUM_PERF, collects the performance workload statistics for the last full hour. You can display the workload statistics for all task types, for example, dialog, background, RFC, ALE, or update. The WLSUM_PERF performance monitor is mandatory; you must configure it for every application server that you want to monitor.



The data collection for the WLSUM monitor is based on the internal SAP job COLLECTOR_FOR_PERFORMANCEMONITOR. This job must run with the same frequency as specified for WLSUM_PERF in r3perfagent.cfg. WLSUM_PERF will then pick up the data collected by the last run of COLLECTOR FOR PERFORMANCEMONITOR.

Type

The WLSUM_PERF performance monitor is of type *time-frame* and does not make use of alert types or parameters. One monitor run gathers only one value set. The WLSUM_PERF performance monitor collects application-server-specific metrics; it should run on each application server whose performance you want to monitor.

Frequency

Due to the way in which the performance monitor, WLSUM_PERF, measures and records time, it is *mandatory* to configure the WLSUM_PERF performance monitor to run once an hour.

Data source

The WLSUM_PERF performance monitor uses the SAP transaction ST03 (workload analysis) as its data source.

Metrics

Table 85 shows the values in the performance table returned by the WLSUM_PERF performance monitor.

Table 85 WLSUM_PERF Performance Monitor Metrics

Order	Metric Name	Description
1	Hostname	The SAP System hostname
2	SID	The SAP System ID
3	INSTANCE	The SAP instance number, if SAP version < 4.6x
4	TASKTYPE	Type of SAP NetWeaver task (RFC, dialog)
5	CNT	The number of dialog steps
6	DBACTIVCNT	Counter for database-active dialog steps
7	RESPTI	Time that elapses between a dialog sending a request to the dispatcher and receiving a response
8	CPUTI	CPU time used in the work process
9	QUEUETI	The time an unprocessed dialog step waits in the dispatcher queue for a free work process
10	LOADGENTI	Time taken loading and generating objects such as ABAP source code and screen information from the database
11	COMMITTI	Time required for commit to complete
12	DDICTI	Time required for Data Dictionary
13	QUETI	Time required for batch-input queue
14	CPICTI	Time required for RFC and CPI-C
15	ROLLINCNT	Number of roll-ins (rolled-in user contexts)
16	ROLLINTI	Processing time for roll-ins
17	ROLLOUTCNT	Number of roll-outs (rolled-out user contexts)
18	ROLLOUTTI	Processing time for roll-outs
19	READDIRCNT	Number of direct read accesses
20	READDIRTI	Time for direct read access
21	READSEQCNT	Number of sequential read attempts
22	READSEQTI	Time for sequential read accesses
23	CHNGCNT	Number of modified database accesses
24	CHNGTI	Time for modified database accesses
25	BYTES	Number of bytes

Table 85 WLSUM_PERF Performance Monitor Metrics (cont'd)

Order	Metric Name	Description
26	GUITIME	Total time taken for the dispatcher to execute a GUI request
27	GUICNT	Count of GUI steps
28	GUINETTIME	Time taken for the application server to respond to a request from the SAP GUI

WP PERF

The SPI for SAP performance agent uses the WP_PERF monitor to detect performance problems concerning SAP work processes. For example, WP_PERF can detect and report on the following situations:

- Work processes need to wait for semaphores
- Work processes are in *private* mode
- A dialog work-process does not return to idle after use/release

Type

The WP_PERF monitor is of type *snapshot* and does not make use of alert types or parameters. One monitor run gathers only one value set. The WP_PERF performance monitor collects application-server-specific metrics; it should run on each application server whose performance you want to monitor.

Frequency

It is recommended that you configure the WP_PERF performance monitor to run once every 15 minutes.

Data Source

The WP_PERF performance monitor uses SAP transaction SM50 (work- process overview) as its data source.

Metrics

Table 86 shows the values in the performance table returned by the performance monitor.

Table 86 WP PERF Performance Monitor Metrics

Order	Metric Name	Description
1	ALL_WP	Number of all work processes
2	SEMAPHORE_WP	Number of work processes waiting on a semaphore
3	DEBUG_WP	Number of work processes in debug mode

Table 86 WP_PERF Performance Monitor Metrics (cont'd)

Order	Metric Name	Description
4	LONG_RUNNING	Number of long running dialog wp
5	PRIVAT_WP	Number of dialog wp in private mode
6	NOSTART_WP	Number of dialog wp with no restart capability
7	DIA_IDLE	Number of idle dialog work processes
8	DIA_ALL	Number of dialog work processes
9	DIA_RUNNING	Number of running dialog wp
10	BTC_IDLE	Number of idle batch work processes
11	BT_ALL	Number of batch work processes
12	BTC_RUNNING	Number of running batch wp
13	SPO_IDLE	Number of idle spool work processes
14	SPO_ALL	Number of spool work processes
15	SPO_RUNNING	Number of running spool wp
16	ENQ_IDLE	Number of idle enqueue work processes
17	ENQ_ALL	Number of enqueue work processes
18	ENQ_RUNNING	Number of running enqueue wp
19	UPD_IDLE	Number of idle update work processes
20	UPD_ALL	Number of update work processes
21	UPD_RUNNING	Number of running update wp
22	UPD2_IDLE	Number of idle update2 work processes
23	UPD2_ALL	Number of update2 work processes
24	UPD2_RUNNING	Number of running update2 work processes

Removing the SPI for SAP R/3 Performance Agent

To remove the SPI for SAP R/3 Performance Agent from the managed node, you need to perform the following steps in the order indicated:

- Before starting the process of removing the SPI for SAP performance agent from the managed node, make sure that you *stop* the SPI for SAP performance agent, for example,
 - Use the SPI for SAP tool, PerfAgt Stop, which resides in the SPI for SAP > SAP R/3 UN*X or SPI for SAP > SAP R/3 NT tool group.
 - Use the following command as user root on the command line:

r3perfagent stop

- 2 From the Tool Bank window, go to the SPI for SAP group, and then run the following tools:
 - Run the Remove Performance Package (UNIX) tool on UNIX nodes
 - Run the Remove Performance Package (Windows) tool on Windows nodes

7 Monitoring SAP NetWeaver Web Application Server (J2EE)

The SPI for SAP helps you monitor the health of the J2EE engine of the SAP NetWeaver Web Application Server. With the help of a series of policies, you can collect metrics indicating the health, availability, and performance of the J2EE engine of an SAP NetWeaver Web Application Server. All the policies, necessary for monitoring the J2EE engine of SAP NetWeaver, are grouped under the SAP NetWeaver Java Monitoring policy group.

The policies under the SAP NetWeaver Java Monitoring policy group cannot be used to monitor the Web AS (Java) environment of an SAP R/3 environment. For an SAP R/3 deployment, you can use the SAPSPI_CCMS_Monitors.car transport, which is distributed with the SPI for SAP, to monitor the Web AS (Java) environment.

This version of the SPI for SAP helps you monitor the SAP NetWeaver Web Application Server (J2EE) for SAP NetWeaver 6.40, 7.00, and 7.10 only.

Before You Begin

Before you start monitoring the SAP NetWeaver Web Application Server (J2EE) environment, follow these steps:

- Install Actions, Monitors, and Commands on the managed node.
 - Before installing the Actions, Monitors, and Commands, make sure that the Generic JMX Component is installed on the HPOM management server.
- 2 Verify the location of necessary JAR files.

Make sure that the following JAR files are included in the specified locations on the SAP NetWeaver system:

These JAR file are placed in these locations by your SAP installation.

The following are the jar file locations for Netweaver 7.0.

- logging.jar (in the <SAP_home>/j2ee/admin/lib directory)
- exception.jar (in the <SAP_home>/j2ee/admin/lib directory)
- com sap pj jmx.jar (in the <SAP_home>/j2ee/admin/lib directory)
- sapj2eeclient.jar (in the <SAP_home>/j2ee/j2eeclient directory)
- jmx.jar (in the <SAP_home>/j2ee/admin/logviewer_standalone/lib
 directory)

The following are the jar file locations for Netweaver 7.1.

- tc~bl~pj_jmx~Impl.jar (in the <SAP-home>/j2ee/cluster/bin/ext/ tc~jmx/sap.com directory)

3 Provide access-related details.

You must provide the SPI for SAP with the details to access SAP NetWeaver Web Application Servers. With the help of the SiteConfig configuration file, you can provide the SPI for SAP with the access details of an SAP NetWeaver Web Application Server and enable the SPI for SAP to collect necessary metrics. To provide the SPI with all the access-related information, follow these steps:

- a In the SAP R/3 Admin tool group, click SiteConfig. The SiteConfig file opens in the vieditor.
- b Specify values for all attributes in the SiteConfig file. See The SiteConfig File on page 241 for information on all the attributes. You can specify the attributes of all nodes that you want to monitor in this file
- The SiteConfig file enables you to add the access details of all the SAP NetWeaver nodes that you want to monitor into the same file (see The SiteConfig File on page 241).
- c Save the file.
- d Run the Install Admin tool from the SAP R/3 Admin tool group on the node that you want to monitor. This step deploys the updated SiteConfig file along with all other configuration files on the node.

The SiteConfig file stores the password in an encrypted format. The password encryption happens in the managed node as part of Netweaver configuration and not on the management server.

Example of SiteConfig File in encrypted format

```
NUM_SERVERS=1
SERVER1_NAME=sapspil2.example.com
SERVER1_LOGIN=j2ee_admin
SERVER1_PASSWORD=ENCRYPTED 9pFfwhMzESIx+BilJKRPlA==

SERVER1_PORT=50004
SERVER1_VERSION=71
SERVER1_HOME=/usr/sap/<SID>/DVEBMGS00
SERVER1_JAVA_HOME=/usr/sap/<SID>/DVEBMGS00\exe\sapjvm_5
SERVER1_SID=<SID>
SERVER1_SID=<SID>
SERVER1_NR=00
SERVER1_CLUSTERNODEID=<Cluster_ID>, where Cluster_ID is the cluster ID of the central instance
SERVER1_AS_DETAILS=null
SERVER1_AS_NUM=0
SERVER1_AS_NUM=0
SERVER1_AS_NUM=0
```

SERVER1_AS1_LOGIN=null SERVER1_AS1_PASSWORD=null SERVER1_AS1_PORT=null



If you have upgraded the SPI for SAP from a previous version, the Siteconfig file for SAP Netweaver 7.0 will not work in the new environment. You need to configure the SiteConfig file in accordance with the new requirements.

4 Create necessary configurations on nodes.

Run the Create SPI for SAP NetWeaver Config to create necessary configurations on nodes. Run this on all the SAP NetWeaver Web Application Servers. This is available in the SPI for SAP > SAP R/3 Admin group in the HPOM console.

5 Test the monitoring setup.

The setup that you have prepared, by performing step 1 through step 3, can be tested with the help of the Check the SAP NetWeaver Connection. From the HPOM console, run the Check the SAP NetWeaver Connection (SPI for SAP > SAP R/3 Admin) on all the nodes that you want to monitor.

6 Deploy the collection definition.

The SPISAP-UpdateNWMetricConfig -1d policy (included in the SPI for SAP > SAP NW Java Monitoring 7.0 > Configure policy group and SPI for SAP > SAP NW Java Monitoring 7.1 > Configure) contains the mechanism to collect data from the SAP NetWeaver Web Application Servers. The policy provides the SPI with the following details:

- Types of information to be collected
- Types of information to be stored into the data store
- Types of information to be compared with preset thresholds

You must deploy the SPISAP-UpdateNWMetricConfig -1d policy on all the SAP NetWeaver Web Application Server nodes.

7 Create data sources.

Before the SPI for SAP starts logging the collected data into the data store on the node, necessary data tables must be created. The SPI for SAP and HP Operations environment use these data tables as the source of data to perform analysis, report building, and graph generation. When you install and configure the SPI for SAP R/3 Performance Agent on nodes, these data sources (data tables) are automatically created into the data store. Install and configure the SPI for SAP R/3 Performance Agent on the SAP NetWeaver Web Application Server nodes as described in Installing the SPI for SAP R/3 Performance Agent on page 202 and Configuring the SPI for SAP R/3 Performance Agent on page 206.



Data logging should always be enabled in the SPIConfig file which is available under < OVDataDir > / conf/sapspi/global

For example, DATA_LOGGING_ENABLED=TRUE

The SiteConfig File

The SiteConfig file contains the access-related details of an SAP NetWeaver Web Application Server. You can modify the contents of this file with a text editor. You must specify values of the following attributes in this file:

The following SiteConfig file is an example of SAP Netweaver Web Application Server 7.0.

- NODE: The fully-qualified domain name of the SAP NetWeaver server that you want to
- NUM_SERVERS: The number of Web Application Server instances that you want to monitor on the node.
 - You can monitor only one instance of Web Application Server for every SAP NetWeaver node. Always set this property to 1.
- SERVER1_NAME: The fully-qualified domain name of the SAP NetWeaver 7.0 Web Application Server.
- SERVER1_LOGIN: The user name to log on to the server.
- SERVER1 PASSWORD: The password for the above-mentioned user.
- SERVER1 PORT: The port number for the Web Application Server.
- SERVER1 VERSION: The version of SAP NetWeaver on the node.
- SERVER1 HOME: The SAP home directory on the node.
- SERVER1_JAVA_HOME: The JAVA_HOME location on the node.
 - Always use the forward slash character (/) while specifying location-related details in the SiteConfig file.

After you specify the values for the aforementioned attributes for all the SAP NetWeaver nodes that you want to monitor, you must place the SiteConfig file on the node by running the global_SiteConfig application on the node.

Example SiteConfig File

```
NODE = sapspiw1.example.com
NUM SERVERS=1
SERVER1 NAME=sapspiw2
SERVER1 LOGIN=j2ee admin
SERVER1 PASSWORD=password
SERVER1 PORT=50104
SERVER1 VERSION=7.0
SERVER1 HOME=/usr/sap/GBR/DVEBMGS00
SERVER1 JAVA HOME=/opt/java1.4
NODE = sapspiw2.example.com
{
NUM SERVERS=1
SERVER1 NAME=sapspiw2
SERVER1 LOGIN=j2ee admin
SERVER1 PASSWORD=password
SERVER1 PORT=50104
SERVER1 VERSION=7.0
```

```
SERVER1_HOME=/usr/sap/GBR/DVEBMGS00
SERVER1_JAVA_HOME=/opt/java1.4
SERVER1_CLUSTERNODEID=<Cluster_ID>, where Cluster_ID is the cluster ID of the central instance
SERVER1_AS_DETAILS=null
SERVER1_AS_NUM=0
}
```



To generate metric definition XML file on SAP Netweaver 7.1 node, use SERVER1_JAVA_HOME=/usr/sap/<SID>/DVEBMGS00\exe\sapjvm_5 for the Siteconfig file.

The SAP Netweaver Web Application Server 7.1 supports multiple instance for both Central Instance and Application Server. You can choose to monitor the Central Instance and the Application Server. You can specify the attributes of all the nodes in the SiteConfig file.

The SiteConfig file has access-related details of the Central Instance and the Application Server. You can also monitor the service map for the Java systems. For more information, refer SPI for SAP Service View for Java Server on page 346.

You can modify the contents of this file with a text editor. You must specify values of the following attributes in this file:

- NODE: The fully-qualified domain name of the SAP NetWeaver 7.1 Central Instance server that you want to monitor.
- NUM_SERVERS: The number of Web Application Server instances that you want to monitor on the node for the Central Instance.
- SERVER1_NAME: The fully-qualified domain name of the SAP NetWeaver Web Application Server for the Central Instance.
- SERVER1_LOGIN: The user name to log on to the server where Central Instance is installed.
- SERVER1 PASSWORD: The password for the above-mentioned user.
- SERVER1 PORT: The port number for the Web Application Server for the Central Instance.
- SERVER1 VERSION: The version of SAP NetWeaver on the node for the Central Instance.
- SERVER1 HOME: The SAP home directory on the node for the Central Instance.
- SERVER1 JAVA HOME: The JAVA HOME location on the node for the Central Instance.
- SERVER1 SID: The SAP System ID for the Central Instance.
- SERVER1 NR: The NR number of the Central Instance.
- SERVER1 CLUSTERNODEID: The cluster node ID for the Central Instance.
- SERVER1 AS DETAILS: The details of the application server.
- SERVER1 AS NUM: The number of the application servers used.
- SERVER1 AS NAME: The domain name of the application server.
- SERVER1 AS LOGIN: The user name to log on to the application server.
- SERVER1 AS1 PASSWORD: The password for the user to log on to the application server.

• SERVER1 AS PORT: The port number for the application server.

Example SiteConfig File

```
NODE = sapspil2.example.com
NUM_SERVERS=1
SERVER1 NAME=sapspil2
SERVER1 LOGIN=j2ee admin
SERVER1 PASSWORD=ENCRYPTED 9pFfwhMzESIx+BilJKRPlA==
SERVER1 PORT=50004
SERVER1 VERSION=71
SERVER1 HOME=/usr/sap/<SID>/DVEBMGS00
SERVER1 JAVA HOME=/usr/sap/<SID>/DVEBMGS00\exe\sapjvm 5
SERVER1 SID=<SID>
SERVER1 NR=00
SERVER1 CLUSTERNODEID=<Cluster ID>, where Cluster ID is the cluster ID of the central
instance
SERVER1 AS DETAILS=sapspii4.example.com <SID> <NR>:<Cluster ID>;
SERVER1 AS NUM=1
SERVER1 AS1 NAME=sapspii4.example.com
SERVER1 AS1 LOGIN=j2ee admin
SERVER1 AS1 PASSWORD=ENCRYPTED 9pFfwhMzESIx+BilJKRPlA==
SERVER1 AS1 PORT=50704
where,
sapspii4.example.com - the node name for the application server
SID - the system ID for the application server
\ensuremath{\mathsf{NR}} - the NR number of the application server
Cluster ID - the cluster ID of the application server
```

You can find the Cluster_ID values for both Central Instance and the Application Server by the following way:

UNIX/LINUX:

For dual stack and Java system enter, /usr/sap/CCMS/SID NR/j2ee<cluster ID>

Windows

For dual stack and Java system enter, drive\usr\sap\CCMS\SID NR\j2ee<cluster ID>

If you want to monitor only the Central Instance, you can choose to have the attribute as <code>SERVER1_AS_DETAILS=NULL</code>. To monitor only the Application Server, have the attribute as <code>SERVER1_CLUSTERNODEID=NULL</code>.

Scenarios for Viewing the Service Map for the Java Systems

You can use the <code>global_SiteConfig</code> and specify the attributes to modify and view the service map for the Java systems. The following are few possible scenarios to view the service map:

- Monitoring only the Central Instance
- Monitoring the Central Instance with one application server
- Monitoring the Central Instance with multiple application servers
- Monitoring two Central Instance servers with no application server
- Monitoring two Central Instance servers with application servers

Example of SiteConfig File with only Central Instance

```
NODE = sapspil2.example.com
NUM SERVERS=1
SERVER1 NAME=sapspil2
SERVER1 LOGIN=j2ee admin
SERVER1 PASSWORD=ENCRYPTED 9pffwhMzESIx+BilJKRPlA==
SERVER1 PORT=50004
SERVER1 VERSION=71
SERVER1 HOME=/usr/sap/<SID>/DVEBMGS00
SERVER1 JAVA HOME=/usr/sap/<SID>/DVEBMGS00\exe\sapjvm 5
SERVER1 SID=<SID>
SERVER1 NR=00
SERVER1 CLUSTERNODEID=<Cluster ID>, where Cluster ID is the cluster ID of the central
instance
SERVER1 AS DETAILS=null
SERVER1 AS NUM=0
SERVER1 AS1 NAME=null
SERVER1 AS1 LOGIN=null
SERVER1 AS1 PASSWORD=null
SERVER1 AS1 PORT=null
```

Example of SiteConfig File with Central Instance and Application Server

```
NODE = sapspil2.example.com
```

```
{
NUM SERVERS=1
SERVER1 NAME=sapspil2
SERVER1 LOGIN=j2ee admin
SERVER1 PASSWORD=ENCRYPTED 9pFfwhMzESIx+BilJKRPlA==
SERVER1 PORT=50004
SERVER1 VERSION=71
SERVER1 HOME=/usr/sap/<SID>/DVEBMGS00
SERVER1 JAVA HOME=/usr/sap/<SID>/DVEBMGS00\exe\sapjvm 5
SERVER1 SID=<SID>
SERVER1 NR=00
SERVER1 CLUSTERNODEID=<Cluster ID>, where Cluster ID is the cluster ID of the central
SERVER1 AS DETAILS=sapspii4.example.com < SID> <NR>:<Cluster ID>
SERVER1 AS NUM=1
SERVER1 AS1 NAME=sapspii4.example.com
SERVER1 AS1 LOGIN=j2ee admin
SERVER1 AS1 PASSWORD=ENCRYPTED 9pFfwhMzESIx+BilJKRPlA==
SERVER1 AS1 PORT=50704
Example of SiteConfig File with Central Instance and Multiple Application Servers
NODE = sapspil2.example.com
{
NUM SERVERS=1
SERVER1 NAME=sapspil2
SERVER1 LOGIN=j2ee admin
SERVER1 PASSWORD=ENCRYPTED 9pFfwhMzESIx+BilJKRPlA==
SERVER1 PORT=50004
SERVER1 VERSION=71
SERVER1 HOME=/usr/sap/<SID>/DVEBMGS00
SERVER1 JAVA HOME=/usr/sap/<SID>/DVEBMGS00\exe\sapjvm 5
SERVER1 SID=<SID>
SERVER1 NR=00
SERVER1 CLUSTERNODEID=<Cluster ID>, where Cluster ID is the cluster ID of the central
instance
SERVER1 AS DETAILS=sapspii4.example.com <SID> <NR>:<Cluster ID>;
sapspii5.example.com_<SID>_<NR>:<Cluster_ID>
```

```
SERVER1_AS1_NAME=sapspii4.example.com

SERVER1_AS1_LOGIN=j2ee_admin

SERVER1_AS1_PASSWORD=ENCRYPTED 9pFfwhMzeSix+BilJKRPlA==

SERVER1_AS1_PORT=50704

SERVER1_AS1_PORT=50704

SERVER1_AS_NUM=2

SERVER1_AS1_NAME=sapspii5.example.com

SERVER1_AS1_LOGIN=j2ee_admin

SERVER1_AS1_PASSWORD=ENCRYPTED 9pFfwhMzeSix+BilJKRPlA==

SERVER1_AS1_PASSWORD=ENCRYPTED 9pFfwhMzeSix+BilJKRPlA==

SERVER1_AS1_PORT=50704
```

Monitoring the J2EE Engine

After performing all the prerequisite tasks on the SAP NetWeaver Web AS node, you can start deploying the necessary policies to initiate monitoring. The SPI for SAP introduces three new policies to start the collector and analyzer programs on the SAP NetWeaver Web Application Server nodes.

Deploy the Scheduled Action Policies

Scheduled action policies help the collectors run on the node at a regular interval to collect metric data that can be stored or compared by the SPI for SAP against preset thresholds to generate alarms. The following are the policies for SAP Netweaver 7.0:

- **SPISAP-70-High-10m:** Runs every 10 minutes.
- **SPISAP-70-High-30m:** Runs every 30 minutes.
- **SPISAP-70-High-1h:** Runs every hour.
- **SPISAP-70-perf-30m:** Runs every 30 minutes.
- **SPISAP-NWSTATUS-02m:** Runs every 2 minutes. This policy sends an alert to the message browser if the SAP NetWeaver Web Application Server is found to be down.

These policies are grouped under the SPI for SAP > SAP NW Java Monitoring 7.0 > Monitors group.

The following are the templates for SAP Netweaver 7.10:

- **SPISAP-71-High-10m:** Runs every 10 minutes.
- **SPISAP-71-High-30m:** Runs every 30 minutes.
- SPISAP-71-High-1h: Runs every hour.
- **SPISAP-71-perf-30m:** Runs every 30 minutes.
- **SPISAP-NWSTATUS-02m:** Runs every 2 minutes. This policy sends an alert to the message browser if the SAP NetWeaver Web Application Server is found to be down.

These policies are grouped under the SPI for SAP > SAP NW Java Monitoring 7.1 > Monitors group.

Deploy the Monitor Policies

The monitor policies help the SPI generate alarms in the event of threshold violation. The collectors and analyzers collect a variety of metrics on the node that indicates the availability, health, and performance of the J2EE engine of the Web AS. You must deploy the policies under the following groups to receive alerts and messages on your HPOM console.

- **J2EE Engine Kernel:** Includes the policies to monitor the Kernel of the J2EE engine.
- **J2EE Engine Performance:** Includes the policies to monitor the performance of the J2EE engine.
- **J2EE Engine Services:** Includes the policies to monitor the various services on the SAP NetWeaver Web Application Server.

The monitor policies generate messages without reset. If you want to generate continuous messages, modify these policies by selecting the Continuous option in the Modify Threshold Monitor dialog box.

For information on these policies, see Reference Information on SAP NetWeaver Java Monitoring 7.0 Policies.

Reference Information on SAP NetWeaver Java Monitoring 7.0 Policies

This section includes the reference information on all the policies required to monitor the SAP NetWeaver Web Application Server's J2EE engine. The SPI for SAP primarily collects metric data from the **managers** and **services** that run on the J2EE engine.

Policies: the J2EE Engine - Kernel Group

The policies under the J2EE Engine - Kernel group collect data from the managers available on the J2EE engine. The SPI for SAP monitors metrics indicating the health and performance of the J2EE engine kernel from the data collected from several monitored units on SAP nodes.

Policies to Monitor the Configuration Manager Data

The SPI for SAP collects and monitors values of monitored units of Configuration Manager from SAP nodes.

SPISAP 0001

Policy name SPISAP_0001

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the *Cache hit rate* monitored unit of

the Configuration Manager.

Default threshold • 110: The SPI for SAP sends an alert with the severity

Warning when the cache hit rate exceeds 110.

• 120: The SPI for SAP sends an alert with the severity Major when the cache hit rate exceeds 120.

SPISAP 0002

Policy name SPISAP_0002

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description Commit duration of the J2EE engine.

• 30: The SPI for SAP sends an alert with the severity Warning when the commit duration is above or equal to

30.

• 120: The SPI for SAP sends an alert with the severity Major when the commit duration is above or equal to

120.

SPISAP 0012

Policy name SPISAP_0012

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description ClassLoader count of the J2EE engine.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the ClassLoader count is equal to 0.

SPISAP_0013

Policy name SPISAP_0013

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description Total connection count of the J2EE engine.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the total connection count is equal to 0.

Policies to Monitor the Cluster Manager Data

The SPI for SAP collects and monitors values of monitored units of Cluster Manager from SAP nodes.

SPISAP 0038

Policy name SPISAP 0038

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the value of the message context pool

size of cluster management.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value falls below the threshold.

SPISAP_0039

Policy name SPISAP_0039

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the average message context pool size

of cluster management.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value falls below the threshold.

SPISAP_0040

Policy name SPISAP 0040

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

configuration manager.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0041

Policy name SPISAP_0041

Policy type Monitor

Policy name SPISAP_0041

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for cache

manager.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 ${\bf SPISAP_0042}$

Policy name SPISAP_0042

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

service manager deploy distributor.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0043

Policy name SPISAP 0043

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

service manager internal connection.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 ${\bf SPISAP_0044}$

Policy name SPISAP 0044

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for P4.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0045

Policy name SPISAP_0045

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for iiop.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0046

Policy name SPISAP_0046

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for sld.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0047

Policy name SPISAP_0047

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for shell.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 ${\bf SPISAP_0048}$

Policy name SPISAP 0048

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for web

services.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_0049

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for log

configurator.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 $\mathbf{SPISAP_0050}$

Policy name SPISAP_0050

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for jmx

notification.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0051

Policy name SPISAP_0051

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for telnet.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0052

Policy name SPISAP 0052

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for jmx.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_0053

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for jms

provider.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 $SPISAP_0054$

Policy name SPISAP_0054

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for http.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0055

Policy name SPISAP_0055

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

deploy.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0056

Policy name SPISAP 0056

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

naming.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_0057

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

connector.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 $\mathbf{SPISAP_0058}$

Policy name SPISAP_0058

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for BI

MMR deployer.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0059

Policy name SPISAP 0059

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

com.sap.security.core.ume.service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 0060

Policy name SPISAP_0060

Policy type Monitor

Policy group SPI for SAP >SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

security.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_0061

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for web

dynpro.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 ${\bf SPISAP_0062}$

Policy name SPISAP_0062

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

servlet jsp.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0063

Policy name SPISAP 0063

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

rfcengine.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0064

Policy name SPISAP_0064

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

apptracing.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_0065

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte sent for

prtbridge.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0066

Policy name SPISAP 0066

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

configuration manager.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0067

Policy name SPISAP 0067

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

cache manager.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 0068

Policy name SPISAP_0068

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

service manager deploy distributor.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP 0069

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

service manager (internal connection).

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0070

Policy name SPISAP_0070

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

P4.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0071

Policy name SPISAP 0071

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

iiop.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0072

Policy name SPISAP_0072

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

sld.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_0073

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

Shell.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0074

Policy name SPISAP_0074

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

Web Services.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0075

Policy name SPISAP_0075

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

Log Configurator.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 0076

Policy name SPISAP_0076

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

jmx_notification.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP 0077

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

jmx_notification.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0078

Policy name SPISAP_0078

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

jmx.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0079

Policy name SPISAP 0079

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

jms_provider.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0080

Policy name SPISAP_0080

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

http.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_0081

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

deploy.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 $SPISAP_0082$

Policy name SPISAP_0082

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

naming.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0083

Policy name SPISAP_0083

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

connector.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 0084

Policy name SPISAP_0084

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

bi~mmr~deployer.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP 0085

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

com.sap.security.core.ume.service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0086

Policy name SPISAP_0086

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

security.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0087

Policy name SPISAP 0087

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

web dynpro.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0088

Policy name SPISAP_0088

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

servlet_jsp.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_0089

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

rfcengine.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 $\mathbf{SPISAP_0090}$

Policy name SPISAP_0090

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

apptracing.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_0091

Policy name SPISAP_0091

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the total message byte received for

prtbridge.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 0092

Policy name SPISAP_0092

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the maximum session queue size.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

Policy name SPISAP_0093

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the P4 current session queue size.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP 0094

Policy name SPISAP_0094

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the internal current session queue

size.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0095

Policy name SPISAP_0095

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the telnet current session queue size.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP 0096

Policy name SPISAP_0096

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the http current session queue size.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

Policy name SPISAP_0097

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the jms provider current session

queue size.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0098

Policy name SPISAP_0098

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the web services current session

queue size.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP 0099

Policy name SPISAP 0099

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors the iiop current session queue size.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0100

Policy name SPISAP 0100

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session bytes sent for the P4

processor.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

Policy name SPISAP_0101

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session bytes sent for the

internal processor.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

 $\mathbf{SPISAP_0102}$

Policy name SPISAP_0102

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session bytes sent for the telnet

processor.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP 0103

Policy name SPISAP 0103

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session bytes sent for the http

processor.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0104

Policy name SPISAP_0104

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session bytes sent for the

jms_provider processor.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

Policy name SPISAP_0105

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session bytes sent for the web

services processor.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0106

Policy name SPISAP_0106

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session bytes sent for the iiop

processor.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP 0107

Policy name SPISAP 0107

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session byte received for the P4

processor(

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0108

Policy name SPISAP_0108

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session byte received for the

internal processor(

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

Policy name SPISAP_0109

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session byte received for the

telnet processor(

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0110

Policy name SPISAP_0110

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session byte received for the

http processor(

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0111

Policy name SPISAP_0111

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session byte received for the

jms_provider processor(

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

SPISAP_0112

Policy name SPISAP_0112

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session byte received for the

web services processor(

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

Policy name SPISAP_0113

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Kernel

Description This policy monitors total session byte received for the iiop

processor.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the value reaches the threshold.

Policies: the J2EE Engine - Services Group

The policies under the J2EE Engine - Services group collect data from the services available on the J2EE engine.

This group monitors states and conditions of the services that are necessary for the J2EE engine. Policies under this group monitor the following services and send alert messages to the message appropriate in the events of threshold violation:

- JMX Adapter Service
- HTTP Provider Service
- Connector Container Service: SAPSR3DB
- Connector Container Service: SAP/EP PRT
- Connector Container Service: SAP/BC MIGSERVICE
- Connector Container Service: SAP/CAF EUF GP
- Connector Container Service: SAP/BC_WDRR
- Connector Container Service: SAP/CAF_RT
- Connector Container Service: SAP/BW MMR
- Connector Container Service: SAP/EP DQE
- Connector Container Service: SAP/CAF/EUP_GP/MAIL_CF
- Connector Container Service: SAP/BC_UME
- Connector Container Service: SAP/BC_JMS
- Connector Container Service: SAP/BC_FO
- Connector Container Service: SAP/BC_XMLA
- Connector Container Service: SAP/BC MON
- Connector Container Service: SAP/CAF EUP ER
- Connector Container Service: SAP/EP_PCD
- Connector Container Service: SAP/CAF_BW_RD
- Connector Container Service: SAP/BC SLM
- Connector Container Service: SAP/LOCAL MAINFRAME POOL

Connector Container Service: SAP/BC_SLD

Connector Container Service: SAP/BC_JDO

Connector Container Service: SAP/BC UDDI

Connector Container Service: utdb

• Connector Container Service: ADS

• Connector Container Service: SDK_JDBC

• Connector Container Service: SDK_CAF

Connector Container Service: SDK_SAPQ

Connector Container Service: SDK_XMLA

Connector Container Service: SDK_ODBO

• EJB Container Service: Session stateful beans

• EJB Container Service: Session stateless beans

• EJB Container Service: Message driven beans.

• EJB Container Service: Entity beans

• Web Services Container Service

Web Container Service

Policies to Monitor the JMX Adapter Service

These policies monitor the JMX Adapter Service.

SPISAP_2001

Policy name SPISAP_2001

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the maximum entries of the JMX

adapter service.

Default threshold 10000: The SPI for SAP sends an alert with the severity

Warning when the maximum entries of the JMX adapter

service exceeds 10000.

50000: The SPI for SAP sends an alert with the severity Major when the maximum entries of the JMX adapter

service exceeds 50000.

Policy name SPISAP 2002

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the current entries of the JMX

adapter service.

Default threshold 10000: The SPI for SAP sends an alert with the severity

Warning when the current entries of the JMX adapter

service exceeds 10000.

50000: The SPI for SAP sends an alert with the severity

Major when the current entries of the JMX adapter

service exceeds 50000.

 ${\bf SPISAP_2003}$

Policy name SPISAP_2003

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the replaced entries of the JMX

adapter service.

Default threshold 10000: The SPI for SAP sends an alert with the severity

Warning when the replaced entries of the JMX adapter

service exceeds 10000.

50000: The SPI for SAP sends an alert with the severity

Major when the replaced entries of the JMX adapter

service exceeds 50000.

SPISAP 2004

Policy name SPISAP 2004

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the hit rate of the JMX adapter v.

Default threshold 500: The SPI for SAP sends an alert with the severity

Warning when the hit rate of the JMX adapter service

exceeds 500.

1000: The SPI for SAP sends an alert with the severity Major when the hit rate of the JMX adapter service

exceeds 1000.

Policy name SPISAP_2005

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the notification queue size of the

JMX adapter service.

Default threshold 10: The SPI for SAP sends an alert with the severity

Warning when the queue size of the JMX adapter service

exceeds 10.

100: The SPI for SAP sends an alert with the severity Major when the queue size of the JMX adapter service

exceeds 100.

SPISAP_2006

Policy name SPISAP_2006

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the number of active threads of the

JMX adapter service.

Default threshold 3: The SPI for SAP sends an alert with the severity Major

when the number of active threads of the JMX adapter

service exceeds 3.

SPISAP 2007

Policy name SPISAP_2007

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the log size on the SAP node.

Default threshold 524288 (KB): The SPI for SAP sends an alert with the

severity Major when the log size of the monitored node

exceeds 524288 kb.

Policies to Monitor the HTTP Provider Service

These policies monitor the HTTP Provider Service.

Policy name SPISAP_2011

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Current open connections: Total

count monitored unit of the HTTP Provider Service.

Default threshold 100: The SPI for SAP sends an alert with the severity

Major when the value of the Current open connections:

Total count monitored unit exceeds 100.

SPISAP 2012

Policy name SPISAP_2012

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Current open connections*:

Reading request monitored unit of the HTTP Provider

Service.

Default threshold 100: The SPI for SAP sends an alert with the severity

Major when the value of the *Current open connections*:

Reading request monitored unit exceeds 100.

 ${\bf SPISAP_2013}$

Policy name SPISAP_2013

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Current open connections*:

Reading response monitored unit of the HTTP Provider

Service.

Default threshold 100: The SPI for SAP sends an alert with the severity

Major when the value of the *Current open connections:*

Reading response monitored unit exceeds 100.

SPISAP_2014

Policy name SPISAP_2014

Policy type Monitor

Policy name SPISAP_2014

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Current open connections*:

Skipping requests monitored unit of the HTTP Provider

Service.

Default threshold 100: The SPI for SAP sends an alert with the severity

Major when the value of the *Current open connections*:

Skipping requests monitored unit exceeds 100.

SPISAP_2015

Policy name SPISAP_2015

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Current open connections*:

Keep-Alive waiting monitored unit of the HTTP Provider

Service.

Default threshold 100: The SPI for SAP sends an alert with the severity

Major when the value of the *Current open connections*:

Keep-Alive waiting monitored unit exceeds 100.

SPISAP_2016

Policy name SPISAP_2016

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine - Services

Description This policy monitors the *Total requests: Avg requests per*

connection rate monitored unit of the HTTP Provider Service.

Default threshold 100000: The SPI for SAP sends an alert with the severity Major

when the value of the *Total requests: Avg requests per connection*

rate monitored unit exceeds 100000.

SPISAP 2018

Policy name SPISAP_2018

Policy type Measurement Threshold

Policy name SPISAP 2018

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine - Services

Description This policy monitors the *Total requests: Avg request-response time*

monitored unit of the HTTP Provider Service.

Default threshold

• **120**: The SPI for SAP sends an alert with the severity Major when the value of the *Total requests: Avg request-response time* monitored unit exceeds 120.

• **60**: The SPI for SAP sends an alert with the severity Warning when the value of the *Total requests: Avg request-response time* monitored unit exceeds 60.

Policies to Monitor the SAPSR3DB Connector Container Service

These policies monitor the SAPSR3DB Connector Container Service.

SPISAP_2019

Policy name SPISAP_2019

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAPSR3DB Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP_2020

Policy name SPISAP_2020

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAPSR3DB Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed connections number* monitored unit exceeds 10000000.

Policy name SPISAP 2021

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAPSR3DB Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

 ${\bf SPISAP_2022}$

Policy name SPISAP_2022

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAPSR3DB Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for connections number* monitored unit exceeds 10000000.

Policies to Monitor the SAP/EP PRT Connector Container Service

These policies monitor the SAP/EP_PRT Connector Container Service.

SPISAP_2023

Policy name SPISAP_2023

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine - Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/EP_PRT Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the severity

Major when the value of the Maximum connections number

monitored unit exceeds 10000000.

Policy name SPISAP_2024

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine - Services

Description This policy monitors the *Free managed connections number*

monitored unit of the SAP/EP_PRT Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the severity

Major when the value of the Free managed connections number

monitored unit exceeds 10000000.

SPISAP 2025

Policy name SPISAP_2025

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/EP PRT Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP 2026

Policy name SPISAP_2026

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/EP PRT Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Waiting for connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC_MIGSERVICE Connector Container Service

These policies monitor the SAP/BC_MIGSERVICE Connector Container Service.

Policy name SPISAP_2027

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC MIGSERVICE Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum* connections number monitored unit exceeds 10000000.

SPISAP_2028

Policy name SPISAP_2028

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC_MIGSERVICE

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2029

Policy name SPISAP_2029

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC_MIGSERVICE

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the $Used\ managed\ connections\ number\ monitored\ unit\ exceeds\ 10000000.$

Policy name SPISAP_2030

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC MIGSERVICE Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/CAF_EUP_GP Connector Container Service

These policies monitor the SAP/CAF_EUP_GP Connector Container Service.

 ${\bf SPISAP_2031}$

Policy name SPISAP_2031

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/CAF_EUP_GP Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP 2032

Policy name SPISAP_2032

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/CAF_EUP_GP

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

Policy name SPISAP 2033

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/CAF EUP GP

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

 ${\bf SPISAP_2034}$

Policy name SPISAP_2034

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/CAF_EUP_GP Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC_WDRR Connector Container Service

These policies monitor the SAP/BC_WDRR Connector Container Service.

SPISAP 2035

Policy name SPISAP_2035

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC_WDRR Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

Policy name SPISAP_2036

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC WDRR Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2037

Policy name SPISAP_2037

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC_WDRR Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2038

Policy name SPISAP_2038

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC WDRR Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for connections number* monitored unit exceeds 10000000.

Policies to Monitor the SAP/CAF_RT Connector Container Service

These policies monitor the SAP/CAF RT Connector Container Service.

Policy name SPISAP_2039

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/CAF RT.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum* connections number monitored unit exceeds 10000000.

SPISAP_2040

Policy name SPISAP_2040

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/CAF_RT.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2041

Policy name SPISAP_2041

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/CAF_RT.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2042

Policy name SPISAP_2042

Policy type Monitor

Policy name SPISAP_2042

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/CAF_RT Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for connections number* monitored unit exceeds 10000000.

Policies to Monitor the SAP/BW_MMR Connector Container Service

These policies monitor the SAP/BW_MMR Connector Container Service.

SPISAP_2043

Policy name SPISAP_2043

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BW_MMR Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Maximum

connections number monitored unit exceeds 10000000.

SPISAP 2044

Policy name SPISAP 2044

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BW_MMR Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed connections number* monitored unit exceeds 10000000.

Policy name SPISAP_2045

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BW MMR Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2046

Policy name SPISAP_2046

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BW MMR Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/EP DQE Connector Container Service

These policies monitor the SAP/EP_DQE Connector Container Service.

SPISAP_2047

Policy name SPISAP 2047

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/EP_DQE Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

Policy name SPISAP_2048

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/EP DQE Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2049

Policy name SPISAP_2049

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/EP_DQE Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2050

Policy name SPISAP 2050

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/EP_DQE Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the $Waiting\ for\ connections\ number$ monitored unit exceeds 10000000.

Policies to Monitor the SAP/CAF/EUP_GP/MAIL_CF Connector Container Service

These policies monitor the $SAP/CAF/EUP_GP/MAIL_CF$ Connector Container Service.

Policy name SPISAP_2051

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/CAF/EUP GP/MAIL CF

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

 ${\bf SPISAP_2052}$

Policy name SPISAP 2052

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/CAF/EUP_GP/

MAIL CF Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2053

Policy name SPISAP 2053

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/CAF/EUP_GP/

MAIL CF Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the $Used\ managed\ connections\ number\ monitored\ unit\ exceeds\ 10000000.$

Policy name SPISAP_2054

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/CAF/EUP GP/MAIL CF

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for connections number* monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC_UME Connector Container Service

These policies monitor the SAP/BC_UME Connector Container Service.

SPISAP_2055

Policy name SPISAP_2055

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC_UME Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP 2056

Policy name SPISAP_2056

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC_UME Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

Policy name SPISAP_2057

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC_UME Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed connections number* monitored unit exceeds 10000000.

SPISAP_2058

Policy name SPISAP_2058

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC_UME Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC_JMS Connector Container Service

These policies monitor the SAP/BC_JMS Connector Container Service.

SPISAP_2059

Policy name SPISAP_2059

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC_JMS Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

Policy name SPISAP_2060

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC JMS Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2061

Policy name SPISAP_2061

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC_JMS Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

 ${\bf SPISAP_2062}$

Policy name SPISAP_2062

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC_JMS Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the $Waiting\ for\ connections\ number$ monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC FO Connector Container Service

These policies monitor the SAP/BC_FO Connector Container Service.

Policy name SPISAP_2063

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC_FO Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Maximum

connections number monitored unit exceeds 10000000.

SPISAP 2064

Policy name SPISAP_2064

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC_FO Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2065

Policy name SPISAP 2065

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC_FO Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed connections number* monitored unit exceeds 10000000.

Policy name SPISAP_2066

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC FO Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC_XMLA Container Service

These policies monitor the SAP/BC_XMLA Connector Container Service.

SPISAP_2067

Policy name SPISAP_2067

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC XMLA Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP 2068

Policy name SPISAP_2068

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC_XMLA Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

Policy name SPISAP_2069

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC XMLA Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed connections number* monitored unit exceeds 10000000.

SPISAP_2070

Policy name SPISAP_2070

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC_XMLA Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC MON Connector Container Service

These policies monitor the SAP/BC_MON Connector Container Service.

SPISAP_2071

Policy name SPISAP_2071

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC_MON Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

Policy name SPISAP 2072

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC MON Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2073

Policy name SPISAP_2073

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC MON Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2074

Policy name SPISAP 2074

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC_MON Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the $Waiting\ for\ connections\ number$ monitored unit exceeds 10000000.

Policies to Monitor the SAP/CAF EUP ER Connector Container Service

These policies monitor the SAP/CAF_EUP_ER Connector Container Service.

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/CAF_EUP_ER Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum* connections number monitored unit exceeds 10000000.

SPISAP_2076

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/CAF EUP ER

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2077

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/CAF EUP ER

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2078

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/CAF_EUP_ER Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/EP PCD Connector Container Service

These policies monitor the SAP/EP_PCD Connector Container Service.

SPISAP 2079

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/EP_PCD Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Maximum

connections number monitored unit exceeds 10000000.

SPISAP 2080

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/EP PCD Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2081

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/EP_PCD Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2082

Policy type Monitor

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/EP_PCD Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC ADM Connector Container Service

These policies monitor the SAP/BC_ADM Connector Container Service.

 ${\bf SPISAP_2083}$

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC_ADM Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP 2084

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC_ADM Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2085

Policy type Monitor

SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -Policy group

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC ADM Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

> severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP 2086

Monitor Policy type

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Waiting for connections number*

monitored unit of the SAP/BC_ADM Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

> severity Major when the value of the Waiting for connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/CAF BW RT Connector Container Service

These policies monitor the SAP/CAF_BW_RT Connector Container Service.

SPISAP 2087

Policy type Monitor

SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -Policy group

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/CAF_BW_RT Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Maximum

connections number monitored unit exceeds 10000000.

SPISAP_2088

Monitor Policy type

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/CAF_BW_RT

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2089

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/CAF_BW_RT

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP 2090

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/CAF_BW_RT Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Waiting for connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC SLM Connector Container Service

These policies monitor the SAP/BC_SLM Connector Container Service.

SPISAP_2091

Policy type Monitor

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC SLM Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Maximum

connections number monitored unit exceeds 10000000.

SPISAP 2092

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC_SLM Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2093

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC_SLM Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2094

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC SLM Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Waiting for

connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/LOCAL_MAINFRAME_POOL Connector Container Service

These policies monitor the SAP/LOCAL_MAINFRAME_POOL Connector Container Service.

SPISAP_2095

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/LOCAL MAINFRAME POOL

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP 2096

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/

LOCAL_MAINFRAME_POOL Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2097

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/

 $LOCAL_MAINFRAME_POOL\ Connector\ Container$

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/LOCAL_MAINFRAME_POOL

Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC SLD Connector Container Service

These policies monitor the SAP/BC_SLD Connector Container Service.

SPISAP_2099

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC_SLD Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP 2100

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC_SLD Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed connections number* monitored unit exceeds 10000000.

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC SLD Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP 2102

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC SLD Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for connections number* monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC_JDO Connector Container Service

These policies monitor the SAP/BC_JDO Connector Container Service.

SPISAP 2103

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC_JDO Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC_JDO Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2105

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC JDO Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP 2106

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC_JDO Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SAP/BC_UDDI Connector Container Service

These policies monitor the SAP/BC_UDDI Connector Container Service.

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SAP/BC UDDI Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum* connections number monitored unit exceeds 10000000.

SPISAP_2108

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SAP/BC UDDI Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2109

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SAP/BC UDDI Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2110

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SAP/BC_UDDI Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the utdb Connector Container Service

These policies monitor the SAP/utdb Connector Container Service.

SPISAP_2111

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the utdb Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP_2112

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the utdb Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2113

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the utdb Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2114

Policy type Monitor

Services

Description This policy monitors the Waiting for connections number

monitored unit of the utdb Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for connections number* monitored unit exceeds 10000000.

Policies to Monitor the ADS Connector Container Service

These policies monitor the ADS Connector Container Service.

SPISAP_2115

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the ADS Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum* connections number monitored unit exceeds 10000000.

SPISAP_2116

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the ADS Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2117

Policy type Monitor

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the ADS Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP 2118

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the ADS Connector Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SDK_JDBC Connector Container Service

These policies monitor the *SDK_JDBC Connector Container Service*.

SPISAP 2119

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SDK_JDBC Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

 ${\bf SPISAP_2120}$

Policy type Monitor

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SDK_JDBC Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2121

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SDK_JDBC Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2122

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SDK_JDBC Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Waiting for

connections number monitored unit exceeds 10000000.

Policies to Monitor the SDK CAF Connector Container Service

These policies monitor the SDK CAF Connector Container Service.

SPISAP_2123

Policy type Monitor

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SDK_CAF Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum* connections number monitored unit exceeds 10000000.

SPISAP 2124

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SDK CAF Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2125

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SDK_CAF Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the $Used\ managed\ connections\ number\ monitored\ unit\ exceeds\ 10000000.$

SPISAP_2126

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SDK CAF Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Waiting for

Policies to Monitor the SDK SAPQ Connector Container Service

These policies monitor the SDK_SAPQ Connector Container Service.

SPISAP_2127

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SDK SAPQ Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the Maximum

connections number monitored unit exceeds 10000000.

SPISAP 2128

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SDK_SAPQ Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2129

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SDK_SAPQ Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2130

Policy type Monitor

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SDK SAPQ Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the SDK XMLA Connector Container Service

These policies monitor the *SDK_XMLA Connector Container Service*.

SPISAP 2131

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SDK XMLA Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP 2132

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SDK_XMLA Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP_2133

Policy type Monitor

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SDK_XMLA Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP 2134

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SDK XMLA Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for connections number* monitored unit exceeds 10000000.

Policies to Monitor the SDK_ODBO Connector Container Service

These policies monitor the *SDK_ODBO Connector Container Service*.

SPISAP 2135

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Maximum connections number*

monitored unit of the SDK_ODBO Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Maximum*

connections number monitored unit exceeds 10000000.

SPISAP_2136

Policy type Monitor

Services

Description This policy monitors the *Free managed connections*

number monitored unit of the SDK_ODBO Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Free managed* connections number monitored unit exceeds 10000000.

SPISAP 2137

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Used managed connections*

number monitored unit of the SDK ODBO Connector

Container Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Used managed* connections number monitored unit exceeds 10000000.

SPISAP_2138

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Waiting for connections number

monitored unit of the SDK_ODBO Connector Container

Service.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value of the *Waiting for* connections number monitored unit exceeds 10000000.

Policies to Monitor the EJB Container Services

These policies monitor the EJB container services.

SPISAP 2139

Policy name SPISAP 2139

Policy type Monitor

Policy name SPISAP_2139

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the ActiveSessionTimeout

monitoring unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2140

Policy name SPISAP_2140

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PassiveSessionTimeout

monitoring unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2141

Policy name SPISAP 2141

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the ActiveSessionCount monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2142

Policy name SPISAP 2142

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PassiveSessionCount monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_2143

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the CompletedSessions monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2144

Policy name SPISAP_2144

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Creations Number monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 2145

Policy name SPISAP 2145

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the RemovalsNumber monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2146

Policy name SPISAP_2146

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PassivationsNumber monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_2147

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Activations Number monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2148

Policy name SPISAP_2148

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the CreationsNumber monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2149

Policy name SPISAP 2149

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the RemovalsNumber monitoring

unit of the Stateful Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2150

Policy name SPISAP_2150

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the CurrentPoolSize monitoring unit

of the Stateless Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_2151

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the MaxPoolSize monitoring unit of

the Stateless Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

 ${\bf SPISAP_2152}$

Policy name SPISAP_2152

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Initial Pool Size monitoring unit of

the Stateless Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2153

Policy name SPISAP 2153

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PoolIncrementSize monitoring

unit of the Stateless Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 2154

Policy name SPISAP_2154

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PoolCurrentlyUsedObject

monitoring unit of the Stateless Session beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_2155

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Creations Number monitoring

unit of the Message-Driven beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2156

Policy name SPISAP_2156

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the RemovalsNumber monitoring

unit of the Message-Driven beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 2157

Policy name SPISAP 2157

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the CurrentPoolSize monitoring unit

of the Message-Driven beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2158

Policy name SPISAP_2158

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the MaxPoolSize monitoring unit of

the Message-Driven beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_2159

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Initial Pool Size monitoring unit of

the Message-Driven beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2160

Policy name SPISAP_2160

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PoolIncrementSize monitoring

unit of the Message-Driven beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2161

Policy name SPISAP 2161

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PoolCurrentlyUsedObject

monitoring unit of the Message-Driven beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2162

Policy name SPISAP_2162

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Creations Number monitoring

unit of the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_2163

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the RemovalsNumber monitoring

unit of the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2164

Policy name SPISAP_2164

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the CurrentPoolSize monitoring unit

of the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2165

Policy name SPISAP 2165

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the MaxPoolSize monitoring unit of

the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2166

Policy name SPISAP_2166

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the InitialPoolSize monitoring unit of

the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policy name SPISAP_2167

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PoolIncrementSize monitoring

unit of the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP_2168

Policy name SPISAP_2168

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PoolCurrentlyUsedObject

monitoring unit of the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 2169

Policy name SPISAP 2169

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the PassivationsNumber monitoring

unit of the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

SPISAP 2170

Policy name SPISAP_2170

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the Activations Number monitoring

unit of the Entity beans.

Default threshold 10000000: The SPI for SAP sends an alert with the

severity Major when the value exceeds the threshold.

Policies to Monitor the Web Container Service

These policies monitor the Web Container Service.

SPISAP_2187

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Current Http sessions* monitored

unit of the Web Container Service.

Default threshold 500: The SPI for SAP sends an alert with the severity

Major when the value of the Current Http sessions

monitored unit exceeds 500.

SPISAP_2188

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Current security sessions*

monitored unit of the Web Container Service.

Default threshold 500: The SPI for SAP sends an alert with the severity

Major when the value of the Current security sessions

monitored unit exceeds 500.

SPISAP 2189

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Number of timed out http sessions*

monitored unit of the Web Container Service.

Default threshold 100000: The SPI for SAP sends an alert with the severity

Major when the value of the *Number of timed out http*

sessions monitored unit exceeds 100000.

SPISAP_2190

Policy type Monitor

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Services

Description This policy monitors the *Number of timed out security*

sessions monitored unit of the Web Container Service.

Default threshold 100000: The SPI for SAP sends an alert with the severity

Major when the value of the Number of timed out security

sessions monitored unit exceeds 100000.

Policies: the J2EE Engine - Performance Group

The J2EE Engine - Performance group of policies collects the performance monitor data of the J2EE engine. This group collects the data from the *Request performance* monitor group.

SPISAP 4001

Policy name SPISAP_4001

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Performance

Description The SPISAP_4001 policy collects data from the *Number of*

requests monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with the severity

Major when the total number of JARM requests equals or

exceeds 1000000.

SPISAP_4002

Policy name SPISAP_4002

Policy type Measurement Threshold

Policy group SPI for SAP >SAP NW Java Monitoring 7.0 > J2EE Engine -

Performance

Description The SPISAP_4002 policy collects data from the *Requests*

per second monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with the severity

Major when the number of JARM requests per second

equals or exceeds 1000000.

SPISAP_4003

Policy name SPISAP_4003

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Performance

Description The SPISAP_4003 policy collects data from the

Component calls monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with the severity

Major when the total number of component calls made by

all JARM requests equals or exceeds 1000000.

Policy name SPISAP_4004

Policy type Measurement Threshold

Policy group SPI for SAP >SAP NW Java Monitoring 7.0 > J2EE Engine -

Performance

Description The SPISAP_4004 policy collects data from the *Average*

response time monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with the severity

Major when the total number of component calls made by

all JARM requests equals or exceeds 1000000.

SPISAP 4005

Policy name SPISAP_4006

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Performance

Description The SPISAP 4006 policy collects data from the *Average*

CPU Time monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with the severity

Major when the average CPU time equals or exceeds

1000000.

SPISAP_4006

Policy name SPISAP_4006

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.0 > J2EE Engine -

Performance

Description The SPISAP_4006 policy collects data from the *Average*

outbound data monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with the severity

Major when the average outbound data equals or exceeds

1000000.

Reference Information on SAP Netweaver Java Monitoring 7.1 Policies

This section includes the reference information on all policies required to monitor the SAP Netweaver Web Application Server's J2EE engine. The SPI for SAP primarily collects metric data from the managers and services that run on the J2EE engine.

Policies: the J2EE Engine: Kernel Group

The policies under the J2EE Engine - Kernel group collect data from the managers available on the J2EE engine. The SPI for SAP monitors metrics that indicate the health and performance of the J2EE engine kernel.

Policy to Monitor the Session Manager Data

This policy monitors the Session Manager Data from SAP nodes.

SPISAP 0204

Policy name SPISAP_0204

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the number of active web sessions.

Default threshold 100: The SPI for SAP sends an alert with the severity

Major when the total connection count for the active web

sessions exceeds 100.

Policies to Monitor the System Threads Pool

These policies monitor the System Threads Pool data from SAP nodes.

SPISAP_0206

Policy name SPISAP_0206

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the usage rate for different system

thread pools.

Default threshold 80: The SPI for SAP sends an alert with the severity

Major when the *usage rate* exceeds 80.

Policy name SPISAP_0207

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the system thread pool usage rate.

Default threshold 80: The SPI for SAP sends an alert with the severity

Major when the thread pool usage rate exceeds 80.

SPISAP_0208

Policy name SPISAP_0208

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the system waiting pool usage rate.

Default threshold 80: The SPI for SAP sends an alert with the severity

Major when the waiting tasks usage rate exceeds 80.

SPISAP_0215

Policy name SPISAP_0215

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the thread pool capacity rate.

Default threshold 80: The SPI for SAP sends an alert with the severity

Major when the thread pool capacity rate exceeds 80.

Policies to Monitor the Application Threads Pool

These policies monitor the Application Threads Pool data from SAP nodes.

SPISAP 0218

Policy name SPISAP_0218

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the usage rate for different

application threads pool.

Default threshold 80: The SPI for SAP sends an alert with the severity

Major when the usage rate exceeds 80.

Policy name SPISAP_0219

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the application thread pool usage

rate.

Default threshold 80: The SPI for SAP sends an alert with the severity

Major when the thread pool usage rate exceeds 80.

SPISAP_0220

Policy name SPISAP_0220

Policy type Measurement Threshold

Policy group SPI for SAP >SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the application waiting pool usage

rate.

Default threshold 80: The SPI for SAP sends an alert with the severity

Major when the waiting tasks usage rate exceeds 80.

SPISAP_0227

Policy name SPISAP 0227

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the thread pool capacity rate for

applications.

Default threshold 80: The SPI for SAP sends an alert with the severity

Major when the thread pool capacity rate exceeds 80.

Policies to Monitor the Cluster Manager Data

These policies monitor the Cluster Manager Data from SAP nodes.

SPISAP 0230

Policy name SPISAP 0230

Policy type Measurement Threshold

Policy name SPISAP_0230

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the average time in microseconds

that a message spends in the message queue of the

message server communication layer.

Default threshold 500: The SPI for SAP sends an alert with the severity

Major when the value exceeds 500.

SPISAP_0231

Policy name SPISAP_0231

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the average time in microseconds

that a message spends in the message queue of the session

communication layer.

Default threshold 500: The SPI for SAP sends an alert with the severity

Major when the value exceeds 500.

Policy to Monitor the Class Loader Manager Data

This policy monitors the Class Loader Manager Data from SAP nodes.

SPISAP_0232

Policy name SPISAP 0232

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the count of the registered

classloaders of the J2EE engine.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the *class loaders count* is below 0.

Policies to Monitor the Configuration Manager Data

These policies monitor the Configuration Manager Data from SAP nodes.

Policy name SPISAP_0233

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the *cache hit rate* monitored unit of

the Configuration Manager.

Default threshold 120: The SPI for SAP sends an alert with the severity

Major when the cache hit rate exceeds 120.

 $SPISAP_0234$

Policy name SPISAP_0234

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Kernel

Description This policy monitors the *commit duration* of the J2EE

engine.

Default threshold 120000: The SPI for SAP sends an alert with the severity

Major when the commit duration exceeds 120000.

Policies: the J2EE Engine - Services Group

The policies under the J2EE Engine - Services group collect data from the services available in the J2EE engine. The SPI for SAP monitors states and conditions of the services that are necessary for the J2EE engine.

Policy to Monitor Timeout Service

This policy monitors the Timeout service from SAP nodes.

SPISAP 2204

Policy name SPISAP_2204

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors count of the timeout events per

minute.

Default threshold 1200: The SPI for SAP sends an alert with the severity

Major when the *estimated frequency per minute* exceeds

1200.

Policy to Monitor WebContainer Service

This policy monitors the WebContainer service from SAP nodes.

SPISAP 2205

Policy name SPISAP_2205

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the average value of the requested

processing time for the given time interval.

Default threshold 2147483647: The SPI for SAP sends an alert with the

severity Major when the processing time exceeds

2147483647.

Policies to Monitor the JMS Service

These policies monitor the JMS service from SAP nodes.

SPISAP_2207

Policy name SPISAP_2207

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the number of connections of the JMS

service.

Default threshold 1000: The SPI for SAP sends an alert with the severity

Major when the number of connections exceed 1000.

SPISAP 2208

Policy name SPISAP_2208

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the number of consumers using the

JMS service.

Default threshold 500: The SPI for SAP sends an alert with the severity

Major when the number of consumers exceed 500.

Policy name SPISAP_2209

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the number of producers using the

JMS service.

Default threshold 1000: The SPI for SAP sends an alert with the severity

Major when the number of producers exceeds 1000.

Policy to Monitor the Log Configurator Service

This policy monitors the Log Configurator service from SAP nodes.

SPISAP_2210

Policy name SPISAP_2210

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the total number of log and trace files

excluding archive files.

Default threshold 524288: The SPI for SAP sends an alert with the severity

Major when the total log file size exceeds 524288.

Policies to Monitor the HTTP Provider Service

These policies monitor the HTTP Provider Service.

SPISAP_2216

Policy name SPISAP_2216

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the number of currently used HTTP

threads.

Default threshold 500: The SPI for SAP sends an alert with the severity

Major when the Active Thread Count exceeds 500.

Policy name SPISAP_2217

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the rate used to configure the HTTP

threads.

Default threshold 90: The SPI for SAP sends an alert with the severity

Major when the Threads In Process Rate exceeds 90.

SPISAP_2218

Policy name SPISAP_2218

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the number of failed P4 server

startup.

Default threshold 2147483647: The SPI for SAP sends an alert with the

severity Major when the failed request count exceeds

2147483647.

SPISAP_2219

Policy name SPISAP_2219

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the percentage of used threads

compared to configured threads.

Default threshold 90: The SPI for SAP sends an alert with the severity

Major when the thread usage rate exceeds 90.

Policy to Monitor the Transaction Service

This policy monitors the Transaction Service from SAP nodes.

SPISAP_2226

Policy name SPISAP_2226

Policy type Measurement Threshold

Policy name SPISAP 2226

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the ratio between committed

transaction count and total transaction count.

Default threshold 90: The SPI for SAP sends an alert with the severity

Major when the transaction success rate is below 90.

Policy to Monitor the IIOP Service

This policy monitors the IIOP service from SAP nodes.

SPISAP 2227

Policy name SPISAP_2227

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the percentage of used threads

compared to configured IIOP threads.

Default threshold 90: The SPI for SAP sends an alert with the severity

Major when the IIOP thread usage rate exceeds 90.

Policies to Monitor the JMX Adapter Service

These policies monitor the JMX Adapter Service from SAP nodes.

SPISAP 2228

Policy name SPISAP_2228

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors number of JMX notification listeners

registered with the MBean server to receive MBean server

notifications from remote cluster nodes.

Default threshold 0: The SPI for SAP sends an alert with the severity Major

when the ClusterWideNotificationListeners is below 0.

Policy name SPISAP_2229

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the number of MBeans registered

with the MBean server in the local cluster node.

Default threshold 2147483647: The SPI for SAP sends an alert with the

severity Major when the local MBean repository size

exceeds 2147483647.

Policies to Monitor the JNDI Registry Service

These policies monitor the JNDI Registry Service from SAP nodes.

SPISAP_2230

Policy name SPISAP_2230

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the number of objects bound in the

naming system at the present time.

Default threshold 10000: The SPI for SAP sends an alert with the severity

Major when bound objects count exceeds 10000.

SPISAP_2231

Policy name SPISAP 2231

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the size of the naming system byte

array cache.

Default threshold 4000: The SPI for SAP sends an alert with the severity

Major when byte array cache size is below 4000.

Policy to Monitor the Security Service

This policy monitors the Security service from SAP nodes.

Policy name SPISAP_2232

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Services

Description This policy monitors the number of unsuccessful logon

attempts.

Default threshold 25: The SPI for SAP sends an alert with the severity

Major when the unsuccessful logon count exceeds 25.

Policies: the J2EE Engine - Performance Group

The J2EE Engine - Performance group of policies collects the performance monitor data of the J2EE engine. This group collects the data from the *Request performance* monitor group.

SPISAP 4201

Policy name SPISAP_4201

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Performance

Description This policy collects data from the *Average response time*

monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with severity

Major when the number of JARM requests exceeds

1000000.

SPISAP_4202

Policy name SPISAP_4202

Policy type Measurement Threshold

Performance

Description This policy collects data from the *Requests per second*

monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with severity

Major when the number of JARM request per second

exceeds 1000000.

Policy name SPISAP_4203

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Performance

Description This policy collects data from the Average CPU time

monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with severity

Major when the average CPU time exceeds 1000000.

SPISAP_4204

Policy name SPISAP_4204

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Performance

Description This policy collects data from the Average outbound data

monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with severity

Major when the average outbound data exceeds 1000000.

SPISAP 4205

Policy name SPISAP 4205

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Performance

Description This policy collects data from the *Component calls*

monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with severity

Major when the total number of component calls made by

JARM request exceeds 1000000.

SPISAP_4206

Policy name SPISAP_4206

Policy type Measurement Threshold

Policy group SPI for SAP > SAP NW Java Monitoring 7.1 > J2EE Engine -

Performance

Description This policy collects data from the *Number of requests*

monitored unit.

Default threshold 1000000: The SPI for SAP sends an alert with severity

Major when the total number the of JARM requests

exceeds 1000000.

8 Service Views

This section describes how to install, set up, and use the service views provided with the SPI for SAP.

In this Section

The information in this section introduces you to the concept of Service Views and explains how they are used by both the SPI for SAP and HPOM to provide you with information that is specifically designed to help you manage your SAP NetWeaver landscape in a more efficient and more convenient way. Troubleshooting Service Discovery on page 344

What are Service Views?

Service views provide you with a way of viewing the objects that make up your environment so that, you can better determine the effect of current problems or predict potential problems. You can view the Service Views using HPOM's Java-based operator GUI.

Use the capabilities of HPOM and HP Operations Navigator to perform the following tasks:

- Map messages to the services that they directly affect
- Generate a service model of your environment, which includes all relationships and dependencies between component objects
- Identify and select actions available for each object
- Define propagation rules, which can identify potential or present problems on objects and on related services


Define message-to-object mapping in the HP Operations Manager policy groups by specifying a service ID. The environment model, message calculation and propagation rules, and available actions for each object are defined in the service-configuration file.

The scoping pane of the main window in the Java GUI shows discovered services in addition to the usual HPOM managed nodes, message groups, and applications. Click a service to display the navigation tree for the selected service in the scoping pane. In the tree, you can select any service or subservice and display a service graph.

In both the navigation tree and the service graph, the component services are color-coded according to the status. This color-coding of the tree elements matches the color-coding of messages in the message browser, which is determined by message severity level.

For instance, a service displayed in red indicates that a condition exists that has a critical effect on that service or on a related service. The action Get Root Cause traces the origin of a condition that has affected the status of a selected service.

Figure 24 The Navigator GUI

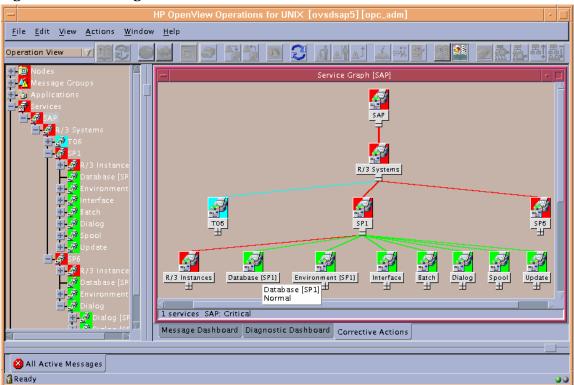

For a detailed explanation of the concepts and implementation of HP Operations Navigator, see the *HP Navigator Concepts and Configuration Guide*.

Service Views in the SPI for SAP

The SPI for SAP provides a Service Discovery application, which you can execute on each managed node to analyze the SAP environment and generate a service-configuration file. The service-configuration file represents all existing ownership and dependency relationships between objects on the nodes, message-propagation rules, and any actions that are available for objects. This file must be uploaded to the HP Operations Navigator.

The service view reflects your individual setup. Each service view is a unique representation of the environment from which it is taken. In general, the SAP service view consists of several levels.

The first level is an accumulation object including all SAP systems. When you expand a first-level object, you see an object for each SAP NetWeaver system in your environment. The SAP Systems object changes status in response to a change of status in any of the objects that make up the instances that it contains.


The second level includes logical objects within each SAP system. Notice that none of the objects shown at this level have any messages mapped directly to them. They are logical objects, used to give a general overview of the status of the services provided by the SAP NetWeaver system. Expand an SAP NetWeaver system object to display the following logical objects:

SAP NetWeaver Instances

- Database (<*SID*>)
- Environment (<*SID*>)
- Interface
- Batch
- Dialog
- Spool
- Update

Figure 25 shows an example SAP service view expanded to the logical object level.

Figure 25 Service View of SAP Systems

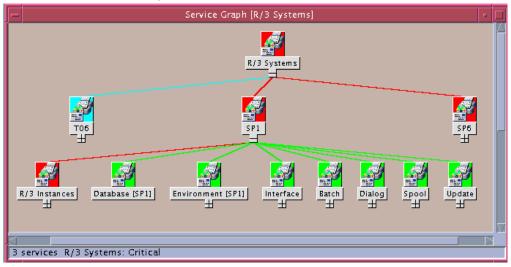


When you expand the SAP NetWeaver Instance object, each SAP NetWeaver instance appears as an object in the tree. When you expand the environment object, the following three objects are displayed:

- Operating System
- Network
- Memory Management

These objects have messages mapped to them which would then be propagated to the environment object. The other objects have **use** relationships with objects contained within the processes object; an event that affects a related process would cause a change in status in these objects.

Service Views 339

Figure 26 Service View of an SAP Instance

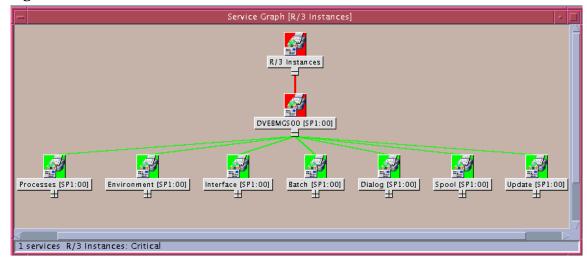

The processes object can be expanded to show the following objects:


- Gateway
- Message
- Dialog work process
- Batch work process
- Spool work process
- Update work process

Line of Business Views

The SAP NetWeaver service view and the other service views available with HPOM provide graphical representations of the individual areas you are monitoring, for example SAP NetWeaver, a WAN or a LAN, or printer services. Business processes are not typically confined to any one of these areas and each business process depends on the services of several areas and is specific to the customer's defined processes.

For example, for an operator to enter orders and print acknowledgments, the printer, the network, and SAP NetWeaver Dialog Spool Service must all be available. To monitor order entry and printing at a particular location, you could set up a view that includes the WAN, the LAN at that location, the printer being used for the order acknowledgments, and the SAP NetWeaver dispatch, dialog, and spooling processes for the specific SAP NetWeaver instance.

Figure 27 Service Areas Affecting Order Entry

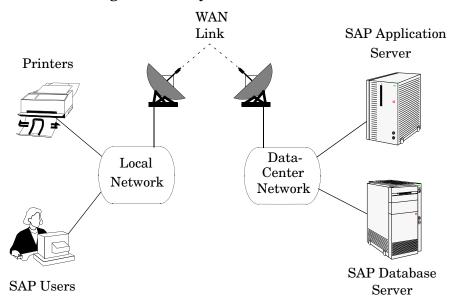

To create a line-of-business service view, you must first define the structure you want to see by generating a custom service-configuration file, in which you must define one or more logical objects (for example, Order Entry) to which messages will be propagated by the objects you include in the view.

Using the service-configuration files for the service areas you are interested in (for example, the SAP R/3 file), obtain the service names of the objects you want to include and add use references to them to your Service Configuration file. See the *HP Service Navigator Concepts and Configuration Guide* for information on creating Service Configuration files.

Be aware that the services should only be built on top of logical (not physical) service objects. For example, use the SAP Spool-Service object in a reference but not the underlying physical objects such as Spool Work Process. This ensures that your customization and Business Service Views remain working, even if new releases of SAP or the SPI for SAP change the dependencies between physical components, for example, as a result of architectural changes.

Service Views 341

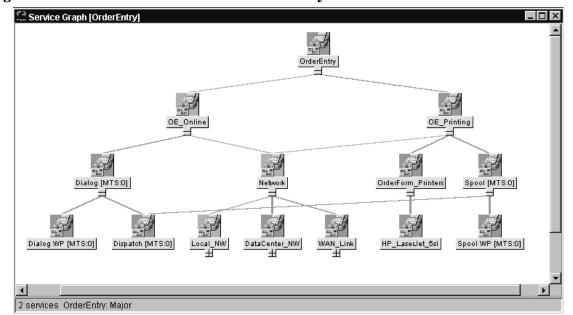


Figure 28 Line of Business View for Order Entry

Configuring Service Views for SAP

To use the service-views feature of the SPI for SAP, you need to find out which services are running on the SAP servers you are monitoring and upload the discovered information to the HPOM database, as follows:

1 Discover the SAP services

Discover which SAP services to monitor with the SPI for SAP on each of the SAP servers.



Make sure that Perl 5.8 or later is installed in the default location on the managed node, for example in UNIX environments: /usr/bin/perl. If Perl is not installed in the default location, make sure it is accessible by means of the PATH environment variable. In a Microsoft Windows environment, the Perl interpreter is accessible through the PATH variable. Note that the Perl installation sometimes has an option to automatically add Perl to the PATH.

2 Create a service-configuration file

Use the information about the discovered services to create a service-configuration file. The service-configuration file contains definitions for the services present on each SAP NetWeaver instance on each of the SAP NetWeaver servers that you want to monitor with HP Operations Manager and the SPI for SAP.

For more information, see Create the Service Configuration file on page 343.

3 Upload the service-configuration file to HPOM.

After HPOM discovers the SAP services, you can use the HP Operations Navigator tool (or, from HPOM 5.0 onwards, the Java GUI) to display a graphical overview of the services.

For more information, see Upload the Service Configuration File to HPOM on page 343.

4 Assign SAP services to SPI for SAP operators

Assign the SAP services to the SPI for SAP operators who are responsible for them. In this way, the operators receive messages concerning only those services for which they are responsible.

For more information, see Assign the SAP Services to an HPOM Operator on page 344.

5 Troubleshoot Service-discovery Problems (optional)

There are a number of ways in which you can attempt to troubleshoot problems that arise during the Service-discovery process.


For more information, see Troubleshooting Service Discovery on page 344.

Create the Service Configuration file

- 1 Log in to HPOM as opc_adm
- 2 Open the Managed Nodes window and the SAP R/3 Admin Tool Group window
- 3 Select the node, nodes, or node group for which you want to generate a service configuration and drag it (or them) over the SAP R/3 Admin Tool Group window and drop it (or them) onto the R/3 Service Discovery icon.
- 4 The R/3 Service Discovery application writes entries in the file /var/opt/OV/tmp/ SapSpiServices for each SAP NetWeaver instance it discovers on each of the managed nodes selected in the previous step.
 - Note that tracing is enabled by default and writes information and error messages relating to the SPI for SAP service-discovery process to the following file: /var/opt/OV/tmp/r3sm.trace
- 5 You can watch the progress of the R/3 Service Discovery application as it writes progress to stdout. After the R/3 Service Discovery application completes its tasks, you can examine the contents of the /var/opt/OV/tmp/SapSpiServiceDiscovery file to verify that the managed nodes have all been successfully discovered. If this is not the case, and managed nodes are missing from the list of discovered nodes, see Common SPI for SAP Problems on page 370.

Upload the Service Configuration File to HPOM

This section describes how to upload the service-configuration file to HPOM:



Upload the service-configuration file to HPOM. On the command line, enter:

#/usr/bin/opcservice -replace /var/opt/OV/tmp/SapSpiServices

```
Converting service file to XML ...

Successfully added service file:/tmp/SapSpiServices
```

Note that /usr/bin/opcservice takes care of the conversion to XML where appropriate.

If a Navigator GUI is open, it will not immediately reflect the changes made by the R/3 Service Discovery application. You must refresh the Navigator GUI to load the new configuration. To refresh the Navigator GUI, open the File menu and select Reload Configuration.

Service Views 343

Assign the SAP Services to an HPOM Operator

This section describes how to assign the configured and uploaded SAP services to the SPI for SAP operators:



You do *not* need to stop the HP Software services to complete this task.

Assign the service to an operator. Enter:

#/usr/bin/opcservice -assign <Operator> SAP SPI:SAP

Successfully assigned services to operator <Operator>

If a Navigator GUI is open, it will not immediately reflect the changes made by the R/3 Service Discovery application. You must refresh the Navigator GUI to load the new configuration. To refresh the Navigator GUI, open the File menu and select Reload Configuration.

Troubleshooting Service Discovery

In normal circumstances, the SPI for SAP discovers SAP services automatically and without any problem. However, if for any reason the information the SPI for SAP is looking for is not present in the default locations, then the service-discovery process fails.

For example, the SPI for SAP needs to know the names of the hosts on which SAP instances are running and, in addition, the location of the SAP profile directory, which contains the SAP **default**, **instance**, and **startup** profiles. The SAP default and instance profiles are of particular interest as they contain SAP System- and instance-specific information, which the SPI for SAP uses to determine the SAP System IDs (SID) and SAP instance names as well as the SAP instance numbers, whose services it attempts to discover.

In the event that the service discovery fails, you can use the environment variables in Table 87 on the managed node to help the SPI for SAP find the information it needs to discover SAP services successfully. The SPI for SAP Service discovery tool looks for SAP profiles in the following locations on the SAP application servers:

UNIX operating systems

/sapmnt/<SID>/profile/

Microsoft Windows operating systems

\\<central_instance_host>\sapmnt\<SID>\SYS\profile\

On SAP application servers running Microsoft Windows operating systems, the path to the SAP profile includes the name of the host on which the SAP central instance is running, for example: <central_instance_host>. Note that you can use the long or short hostname, the IP address of the hostname, or the UNC notation.

Table 87 Service-discovery Environment Variables


Environment Variable	Description
SAPOPC_SAPPROFILEDIR	the path to the location of the SAP profiles. Like the PATH environment variable, it may contain a list of directories where the profiles could reside
SAPOPC_HOSTNAMES	Use on managed nodes in a high-availability cluster to define the list of physical and virtual hostnames (each separated by a space) to process with service- discovery

Service Views 345

SPI for SAP Service View for Java Server

The SPI for SAP provides a Service Discovery tool, which you can execute on each managed node to analyze the SAP environment and generate a service-configuration file for the Java systems. The service-configuration file represents all existing ownership and dependency relationships between objects on the nodes, message-propagation rules, and any actions that are available for objects. This file must be uploaded to the HP Operations Navigator.

The service view reflects your individual setup. Each service view is a unique representation of the environment from which it is taken. In general, the Java service view consists of instances and availability.

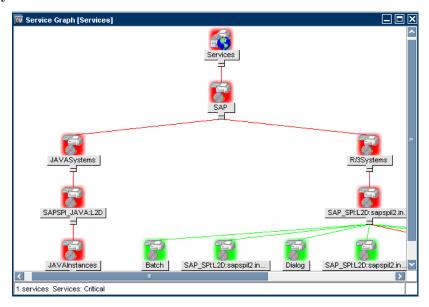

Deploy the SiteConfig File

- In the HPOM console, open the policy dialog of the global_Siteconfig policy from the Policy Bank → SPI for SAP.
- 2 Specify the value for every attribute for the Java Instances that you want to monitor.
- 3 Click Save and Close.

Deploy the global SiteConfig policy on the node.

Configuring Service Views for Java System

To configure the Service Views for Java systems:

- 1 In the HP Operations Manager for UNIX console, browse to the following folder: Policy Bank → SPI for SAP.
- 2 Select **r3j2eesdisc** and deploy the policy on the nodes.
- 3 The service discovery starts as soon as the policy is successfully deployed to the managed node and, in addition, according to the schedule defined in the policy. The default schedule is once a day.

You can verify that the service discovery has completed successfully, by checking the Netweaver connection and checking for the presence of the SAP servers (where you ran the service discovery) and the Java systems.

For more information on different scenarios used by the Java systems, refer Scenarios for Viewing the Service Map for the Java Systems on page 245.

Service Views 347

9 Service Reports

This section describes how to install, set up, and use the service reports provided with the SPI for SAP.

In this Section

The information in this section introduces you to the concept of Service Reports and explains how you can use them in conjunction with both the SPI for SAP and HPOM to provide you with information that is specifically designed to help you manage your SAP NetWeaver landscape in a more efficient and more convenient way. You can find detailed information about the following topics:

- What Are Service Reports? on page 349
- Upgrading the SPI for SAP Reports on page 350
- Installing the SPI for SAP Reports on page 350
- Service Reports in the SPI for SAP on page 353
- SPI for SAP Report Metrics on page 361
- Removing the SPI for SAP Reports on page 363

What Are Service Reports?

Service reports are web-based reports that are produced by HP Reporter (Reporter) using default templates and viewed using a web browser. Reporter allows you to request both scheduled and on-demand versions of reports.

SPI for SAP service reports correlate the data extracted from either the HP Software Embedded Performance Component or the HP Performance Agent. You can use the correlated data to generate reports which display short-, medium-, or long-term views of your IT environment and supplement the detailed, real-time graphs available with Performance Manager. The combination of reports and graphs is a powerful tool for trend analysis. For example, you can perform the following tasks:

- Identify potential bottlenecks in your IT system, so that you can take action before problems become acute.
- Use the information presented in the reports to help you to make accurate predictions for future upgrades.
- Collect accurate information to use in measuring service levels.

Upgrading the SPI for SAP Reports

This section describes what you have to do if you upgrade the SPI for SAP software and the SPI for SAP R/3 Performance Agent and want to continue using the service-reporter functionality. Note that upgrading the SPI for SAP Service Reports is not the same as upgrading the HP Reporter software. For more information about supported software versions, refer to HP Operations Smart Plug-in for SAP Installation and Configuration Guide.

For more information about upgrading the SPI for SAP R/3 Performance Agent, which gathers performance data for the Service Reports, see Upgrading the SPI for SAP R/3 Performance Agent on page 197. For more information about upgrading the SPI for SAP itself, see "Upgrading the SPI for SAP" in the HP Operations Smart Plug-in for SAP Installation and Configuration Guide.

The SPI for SAP comes with a Reporter-integration package containing improved and enhanced reports, some of which make use of new metrics lists. To upgrade the SPI for SAP reporter-integration, you have to remove the old Reporter-integration package and install the new one in its place, as follows:

Remove the old SPI for SAP reporter-integration package using the standard Windows method:

```
Start: Settings > Control Panel > Add/Remove Software
```

- 2 Install the new SPI for SAP reporter integration as described in Installing the SPI for SAP Reports on page 350.
- 3 Schedule and generate the new service reports as described in Generating SPI for SAP Reports on page 360.

Installing the SPI for SAP Reports

This section explains how to install the SAP NetWeaver service reports which come with the SPI for SAP and, in addition, provides information designed to help you prepare for the installation. The section covers the following topics:

- Before You Begin on page 350
- Installing SAP Service Reports on page 351

Before You Begin

Before you install and set-up for the SAP NetWeaver Service Reports, you must ensure that the following tasks have been completed:

1 Performance Agent

Either the HP Software Embedded Performance Component or the HP Performance Agent must be available on all SAP NetWeaver managed nodes for which you want to produce service reports.

The HP Performance Agent must also have been configured according to the instructions given in The SPI for SAP Performance Monitors on page 218.

2 Service Reports

The HP Reporter instance must be available. For more detailed information about the platforms the Reporter supports, see the Reporter product documentation.

If you want to edit existing (or create new) Service Reports for the SPI for SAP, make sure that Crystal Reports is running on the machine hosting the HP Reporter. For more information about required or supported software versions, see the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

Installing SAP Service Reports

The service reports for SAP NetWeaver are installed into the HP Reporter product as a snap-in using InstallShield on the HP Reporter system. During set-up you will be asked to select the common application path of HP Reporter. This is the folder where you installed HP Reporter. Setup attempts to discover this path automatically and indicate to you what it finds. In most circumstances you should avoid changing it and accept the suggested settings.

The set-up copies components to the directories as summarized in Table 88. All directory paths are relative to the HP Reporter common application path.

Table 88 Locations of SAP Service Report Components

Component	Directory
Configuration files	\newconfig\
Installation script	\newconfig\
Report template files	\data\reports\Sap\
Executables	\bin\

To install the SPI for SAP Service Reports:

1 Insert the product media and browse to the following directory:

```
\WINDOWS\OV REPORTER\SAPSPI REPORTER 12.00
```

Double-click the sapspi_reporter.msi file, and select the Complete Installation option.

2 Follow the installation-wizard's instructions. During set-up of the SPI for SAP service reports you will be asked to confirm or specify the common application path for the HP Reporter. Accept the default to ensure that all automatic configuration steps are correctly executed without the need for manual re-configuration.



If you change the common application path, set-up will not be able to find its executables and will generate warning messages.

- 3 Set-up automatically performs the following tasks:
 - Creates SAP-specific report group: SAP_R3
 - Assigns metric list to the SAP_R3report group
 - Assigns group reports to the SAP_R3 report group
 - Assigns system reports to the SAP_R3report group

Service Reports 351

- 4 Verify that the installation of the SPI for SAP service reports completed successfully by confirming that setup created the report and metrics groups mentioned in the previous step and listed in full in SPI for SAP Report Metrics on page 361. The installation should look similar to the example illustrated in Figure 29.
- If you choose to add your SAP NetWeaver system to HP Reporter manually, you can use the following values in the Add System window replacing the example "host.name.com" with the real name of the system you want to add:
 - System: host.name.com
 Replace "host.name.com" with the real name of the system you want to add to HP Reporter.

Network: SAPDomain: SAP

Check that your SAP NetWeaver hosts have been added to the appropriate HP Reporter group, namely; SAP_R3. Hosts are automatically assigned to a report group according to the kind of data source (SAP NetWeaver) discovered on the monitored host.

- 6 Click [OK] to display the newly added systems in the Reporter's Details Pane.
- 7 Use the Reporter GUI to schedule the generation of the SPI for SAP reports or generate them now using the following option:

Actions > Run > Generate Reports



Make sure you allow enough time for HP Reporter to gather the report data and store it in the HP Reporter database before you start generating reports. For more information, see Generating SPI for SAP Reports on page 360.

8 After you have successfully generated the SPI for SAP reports, you can view them with any standard web browser. For more information about how to view the SPI for SAP reports, see Viewing SPI for SAP Reports on page 361.

🕏 Reporter <u>V</u>iew Action Help 🔁 Reporter Administratoi Report Name Description Category ্ৰস্ট্ৰে Discovery Area SAP R/3 Database Performance (FR) SAP R/3 Database Performance Full Range 6000 SAPSPI V.1 SAP R/3 Database Quality (FR) SAP R/3 Database Quality Full Range 6001 SAPSPI V.1 Metric Lists SAP R/3 Job Overview (FR) SAP R/3 Job Overview Full Range 6002 SAPSPI V.1 - 🔠 Reports SAP R/3 System Uptime (FR) SAP R/3 System Uptime Full Range 6004 SAPSPI V.1 ALL Con SAP R/3 E2E Time (FR) SAP R/3 E2E Time Full Range 6007 SAPSPI V.1 Configuration SAP R/3 Number of Spool Jobs (FR) SAP R/3 Number of Spool Jobs Full Range 6010 SAPSPI V.1 Performance History SAP R/3 Amount of Update Tasks (FR) 6012 SAPSPI V.1 SAP R/3 Amount of Update Tasks Full Range SAP R/3 Full Range SAP R/3 Workprocess Overview (FR) SAP R/3 Workprocess Overview Full Range 6013 SAPSPI V.1 SAP R/3 Last Full Month SAP R/3 Document Volume Overview (FR) SAP R/3 Document Volume Overview Full Range 6014 SAPSPI V.1 SAP R/3 Document Volume Docs-Lines (FR) SAP R/3 Documents and Lines Full Range 6015 SAPSPI V.1 SAP R/3 Last Full Week E ■ SAP R/3 Yesterday SAP R/3 Document Volume by Module (FR) SAP R/3 Documents by Module Full Range 6016 SAPSPI V.1 SAP R/3 Workload Overview Count (FR) SAP R/3 Workload Overview Count Full Range 6017 SAPSPI V.1 ্ৰী Schedule SAP R/3 Workload Overview Resp (FR) SAP R/3 Workload Overview Response Full Range 6018 SAPSPI V.1 Discovered Systems SAP R/3 Workload TaskType Resp (FR) 6019 SAPSPT V.1 SAP R/3 Workload Tasktype Response Full Range Customers SAP R/3 Workload DB Overview Resp (FR) SAP R/3 Workload DB Overview Full Range 6020 SAPSPI V.1 SAP R/3 Workload DB TaskType (FR) SAP R/3 Workload DR TaskType, Full Range 6021 SAPSPT V.1 SAP R/3 Memory Full Range SAP R/3 Memory (FR) 6022 SAPSPI V.1 SAP R/3 Users - Overview (FR) SAP R/3 Users - Overview Full Range 6023 SAPSPI V.1 SAP R/3 Users - Workload (FR) SAP R/3 Users - Workload Full Range 6024 SAPSPI V.1 SAP R/3 Users - Document Stats (FR) SAP R/3 Users - Document Statistics Full Range 6025 SAPSPI V.1 SAP R/3 Buffer Performance-Overview (FR) SAP R/3 Buffer Performance - Overview Full Range 6026 SAPSPI V.1 SAP R/3 Buffer Performance - Detailed Analysis Full Range SAP R/3 Buffer Performance-Details (FR) 6027 SAPSPI V.1 SAP R/3 ICM Statistics - Overview (FR) SAP R/3 ICM Statistics - Overview Full Range 6028 SAPSPI V.1 -2009/11/25 17:55:56 : RepLoad Completed loading template file 🗘 2009/11/25 17:56:04 : Scheduler Starting program "RepMaint.exe" 92009/11/25 17:56:04 : Scheduler There are currently 180 programs queued to run and 1 running 🗓 2009/11/25 17:56:16 : RepMaint Adjusting Automatic Groups 2009/11/25 17:56:19 : RepMaint Finished, Processing Automatic Groups. 2 group memberships were added A peporter Status Λ Discover Trace λ Dependencies Trace λ Gather Trace λ Discover Neutron Trace λ Report Trace λ RepLoad Trace λ Mai report family selection mode:SAP R/3 Full Range Reporter Service - Running

Figure 29 SPI for SAP Reports and Metrics

Service Reports in the SPI for SAP

The Smart Plug-in for SAP includes a package of service reports that use the data collected by the HP Software Embedded Performance Component and HP Performance Agent to generate reports, which display vital information about the health and availability of the Systems in your SAP landscape. The reports provided in the Smart Plug-in for SAP report package cover a wide variety of system- and business-critical areas.

The information in this section describes in detail the service reports, which are supplied with the SPI for SAP. You can find information about the following topics:

SAP Reports on page 354

A complete list of all the SAP-related reports provided with the SPI for SAP including the metrics used

Defining the Scope of SAP Service Reports on page 359

Hints to help you target more accurately the information you want to display in a report

Generating SPI for SAP Reports on page 360

Instructions for starting the generation of the SPI for SAP reports

Viewing SPI for SAP Reports on page 361

Service Reports 353

Instructions for viewing the SPI for SAP reports you have generated

The SPI for SAP service-report integration supports the remote-monitoring functionality, where SAP servers which are *not* HPOM managed nodes and do *not* have the SPI for SAP software installed, are monitored remotely from an HPOM managed node, where the SPI for SAP monitors are installed, configured, and running. You can generate service reports for SAP servers, which are managed remotely. For more information about remote monitoring feature, see Remote Monitoring with Alert Monitors on page 23, and Remote Performance Monitoring on page 211.

SAP Reports

Table 89 lists the SAP reports available with the Smart Plug-in for SAP. You can also find in the table details about the information displayed in the reports and the individual metrics used to generate the reports. For more information about the SPI for SAP performance monitors, see The SPI for SAP Performance Monitors on page 218.

Table 89 SAP Performance Reports

Report	Purpose	Metrics
Database Performance	Correlates and displays the most important database performance metrics	 Physical reads/writes Disk Physical IO Long Table Scans Sort Rows Sort in Memory Sort on Disk Redo block Written Redo Buffer Size
Database Quality	Shows important metrics, which taken together give a detailed picture of the quality of the database configuration	 Quality of data base buffer pool Quality of Data Dictionary cache Redo-Log faults Buffer Pool Size Dictionary Cache Size Redo log buffer size Buffer busy waits Buffer busy wait time
Enterprise Portal Performance Enterprise Portal Availability	Correlates and displays the most important status and performance metrics for the SAP Enterprise Portal	 Average response time Average CPU time Average Outbound data Average number of component calls per request Number of users making requests Requests running in different levels Percentage of requests not serviced

Table 89 SAP Performance Reports (cont'd)

Report	Purpose	Metrics
E2E Time	Shows the E2E Transaction Time of the configured transactions, divided into Response and Network Time	Response time Network time
ICM Statistics - Overview ICM Statistics - Details	Shows an overview of the status of the Internet Communication Manager plus general information about queues, threads, and connections Shows a much more detailed view of the status of the Internet Communication Manager including up-time and down-time periods, plus statistics for request queues, work threads, and open connections	 ICM Status Max. number of threads Peak number of threads Current number of threads Max. number of connections Peak number of connections Current number of connections Max. number of queue entries Peak number of queue entries Current number of queue entries Number of running work threads Number of dead work threads Number of processed work threads
Job Overview	Shows the number of jobs for the SAP instances in the different, specified states (running, ready, released)	Number of Jobs in the status: Running Ready Scheduled Released Aborted Finished
Number of Spool Jobs	Shows the number of spool jobs and print requests in different status	 Total Number of Spool Jobs Number of Spool Jobs in status Archive Number of open print Requests Number of print Requests with errors Number of failed print requests
Amount of Update Tasks	Shows the amount of Update tasks	 total VB-update tasks initial VB-update tasks erroneous VB-update tasks update tasks having V1 executed update tasks having V2 executed
Work Process Overview	Compares the total number of the different work processes with the number of in use processes	 Dialog processes/processes in Use Batch processes/processes in Use Spool processes/processes in Use Update processes/processes in Use Update2 processes/processes in Use

Service Reports 355

Table 89 SAP Performance Reports (cont'd)

Report	Purpose	Metrics
Document Volume	Shows the total document volumes per module (BW, FA, QA) correlated with business-transaction metrics	GUI net timeResponse timeCPU timeDB Request time
Document & Lines	Shows the number of documents and the lines created per document, sorted by SAP application module	 Head - generic doc. information Detail - the average number of lines in the document. The larger the file, the longer it takes to commit to the database.
Document Volume by Module	Shows the volume of documents per application module	Number of documents
Workload Overview Count	Shows the number of steps for all task types in an SAP NetWeaver System, for example: Batch, Dialog, Spool, Update)	GUI net timeResponse timeCPU timeDB Request time
Workload Overview Response Time	Shows the average number of steps and response time (in seconds) for each SAP NetWeaver instance	 CPU Time Load Time Queue Time DB Read Time
Workload Overview Task Type	Shows the average number of steps and response time (in seconds) for each task type (AUTOABA, BCKGRD)	DB Read Time DB Update Time
Workload Overview DB Overview	Shows the work-load metrics based on database activity for a defined SAP NetWeaver system	 Change Count Change Time DB Calls DB Requests
Workload Overview DB Task Type	Shows the work-load metrics per task type and based on database activity for a defined SAP NetWeaver system	 DB Requests DB Time per Req. Read-Dir Count Read-Dir Time Read-Seq. Count Read-Seq. Time Requested Bytes
SAP R/3 Memory	Shows SAP memory use for the defined System	Extended MemoryPaging AreaRoll Area
SAP R/3 Users - Overview	Shows the number of users and user sessions per SAP client for a given SAP application server	Average UsersAverage Sessions

Table 89 SAP Performance Reports (cont'd)

Report	Purpose	Metrics
SAP R/3 Users - Workload	Shows the load for named SAP work process of users and user sessions (per SAP client/application server)	 Average Users Average Sessions Average Response Time CPU Time Dialog, Update, Spool, Batch steps
SAP R/3 Users - Document Statistics	Shows the document statistics per SAP module for users and user sessions (per SAP client/application server)	 Average Sessions Average Users SAP Module (FA, MM, SD)
SAP R/3 Buffer Performance - Overview SAP R/3 Buffer Performance - Detailed Analysis	Shows general and detailed analyses of the use of SAP memory buffers by SAP users for a given instance and client.	 Buffer Name Hit Ration Allocated Size Free Space Free Space Percent Max. Dir Entry Free Dir Entry Free Dir Entry (Percent) Buffer Swaps Buffer Swaps (Delta) Database Accesses Database Accesses (Delta)
Threads usage rate for different ports	Shows the usage rate of different ports in the form of a bar graph.	 http http ssl iiop iiop ssl p4 p4 http tunneling p4 ssl telnet jms provider
Connections count	Shows the sum of connections of all types in the form of a bar graph.	 http connections p4 connections iiop connections jms connections telnet connections Other connections Free connections Maximum connections

Service Reports 357

Table 89 SAP Performance Reports (cont'd)

Report	Purpose	Metrics
Memory Consumption	Shows the average memory consumption in the form of a bar graph.	Allocated memoryAvailable memoryUsed memory
Sessions view	Shows the sum of the sessions of all types in the form of a line graph.	 Active sessions Total sessions Timed-out sessions Invalid sessions Logged-off sessions
Requests view	Shows the sum of the requests of all types in the form of a bar graph.	Web container all requestsp4 provider all requestshttp provider all requests
Comparison of application and system threads	Shows the sum of sizes of application threads of all types in the form of a line graph.	 Minimum Application thread pool size threads Maximum application thread pool size threads Initial application thread pool size threads Current application thread pool size threads Active applications threads Minimum system thread pool size threads Maximum system thread pool size threads Initial system thread pool size threads Current system thread pool size threads Current system thread pool size threads Active system threads
Comparison of application and system waiting tasks	Shows the states of the waiting task details between the application thread pool and system thread pool in the form of a line graph.	 Waiting application tasks Waiting application queue size tasks Waiting application queue overflow tasks Waiting system tasks Waiting system queue size tasks Waiting system queue overflow tasks

Table 89 SAP Performance Reports (cont'd)

Report	Purpose	Metrics
Opened Sessions	Shows the total number of security, web, and EJB sessions in the form of line graph.	Opened security sessions countOpened web sessions countOpened EJB sessions count
Transaction Count	Shows the total number of transactions in various states in the form of line graph.	 Committed Transactions count Open Transactions count Rolled Back Transactions count Suspended Transactions count Timedout Transactions count
Message Status in the Log Configurator	Shows the total number of warning, error, and fatal messages in the form of line graph.	AllWarningErrorFatal

The following table lists the reports supported on SAP Netweaver 7.0 and SAP Netweaver 7.1.

Table 90 SAP 7.0 and SAP 7.1 Reports

Report Name	SAP 7.0	SAP 7.1
Memory Consumption	Yes	Yes
Comparison of System and Application threads	Yes	Yes
Comparison of System and Application Waiting Tasks	Yes	Yes
Requests View	Yes	Yes
Sessions View	Yes	No
Threads usage for different ports	Yes	No
Connections count for different ports	Yes	No
Opened Sessions	No	Yes
Transaction Count	No	Yes
Message Status in the Log Configurator	No	Yes

Defining the Scope of SAP Service Reports

You can limit the scope of any service report by using the following criteria:

- Specify which systems to include, by using one of the following possible values:
 - all systems
 - a selected group of systems
 - a selected system

Service Reports 359

- Specify the period for which you want to include report data by using one of the following possible values:
 - a full *range* (up to the last 180 days)
 - last full *month*
 - last full week
 - yesterday

Generating SPI for SAP Reports

You can use the Reporter GUI either to schedule the generation of the SPI for SAP reports or manually generate them on demand. You should consider using the schedule option, if you need to generate a lot of reports and the reports involve collecting and processing data from multiple SAP Systems. To generate single reports or multiple reports, follow the steps described below:

- 1 Make sure you complete the installation and configuration steps described in Installing SAP Service Reports on page 351 before you start generating reports.
- 2 Use the Reporter GUI to schedule data collection for the SPI for SAP reports using the following menu option:


Report Administrator > Schedule > Gather

In the right pane, select and right-click the job whose schedule you want to view or change. To ensure that *all* data up to the current hour are included in the collection for the given host, use the -h option before the host name in the Parameters box of the Edit Schedule Entry window.



Due to differences between the way SAP and the SPI for SAP's performance-data sources (HP Software Embedded Performance Component and HP Performance Agent) handle time, avoid scheduling data collection to start between midnight (00:00) and 2 a.m. (02:00). Run data collection *after* 02:00 instead, as illustrated in Figure 30 on page 360.

Figure 30 Setting up Data Collection for Reports

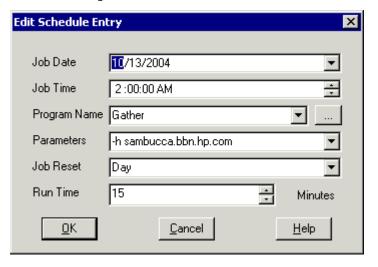

3 Use the Reporter GUI to start the generation of the SPI for SAP reports using the following option:

Actions > Run > Generate Reports



Remember to allow enough time for the data-collection process to complete to ensure you have all the latest data for the reports.

Viewing SPI for SAP Reports

To view the SPI for SAP reports:

- First, ensure that the reports have been successfully generated. For more information about generating reports, see Installing SAP Service Reports on page 351.
- 2 Open a web browser.
- 3 Enter the following string in the location bar: http://<machine.name.com>/HPOV reports/reports.htm
- 4 Navigate through the displayed reports to the report, which you want to examine more closely.

SPI for SAP Report Metrics

This section lists the metrics used by the reports for SAP R/3 and SAP Netweaver, which are installed as part of the SPI for SAP reporter package. For more information about the metrics listed in the section below, see The SPI for SAP Performance Monitors on page 218. For more information about the SPI for SAP reports, see Service Reports in the SPI for SAP on page 353.

SAP Report Metrics

The information in this section shows which performance metrics are used to gather the data that is used in the preparation of the performance-related reports for the SPI for SAP. Note that the name of the performance metric is often (but not always) the same as the monitor that collects the performance data. For example, the SPI for SAP performance monitor DBINFO_PERF uses the metrics list DBINFO_PERF; the performance monitor USER_PERF uses the metrics list SAP_USER_PERF.

Table 91 lists the metrics that are available to the SPI for SAP and shows which performance monitor uses the metric.

Table 91 SPI for SAP Performance-report Metrics

Report-metric Name	Referenced Monitor	Description
DBINFO_PERF	DBINFO_PERF	Collects database-performance analysis values
DOCSTAT_PERF	DOCSTAT_PERF	Collects the quantity-structure statistics (the document volume) for the last full hour
EP_PERF	EP_PERF	Monitors the status and performance of the SAP Enterprise Portal

Service Reports 361

Table 91 SPI for SAP Performance-report Metrics (cont'd)

Report-metric Name	Referenced Monitor	Description
JOBREP_PERF	JOBREP_PERF	Counts the number of jobs per state (scheduled, running, etc.)
SAPBUFFER_PERF	SAPBUFFER_PERF	Returns values for the use of SAP memory <i>buffers</i> for an SAP instance
SAPMEMORY_PERF	SAPMEMORY_PERF	SAP memory used by SAP users for an SAP instance
SAP_ICMSTAT_PERF	ICMSTAT_PERF	Monitors the status and performance of the SAP Internet Communication Manager
SAP_STATRECS_PERF	STATRECS_PERF	Returns the response/net times of defined transactions
SAP_SYSUP_PERF	SYSUP_PERF	Shows the status of the SAP NetWeaver instances
SAP_USER_PERF	USER_PERF	Monitors the number of users and user sessions per SAP client for a given SAP application server
SAP_WLSUM_PERF	WLSUM_PERF	Collects the performance-workload statistics
SPOOL_PERF	SPOOL_PERF	Counts the number of spool requests in different states
UPDATE_PERF	UPDATE_PERF	The number of update processes
WP_PERF	WP_PERF	Number of users/sessions per SAP client for an SAP application server

SAP Netweaver Report Metrics

The following list shows which performance metrics are used to gather the data that is used in the preparation of the performance-related reports for SPI for SAP Netweaver 7.0 and Netweaver 7.1.

• SAP Netweaver 7.0

Uses the data source "SAPSPINW_RPT_METRICS" to gather data from SAP Netweaver 7.0 instances.

• SAP Netweaver 7.1

Uses the datasource "SAPSPINW_RPT_METRICS" to gather data from SAP Netweaver 7.1 instances. This data source is the same data source as used by Netweaver 7.0.

Removing the SPI for SAP Reports

To completely remove the SPI for SAP reports and the integration with the HP Reporter, you need to perform the following steps described in this section in the order specified. This section covers the following topics:

- To Remove HP Reporter Snap-in Packages on page 363
- To Remove the SPI for SAP from the Reporter System on page 363

To Remove HP Reporter Snap-in Packages

Use the following instructions to help you remove the SPI for SAP snap-in package for the HP Reporter quickly and easily from the HP Reporter system:

1 In Reporter, browse to:

File > Configure > Reporter Packages

- 2 Select the following files from the Installed Packages window located in the right pane of the Configure Report Packages window:
 - SPI for SAP
- 3 Double-click the left arrow button [<-] in the Available Packages window located in the left pane of the Configure Report Packages window.
- 4 Click **OK** to finish

To Remove the SPI for SAP from the Reporter System

To remove the SPI for SAP binaries from the HP Reporter system, you need to carry out the following steps on the HP Reporter system as the system administrator:

- 1 Go to the HP Reporter system.
- 2 Insert the HP Operations Smart Plug-in DVD in the DVD drive.
- 3 Chose to remove program.
- 4 Follow the on-screen instructions and select Reports under SAP SPI.
- 5 Follow the on-screen instructions to complete the removal process.

Service Reports 363

10 Troubleshooting the SPI for SAP

This section provides information that is designed to help troubleshoot the problems you encounter when working with the SPI for SAP.

Characterizing Problems

When you encounter a problem, make a note of all associated information. This information may be useful when you proceed to the next stage of problem analysis or if external support is required and you are requested to explain the problem to service personnel:

Context

What has changed? Determine if anything has changed on your network or with the product configuration:

- Hardware?
- Software (including operating system, HP Operations Manager (HPOM), and SAP patches)?
- Files?
- Security (file permissions)?
- Name services?
- Utilization?
- In what situation does (or did) the problem occur?

Duration

How long and how often? Is the problem consistent (fails every time) or inconsistent (fails only sometimes)?

Problem Identification Procedures

This section includes descriptions of procedures that you can use to identify the root of the problem that is causing the symptoms you have noted. You will not need all these procedures for every problem you encounter, as some problems can be easily localized to a particular component of the system. However, for most problems, you will need to check one or more of the following:

- The HP Operations agent and HP Operations management-server installation (including patches).
- SPI for SAP installation.
- The message-source templates that are distributed to managed nodes.

- The operation of the SPI for SAP monitors on managed nodes.
- SPI for SAP access to the SAP front end.

Checking the HPOM Agent Installation

You must check the following:

- the HP Operations agent is installed on both the managed node and the management server.
- which version of the HP Operations agent is installed

To check whether the HP Operations agent is installed on a managed node or the HP Operations management server, go to the command line and enter the following command (on the HTTPS agent):

ovdeploy -inv

This provides information about the installed version of the HP Operations agent on the managed node or the HP Operations management server where you executed the command.

Checking the HPOM Server Installation

To check whether the server component is installed on the HP Operations management server, go to the command line and enter the following commands (for the HTTPS agent):

- ovdeploy -inv
- opcsv -version

This provides information about the installed version of the HPOM server component that is installed on the management server.

Checking Installed Patches

To check whether you have the latest HPOM patches installed, go to the command line and execute the following command:

swlist

The information displayed includes the patch number. To ensure that the patch has been distributed to managed nodes, you should check:

- to see which version of HPOM the patch relates to, as well as
- note which version of HPOM executable is on the managed node.

To check the version of an executable on a managed node where a UNIX operating system is installed, run the what command, for example:

what opcgt

The output includes the version number.

To check the version of an executable on an Microsoft Windows node, select and right-click the executable file in Windows Explorer, choose Properties from the context menu, then click the Version tab.

The information about the latest patch is available at Software Support Online:

http://www.hp.com/go/hpsoftwaresupport

To make sure that the patch is distributed to managed nodes, check the following details:

- The version of HPOM components that are delivered with the patch (this is included in the patch text)
- The version of HPOM executable available on the managed node. See the output of the ovdeploy -inv command.

Testing the SPI for SAP Installation

You can check which version of the SPI for SAP is installed on the HPOM management server or on a UNIX managed node by checking the versions of the r3itogui and the SPI for SAP monitors. To find out which versions of the r3itogui and the SPI for SAP monitors are installed on a particular system, enter the following commands:

what /opt/OV/lbin/sapspi/r3itogui

what /var/opt/OV/bin/OpC/monitor/r3mon*

The information displayed when you execute either of these commands includes the SPI for SAP version. For example:

```
/opt/OV/lbin/sapspi/r3itogui:
abcglob %u.%u
HP Open View SMART Plug-In for SAP Mon Oct 312:30:21 METDST 2004
HP Open View SMART Plug-In for SAP Rev. #.# Serie 700/800 HP-UX 11.X
alxxsnmp.c 20.7 SAP 04/07/08
```

Checking the Distributed Templates

You can check which message source templates are distributed to a managed node as well as any parameters (such as polling rate) that have been set for them. To obtain this information, enter the command:

/opt/OV/bin/OpC/utils/opcdcode /var/opt/OV/conf/OpC/monitor

The following is an example of the information that is displayed for each template that is found on the node:

```
Monitor "r3monjob"

DESCRIPTION "Monitoring of SAP R/3 batch jobs
INTERVAL "15m"

MONPROG "r3monpro

MAXTHRESHOLD

GEN_BELOW_RESET

THRESHOLD 0750000

RESET 0.250000
```

Checking the Execution of Monitors on HP-UX Nodes

To check that a monitor is running correctly, you can enable tracing, start the monitor from the command line, and then view the resulting trace file.

To enable tracing, set the TraceLevel line of the *<monitor>*.cfg file appropriately. When the monitor has started, you can view the trace file. For the location of the trace file, see Trace File on page 38.

Additional trace information can be obtained for monitors that use Remote Function Calls (RFCs), by checking the file dev rfc.

The rfc_dev file holds trace information regarding the establishment of the RFC connection, RFC-get and RFC-send data, and any RFC exceptions. All the monitors other than r3monpro, r3mondev, and r3mondisp use RFCs.

For the following monitors, there is an additional facility that allows you to validate the monitoring conditions that have been defined in the monitor configuration files:

- The process monitor, r3monpro
- The batch job monitor, r3monjob

For these monitors, you can add the switch, -parser, to the start monitor command, as follows:

/var/opt/OV/bin/OpC/monitor/<monitor> -trace 1 -parser

If the configuration is found to be invalid, a critical message is sent to the message browser. Otherwise, there is no message.

For information about configuration of SPI for SAP monitors, see Customizing the SPI for SAP Monitors on page 19.

Checking SPI for SAP Access to the SAP Front End

The SPI for SAP includes a number of applications and operator-initiated actions that open a SAP NetWeaver online session. Figure 31 illustrates how the connection to the SAP front end is made from the HPOM desktop.

Environment config file, 13itosap.cfg for SAP System logons

RFC Handler

Tiselgui

SAP connect parameters

SAP Application Server

Figure 31 SPI for SAP Connection to the SAP Front End

You can test the connection to the SAP NetWeaver front end for a particular instance by starting the sapgui and the r3selgui utilities, each with trace enabled. To do this, go to the command line on the management server and enter:

```
export DISPLAY =<hostname>:0.0
/opt/OV/lbin/sapspi/sapgui/sapgui -host<hostname> -nr \
<SAP_instance_number>
/opt/OV/lbin/sapspi/r3selgui -exefile /opt/OV/lbin/sapspi/r3itogui -host
<hostname> -trace 1
```

To view the result of the trace, enter:

more dev_rfc

This command displays the rfc_dev file, where you can see trace information regarding the establishment of the RFC connection, RFC get and send data, and any RFC exceptions.

 $\begin{tabular}{l} Figure 32 illustrates the different stages in the process of communication between HPOM and SAP NetWeaver \end{tabular}$

Figure 32 Message Flow between HP Operations Manager and SAP

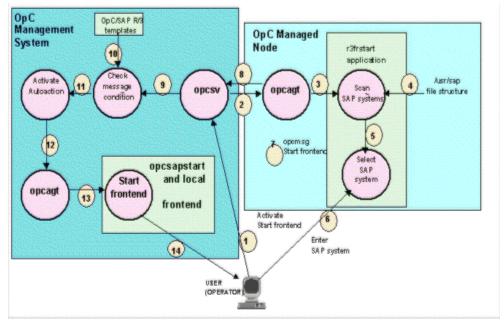


Table 92 summarizes the problems that can occur at different stages in this communication process, and the checks that you can make to discover the cause.

Table 92 Checking Communication Problems

Stages	Problem	Check
1, 2, 3	Permission problems on the managed node	rlogin to the managed node as user opc_op, and try to start the SAP R/3 Front End application manually.
	The action agent opeacta is not running on the managed node.	Execute the command: opcagt -status
4, 5, 6	No read permissions in directory structure: /usr/sap	Log on to managed node: su opc_op execute: find /usr/sap -print If it is a problem with read permissions, the message "Cannot Open" will appear.
7, 8, 9	HP Operations agent or server is not running	On the management server and managed node, execute: opcagt -status
	Problems with communication	On the management server, execute: opcsv -status Enable HPOM trace mode on the managed
10, 11, 12	The message sent via opcmsg does not match the r3frstart message condition.	node and the management server. Check for the existence and order of the r3frstart condition in the opcmsg template. Check whether the message appears in the message browser after confirmation of the selected SAP system. In the message details, check the status of the automatic action.
13, 14	HP Operations agent is not running on the management server. The shell script opcsapstart cannot be started.	On the management server, execute: opcagt -status On the management server, execute: /opt/OV/lbin/sapspi/sapgui/\ opcsapstart <hostname>\ <instance_number> <sid></sid></instance_number></hostname>

Common SPI for SAP Problems

SPI for SAP related problems could fall into one of the following areas:

• SPI Product Cannot be Installed on page 371

- Distributing SPI for SAP Software to a Microsoft Windows Node Aborts on page 371
- Configuration Files Cannot be Edited on page 371
- SAP NetWeaver Service Discovery Fails on some Managed Nodes on page 372
- SAP System Up/Down Not Reported Correctly
- Duplicate HPOM Messages in the Message Browser on page 373
- Performance Monitor out of Synchronization on page 373
- Performance Monitor does not Work on page 374
- Work-Process monitor (r3monwpa) ends with an rfc exception on page 374
- Distributing Actions, Monitors, and Commands on Windows Nodes on page 374

SPI Product Cannot be Installed

- Check which management server components or managed node components cannot be installed.
- Check whether installation prerequisites have been met (both for the management server and managed nodes). Refer to the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.
- Verify if the installation steps have been correctly executed. Refer to the *HP Operations* Smart Plug-in for SAP Installation and Configuration Guide.
- Verify that the product has already been installed (either on the management server or the managed node).

Distributing SPI for SAP Software to a Microsoft Windows Node Aborts

This is caused by a sharing violation in the following directory:

\usr\OV\bin\OpC\intel\monitor\cmds

You must ensure that no other process is using this directory on the node. To do this, close the Microsoft Windows Explorer and the command shell on the managed node to which you want to distribute the SPI for SAP software.

Configuration Files Cannot be Edited

If you get an error message when you try to edit a configuration file using one of the applications in the SAP R/3 Admin or SAP R/3 Admin Local groups, this is probably because you have not distributed the SPI for SAP software components to the management server and nodes. Refer to the HP Operations Smart Plug-in for SAP Installation and Configuration Guide.

SAP NetWeaver Service Discovery Fails on some Managed Nodes

If the R/3 Service Discovery tool fails to collect the information it needs for a given host, the host will not appear in the SPI for SAP service tree. However, you add the missing information by hand and create the SapSpiServices file as follows:

1 For each managed SAP node whose service-discovery information is missing from the SapSpiServiceDiscovery file, log into the managed node and execute the following command. Enter:

/var/opt/OV/bin/OpC/cmds/r3sd

The r3sd command writes the information you need to stdout. The result should be similar to the example shown in Example Output of the r3sd Command.

Example Output of the r3sd Command

```
[R3Instance]
Hostname=sapper
HostnameGUID=
SystemName=AST
InstanceName=DVEBMGS00
Number=0
Release=40B
DBName=AST
DBHostname=sapper
Process=Dialog
Process=Update
Process=Enqueue
Process=Batch
Process=Message
Process=Gateway
Process=Spool
```

2 For each managed node not automatically discovered by the R3 Service Discovery command, copy the output of the r3sd command (including opening and closing curly brackets {}) into the following file on the HP Operations management server:

```
var/opt/OV/tmp/SapSpiServiceDiscovery
```

3 On the HP Operations management server, execute the following command. Enter:

/opt/OV/lbin/sapspi/r3sm -file \ /var/opt/OV/tmp/SapSpiServiceDiscovery

If the program completes successfully, r3sm creates the following file, containing the SPI for SAP service tree, which you then upload to HPOM, as described in Upload the Service Configuration File to HPOM on page 343:

/var/opt/OV/tmp/SapSpiServices

SAP System Up/Down Not Reported Correctly

The symptom of this problem is that a message, reporting that the r3monup. his file cannot be accessed, appears in the message browser after each run of the r3monsap monitor. It is normal for this message to appear on the first run of the monitor, as the file is created by the r3moncol alert-collector monitor on its first run.

If the message continues to appear, this is probably because the monitor is failing to log on to the SAP NetWeaver system. You should check the environment configuration file (r3itosap.cfg) and ensure that the log-on information has been correctly set up.

Note that the SPI for SAP now uses the r3status monitor to check the status of SAP NetWeaver. The r3status monitor is able to distinguish between the following states:

- a host that is *un* reachable
- a host that is reachable but whose SAP Systems are not available
- a host that is reachable and the SAP Systems are available, but where the specified SAP user could not log in



The status monitor, r3status, considers an SAP instance as "not available" if the SAP instance being monitored does not respond within 60 seconds. However, this lack of response could be due to a number of different reasons, for example: all available dialog work processes are allocated, or all available SAP gateway connections are busy.

Another problem the SPI for SAP has when trying to determine the status of an SAP instance on a Unix system is that the RFC call can occasionally hang and, as a result, fail to return any information. One explanation for this is a bug in an SAP library. If the SAP GUI cannot connect to the SAP System whose status the r3status monitor is attempting to check, then it could be that the RFC call is simply hanging.

The r3status monitor can also occasionally report the status of an SAP instance incorrectly, namely; an SAP instance is reported as *down* when it is actually up and available. This is often due to a problem with the ping command. To find out if the ping command is causing the problem, you should enable tracing for the r3status monitor with level 3 and check the trace output in the r3status.log file for unusual ping entries, for example, the number or packets the ping commands sends and receives is *not* the same.

Duplicate HPOM Messages in the Message Browser

You have not suppressed SAP-related messages in the standard HPOM opcmsg template. The SPI for SAP has its own opcmsg template which is installed on managed nodes in parallel with the standard opcmsg template. If SAP-related messages are not suppressed in the standard template, some conditions will be reported by both templates. Refer to the *HP Operations Smart Plug-in for SAP Installation and Configuration Guide*.

Performance Monitor out of Synchronization

The performance monitor has problems with synchronization if it is not able to complete all its scheduled tasks in the allowed time between each monitor run. To troubleshoot scheduler-synchronization problems:

1 Check the Polling Interval

Check that the polling interval for the individual r3perfagent monitors has not been changed in the r3perfagent.cfg file to a value that is too small. You can define the polling interval for individual monitors in the "Polling Interval" column of the r3perfagent.cfg file. For more information, see The Performance-Monitor Scheduler on page 212.

2 Disable Remote Monitoring

If you have enabled remote monitoring for the r3perfagent Performance Monitor, network problems could mean that requests for information from the remote server are not being answered in a timely fashion. Try disabling remote monitoring for a short while to test whether or not this is the reason the r3perfagent Performance Monitor is having. You can do this for one individual remote host, or all (if there are more than one). For more information about remote monitoring with the SPI for SAP Performance Monitor, see Remote Performance Monitoring on page 211.

Performance Monitor does not Work

If you change the SAP user name/password which the SPI for SAP uses to log in to SAP, you need to make sure that the changes are reflected in the r3itosap.cfg and, in addition, that the SPI for SAP components which use the information in the r3itosap.cfg are restarted in order to make them aware of the changes.

This is particularly important for the SPI for SAP's SAP/Performance subagent, which reads the SAP log-in information in the r3itosap.cfg *once only*, on startup, and will not start if it cannot log in to SAP. In addition, SAP itself has a security mechanism which prevents further logins from a user who has already tried and failed to login a given number of times. For more information, see Managing the SPI for SAP R/3 Performance Agent on page 216.

Work-Process monitor (r3monwpa) ends with an rfc exception

The alert type WP_CHECK_CONFIGURED instructs the work-process monitor, r3monwpa, to compare the number of actual running work processes with the number of work processes configured in the current operation mode. If there is no operation mode configured, the work-process monitor ends with an rfc exception.

If this rfc exception occurs, check that the operation mode is working correctly on each application server in the SAP environment where you have configured r3monwpa with the alert type "WP_CHECK_CONFIGURED".

To check the operation-mode configuration:

- 1 Connect to the affected SAP System
- 2 Start transaction "rz03"
- 3 Enter "F7" and check if there are any inconsistencies in the configured operation mode.
- 4 If you have inconsistency in the operation mode for your application server, disable the alert type WP_CHECK_CONFIGURED for this application server.

Distributing Actions, Monitors, and Commands on Windows Nodes

After distributing actions, monitors, and commands on a Windows node, the following message occasionally appears in the message browser:

File Name Collision Detected

This message appears if a file is copied twice on the node during the process of distributing actions, monitors, and commands.

Change the location of dev_rfc.trc

If the dev_rfc* file is getting created in multiple locations the file size continues to extend even after reaching maximum size during data collection. You have to set the following environment variable:

such that the file will be created in the particular defined location.

A SPI for SAP Golden Metrics

Golden Metrics are the most important and fundamental metrics for monitoring the SAP and its environment. With the help of these metrics, you can monitor the health, availability, and performance of the ABAP and Java Stack of the SAP Netweaver system.

Table 93 Golden Metrics for ABAP

Metric Type	Monitor fetching the metric	Metric
Alert for ABAP	r3status	r3status - r3status: The SAP Status Monitor
	r3mondev	r3mondev - r3mondev: The SAP Trace-file Monitor
	r3monsec	r3monsec - r3monsec: The SAP Security Monitor
	r3monale	r3monale - r3monale: The iDOC-Status Monitor
	r3mondmp	r3mondmp - r3mondmp: The ABAP-Dump Monitor
	r3monjob	r3monjob - r3monjob: The Job-Report Monitor
	r3monupd	r3monupd - r3monupd: The Update Monitor
	r3monusr	r3monusr - r3monusr: The SAP-User Monitor

Table 94 Golden Metrics for Java

Metric Type	Metric
Alert for Java	nwstatus
	SPISAP_0207
	SPISAP_0219
	SPISAP_0233
	SPISAP_0234
	SPISAP_4201
	SPISAP_4202
	SPISAP_4203
	SPISAP_4204
	SPISAP_4206

In addition to the Alert metrics, the following are the important Netweaver ABAP and Java Performance metrics that you can use to log the data and view as Reports.

378 Chapter A

Table 95 Performance Metrics for ABAP

Metric Type	Monitor fetching the metric	Metric
Performance for ABAP	DBINFO_PERF	CPUUSAGE
	JOBREP_PERF	ABORTED
	SAPBUFFER_PERF	HITRATIO
	SAPMEMORY_PERF	CURRENT_USE_PERCENT
		ON_DISK
	SPOOL_PERF	OPEN_PR
		ERROR_PR
		FAILED_PR
	STATRECS_PERF	SAP_REC_COUNT
	WLSUM_PERF	RESPTI
		CPUTI
		CHNGCNT
		GUITIME
		GUINETTIME
	WP_PERF	LONG_RUNNING
	EP_PERF	AVG_RESP_TIME_EP
		AVG_CPU_TIME_EP
		AVG_CMPCALLPERREQ_EP

Table 96 Performance Metrics for Java

Metric Type	Metric
Performance for Java	SPISAP_2202 (Available memory)
	SPISAP_2201 (Allocated memory)
	SPISAP_2203 (Used memory)

380 Chapter A

B Data Store Details for SPI for SAP Reports

The SPI for SAP creates the following data store table for the metrics to enable data collection.

 $\textbf{DataSource Name:} \ \texttt{R3} \verb|<| SAP_Hostname| \verb|<| SAPSID| \verb|<| SAP_Instance| \ \textit{Number} \verb|>| DATA \\$

Spec File: r3statistics.DBINFO_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
DBINFO_PERF	CPUUSAGE	R64
	BUFPREADS	I32
	BUFPWRITES	I32
	BUFQUAL	R64
	BUFSIZE	I32
	BUFWAITS	I32
	BUFWTIME	I32
	DICTSIZE	I32
	DDQUAL	R64
	LOGBLOCKS	I32
	LOGENTRIES	I32
	LOGSIZE	I32
	LOGFAULT	R64
	LOGALLOC	I32
	ROLLBACKS	I32
	SCANLONG	I32
	SORTDISK	I32
	SORTMEM	I32
	SORTROWS	I32
	HOSTNAME_DBINFO	UTF8
	SID_DBINFO	UTF8
	INSTANCE_DBINFO	UTF8
	KEY_DBINFO	UTF8

Spec File: r3statistics.DOCSTAT_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
DOCSTAT_PERF	APPMODE_DOC	UTF8
	CNTHEADER	I32
	CNTITEM	I32
	CNTDIV	I32
	CNTTOTAL	I32
	CNTLINE	I32
	CNTCHGDOC	I32
	CNTTEXT	I32
	HOSTNAME_DOCSTAT	UTF8
	SID_DOCSTAT	UTF8
	INSTANCE_DOCSTAT	UTF8
	KEY_DOCSTAT	UTF8

Spec File: r3statistics.EP_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
EP_PERF	SID_EP	UTF8
	HOSTNAME_EP	UTF8
	START_TIME_EP	UTF8
	NO_REQ_EP	I32
	AVG_RESP_TIME_EP	R64
	AVG_CPU_TIME_EP	R64
	REQ_PER_SEC_EP	I32
	AVG_OUTBND_DATA_EP	I32
	ACC_RESP_TIME_EP	R64
	ACC_CPU_TIME_EP	R64
	OUTBND_DATA_REQ_EP	I32
	ACC_OUTBND_DATA_EP	I32
	NO_COMPCALLS_REQ_EP	I32
	AVG_CMPCALLPERREQ_EP	I32
	VALID_MONDATA_REQ_EP	I32
	REQ_NOT_CORR_CLSD_EP	I32
	REQCLSD_TOOMNYCMP_EP	I32
	REQS_RUNLEVEL_0_EP	I32
	REQS_RUNLEVEL_1_EP	I32
	REQS_RUNLEVEL_2_EP	I32
	USRS_SINCE_1_REQ_EP	I32
	USRS_SINCE_LSTRST_EP	I32
	LST_REQ_RST_TSTMP_EP	UTF8
	LST_CMPREQ_TSTMP_EP	UTF8
	LST_USRREQ_TSTMP_EP	UTF8

Spec File: r3statistics.ICMSTAT_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
ICMSTAT_PERF	ICM_Status	I32
	Max_Threads	I32
	Peak_Threads	I32
	Cur_Threads	I32
	Max_Connections	I32
	Peak_Connections	I32
	Cur_Connections	I32
	Max_QueueEntries	I32
	Peak_QueueEntries	I32
	Cur_QueueEntries	I32
	Running_Threads	I32
	Dead_Threads	I32
	Processed_Threads	I32
	HOSTNAME_ICMSTAT	I32
	SID_ICMSTAT	UTF8
	INSTANCE_ICMSTAT	UTF8
	KEY_ICMSTAT	UTF8

 $\textbf{Spec File:} \ \texttt{r3statistics.JOBREP_PERF}$

Table Name and Report Details	Metric in the table	Metric Data Type
JOBREP_PERF	RUNNING	UTF8
	READY	I32
	SCHEDULED	132
	RELEASED	132
	ABORTED	I32
	FINISHED	I32
	PUT_ACTIVE	132
	UNKNOWN_STATE	I32
	HOSTNAME_JOBREP	UTF8
	SID_JOBREP	UTF8
	INSTANCE_JOBREP	UTF8
	KEY_JOBREP	UTF8

Spec File: r3statistics.SAPBUFFER_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
SAPBUFFER_PERF	BUFFER_NAME	UTF8
	HITRATIO	R64
	ALLOCATED_SIZE	I32
	FREE_SPACE	I32
	FREE_SPACE_PERCENT	R64
	MAXDIR_ENTR	I32
	FREEDIR_ENTR	I32
	FDIR_ENTR_PERCENT	R64
	BUFFER_SWAPS	I32
	BUFFER_SWAPS_DELTA	I32
	DB_ACCESSES	I32
	DB_ACCESSES_DELTA	I32
	HOSTNAME_SAPBUFFER	UTF8
	SID_SAPBUFFER	UTF8
	INSTANCE_SAPBUFFER	UTF8
	KEY_SAPBUFFER	UTF8

DataSource Name: R3_<SAP_Hostname>_<SAPSID>_<SAP_Instance_ Number>_DATA

Spec File: r3statistics.SAPMEMORY PERF

Table Name and Report Details	Metric in the table	Metric Data Type
SAPMEMORY_PERF	MEMORY_AREA	UTF8
	CURRENT_USE_PERCENT	R64
	CURRENT_USE	I32
	MAX_USE	I32
	IN_MEMORY	I32
	ON_DISK	I32
	HOSTNAME_SAPMEMORY	UTF8
	SID_SAPMEMORY	UTF8
	INSTANCE_SAPMEMORY	UTF8
	KEY_SAPMEMORY	UTF8

 $\textbf{Spec File:} \ \texttt{r3statistics.SPOOL_PERF}$

Table Name and Report Details	Metric in the table	Metric Data Type
SPOOL_PERF	ALL_SJ	I32
	SJ_ARCHIVE	I32
	PRINT_REQ	I32
	OPEN_PR	I32
	SUCCESS_PR	I32
	ERROR_PR	I32
	FAILED_PR	I32
	HOSTNAME_SPOOL	UTF8
	SID_SPOOL	UTF8
	INSTANCE_SPOOL	UTF8
	KEY_SPOOL	UTF8

DataSource Name: R3_<SAP_Hostname>_<SAPSID>_<SAP_Instance_ Number>_DATA

Spec File: r3statistics.STATRECS PERF

Table Name and Report Details	Metric in the table	Metric Data Type
SAP_STATRECS_PERF	SAP_TCODE	UTF8
	SAP_RESPONSE_T IME	I32
	SAP_NET_TIME	I32
	SAP_REC_COUNT	I32
	SAP_HOST_STATRECS	UTF8
	SAP_SID_STATRECS	UTF8
	SAP_INSTNO_STATRECS	UTF8
	SAP_KEY_STATRECS	UTF8

Spec File: r3statistics.SYSUP_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
SYSUP_PERF	SYSTEM_STATUS	UTF8
	HOSTNAME_SYSUP	UTF8
	SID_SYSUP	UTF8
	INSTANCE_SYSUP	UTF8
	KEY_SYSUP	UTF8

Spec File: r3statistics.UPDATE_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
UPDATE_PERF	ALL_TASKS	UTF8
	INITIAL_TASKS	I32
	ERRONOUS_TASKS	I32
	VB1	I32
	V2	I32
	HOSTNAME_UPDATE	UTF8
	SID_UPDATE	UTF8
	INSTANCE_UPDATE	UTF8
	KEY_UPDATE	UTF8

DataSource Name: R3_<SAP_Hostname>_<SAPSID>_<SAP_Instance_ Number>_DATA

Spec File: r3statistics.USER_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
USER_PERF	USER_CLIENT	UTF8
	USER_CNT	I32
	SESSION_CNT	I32
	HOSTNAME_USER	UTF8
	SID_USER	UTF8
	INSTANCE_USER	UTF8
	KEY_USER	UTF8

DataSource Name: R3_<SAP_Hostname>_<SAPSID>_<SAP_Instance_ Number>_DATA

Spec File: r3statistics.WLSUM PERF

Table Name and Report Details	Metric in the table	Metric Data Type
SAP_WLSUM_PERF	SAP_HOSTNAME_WLSUM	UTF8
	SAP_SID_WLSUM	UTF8
	SAP_INSTANCE_WLSUM	UTF8
	SAP_KEY_WLSUM	UTF8
	SAP_TASKTYPE	UTF8
	SAP_CNT	I32
	SAP_DBACTIVCNT	I32
	SAP_RESPTI	R64
	SAP_CPUTI	R64
	SAP_QUEUETI	R64
	SAP_LOADGENTI	R64
	SAP_COMMITTI	R64
	SAP_DDICTI	R64
	SAP_QUETI	R64
	SAP_CPICTI	R64
	SAP_ROLLINCNT	I32
	SAP_ROLLINTI	R64
	SAP_ROLLOUTCNT	I32
	SAP_ROLLOUTTI	R64
	SAP_READDIRCNT	I32
	SAP_READDIRTI	R64
	SAP_READSEQCNT	I32
	SAP_READSEQTI	R64
	SAP_CHNGCNT	I32
	SAP_CHNGTI	R64
	SAP_BYTES	I32
	SAP_GUITIME	R64
	SAP_GUICNT	I32
	SAP_GUINETTIME	R64

Spec File: r3statistics.WP_PERF

Table Name and Report Details	Metric in the table	Metric Data Type
WP_PERF	ALL_WP	I32
	SEMAPHORE_WP	I32
	DEBUG_WP	I32
	LONG_RUNNING	I32
	PRIVAT_WP	I32
	NOSTART_WP	I32
	DIA_IDLE	I32
	DIA_ALL	I32
	DIA_RUNNING	I32
	BTC_IDLE	I32
	BT_ALL	I32
	BTC_RUNNING	I32
	SPO_IDLE	I32
	SPO_ALL	I32
	SPO_RUNNING	I32
	ENQ_IDLE	I32
	ENQ_ALL	I32
	ENQ_RUNNING	I32
	UPD_IDLE	I32
	UPD_ALL	I32
	UPD_RUNNING	I32
	UPD2_IDLE	I32
	UPD2_ALL	I32
	UPD2_RUNNING	I32
	HOSTNAME_WP	UTF8
	SID_WP	UTF8
	INSTANCE_WP	UTF8
	KEY_WP	UTF8

DataSource Name: SAPSPINW_RPT_METRICS

Spec File: SAPNW_reporter.sp

Report Name	Metric in the table	Metric Data Type
SAPSPINW_RPT_METRICS	METRICID	I32
	VALUEID	I32
	VALUE	R64
	SORTID	UTF8
	SERVERNAME	UTF8
	OBJECTNAME	UTF8

Index

command-line parameters for r3moncol, 102 configuration file for r3moncol, 104
error messages, 108 validating contents, 108
configuring remote monitor, 23 environment variables, 101 environment variables for r3moncol, 101 history file for r3moncol, 98 Order of Precedence, 23 Polling Rates, 45, 98 polling rates for, 45 Query Conditions, 99 query conditions for r3moncol, 99 remote monitoring with r3moncol, 102
ReportTypes for r3moncol, 97 run interval for, 45 SPI for SAP, 45 the Alert Collector, 97
AlertMonPro Keyword, 26 Configuration File, 26
Alerts CCMS monitoring in the CEN, 189 SAP security-audit, 90
Alert Thresholds SAP-RFC alert types, 148 SAP-RFC Parameter CONNECTION_TYPE, 148 NAME, 148 transport alert types, 154

Alert type	RFCONNECT, 158
CHANGE_OPTION	TPTEST, 159
SAP R/3 (4.6x), 120	TRANS, 155
CHECK, 149	r3monupd
JOB_ABORTED, 141	configuring, 161
JOB_MAX_RUN_TIME, 137	UPDATE_ACTIVE, 162
JOB_MIN_RUN_TIME, 139	UPDATE_ERRORS_EXIST, 162
OBJECT_RELEASED, 131	r3monusr
OBJECT_USED, 129	configuring, 163
OLD_LOCKS, 144	USER_LOGGEDIN_MAX, 163
OM_SWITCH_OVERDUE, 146	r3monwpa
PRINT_ERROR_EXISTS, 152	configuring, 166
r3monale	WP_AVAILABLE, 167
configuring, 113	WP_CHECK_CONFIGURED, 172
IDOC_CURRENT_STATUS, 113	WP_IDLE, 169
r3monchg	WP_STATUS, 173
CHANGE_OPT (SAP R/3 4.6x), 120	REPAIR, 157
configuring, 120	REQUEST_CREATED, 125
r3moncts	REQUEST_RELEASED, 126
configuring, 124	RFCONNECT, 158
OBJECT_RELEASED, 131	•
— · · · · · · · · · · · · · · · · · · ·	SPOOL_ENTRIES_RANGE, 151
OBJECT_USED, 129	SPOOL_ERROR_RANGE, 152
REQUEST_CREATED, 125	START_PASSED, 140
REQUEST_RELEASED, 126	TASK_CREATED, 128
TASK_CREATED, 128	TASK_RELEASED, 128
TASK_RELEASED, 128	TPTEST, 159
r3mondmp	TRANS, 155
ABAP4_ERROR_EXIST, 133	UPDATE_ACTIVE, 162
r3monjob	UPDATE_ERRORS_EXIST, 162
configuring, 136	USER_LOGGEDIN_MAX, 163
JOB_ABORTED, 141	WP_AVAILABLE, 167
JOB_MAX_RUN_TIME, 137	WP_CHECK_CONFIGURED, 172
JOB_MIN_RUN_TIME, 139	WP_IDLE, 169
START_PASSED, 140	WP_STATUS, 173
r3monlck	alert type
configuring, 144	r3monale monitor, 112
OLD_LOCKS, 144	r3monchg monitor, 119
r3monoms	r3monets monitor, 123
configuring, 146	r3mondmp monitor, 133
OM_SWITCH_OVERDUE, 146	r3monjob monitor, 135
r3monrfc	r3monlek monitor, 143
CHECK, 149	r3monoms monitor, 145
configuring, 148	r3monrfc monitor, 147
r3monsec	
DEFAULT_USERS, 74	r3monspl monitor, 150
PRIVILEGED_USERS, 74	r3montra monitor, 154
SAP_PARAMETERS, 72	r3monupd monitor, 161
r3monspl	r3monusr monitor, 162
configuring, 151	r3monwpa monitor, 165
PRINT_ERROR_EXISTS, 152	Alerttype Parameter, 28, 105
SPOOL_ENTRIES_RANGE, 151	Alert Types
SPOOL_ERROR_RANGE, 151	r3monsec, 71
r3montra	
configuring, 154	and parameter value, 101
REPAIR, 157	application
1011111110, 101	R/3 Service Discovery, 342

application groups	Command
SAP R/3 Admin, 43 SAP R/3 Admin, 40	r3ovo2ccms, 188
SAP R/3 Admin Local, 40, 43	command-line parameter options r3ovo2ccms, 188
applications	command-line parameters, 102
testing access to SAP front end, 368	for r3moncol alert monitors, 102
APSERVER	r3monale monitor, 112
OM_SWITCH_OVERDUE, 146 USER_LOGGEDIN_MAX, 164	r3monchg monitor, 119 r3moncts monitor, 124
WP_AVAILABLE, 168	r3mondmp monitor, 133
WP_IDLE, 170	r3monjob monitor, 136
WP_STATUS, 173	r3monlck monitor, 143
Audit	r3monoms monitor, 145
SAP Security Logs	r3monrfc monitor, 148
monitoring with r3monal, 59	r3monspl monitor, 151 r3montra monitor, 154
SAP security monitor, 89	r3monupd monitor, 161
SAP security alerts, 90	r3monusr monitor, 163
В	r3monwpa monitor, 166
	r3ovo2ccms, 188
Batch service, 339	conditions
Batch WP service, 340	query for r3moncol alert monitors, 99
BehindSyncMessage	r3mondev monitor, 61 r3monpro monitor, 63
schedule synchronization for performance	
monitor, 214 synchronize schedule of r3perfagent, 214	configuration global, 43
Synemonize senerate of repertugent, 211	keywords
C	AlerMonSyslog, 27
CCMS	AlertDevMon, 26
customizing message flow, 180	AlertInstMonPro, 26
message flow customization, 180	AlertMonFun, 26 AlertMonPro, 26
Monitoring alerts in the CEN, 189	local, 43
CCMSAcknowledgeMessage for Alert Monitors, 30,	monitors, 40
53	service configuration file, 342
CCMS alert monitor, 47	service discovery, 342
environment variables, 53	configuration file
file locations, 54	r3status.cfg, 68
Remote Monitoring, 54	
CCMSMonitorSet for Alert Monitors, 31, 48	
CEN Maria in COMP 1 4 1 100	
Monitoring CCMS alerts centrally, 189 monitoring with r3monal, 60	
CHANGE_OPTION SAP R/3 4.6x, 120	
characterizing problems, 365	
CHECK Alert Type for the r3monrfc monitor, 149	
Classes	
Alerts in r3monal, 57	
Coda	
migrating from MWA, 200	

configuration file for Alert Monitors, 25, 46	Configuring
AgentHostname keyword, 104	Security-Audit monitor, 91
Alert Classes, 27	Define security audits, 92
DisableMonitoringWithSeverity keyword, 31, 79	Enabling CCMS Security Monitoring, 92
DPQueueCheck keyword, 32, 78	Install security monitoring, 91
EnableDPQueueCheck keyword, 77	configuring
HistoryPathAIX keyword, 35, 68	performance monitor, 206
HistoryPathUnix keyword, 35, 68	Agent Hostname, 214
HistoryPathWinNT keyword, 35, 68	BehindSyncMessage, 214
InstanceProfilePath keyword, 35, 79	PerfMon, 215
Parameter	Remote Monitoring, 215
AlertMonitor, 27, 105	SyncBack, 214
Alerttype, 28, 105	Trace Level, 213
Enable/Disable, 28, 105	performance-monitor scheduler, 212
Filemask, 28	remote alert-collector monitor, 102
Mode, 28	remote Alert Monitor, 23
OPC MsgGroup, 28, 105	remote monitoring with r3monsec, 75
OPC Object, 28, 105	remote performance monitor, 211
OPC Severity, 29, 105	remote r3status monitor, 69
Process Name, 29	STATRECS_PERF, 230
ProcessNumber, 29	
RFC Parameter, 29, 106	
SAP Client, 29, 106	
SAP Hostname, 30, 106	
SAP Number, 30, 106	
SAP System, 30, 107	
SyslogId, 30	
RemoteMonitoring keyword, 36, 69, 104	
trace file, 38, 68, 78	
trace level, 39, 56, 68, 78	
configuration file for r3moncol	
HistoryPathAIX keyword, 104	
HistoryPathUnix keyword, 104	
HistoryPathWinNT keyword, 104	
trace file, 104	
trace level, 104	
,	
configuration file for r3moncol Alert Monitors, 104	
error messages, 108 validating contents, 108	
configuration file for r3perfagent	
Parameter	
RFC FUNCTION, 216	
configuration files, 22	
r3itosap.cfg, 67, 372	
r3monal.cfg, 54	
r3mondev.cfg, 61	
r3monpro.cfg, 63	
r3perfagent.cfg, 209	
r3status.cfg, 67	
r3status.log, 66	
- -	

configuring Alert Types r3monale, 113 IDOC_CURRENT_STATUS, 113 r3monchg, 120 CHANGE_OPT (SAP R/3 4.6x), 120	customizing alert collector monitoring conditions, 99 changing severity level, 180 disabling messages in SAP R/3, 180 message flow, 177
r3moncts, 124 OBJECT_RELEASED, 131 OBJECT_USED, 129	setting thresholds for messages in SAP R/3, 182
REQUEST_CREATED, 125 REQUEST_RELEASED, 126 TASK_CREATED, 128	data gathering for SPI for SAP reports, 360
TASK_RELEASED, 128	Database service, 339
r3mondmp ABAP4_ERROR_EXIST, 133 r3monjob, 136	DBINFO_PERF Performance metrics, 219, 220, 361 Delta
JOB_ABORTED, 141	condition in process monitor, 64
JOB_MAX_RUN_TIME, 137	Dialog service, 339
JOB_MIN_RUN_TIME, 139	Dialog WP service, 340
START_PASSED, 140 r3monlck, 144 OLD_LOCKS, 144	DisableMonitoringWithSeverity keyword for alert monitors, 31
r3monoms, 146	DisableMonitoringWithSeverity keyword, 79
OM_SWITCH_OVERDUE, 146	Dispatcher-queue monitor
r3monrfc, 148 CHECK, 149	File locations, 77
r3monsec	Dispatch-queue monitor, 76
DEFAULT_USERS, 74 PRIVILEGED_USERS, 74	DOCSTAT_PERF Performance metrics, 219, 221, 361
SAP_PARAMETERS, 72	DPQueueCheck keyword, 32, 78
r3monspl, 151	dsi2ddf wrapper utility, 202
PRINT_ERROR_EXISTS, 152 SPOOL_ENTRIES_RANGE, 151 SPOOL_ERROR_RANGE, 152	duplicate messages OpC, 373
r3montra, 154	
REPAIR, 157 RFCONNECT, 158	E
TPTEST, 159	EM_PERF Performance metrics, 222
TRANS, 155	Enable/Disable Parameter, 28, 105
r3monupd, 161	EnableDPQueueCheck for Alert Monitors, 34, 68
UPDATE_ACTIVE, 162	EnableDPQueueCheck keyword, 77
UPDATE_ERRORS_EXIST, 162 r3monusr, 163	Enqueue process, 142
USER_LOGGEDIN_MAX, 163	Enqueue server
r3monwpa, 166 WP_AVAILABLE, 167 WP_CHECK_CONFIGURED, 172	monitoring with r3monal, 59, 83 configuration pre-requisites, 84 enabling CCMS alerts, 83
WP_IDLE, 169 WP_STATUS, 173	Enqueue-server monitor Configuring, 84
Configuring r3monsec, 71	Enterprise Portal
CORRECTION AND TRANSPORT SYSTEM (CTS) Monitor, 123	monitoring with r3monal, 59, 85 configuration pre-requisites, 86 enabling CCMS alerts, 86
	Enterprise Portal monitor Configuring, 87

```
Environment service, 339
environment variables
   CCMS alert monitor, 53
   for r3moncol alert monitors, 101
   process monitor, 63
   r3monale monitor, 112
   r3monal monitor, 53
   r3monchg monitor, 119
   r3moncts monitor, 124
   r3mondev monitor, 61
   r3mondmp monitor, 133
   r3monjob monitor, 136
   r3monlck monitor, 143
   r3monoms monitor, 145
   r3monpro monitor, 63
   r3monrfc monitor, 148
   r3monspl monitor, 151
   r3montra monitor, 154
   r3monupd monitor, 161
   r3monusr monitor, 163
   r3monwpa monitor, 166
   r3status monitor, 67
   SAPOPC DRIVE, 53, 61, 63
   SAPOPC_HISTORYPATH, 53, 61, 63, 67
   SAPOPC R3ITOSAP CONFIGFILE, 67
   SAPOPC_R3MONAL_CONFIGFILE, 53
   SAPOPC R3MONDEV CONFIGFILE, 61
   SAPOPC R3MONPRO CONFIGFILE, 63
   SAPOPC R3STATUS CONFIGFILE, 67
   SAPOPC RFC TIMEOUT, 67
   SAPOPC_SAPDIR, 53, 61, 63
   SAPOPC_TRACEPATH, 53, 61, 63, 67
EP_PERF Performance metrics, 219, 361
Error messages
   configuring r3moncol alert monitors, 108
Exact
   condition in process monitor, 63
F
File
   Configuration
      AlerMonSyslog Keyword, 27
       AlertDevMon Keyword, 26
      AlertInstMonPro Keyword, 26
       AlertMonFun Keyword, 26
```

AlertMonPro Keyword, 26

file	r3monoms, 145
Agent Hostname for r3perfagent	r3monrfc, 148
configuration, 214	r3monspl, 150
Alert Collector history, 98	r3montra, 154
configuration for Alert Monitors, 25, 46	r3monupd, 161
AgentHostname keyword, 104	r3monusr, 163
Alert Types, 27	r3monwpa, 166
CCMSAcknowledgeMessage, 30, 53	r3moncts.cfg, 124
CCMSMonitorSet, 31, 48	r3mondev.cfg, 61
DisableMonitoringWithSeverity keyword,	r3mondev.exe, 61
31, 79	r3mondev.his, 61
DPQueueCheck keyword, 32, 78	r3mondisp, 77
EnableDPQueueCheck, 34, 68	r3mondisp.cfg, 77
EnableDPQueueCheck keyword, 77	r3mondisp.log, 77
HistoryPathAIX keyword, 35, 68	r3mondmp.cfg, 133
HistoryPathUnix keyword, 35, 68	r3monjob.cfg, 136
HistoryPathWinNT keyword, 35, 68	r3monlck.cfg, 143
InstanceProfilePath keyword, 35, 79	r3monoms.cfg, 145
RemoteMonitoring keyword, 36, 69, 104	r3monpro.cfg, 63
RFCTimeOut, 37, 54	r3monpro.exe, 63
trace file, 38, 68, 78	r3monpro.his, 63
trace level, 39, 56, 68, 78	r3monrfc.cfg, 148
XMI syslog mode, 56	r3monsec, 71
configuration for r3moncol	r3monsec.cfg, 71
HistoryPathAIX keyword, 104	r3monsec.log, 71
HistoryPathUnix keyword, 104	r3monsecpw.msg, 71
HistoryPathWinNT keyword, 104	r3monspl.cfg, 150
trace file, 104	r3montra.cfg, 154
trace level, 104	r3monup.his
configuration for r3moncol Alert Monitors, 104	troubleshooting SAP status, 372
error messages, 108	r3monupd.cfg, 161
validating contents, 108	r3monwpa.cfg, 166
configuration for r3perfagent	r3status(.exe), 66
Agent Hostname, 214	r3status.cfg, 67, 68
BehindSyncMessage, 214	r3status.his, 67
PerfMon, 215	r3status.log, 66
Remote Monitoring, 215	Remote Monitoring with r3perfagent
SyncBack, 214	configuration, 215
trace level, 213	schedule synchronization for r3perfagent
history for r3moncol Alert Monitors, 98	configuration, 214
PerfMon with r3perfagent	TemSe, 174
configuration, 215	trace file listed for each monitor, 40
r3itosap.cfg, 19, 67, 372	trace for Alert-Monitor configuration, 38, 68, 78
r3monal.cfg, 54 r3monal.exe, 54	trace for r3moncol configuration, 104 trace level for r3perfagent
r3monal.his, 54	configuration, 213
r3monale.cfg, 112	comiguration, 215
r3monale.log, 112	
r3monchg.cfg, 119	
r3moncol(.exe), 112	
r3monchg, 119	
r3moncts, 124	
r3mondmp, 133	
r3monjob, 136	
r3monlck, 143	
,	

file locations	HPOM
r3monal, 54	message customization, 177
r3monale monitor, 112	HPOM agent
r3monchg monitor, 119	troubleshooting, 366
r3moncts monitor, 124	HPOM server
r3mondev, 61	troubleshooting, 366
r3mondisp, 77	version, 366
r3mondmp monitor, 133	version, 500
r3monjob monitor, 136	1
r3monlck monitor, 143	1
r3monoms monitor, 145	ICMSTAT_PERF Performance metrics, 219, 224
r3monpro, 63	installing
r3monrfc monitor, 148 r3monsec, 71	SAP R/3 Performance Agent, 202
r3monspl monitor, 150	SPI for SAP service reports, 350
r3montra monitor, 154	Installing the SPI for SAP Reports, 350
r3monupd monitor, 161	
r3monusr monitor, 163	InstanceProfilePath keyword, 35, 79
r3monwpa monitor, 166	Integration
r3status, 66	SPI for SAP and SAP Solution Manager, 184 pre-requisites, 184
Filemask Parameter, 28	Interface service, 339
file monitor, 60	Interval
frequency	run for alert monitors, 45
r3status monitor run interval, 66	run for r3moncol Alert-Collector Monitors, 98
G	ITO agent
	version, 366
Gateway service, 340	
gathering data for SPI for SAP reports, 360	J
generating	J2EE (Web AS Java) monitor, 80
SPI for SAP service reports, 360	Configuration pre-requisites, 81
generating SPI for SAP reports, 352	Configuring, 82
global configuration, 22, 43	Enabling CCMS Alerts, 80
	GRMG monitoring, 81
Golden Metrics, 377	J2EE kernel, 81, 84, 86
GRMG Monitoring	J2EE services, 81, 84, 86
monitoring in J2EE (Web AS Java), 81	J2EE system, 81
	SAPCCMSR availability, 81
Н	J2EE engine
history file, 41	monitoring with r3monal, 59
path, 41	J2EE kernel
r3monal.his, 54	monitoring in Web AS Java, 81, 84, 86
r3moncol, 98	J2EE services
r3mondev.his, 61	monitoring in Web AS Java, 81, 84, 86
r3monpro.his, 63	J2EE system
r3monup.his, 372	monitoring in Web AS Java, 81
r3status.his, 67	
history file for r3moncol Alert Monitors, 98	JOB_ABORTED, 141
HistoryPathAIX keyword, 35, 68, 104	JOB_MAX_RUN_TIME, 137
	JOB_MIN_RUN_TIME, 139
HistoryPathUnix keyword, 35, 68, 104	condition in job monitor, 134, 144
HistoryPathWinNT keyword, 35, 68, 104	JOBREP_PERF Performance metrics, 219, 225, 362

JOBREPORT Monitor, 134	MAX USER_LOGGEDIN_MAX, 164
K	Max
kernel	condition in process monitor, 64
J2EE	Memory Management service, 339
monitoring in Web AS Java, 81, 84, 86	message browser, 99
Keyword	customizing messages, 178
Monitor Configuration CCMSAcknowledgeMessage, 30, 53	message customization, 177
CCMSMonitorSet, 31, 48	messages
EnableDPQueueCheck, 34, 68	changing severity level, 180
PerfMon for r3perfagent configuration, 215	customizing message browser contents, 178 disabling in SAP R/3, 180
RFCTimeOut, 37, 54 SAP Hostname, 106	errors configuring r3moncol alert monitors, 108
TraceLevel, 56	setting thresholds in SAP R/3, 182
XMI syslog mode, 56	Message service, 340
Keyword AlerMonSyslog, 27	message-source templates
Keyword AlertDevMon, 26	check distribution, 367
Keyword AlertInstMonPro, 26	Metrics performance
Keyword AlertMonFun, 26	DBINFO_PERF, 219, 220, 361
Keyword AlertMonPro, 26	DOCSTAT_PERF, 219, 221, 361
	EM_PERF, 222 EP_PERF, 219, 361
L	ICMSTAT_PERF, 219, 224
level	JOBREF_PERF, 219, 225, 362
trace for Alert-Monitor configuration, 39, 56, 68, 78	SAP_ICMSTAT_PERF, 362
trace for r3moncol configuration, 104	SAP_STATRECS_PERF, 362 SAP_SYSUP_PERF, 362
line of business service, 340	SAP_USER_PERF, 362
local configuration, 22, 42	SAP_WLSUM_PERF, 362
Locations	SAPBUFFER_PERF, 219, 226, 362 SAPMEMORY_PERF, 219, 228, 362
File	SPOOL_PERF, 228
r3mondisp, 77	STATRECS_PERF, 219, 229
r3monsec, 71	SYSUP_PERF, 219, 231
locations r3monal monitor configuration files, 54	UPDATE_PERF, 219, 232, 362 USER_PERF, 219, 233
r3mondev monitor configuration files, 61	WLSUM_PERF, 219, 234
r3monpro monitor configuration files, 63	WP_PERF, 219, 236, 362
r3status monitor configuration files, 66	metrics
LOCK CHECK Monitor, 142	SAP R/3 service reports, 361
Logs	SPI for SAP service reports, 361
SAP Security-Audit monitoring with r3monal, 59	migration performance data, 197
momentum with romanda, or	Coda, 200
M	MWA, 198
Manager	perflbd file, 199, 200 SPI for SAP service reports, 350
Solution	Min
Integration pre-requisites, 184	condition in process monitor, 63
Integration with SPI for SAP, 184	Mode Parameter, 28

Monitor

performance metrics DBINFO_PERF, 219, 220, 361 DOCSTAT_PERF, 219, 221, 361 EM_PERF, 222 EP_PERF, 219, 361 $ICMSTAT_PERF, 219, 224$ JOBREP_PERF, 219, 225, 362 SAP_ICMSTAT_PERF, 362 SAP_STATRECS_PERF, 362 SAP_SYSUP_PERF, 362 SAP_USER_PERF, 362 SAP_WLSUM_PERF, 362 SAPBUFFER_PERF, 219, 226, 362 SAPMEMORY_PERF, 219, 228, 362 SPOOL_PERF, 228 STATRECS_PERF, 219, 229 SYSUP_PERF, 219, 231 UPDATE_PERF, 219, 232, 362 USER_PERF, 219, 233 WLSUM_PERF, 219, 234 WP_PERF, 219, 236, 362

monitor	OPC Severity, 29, 105
AgentHostname keyword, 104	Process Name, 29
Alert Classes, 27	ProcessNumber, 29
alert-configuration file, 46	RFC Parameter, 29, 106
CCMSAcknowledgeMessage, 30, 53	SAP Client, 29, 106
CCMSMonitorSet, 31, 48	SAP Hostname, 30, 106
EnableDPQueueCheck, 34, 68	SAP Number, 30, 106
RFCTimeOut, 37, 54	SAP System, 30, 107
XMI syslog mode, 56	SyslogId, 30
CCMS alert, 45, 47	polling rates for alert monitors, 45
environment variables, 53	polling rates for r3moncol alerts, 98
file locations, 54	process, 62
Remote Monitoring, 54	query conditions for r3moncol alert monitors, 99
check version, 367	r3monal, 47
command-line parameters for r3moncol alert	r3monale, 111
monitors, 102	alert types, 112
configuration file, 25	command-line parameters, 112
AgentHostname keyword, 104	configuring alert types, 113
Alert Classes, 27	environment variables, 112
DisableMonitoringWithSeverity keyword,	file locations, 112
31, 79	IDOC_CURRENT_STATUS alert type, 113
DPQueueCheck keyword, 32, 78	remote monitoring with, 112
The state of the s	type of, 112
EnableDPQueueCheck keyword, 77	• • •
HistoryPathAIX keyword, 35, 68, 104	r3monchg, 119
HistoryPathUnix keyword, 35, 68, 104	alert types, 119
HistoryPathWinNT keyword, 35, 68, 104	CHANGE_OPT (SAP R/3 4.6x) alert type,
InstanceProfilePath keyword, 35, 79	120
RemoteMonitoring keyword, 36, 69, 104	command-line parameters, 119
trace file, 38, 68, 78, 104	configuring alert types, 120
trace level, 39, 56, 68, 78, 104	environment variables, 119
configuration file for r3moncol alerts, 104	file locations, 119
error messages, 108	parameter values, 120
validating contents, 108	remote monitoring with, 120
configuring, 40	r3moncol
DisableMonitoringWithSeverity keyword, 31, 79	parameter values, 100
DPQueueCheck keyword, 32, 78	r3monets, 123
EnableDPQueueCheck keyword, 77	alert types, 123
environment variables for r3moncol alert	command-line parameters, 124
monitors, 101	configuring alert types, 124
file, 60	environment variables, 124
global configuration, 22	file locations, 124
history file for r3moncol alerts, 98	OBJECT_RELEASED alert type, 131
HistoryPathAIX keyword, 35, 68, 104	OBJECT_USED alert type, 129
HistoryPathUnix keyword, 35, 68, 104	remote monitoring with, 124
HistoryPathWinNT keyword, 35, 68, 104	REQUEST_CREATEDalert type, 125
InstanceProfilePath keyword, 35, 79	REQUEST_RELEASED alert type, 126
local configuration, 22	TASK_CREATED alert type, 128
Parameter	TASK_RELEASED alert type, 128
AlertMonitor, 27, 105	r3mondev, 60
Alerttype, 28, 105	r3mondmp, 132
Enable/Disable, 28, 105	ABAP4_ERROR_EXIST alert type, 133
Filemask, 28	alert types, 133
Mode, 28	command-line parameters, 133
OPC MsgGroup, 28, 105	environment variables, 133
OPC Object, 28, 105	file locations, 133
	·

remote monitoring with, 133 r3monjob, 134 alert types, 135 command-line parameters, 136 configuring alert types, 136 environment variables, 136 file locations, 136	command-line parameters, 154 configuring alert types, 154 environment variables, 154 file locations, 154 remote monitoring with, 154 REPAIR alert type, 157 RFCONNECT alert type, 158
JOB_ABORTED alert type, 141	TPTEST alert type, 159
JOB_MAX_RUN_TIME alert type, 137	TRANS alert type, 155
JOB_MIN_RUN_TIME alert type, 139	r3monupd, 160
parameter values, 136	alert types, 161
remote monitoring with, 136	command-line parameters, 161
START_PASSED alert type, 140	configuring alert types, 161
r3monlck, 142	environment variables, 161
alert types, 143	file locations, 161
command-line parameters, 143	remote monitoring with, 161
configuring alert types, 144	UPDATE_ACTIVE, 162
environment variables, 143	UPDATE_ERRORS_EXIST, 162
file locations, 143	r3monusr, 162
OLD_LOCKS alert type, 144	alert types, 162
remote monitoring with, 143 r3monoms, 144	command-line parameters, 163 configuring alert types, 163
alert types, 145	configuring USER_LOGGEDIN_MAX, 163
command-line parameters, 145	environment variables, 163
configuring alert types, 146	file locations, 163
environment variables, 145	remote monitoring with, 163
file locations, 145	r3monwpa, 164
OM_SWITCH_OVERDUE alert type, 146	alert types, 165
remote monitoring with, 146	command-line parameters, 166
r3monpro, 62	configuring alert types, 166
r3monrfc, 147	environment variables, 166
alert types, 147	file locations, 166
CHECK alert type, 149	parameter values, 166
command-line parameters, 148	remote monitoring with, 166
configuring alert types, 148	RemoteMonitoring keyword, 36, 69, 104
environment variables, 148	report types for r3moncol alerts, 97
file locations, 148	run interval for r3moncol alerts, 98
parameter values, 148	run intervals for alert monitors, 45
remote monitoring with, 148	spooler data, 126
r3monsec	testing execution, 367
DEFAULT_USERS alert type, 74	trace file, 38, 68, 78, 104
PRIVILEGED_USERS alert type, 74	trace level, 39, 56, 68, 78, 104
SAP_PARAMETERS alert type, 72	tracing, 367
r3monspl, 126, 150 alert types, 150	monitor Enqueue-server
command-line parameters, 151	Configuring, 84
configuring alert types, 151	monitor Enterprise Portal
environment variables, 151	Configuring, 87
file locations, 150	Monitoring
PRINT_ERROR_EXISTS alert type, 152	r3monal monitor Remotely, 54
remote monitoring with, 151	
SPOOL_ENTRIES_RANGE alert type, 151	
SPOOL_ERROR_RANGE alert type, 152	
r3montra	
alert types, 154	

monitoring remotely with r3moncol alert monitors, 102 remotely with the Alert Monitors, 23 remotely with the performance monitor, 211 remotely with the r3monale monitor, 112, 113 remotely with the r3monchg monitor, 120 remotely with the r3moncts monitor, 124 remotely with the r3mondmp monitor, 133 remotely with the r3monjob monitor, 136	Monitor type r3monaco, 174 r3monchg, 119 r3moncts, 123 r3mondmp, 132 r3monjob, 134 r3monlck, 143 r3monoms, 145 r3monrfc, 147
remotely with the r3monlck monitor, 143 remotely with the r3monrfc monitor, 146 remotely with the r3monrfc monitor, 148 remotely with the r3monsec monitor, 72, 75 remotely with the r3monspl monitor, 151 remotely with the r3montra monitor, 154 remotely with the r3monupd monitor, 161 remotely with the r3monupd monitor, 163 remotely with the r3monupr monitor, 166 remotely with the r3status monitor, 69 the performance-monitor scheduler, 212	r3monspl, 150 r3monupd, 161 r3monusr, 162 r3monwpa, 165 N Network service, 339 O OBJECT_RELEASED, 131
Monitoring CCMS alerts in the CEN, 189 monitoring conditions process monitor, 63 r3mondev monitor, 61 r3monpro monitor, 63 monitoring TEMSE file consistency, 174 monitor J2EE (Web AS Java), 80 Configuration pre-requisites, 81 Configuring, 82 Enabling CCMS Alerts, 80 GRMG Monitoring, 81 J2EE kernel, 81, 84, 86 J2EE services, 81, 84, 86 J2EE system, 81 SAPCCMSR Availability, 81 monitor SAP security audits, 89 SAP security alerts, 90	OBJECT_USED, 129 OLD_LOCKS, 144 OM_SWITCH_OVERDUE, 146 APSERVER, 146 OVERDUE_TIME, 146 OpC messages duplicates in message browser, 373 OPC MsgGroup Parameter, 28, 105 OPC Object Parameter, 28, 105 OPC Severity Parameter, 29, 105 Operating System Service, 339 OPERATION MODE Monitor, 144 options command-line parameter r3ovo2ccms, 188
Monitor Type Snapshot, 97 MonitorType TimeFrame, 97	Oracle Password r3monsecpw.msg, 71 or parameter value, 101 other configuration and customization methods, 177 OVERDUE_TIME OM_SWITCH_OVERDUE, 146

Parameter AlertMonitor, 27, 105 Alerttype, 28, 105 AND or OR Comparison, 101 Blocks, 101 Delimiter, 99, 100 Enable/Disable, 28, 105 Filemask, 28 Line Breaks, 101 Monitor Configuration AlertMonitor, 27, 105 Alerttype, 28, 105 Enable/Disable, 28, 105 Filemask, 28 Mode, 28 OPC MsgGroup, 28, 105 OPC Severity, 29, 105 Process Name, 29 ProcessNumber, 29 Command-line r3ovo2ccms, 188 with the r3moncle monitor, 119 command-line for r3monale monitor, 1 rd command-line for r3monale monitor, 124 with the r3moncts monitor, 124 with the r3monch monitor, 124 with the r3monle monitor, 143 with the r3monspl monitor, 145 with the r3monspl monitor, 148 with the r3monspl monitor, 151 with the r3monupd monitor, 151 with the r3monupd monitor, 163 with the r3monupa monitor, 163 ramonch monitor, 120 r3moncol monitor, 100
RFC Parameter, 29, 106 SAP Client, 29, 106 SAP Hostname, 30 SAP Number, 30, 106 SAP System, 30, 107 SyslogId, 30 Name, 99 OPC MsgGroup, 28, 105 OPC Object, 28, 105 OPC Severity, 29, 105 Performance Monitor Configuration RFC FUNCTION, 216 Process Name, 29 Process Number, 29 RFC FUNCTION with r3perfagent, 216 RFC Parameter, 29, 106 SAP Client, 29, 106 SAP Hostname, 30, 106 SAP Number, 30, 106 RFC FUNCTION SAP Number, 30, 106 RFC Parameter, 29, 106 SAP Number, 30, 106 RFC FUNCTION SAP Number, 30, 106 RFC Parameter, 29, 106 SAP Number, 30, 106

Parameter for monitor configuration Mode, 28

Performance metrics	performance monitor
DBINFO_PERF, 219, 220, 361	commands, 216
DOCSTAT_PERF, 219, 221, 361	configuring, 206
$\mathrm{EM_PERF}, 222$	Agent Hostname, 214
EP_PERF, 219, 361	BehindSyncMessage, 214
ICMSTAT_PERF, 219, 224	PerfMon, 215
JOBREP_PERF, 219, 225, 362	Remote Monitoring, 215
SAP_ICMSTAT_PERF, 362	SyncBack, 214
SAP_STATRECS_PERF, 362	Trace Level, 213
SAP SYSUP PERF, 362	configuring remote monitor, 211
SAP_USER_PERF, 362	description, 218
SAP_WLSUM_PERF, 362	overview, 197
SAPBUFFER_PERF, 219, 226, 362	Parameter
SAPMEMORY_PERF, 219, 228, 362	RFC FUNCTION, 216
SAP R/3 service reports, 361	scheduler, 212
SPI for SAP service reports, 361	subagent files
SPOOL_PERF, 228	AIX, 203
STATRECS_PERF, 219, 229	HP-UX, 204
SYSUP_PERF, 219, 231	Windows, 205
UPDATE_PERF, 219, 232, 362	,
USER_PERF, 219, 233	polling frequency
WLSUM_PERF, 219, 234	r3status, 66
WP_PERF, 219, 236, 362	Polling Rates
	for alert-collector monitors, 98
Performance monitor	for alert monitors, 45
DBINFO_PERF, 219, 220, 361	,
DOCSTAT_PERF, 219, 221, 361	polling rates for Alert Monitors, 45
EM_PERF, 222	polling rates for r3moncol alert-collector monitors,
EP_PERF, 219, 361	98
ICMSTAT_PERF, 219, 224	Precedence
JOBREF_PERF, 219, 362	Order of, 23
${ m JOBREP_PERF}, 225$	•
SAP_ICMSTAT_PERF, 362	PRINT_ERROR_EXISTS, 152
SAP_STATRECS_PERF, 362	problem identification, 365
SAP_SYSUP_PERF, 362	process, 21
SAP_USER_PERF, 362	
SAP_WLSUM_PERF, 362	process monitor, 62
SAPBUFFER_PERF, 219, 226, 362	environment variables, 63
SAPMEMORY_PERF, 219, 228, 362	monitoring conditions, 63
SPOOL_PERF, 228	Process Name Parameter, 29
STATRECS_PERF, 219, 229	Process Number Parameter, 29
SYSUP_PERF, 219, 231	
UPDATE_PERF, 219, 232, 362	Profile
USER_PERF, 219, 233	Security Audit
WLSUM_PERF, 219, 234	Define, 92
WP_PERF, 219, 236, 362	
111 _1 12101, 210, 200, 002	Q
	Query Conditions, 99
	for r3moncol alert monitors, 99
	for remoneor area a montrols, 33
	R
	r3itogui
	check version, 367
	r3itosap.cfg, 19, 67, 372

r3modev	r3monale, 111
SAPOPC_HISTORYPATH, 61	alert types
r3monaco monitor	configuring, 113
type, 174	IDOC_CURRENT_STATUS, 113
	monitor alert types, 112
r3monal	monitor command-line parameters, 112
alert classes, 57	monitor environment variables, 112
file locations, 54	monitor file locations, 112
migrating from r3monxmi, 57	monitor type, 112
monitor, 47	remote monitoring with, 112
monitoring J2EE engine, 59	r3monale.cfg, 112
monitoring SAP Security-Audit Logs, 59	
monitoring the CEN, 60	r3monale.log, 112
monitoring the enqueue server, 59, 83	r3monale Monitor, 111
configuration pre-requisites, 84	alert types, 112
enabling CCMS alerts, 83	command-line parameters, 112
monitoring the Enterprise Portal, 59, 85	environment variables, 112
configuration pre-requisites, 86	file locations, 112
enabling CCMS alerts, 86	remote monitoring with, 112
monitoring the J2EE engine, 59	type, 112
Remote Monitoring, 54	r3monchg, 119
run frequency of, 45	alert types
SAPOPC DRIVE, 53	CHANGE_OPT SAP R/3 4.6x, 120
SAPOPC HISTORYPATH, 53	configuring, 120
SAPOPC_R3MONAL_CONFIGFILE, 53	command-line parameters, 119
SAPOPC_SAPDIR, 53	monitor alert types, 119
SAPOPC_TRACEPATH, 53	monitor environment variables, 119
the Enqueue-server monitor	monitor file locations, 119
Configuring, 84	parameter values, 120
the Enterprise-Portal monitor	remote monitoring with, 120
Configuring, 87	
the J2EE (Web AS Java) monitor, 80	r3monchg.cfg, 119
Configuration pre-requisites, 81 Configuring, 82	r3monchg Monitor
Enabling CCMS Alerts, 80	alert types, 119
GRMG Monitoring, 81	command-line parameters, 119
J2EE kernel, 81, 84, 86	environment variables, 119
J2EE services, 81, 84, 86	file locations, 119
J2EE services, 81, 84, 80 J2EE system, 81	parameter values, 120
SAPCCMSR Availability, 81	remote monitoring with, 120
the security-audit monitor, 89	r3monchg monitor
SAP security-alerts, 90	type, 119
•	r3moncol, 97
r3monal.cfg, 54	command-line parameters for, 102
r3monal.exe, 54	configuration file for, 104
r3monal.his, 54	error messages, 108
Tomonar.ms, 54	validating contents, 108
	environment variables for, 101
	history file for, 98
	parameter values, 100
	query conditions for, 99
	remote monitoring with, 102
	ReportTypes for, 97
	run frequency of, 98
	run interval for, 98
	run locations for 45

r3moncol(.exe), 112, 119, 124, 133, 136, 143, 145,
r3moncts, 123 alert types configuring, 124 monitor environment variables, 133 monitor file locations, 133 remote monitoring with, 133
r3moncts, 123 monitor file locations, 133 alert types remote monitoring with, 133 configuring, 124
alert types remote monitoring with, 133 configuring, 124
configuring, 124
OBJECT_RELEASED, 131 OBJECT_USED, 129 r3mondmp.crg, 133 r3mondmp Monitor
REQUEST_CREATED, 125 alert types, 133
REQUEST_RELEASED, 126 command-line parameters, 133
TASK_CREATED, 128 environment variables, 133
TASK_RELEASED, 128 file locations, 133
command-line parameters, 124 remote monitoring with, 133 monitor alert types, 123 ramondmp monitor
monitor environment versicalles 194
monitor file locations, 124
remote monitoring with, 124 r3monjob, 134
r3moncts.cfg, 124 alert types configuring, 136
r3moncts Monitor command-line parameters, 136
alert types, 123 monitor alert types, 135
command-line parameters, 124 monitor environment variables, 136
environment variables, 124 monitor file locations, 136
file locations, 124 parameter values, 136 remote monitoring with, 124 remote monitoring with, 136
type, 123 type, 134
r3mondev r3monjob.cfg, 136
default settings, 61 r3monjob Monitor
environment variables, 61 alert types, 135
file locations, 61 command-line parameters, 136
monitor, 60 environment variables, 136 monitoring conditions, 61 file leasting, 136
The locations, 150
run frequency of, 45 SAPOPC_DRIVE, 61 remote monitoring with, 136
SAPOPC_R3MONDEV_CONFIGFILE, 61
SAPOPC_SAPDIR, 61 r3monlck, 142 SAPOPC_TRACEPATH_61 alert types
configuring, 144
r3mondev.ctg, 61 command-line parameters, 143
r3mondev.exe, 61 monitor alert types, 143
r3mondev.his, 61 monitor environment variables, 143 monitor file locations, 143
r3mondisp remote monitoring with, 143
R/3 queue monitor
File Leasting 77 r3monlck.cig, 143
File Locations, 77 run frequency of 45 r3monlck.cfg, 143 r3monlck Monitor
run frequency of, 45 r3monlck Monitor
run frequency of, 45 the dispatch-queue monitor, 76 r3mondisp(.exe), 77 r3mondisp(.exe), 77 r3mondisp(.exe), 77 r3mondisp(.exe), 77
run frequency of, 45 r3monlck Monitor the dispatch-queue monitor, 76 r3mondisp(.exe), 77 command-line parameters, 143 environment variables, 143
run frequency of, 45 r3monlck Monitor the dispatch-queue monitor, 76 r3mondisp(.exe), 77 r3mondisp.cfg, 77 r3mondisp.cfg, 77 r3mondisp.cfg, 77 r3mondisp.cfg, 77 r3monlck Monitor alert types, 143 command-line parameters, 143 environment variables, 143 file locations, 143
run frequency of, 45 r3monlck Monitor the dispatch-queue monitor, 76 r3mondisp(.exe), 77 command-line parameters, 143 environment variables, 143

r3monoms, 144	r3monsec
alert types	alert types
configuring, 146	DEFAULT_USERS, 74
command-line parameters, 145	PRIVILEGED_USERS, 74
monitor alert types, 145	SAP_PARAMETERS, 72
monitor environment variables, 145	R/3 Security monitor, 70
monitor file locations, 145	Alert types, 71
remote monitoring with, 146	Configuring, 71
	File Locations, 71
r3monoms.cfg, 145	run frequency of, 45
r3monoms Monitor	- · · · · · · · · · · · · · · · · · · ·
alert types, 145	r3monsec(.exe), 71
command-line parameters, 145	r3monsec.cfg, 71
environment variables, 145	r3monsec.log, 71
file locations, 145	- -
remote monitoring with, 146	r3monsec monitor
report type, 145	configuring remote monitoring with, 75
r3monoms monitor	r3monsecpw.msg, 71
type, 145	r3monspl, 126, 150
· ·	alert types
r3monpro	configuring, 151
environment variables, 63 file locations, 63	PRINT_ERROR_EXIST, 152
,	SPOOL_ENTRIES_RANGE, 151
monitor, 62	SPOOL_ERROR_RANGE, 152
monitoring conditions, 63	command-line parameters, 151
SAPOPC_DRIVE, 63	monitor, 126
SAPOPC_HISTORYPATH, 63	monitor alert types, 150
SAPOPC_R3MOPRO_CONFIGFILE, 63	monitor environment variables, 151
SAPOPC_SAPDIR, 63	monitor file locations, 150
SAPOPC_TRACEPATH, 63	remote monitoring with, 151
r3monpro.cfg, 63	•
r3monpro.exe, 63	r3monspl.cfg, 150
r3monpro.his, 63	r3monspl Monitor alert types, 150
r3monrfc, 147	command-line parameters, 151
	environment variables, 151
alert types	
CHECK, 149	file locations, 150
configuring, 148	remote monitoring with, 151
command-line parameters, 148	r3monspl monitor
monitor alert types, 147	type, 150
monitor environment variables, 148	r3montra
monitor file locations, 148	alert types
parameter values, 148	configuring, 154
remote monitoring with, 148	REPAIR, 157
r3monrfc.cfg, 148	RFCONNECT, 158
r3monrfc Monitor	TPTEST, 159
alert types, 147	TRANS, 155
command-line parameters, 148	command-line parameters, 154
environment variables, 148	monitor alert types, 154
	monitor aiert types, 154 monitor environment variables, 154
file locations, 148	
parameter values, 148	monitor file locations, 154
remote monitoring with, 148	remote monitoring with, 154
r3monrfc monitor type, 147	r3montra.cfg, 154

r3montra Monitor	r3monwpa, 164
alert types, 154	alert types
command-line parameters, 154	configuring, 166
environment variables, 154	WP_AVAILABLE, 167
file locations, 154	WP_CHECK_CONFIGURED, 172
remote monitoring with, 154	WP_IDLE, 169
r3monup.his, 372	WP_STATUS, 173
- ·	command-line parameters, 166
r3monupd, 160	monitor alert types, 165
alert types	monitor environment variables, 166
configuring, 161	monitor file locations, 166
UPDATE_ACTIVE, 162 UPDATE_ERRORS_EXIST, 162	parameter values, 166
command-line parameters, 161	remote monitoring with, 166
monitor alert types, 161	r3monwpa.cfg, 166
monitor environment variables, 161	r3monwpa Monitor
monitor file locations, 161	alert types, 165
remote monitoring with, 161	command-line parameters, 166
	environment variables, 166
r3monupd.cfg, 161	file locations, 166
r3monupd Monitor	parameter values, 166
alert types, 161	remote monitoring with, 166
command-line parameters, 161	r3monwpa monitor
environment variables, 161	type, 165
file locations, 161	
remote monitoring with, 161	r3monxmi
r3monupd monitor	migrating to r3monal, 57
type, 161	r3mopro
r3monusr, 162	run frequency of, 45
alert types	r3ovo2ccms, 188
configuring, 163	command-line parameter options, 188
USER_LOGGEDIN_MAX, 163	command-line parameters, 188
command-line parameters, 163	r3perfagent.cfg, 209
monitor alert types, 162	
monitor environment variables, 163	r3status
monitor file locations, 163	R/3 Status monitor, 66
remote monitoring with, 163	reporting SAP status, 69 run frequency of, 45
r3monusr.cfg, 163	SAPOPC_HISTORYPATH, 67
r3monusr Monitor	SAPOPC_R3ITOSAP_CONFIGFILE, 67
alert types, 162	SAPOPC_R3STATUS_CONFIGFILE, 67
command-line parameters, 163	SAPOPC_RFC_TIMEOUT, 67
environment variables, 163	SAPOPC_TRACEPATH, 67
file locations, 163	
remote monitoring with, 163	r3status(.exe), 66
r3monusr monitor	r3status.cfg, 67
type, 162	r3status.cfg r3status configuration file, 68
7, pc, 102	r3status.his, 67
	r3status.his r3status history file, 67
	r3status.log, 66

r3status monitor configuring remote monitor, 69	report type r3status, 66
environment variables, 67	ReportTypes for the Alert Monitors, 97
file locations, 66	ReportTypes for the r3moncol Alert Monitors, 97
polling frequency, 66 report type, 66	REQUEST_CREATED, 125
R/3 Instances service, 338	REQUEST_RELEASED, 126
R/3 Service Discovery, 342	RFC connection
Remote Monitoring	tracing, 369
r3monal monitor, 54	RFC-destination Monitor, 147
Remote monitoring	RFC FUNCTION Alert Class
with r3monsec, 75	with r3perfagent, 216
remote monitoring	RFCONNECT, 158
r3monale monitor, 112	RFC Parameter, 29, 106
r3monchg monitor, 120	
r3moncts monitor, 124	RFCTimeOut for Alert Monitors, 37, 54
r3mondmp monitor, 133	roll/paging messages
r3monjob monitor, 136	disabling in SAP R/3, example, 180
r3monlck monitor, 143 r3monoms monitor, 146	Run Interval
r3monrfc monitor, 148	for alert monitors, 45
r3monspl monitor, 151	for r3moncol alert-collector monitors, 98
r3montra monitor, 154	£
r3monupd monitor, 161	S
r3monusr monitor, 163	SAP_ICMSTAT_PERF Performance metrics, 362
r3monwpa monitor, 166	SAP_STATRECS_PERF Performance metrics, 362
with the electrollector monitor, 102	SAP_SYSUP_PERF Performance metrics, 362
with the alert-collector monitors, 102 with the Alert Monitors, 23	SAP_USER_PERF Performance metrics, 362
with the performance monitor, 211	
with the r3status monitor, 69	SAP_WLSUM_PERF Performance metrics, 362
Remote Monitoring for r3perfagent configuration, 215	SAPBUFFER_PERF Performance metrics, 219, 226, 362
RemoteMonitoring keyword, 36, 69, 104	SAPCCMSR Availability monitoring in J2EE (Web AS Java), 81
remote monitoring with r3moncol alert monitors,	SAP CEN
102	monitoring with r3monal, 60
removing	SAP Client Parameter, 29, 106
SPI for SAP R/3 Performance Agent, 237 SPI for SAP service reports, 363	SAP Hostname Parameter, 30, 106
REPAIR, 157	SAPMEMORY_PERF Performance metrics, 219, 228, 362
reports	SAP Number Parameter, 30, 106
service gathering data, 360	SAPOPC_DRIVE, 53, 61, 63
generating, 352	SAPOPC_HISTORYPATH, 53, 61, 63, 67
generating in SPI for SAP, 360	_ , , , ,
installing in SPI for SAP, 350	SAPOPC_R3ITOSAP_CONFIGFILE, 67
metrics, 361	SAPOPC_R3MONAL_CONFIGFILE, 53
removing in SPI for SAP, 363 SAP R/3 metrics, 361	SAPOPC_R3MONDEV_CONFIGFILE, 61
upgrading in SPI for SAP, 350	SAPOPC_R3MOPRO_CONFIGFILE, 63
viewing in SPI for SAP, 352, 361	SAPOPC_R3STATUS_CONFIGFILE, 67

SAPOPC_RFC_TIMEOUT, 67	service
SAPOPC_SAPDIR, 53, 61, 63	batch, 339
SAPOPC_TRACEPATH, 53, 61, 63, 67	batch WP, 340
SAP R/3	database, 339 dialog, 339
Dispatcher-queue monitor	dialog WP, 340
File Locations, 77	environment, 339
Dispatch queue, 76	gateway, 340
J2EE (Web AS Java), 80	interface, 339
Configuration pre-requisites, 81	line of business (LOB), 340
Configuring, 82	memory management, 339
Enabling CCMS Alerts, 80	message, 340
GRMG Monitoring, 81	network, 339
J2EE kernel, 81, 84, 86	operating system, 339
J2EE services, 81, 84, 86	R/3 instances, 338
J2EE system, 81	SAP R/3, 338
SAPCCMSR Availability, 81 monitoring security audits, 89	spool, 339 spool WP, 340
SAP security-alerts, 90	update, 339
Security, 70	update WP, 340
Alert Types, 71	service configuration file, 337
Configuring, 71	ServiceNavigator, 337
File Locations, 71 Status, 66	service report, 349
SAP R/3 Admin, 40, 43	Service Reporter, 349
SAP R/3 Admin Local, 43	service reports
SAP R/3 service, 338	gathering data, 360 generating, 352
SAP status	generating, 332 generating SPI for SAP, 360
determining with r3status, 69	installing SPI for SAP, 350, 360
SAP System Parameter, 30, 107	metrics, 361
scheduler	removing SPI for SAP, 363
performance-monitor, 212	SAP R/3 metrics, 361
-	upgrading SPI for SAP, 350
schedule synchronization for r3perfagent configuration, 214	viewing SPI for SAP, 352, 361
SyncBack for r3perfagent configuration, 214	Services
	J2EE
Security Audit Define security-audit profile, 92	monitoring in Web AS Java, 81, 84, 86
Enabling CCMS Security Monitoring, 92	service view, 337
Security-Audit Logs	setting thresholds, 182
monitoring with r3monal, 59	SeverityCritical, 55
Security-Audit monitor, 89	severity level
Configuring, 91	changing, 180
Define security audits, 92	Severity Major, 107
Install Security Monitoring, 91	Severity Minor, 107
Enabling CCMS Security Monitoring, 92 SAP security alerts, 90	Severity Namoi, 107 SeverityNormal, 55
Security monitor, 70	SeverityNull, 55
Alert Types, 71	•
Configuring, 71	SeverityWarning, 55
File locations, 71	Snapshot Monitor Type, 97

Solution Manager	thresholds in SAP R/3, 182
Integration with SPI for SAP, 184 pre-requisites, 184	Time Frame monitor type, 97 TPTEST, 159
SPI for SAP	,
Golden Metrics, 377 Solution-Manager integration, 184 pre-requisites, 184	file for Alert-Monitor configuration, 38, 68, 78 file for r3moncol configuration, 104
SPI for SAP R/3 Performance Agent installing, 202 removing, 237	level for Alert-Monitor configuration, 39, 56, 68, 78 level for r3moncol configuration, 104 level for r3perfagent configuration, 213
SPOOL_ENTRIES_RANGE, 151	tracefile
SPOOL_ERROR_RANGE, 152	alert-monitor list, 40
SPOOL_PERF Performance metrics, 228	TraceFile keyword
SPOOLER Monitor, 150	for r3moncol alert collectors, 104
Spool service, 339	TraceLevel keyword
Spool WP service, 340	for alert monitors, 39 for r3moncol alert collectors, 104
START_PASSED, 140	
condition in job monitor, 134, 144	TRANS, 155
STATRECS_PERF	troubleshooting access to SAP front end, 368
configuring, 230	characterizing problems, 365
STATRECS_PERF Performance metrics, 219, 229	common SPI problems, 370
Status monitor, 66	context of problem, 365
status of SAP	duration of problem, 365 HPOM agent, 366
reporting with r3status, 69	HPOM server, 366
SyncBack	monitor execution, 367
synchronize schedule of r3perfagent, 214	problem identification, 365
synchronization	SAP SPI installation, 367
schedule for r3perfagent configuration, 214	templates, 367
schedule SyncBack for r3perfagent configuration, 214	type
	r3monaco monitor, 174 r3monchg monitor, 119
SyslogId Parameter, 30	r3moncts monitor, 123
System J2EE	r3mondmp monitor, 132
monitoring in Web AS Java, 81	r3monjob monitor, 134
SYSTEM CHANGE Monitor, 119	r3monlck monitor, 143 r3monoms monitor, 145
SYSUP_PERF Performance metrics, 219, 231	r3monrfc monitor, 147
51501_1 Ett. 1 eriormance metrics, 213, 251	r3monspl monitor, 150
T	r3monupd monitor, 161
TASK_CREATED, 128	r3monusr monitor, 162 r3monwpa monitor, 165
TASK_RELEASED, 128	r3status monitor report, 66
_ ,	• /
Temporary Sequential File see TEMSE, 174	U
TEMSE	UPDATE_ACTIVE, 162
Monitoring the file, 174	UPDATE_ERRORS_EXIST, 162
report, 174	UPDATE_PERF Performance metrics, 219, 232, 362
threshold	UPDATE Monitor, 160
performance alert, 183	

Update service, 339	W
Update WP service, 340	Web AS (J2EE) monitor, 80, 81
upgrading performance monitor subagent, 197 SPI for SAP service reports, 350	Configuring, 82 Enabling CCMS Alerts, 80 GRMG Monitoring, 81
USER_LOGGEDIN_MAX, 163 APSERVER, 164 MAX, 164	J2EE kernel, 81, 84, 86 J2EE services, 81, 84, 86 J2EE system, 81 SAPCCMSR Availability, 81
USER_PERF Performance metrics, 219, 233	WLSUM_PERF Performance metrics, 219, 234
USER Monitor, 162	WORKPROCESS Monitor, 164
utility dsi2ddf wrapper, 202	WP_AVAILABLE, 167 APSERVER, 168
V	WP_CHECK_CONFIGURED, 172
V values	WP_IDLE, 169 APSERVER, 170
r3moncol monitor parameters, 100	WP_PERF Performance metrics, 219, 236, 362
r3monjob monitor parameters, 136 r3monrfc monitor parameters, 148	
r3monwpa monitor parameters, 166	WP_STATUS, 173 APSERVER, 173
variable	
environment SAPOPC_DRIVE, 53, 61, 63 SAPOPC_HISTORYPATH, 53, 61, 63, 67 SAPOPC_R3ITOSAP_CONFIGFILE, 67 SAPOPC_R3MONAL_CONFIGFILE, 53 SAPOPC_R3MONDEV_CONFIGFILE, 61 SAPOPC_R3MONPRO_CONFIGFILE, 63 SAPOPC_R3STATUS_CONFIGFILE, 67 SAPOPC_RFC_TIMEOUT, 67 SAPOPC_SAPDIR, 53, 61, 63 SAPOPC_TRACEPATH, 53, 61, 63, 67	X XMI syslog mode for Alert Monitors, 56
variables	
r3monale monitor environment, 112 r3monal monitor environment, 53 r3monchg monitor environment, 119 r3moncol (alert-collectors) environment, 101 r3moncts monitor environment, 124 r3mondev monitor environment, 61 r3mondmp monitor environment, 133 r3monjob monitor environment, 136 r3monlck monitor environment, 143 r3monoms monitor environment, 145 r3monpro monitor environment, 63 r3monrfc monitor environment, 148 r3monspl monitor environment, 151 r3montra monitor environment, 161 r3monupd monitor environment, 161 r3monupr monitor environment, 163 r3monwpa monitor environment, 166 r3status monitor environment, 67 viewing	
SPI for SAP service reports, 352, 361	

We appreciate your feedback!

If an email client is configured on this system, by default an email window opens when you click on the bookmark "Comments".

In case you do not have the email client configured, copy the information below to a web mail client, and send this email to ${\bf docfeedback@hp.com}$

Product name:
Document title:
Version number:
Feedback: