

HP System Health

For the Windows and Linux operating systems

Software Version: 9.20

Using System Health

Document Release Date: November 2012

Software Release Date: August 2012



Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notice

© Copyright 2005-2012 Hewlett-Packard Development Company, L.P.

Trademark Notices

Adobe® and Acrobat® are trademarks of Adobe Systems Incorporated.

Intel®, Pentium®, and Intel® Xeon® are trademarks of Intel Corporation in the U.S. and other countries.

iPod is a trademark of Apple Computer, Inc.

Java is a registered trademark of Oracle and/or its affiliates.

Microsoft®, Windows®, Windows NT®, and Windows® XP are U.S registered trademarks of Microsoft Corporation.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates.

UNIX® is a registered trademark of The Open Group.

Acknowledgements

This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).

This product includes software developed by the JDOM Project (<http://www.jdom.org/>).

Documentation Updates

The title page of this document contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.
- Software Release Date, which indicates the release date of this version of the software.

To check for recent updates or to verify that you are using the most recent edition of a document, go to:

<http://h20230.www2.hp.com/selfsolve/manuals>

This site requires that you register for an HP Passport and sign in. To register for an HP Passport ID, go to:

<http://h20229.www2.hp.com/passport-registration.html>

Or click the **New users - please register** link on the HP Passport login page.

You will also receive updated or new editions if you subscribe to the appropriate product support service. Contact your HP sales representative for details.

PDF Version of Online Help

This document is a PDF version of the online help. This PDF file is provided so you can easily print multiple topics from the help information or read the online help in PDF format.

This document was last updated: Thursday, October 11, 2012

Support

Visit the HP Software Support Online web site at:

<http://www.hp.com/go/hpsoftwaresupport>

This web site provides contact information and details about the products, services, and support that HP Software offers.

HP Software online support provides customer self-solve capabilities. It provides a fast and efficient way to access interactive technical support tools needed to manage your business. As a valued support customer, you can benefit by using the support web site to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Download software patches
- Manage support contracts
- Look up HP support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and sign in. Many also require a support contract. To register for an HP Passport ID, go to:

<http://h20229.www2.hp.com/passport-registration.html>

To find more information about access levels, go to:

http://h20230.www2.hp.com/new_access_levels.jsp

Contents

Using System Health	1
Contents	5
HP System Health Overview	7
Using the System Health Setup Wizard	8
System Health Displays	10
Understanding the Monitors Table	15
Understanding Service Reassignment	16
Adding Additional Monitors to System Health	18
How to Deploy and Access System Health	19
How to Ensure the Health of Your System	24
How to Add Additional Monitors to System Health Using a Template	28
BSM Components	30
BSM Processes	32
System Health Monitors	34
Machine Hardware Monitors	34
Database Monitors	36
BSM Server Monitors	36
Gateway Server Monitors	46
Data Processing Server Monitors	65
BPI Server Monitors	83
Data Collectors	86
HP CLIP Integration	90
Component and Monitor Status Indicators	92
System Health User Interface	93
Inventory Tab	93
Log Manager	95

System Health Dashboard	97
Map of BSM System and Components	100
System Health Setup Wizard	105
Remote Servers Setup Page	106
Remote Databases Setup Page	107
Recipients Setup Page	109
Toolbar	110
Service Manager Dialog Box	113
Backup Server Setup Window	114
Process Manager Dialog Box	115
Quick Report Screen	116
Troubleshooting and Limitations	117

Chapter 1

HP System Health Overview

System Health uses the SiteScope monitoring system to enable you to monitor the servers, databases, and data collectors running as part of your system.

You use System Health to:

- Measure performance by viewing the output from monitors running on the various system components.
- Monitor areas of the databases that influence performance.
- Display problematic areas of the servers, databases, and data collectors.
- Perform operations on your environment, such as:
 - **Move Backend Services.** You can move backend services from one server to another of the same type, in case the server machine is not functioning properly or requires downtime for servicing. For details on the user interface for performing this task, see "[Service Manager Dialog Box](#)" on page 113.
 - **Configure Backup Servers.** You can define a backup server in case the server machine is not functioning properly or requires downtime for servicing. For details on the user interface for performing this task, see "[Backup Server Setup Window](#)" on page 114.
 - **Manage BSM Processes.** You can start or stop various BSM processes. For details on the user interface for performing this task, see "[Process Manager Dialog Box](#)" on page 115.
- View log files on specific components in a variety of formats.
- View information on components and monitors in .csv format (displaying current status) and Quick Report format (displaying status of the past 24 hours).

Chapter 2

Using the System Health Setup Wizard

The System Health Setup Wizard enables you to create remote connections to the servers which System Health monitors. If remote connections are not created, only the monitors that do not require credential authorization to access the System Health servers will provide data.

Caution: It is not possible for another user to access the System Health interface while you are configuring the System Health Setup Wizard.

For details on configuring the System Health Setup Wizard, see "How to Ensure the Health of Your System" on page 24.

For details on the pages and elements contained in the System Health Setup Wizard, see "System Health Setup Wizard" on page 105.

This section contains the following topics:

- "Synchronizing System Health in the Setup Wizard" below
- "Accessing the System Health Setup Wizard" below

Synchronizing System Health in the Setup Wizard

You can also access the System Health Setup Wizard by performing either **Full Model Synchronization** or **Soft Synchronization**. Soft Synchronization updates System Health with any changes to the System Health model. Full Model Synchronization resets the configuration of the selected component, including resetting of all monitors and their status. If no specific component is selected, the entire System Health configuration is reset, and the System Health Setup Wizard is generated, where you must reconfigure the connection of all system monitors to the servers.

When you perform a Soft Synchronization, System Health applies to BSM with the synchronization request. BSM receives the request and builds an up-to-date model of the BSM system and sends that model back to System Health.

- If there are new components that do not exist in System Health's current model of the BSM system, System Health adds the components to the model and deploys the appropriate monitors on those added components.
- If there is a component that was in System Health but is missing from the updated model that BSM sent to System Health, System Health does not remove the component or its monitors.

Accessing the System Health Setup Wizard

The System Health Setup Wizard is accessible in one of the following ways:

- The first time you access the System Health application on the machine running BSM.
- Clicking the **Soft Synchronization**  button on the System Health Dashboard toolbar or the Inventory tab toolbar. Soft Synchronization opens the wizard only if changes were made to the

System Health model.

- Clicking the **Full Model Synchronization**  button on the System Health Dashboard toolbar or the Inventory tab toolbar, when no specific component is selected.

Note: Clicking the **Soft Synchronization** button displays only the portion of the wizard relevant to changes made in the system. If no changes were made, the System Health Setup Wizard does not appear.

Chapter 3

System Health Displays

You can view the status of the BSM components using the following:

- System Health Dashboard. For details, see "System Health Dashboard" below.
- Inventory Tab. For details, see "Inventory Tab" on page 12.
- Log Manager Tab. For details, see "Log Manager Tab" on page 13.

System Health Dashboard

Displays a map of all components. The color of the component box outline, as well as the status icon's color in the **Monitors** table, determines the component status. For details on the components' outline colors, see "Component Status and Description" on page 101. For details on the status icon colors, see "Component and Monitor Status Indicators" on page 92.

Click the **expand** icon  on a component to view its subcomponents.

Click the **collapse** icon  on a component to hide its subcomponents.

You can perform actions on the components by clicking the various icons on the System Health Dashboard toolbar. For details on the System Health Dashboard toolbar, see "Toolbar" on page 110.

You can also retrieve information on BSM servers using the **General** table, and information on the server's components on the **Monitors** table in the System Health Dashboard right pane. The displayed monitors run on the selected component in the System Health Dashboard left pane. For details, see "Understanding the Monitors Table" on page 15.

Monitors Table:

Last Update Time: 08/07/08 15:26:43

labm1mam11 - Database server

Monitors

Monitor\Group Name	Status	Last Up...
Ping	●	08/07/0...
Virtual Memory	●	08/07/0...
CPU	●	08/07/0...
cmdbhist8	○	
fnd8	○	
cmdb8	○	

Monitor Details:


Description:
Checks the availability of the host via the network

Additional Information:
0.01 sec

General

Property Name	Value
OS Type	IBMPC/MIN_NT-8.1.0
Encoding	Cp1252
Database Type	ORACLE
IP	16.59.60.53
Name	labm1mam11
Version	Oracle Database 10g

Dashboard Tab:

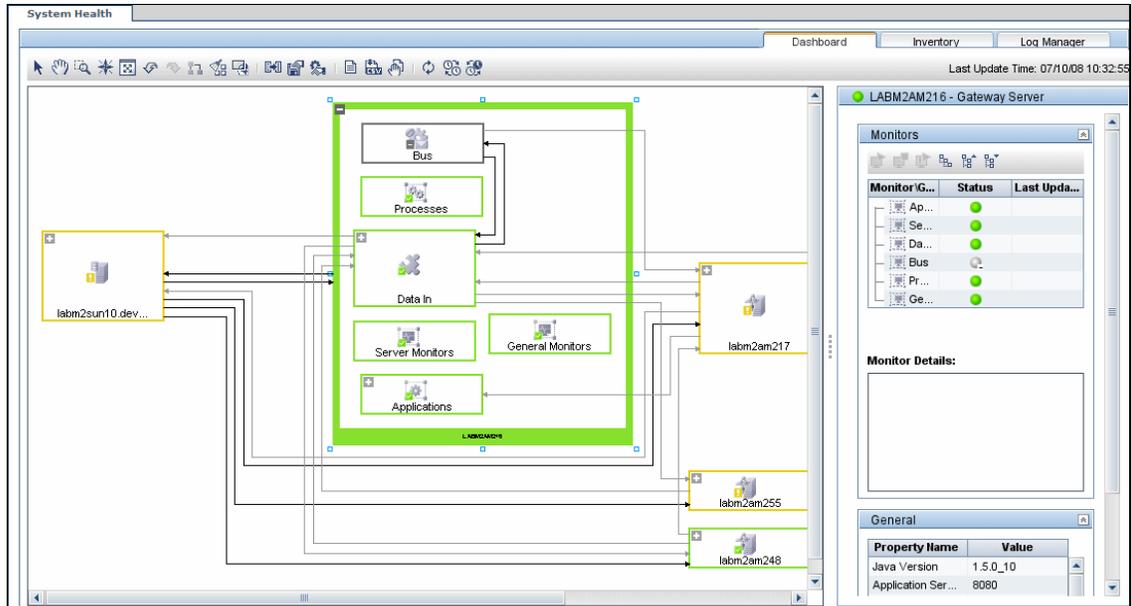

Inventory Tab

Displays information on Gateway Server and Data Processing Server components and their subcomponents, in table format. The Inventory tab enables you to compare the performance of the subcomponents and monitors on multiple servers by presenting their statuses in a single view.

The Inventory tab is divided into the following tables:

- **Gateway Machines.** Displays the status of the various components running on the BSM Gateway machines.
- **Processing Machines.** Displays the status of the various components running on the BSM Data Processing machines.
- **<Subcomponent Name> Details.** Displays information about the selected component's monitors. The **Monitor Details** area provides additional information on the subcomponent's monitors, if applicable.

Note: The **<Subcomponent Name> Details** table is displayed only when a specific component is selected on either on the Gateway Machines or Processing Machines table on the Inventory tab.

Inventory tab:

The screenshot shows the 'Inventory' tab in the System Health application. It contains two main tables: 'Gateway Machines' and 'Processing Machines'.

Name	Type	Status	Server Monitors	Applications							Data In			Bus	General Monitors	Proce...	
				OPR (Console)	Portal	SAM	BPI	SLM	TVB	Dashboard App	Loader	Web Data	OPR (Gateway)				
VMAM...	Gatewa...	✖	🟡	🟡	🟡	🟢	🟡	🟡	🟡	🟡	🟡	🟢	🟢	🟡	🟢	🟡	🟢
VMAM...	Gatewa...	✖	🟢	🟡	🟡	🟢	🟡	🟡	🟡	🟡	🟡	🟢	🟢	🟡	🟢	🟡	🟢

Name	Type	Status
labm3am268	Processing Server	✖
labm3am267	Processing Server	✖

The component and monitor status is indicated on both the monitors table in the System Health Dashboard, and in the Inventory tab tables as a colored icon. For details on the colored icons, see ["Component and Monitor Status Indicators" on page 92](#).

Log Manager Tab

The Log Manager tab displays the various log files associated with the components that System Health is monitoring. Logs are arranged hierarchically in **log bundles**. Nested under the log bundles are the machines in the BSM deployment that contain the individual log files.

The entities that can be seen in the **Log Bundle** pane tree are:

- **Log Bundles.** Can contain any or all of the following:
 - Other log bundles
 - Machines
 - Logs (if there is no model configured on the System Health Dashboard), arranged by category.
- **Machines.** Contains a group of logs arranged by the machine they are located on. Machines are nested under the log bundles in the hierarchical tree.
- **Individual Logs.** The individual log files monitoring the behavior of the monitored components. Logs are nested either under the log bundles, or the specific machines on which they are running.

You configure a time frame for which you want data to be retrieved in the **Time Frame** pane, and then select one or more of the components in the **Log Bundles** pane. You can then perform one of the following actions:

- Download and save the selected logs by clicking the **Save Output**  button in the **Log Bundles** pane.
- Retrieve and view the selected logs by clicking the **Retrieve Logs**  button. The logs are displayed in the **Main** pane, where you can also save the displayed output by clicking the **Save Output**  button.

You can select any combination of log bundles, machines, and log files.

For each log retrieval action that is performed, a separate tab opens in the **Main** pane displaying the logs contained in your selection. Tabs are numbered chronologically, according to the retrieval actions you perform. For details on the available functions in the Log Manager, see ["Log Manager" on page 95](#).

Log Manager Tab:

The screenshot displays the HP System Health Log Manager interface. At the top, there are tabs for 'Dashboard', 'Inventory', and 'Log Manager'. Below the tabs, a 'Time Frame' section allows filtering logs by date and time, currently set to 'From: Dec 11, 2008 9:48' and 'To: Dec 11, 2008 10:48'. On the left, a 'Log Bundles' tree view lists various system components such as Data In, BLE Online Engine, Loader, Bus, Data In Flow (persistence), Alerts Engine, Validator, Service Health, SLM, Repositories, Performance, Clients communication, Reports, RTSM, Discovery Probes, RTSM RES Units, Assignment Mechanism, and Business Impact. The main pane on the right shows a detailed log entry for the 'Loader' bundle. The log entry is titled 'Time Frame - From 09:48:00 AM To 10:48:00 AM Logs mercury_db_loader/loader log, mercury_db_loader/loader all log, mercury_db_loader/msutils log, mercury_db_loader/ms wrapper log,' and contains the following text:

```
***** LABM1 AMRINC14.devlab.ad *** d:\HPBAC\log\mercury_db_loader\loader log *****  
*****  
2008-12-11 00:29:24,647 [DBLoader-Insert-14] (SampleToDBTask.java:112) ERROR - Insert chunk failed. Moving to failures dispatching module. Db:dbType=(ORACLE Server); hostName=labm1f18n1  
Sequence id: 60068 Hashcode: 21700717  
Sequence id: 60069 Hashcode: 20841198  
Sequence id: 60080 Hashcode: 3303502  
Sequence id: 60061 Hashcode: 22942055  
Sequence id: 60062 Hashcode: 13146492  
Sequence id: 60063 Hashcode: 30720312  
Sequence id: 60064 Hashcode: 14252496  
Sequence id: 60065 Hashcode: 30166805  
Sequence id: 60066 Hashcode: 2676344  
Sequence id: 60067 Hashcode: 18377837  
Sequence id: 60068 Hashcode: 4408409  
Sequence id: 60069 Hashcode: 20764897  
Sequence id: 60070 Hashcode: 29534392  
Sequence id: 60071 Hashcode: 13827654  
Sequence id: 60072 Hashcode: 3398772  
Sequence id: 60073 Hashcode: 13526432  
Sequence id: 60074 Hashcode: 7477747  
Sequence id: 60075 Hashcode: 17150774  
Sequence id: 60076 Hashcode: 20496013  
Sequence id: 60077 Hashcode: 6693577  
Sequence id: 60078 Hashcode: 24503919  
Sequence id: 60079 Hashcode: 23832605  
Sequence id: 60080 Hashcode: 15342889  
Sequence id: 60081 Hashcode: 2137440  
Sequence id: 60082 Hashcode: 20720260  
Sequence id: 60083 Hashcode: 17518362  
Sequence id: 60084 Hashcode: 24535457  
Sequence id: 60085 Hashcode: 17026374  
Sequence id: 60086 Hashcode: 10077895  
Sequence id: 60087 Hashcode: 29967504  
Sequence id: 60088 Hashcode: 11819319  
Sequence id: 60089 Hashcode: 6058135  
Sequence id: 60090 Hashcode: 18714485
```

Chapter 4

Understanding the Monitors Table

The Monitors table displays information about the monitors running on the component selected in the System Health Dashboard.

Once you have drilled down to a specific monitor in the Monitors table, you can:

- enable the monitor
- disable the monitor
- run the monitor immediately, instead of waiting for it to run according to its schedule

The monitor groups correspond to the components contained in the highlighted component in the System Health Dashboard left pane. Additional information on the individual monitors is displayed in the **Monitor Details** pane.

You can double-click a group in the Monitors table to open the monitor's parent component on the System Health Dashboard.

For details on the System Health monitors that are run by the SiteScope application, click the **SiteScope** link at the top left corner of the System Health interface.

For details on the Monitors table user interface, see "[Monitors Table](#)" on page 98.

Chapter 5

Understanding Service Reassignment

You may want to reassign services running on BSM Data Processing servers, if a certain machine is not functioning properly or requires downtime for servicing. You can also preconfigure a specific Data Processing server to automatically fail over to a specific backup machine, to ensure that your data is not lost in the event of system downtime.

Note: Service Reassignment can be performed only by an administrator.

BSM servers can be deployed either through the recommended deployment configuration or legacy deployment configuration.

When reassigning services, the secondary machine must also be a Data Processing Server.

The reassignment process can take up to 25 minutes, at which point the system is in downtime.

For details on reassigning services, see "[Service Manager Dialog Box](#)" on page 113.

Service Reassignment Flow Table

There are several theoretical scenarios for reassigning services among machines, depending on the type of deployment with which BSM servers are configured.

The table below illustrates these scenarios by indicating the paths along which services can be reassigned.

	To Full Data Processing Server (Backup server in recommended deployment)	To Modeling Data Processing Server	To Online Data Processing Server	To Offline Data Processing Server
From Full Data Processing Server	Yes Note: This is the recommended server deployment	Yes - for modeling services	Yes - for online services	Yes - for offline services
From Modeling Data Processing Server	Yes	Yes	No	No
From Online Data Processing Server	Yes	No	Yes	No

Using System Health

Chapter 5: Understanding Service Reassignment

From Offline Data Processing Server	Yes	No	No	Yes
--	-----	----	----	-----

Chapter 6

Adding Additional Monitors to System Health

You can add additional monitors to System Health and view the overall health of the BSM system in one place. You can do this by creating a new template, and adding monitors and alerts to the template. You also need to add the template to the **<SiteScope root directory>/conf/sh/templates.xml** file to avoid the newly-created monitors being deleted after a Full Model Synchronization.

Note:

- It is not recommended to modify the original System Health templates, since this may lead to issues if you need to upgrade System Health.
- It is recommended to create templates outside of the System Health template container to avoid losing these changes should you need to redeploy the template.

For task details, see ["How to Add Additional Monitors to System Health Using a Template"](#) on page 28.

Chapter 7

How to Deploy and Access System Health

You deploy System Health in one of the following ways:

- On a standalone machine with access to BSM (recommended so that System Health continues to run if BSM servers are down).
- On any BSM Gateway server (should be done only if a standalone machine is not available).

Deploying System Health

You must ensure that the Gateway server and the Management database are up and running before deploying System Health. System Health must be deployed in the same domain as BSM, and any firewalls must be open.

To deploy System Health:

1. Insert the System Health installation disk into your machine.
2. Run the System Health installation according to your operating system.

For Windows:

Enter the location from which you are installing System Health according to your operating system and architecture, followed by: **SystemHealth_9.20_setup.exe**.

For Linux:

- a. Log into the server as user **root**.
 - b. Move to the directory of the DVD drive where the installation files can be found according to your operating system and architecture.
 - c. Run the script **./SystemHealth_9.20_setup.bin**.
3. If the Installer detects any anti-virus program running on your system, it prompts you to examine the warnings before you continue with the installation. Read the warnings, if any, that appear in the **Application requirement** check warnings screen and follow the instructions as described in the screen.

Click **Continue** to continue with the installation.

4. In the Introduction (Install) screen that opens, click **Next**.
5. To install System Health, you must accept the terms of the license agreement by clicking **Next**.
6. The Install Checks screen opens and runs verification checks. Click **Next** after the free disk space verification is completed successfully.

If the free disk space verification is not successful, free up disk space, for example by using the Windows Disk Cleanup utility, and repeat this step.

7. In the Pre-Install Summary screen, click **Install**.

The Installer selects and installs the required System Health software components. Each software component and its installation progress is displayed on your screen during installation.

- After installing the System Health components, the Introduction screen of the System Health Configuration Wizard opens. Click **Next**.
- The Settings screen of the System Health Configuration Wizard opens.

Settings

Enter values for the following deployment settings:

Basic settings

Port

BSM server

HP BSM Server machine

SiteScope service settings

Service name

Use local system account

Use this account:

Password:

Confirm Password:

Enter the required configuration information and click **Next**:


- **Port.** The System Health port number. Accept the default port number of 18080, or choose another port that is free. If the port number is already in use (an error message is displayed).
- **HP BSM Server machine.** The name of the BSM Gateway server.

Note: If you are connecting System Health to an environment with a Load Balancer, enter the hostname of the BSM Gateway server, not the Load Balancer.

- **Service name.** The name of the System Health service. If the machine has a previous version of System Health installed, enter another name for the System Health service. The default service name is `HP SystemHealth`.
- **Use local system account.** By default, System Health is installed to run as a Local System account. This account has extensive privileges on the local computer, and has access to most system objects. When System Health is running under a Local Systems account, it attempts to connect to remote servers using the name of the server.
- **Use this account.** Select to change the user account of the System Health service. You can set the System Health service to log on as a user with domain administration privileges. This gives System Health access privileges to monitor server data within the domain. Enter an account and password (and confirm the password) that can access the remote servers. If

System Health is installed to run as a custom user account, the account used must have **Log on as a service** rights.

10. The Summary screen opens.

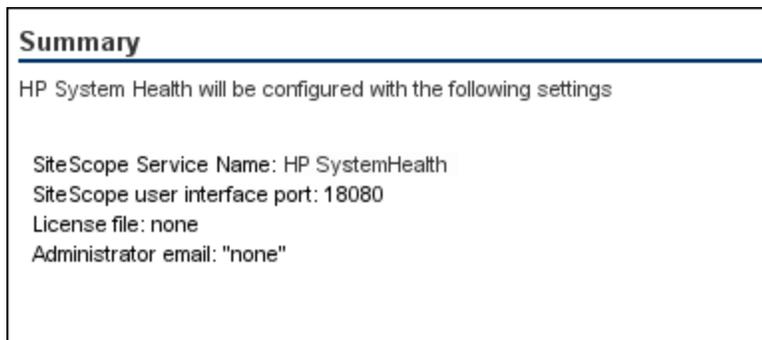

Check that the information is correct and click **Next** to continue, or **Back** to return to previous screens to change your selections.

11. In the Done screen, click **Finish** to close the System Health Configuration Wizard.
12. When the installation finishes, the Installation Complete window opens displaying a summary of the installation paths used and the installation status.

If the installation was not successful, review the installation log file for any errors by clicking the **View log file** link in the **Installation Complete** window to view the log file in a web browser.

For more information about the installed packages, click the **Details** tab.

Click **Done** to close the installation program.

If the installation program determines that the server must be restarted, it prompts you to restart the server.

Deploying System Health in a Secured Environment

For configuration and set up options that can be used to harden the System Health platform, refer to *Hardening the SiteScope Platform* in the HP SiteScope Deployment Guide.

When deploying System Health in a secured environment, note the following:

- On the System Health Dashboard, Reverse Proxy components are depicted in the left pane, together with the Load Balancer components, called **mediators**.
- The WDE URL monitor appears red until you enter the monitor's username and password in SiteScope.
- When accessing System Health using BSM, you must enter a username and password to view the System Health interface.
- You must supply the name of the Gateway server, and not the reverse proxy.

Securing the JMX Channel Used for BSM Communication

System Health uses JMX monitors and JMX calls to collect information from the BSM system it is monitoring. The JMX channel in BSM can be protected by configuring a user name and password (see the section on securing JMX-RMI Channel Used for Internal BSM Communications in the

BSM Hardening Guide). Those Credentials also need to be provided to System Health.

Use the Encryption Tool provided in System Health to encrypt the user login name and password so they do not appear in viewable text. The tool is available from **<System Health install directory>\SystemHealth\tools\EncryptUtil**.

To encrypt text for use in the JMX channel:

1. Run the following batch file:
 - For Windows: **<System Health install directory>\tools\EncryptUtil\EncryptUtil.bat**
 - For Linux: **<System Health install directory>\tools\EncryptUtil\EncryptUtil.sh**
2. In the Encryption Tool, type the JMX user name and password, and click **Encrypt**.
3. The password is encrypted and saved by the system.

Note: If an error occurs, the tool displays a summary of the error. You can get more details on an error from the Encryption Tool log file, available from:

<System Health install directory>\SystemHealth\tools\EncryptUtil\log

4. Perform a Hard Synchronization in System Health:
 - a. In System Health, click the **Full Model Synchronization**  button to synchronize the status and model of the components.
 - b. The Remote Servers Setup Wizard opens. For each server in the left pane, enter the remote connection information in order for System Health to run all of the server's available monitors. For details, see "[System Health Setup Wizard](#)" on page 105.

Accessing System Health

You can access System Health:

- Directly, through a Web browser using the syntax: **http://<server_name>.<domain_name>:<System Health Server port number>/**, where **<server_name>** is the name of the Gateway or dedicated server that System Health is deployed on, depending on the type of deployment you are using.
- As an application embedded in BSM, after configuring the appropriate URL in the **Infrastructure Settings** section of Platform Administration. For details, see the procedure below.

To access System Health directly, through a Web browser:

1. Ensure that System Health has been installed properly, either on your dedicated server or on your Gateway Server.
2. Enter the following link into your browser window:

http://<machine name>:<port number>

Where:

<machine name> = The machine System Health is installed on.

<port number> = 18080 by default, or you can choose another port that is free.

Note: It can take several minutes for the System Health application to appear on your screen.

3. Enter your login name and password in the appropriate boxes to log into System Health.

- Initial access can be gained using the following default login parameters:

Login Name = **systemhealth**, Password = **systemhealth**

- Administrator level access can be gained using the following default login parameters:

Login Name = **administrator**, Password = **syshealthadmin**

It is recommended that you change the password immediately to prevent unauthorized entry. To change the password, click the **Change Password** link on the System Health login page.

Note: After changing your password on the System Health login page, you must enter your System Health username and password when accessing System Health in BSM. Once you have done this, BSM does not require you to re-enter this information to access System Health until the next time your password is changed on the System Health login screen.

To access System Health in BSM:

1. Ensure that System Health has been installed, either on your dedicated server or on your Gateway Server.
2. Log in to your BSM machine. For details, see the section on logging in to BSM in the BSM Platform Administration Guide in the BSM Help.
3. Select **Admin > Platform > Setup and Maintenance > Infrastructure Settings**, choose **Foundations**, select **System Health**, and locate the **URL** entry in the **System Health - URL** table. Modify the value to the following URL:

http://<machine name>:<port number>/SiteScope/SH/Main.do

Where:

<machine name> = The machine System Health is installed on.

<port number> = 18080 by default, or you can choose another port that is free.

4. Click **Save** to register the URL for accessing System Health in BSM.

Note: Steps 3 and 4 are performed the first time you access the System Health interface.

5. Select **Admin > Platform > Setup and Maintenance > System Health** to access the System Health interface.

Chapter 8

How to Ensure the Health of Your System

This task describes how to monitor the components of your system and ensure they are functioning properly.

1. Prerequisites

Before you can monitor the health of your BSM system, you must ensure that System Health is deployed properly. For task details, see ["How to Deploy and Access System Health" on page 19](#).

2. Configure Remote Connection Details for Monitors

You optionally provide the server's remote connection details for the BSM monitors that require it, using the System Health Setup Wizard. You can also configure recipients to receive System Health alerts through email. For user interface details, see ["System Health Setup Wizard" on page 105](#).

3. Monitor Performance of Components

You can monitor the performance of the servers, databases, and data collectors running as part of your BSM system and view the results using either the System Health Dashboard tab or the Inventory tab. For details on the available System Health displays, see ["System Health Displays" on page 10](#).


4. Move Backend Services

In the Service Manager dialog box, you move backend services from one Data Processing server to another of the same type, in case the server machine is not functioning properly or requires downtime for servicing.

For user interface details, see ["Service Manager Dialog Box" on page 113](#).

Example:

- a. On the Toolbar on either the System Health Dashboard or the Inventory tab, click the **Service Manager**  button.
- b. In the **Select Source Machine** window, select the machine that you want to move services from.
- c. In the **Select Operation** window, select the operation you want to perform.
- d. In the **Select Target Machine** window, select the machine you want to move services to.
- e. Click the **Execute** button. The **Operation Status** window indicates whether or not the

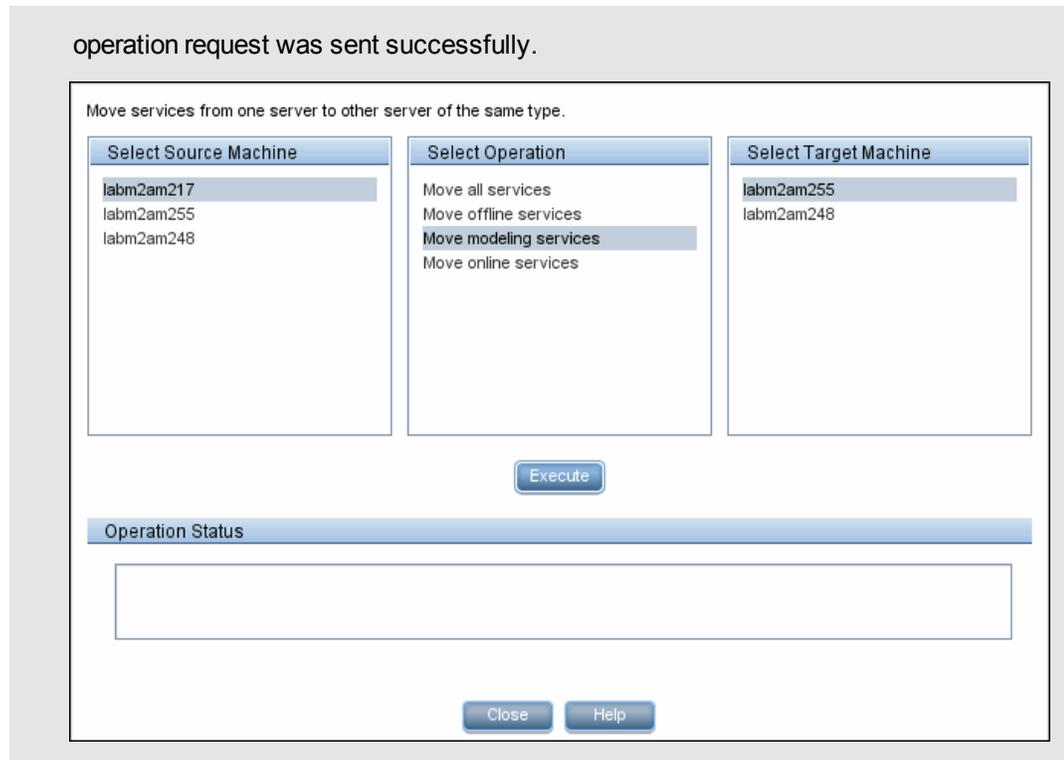

5. Configure Backup Servers

In the Configure Backup Servers dialog box, you define a backup server, in case the server machine is not functioning properly or requires downtime for servicing. For user interface details, see "Backup Server Setup Window" on page 114.

Example:

- On the Toolbar on the System Health Dashboard or the Inventory tab, click the **Backup Server Configuration**  button.
- In the left pane, select a backup server.
- In the right pane, select a server to be backed-up.
- Click the **Enable Automatic Failover** check box to activate your backup server selection.
- Click **Execute** to register your backup server. The **Operation Status** window

indicates whether or not the operation succeeded.

Define backup server.

- 1) Select backup server in the left list.
- 2) Check the servers to be backed up by selected backup server.
- 3) Automatic Failover must be checked in order to activate backup.

Select Backup Server	Select Backed-up Servers
labm2am217	<input checked="" type="checkbox"/> labm2am255
labm2am255	<input type="checkbox"/> labm2am248
labm2am248	

Enable Automatic Failover.

Execute

Operation Status

 Automatic failover has been activated successfully. The configuration will take effect immediately.

Close Help

6. Manage BSM Processes

In the Process Manager dialog box, you stop or start processes on specific servers. For user interface details, see "Process Manager Dialog Box" on page 115.

7. Display a Quick Report

Click the **Quick Report**  button to display a Quick Report with information gathered over the past 24 hours on the monitors deployed on the selected component. For user interface details, see "Quick Report Screen" on page 116.

Example:

[Table Format](#)
[Error List](#)
[Warning List](#)
[Good List](#)

[Close Window](#)

Summary for Multiple Monitors

(information from 8:58 AM 7/9/07 to 12:18 PM 7/9/07)

Uptime Summary

Name	Uptime %	Error %	Warning %	Last
Durable Subscriber Group	94.73	0	5.27	good
Monitor Broker Group	94.73	0	5.27	good
Monitor Subscriber Group	94.73	0	5.27	good
Monitor Container Group	94.73	0	5.27	good
Log Level for D:\HPBAC\conf\core\Tools\log4\mercury_online_engine	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\mercury_offline_engine	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\mercury_data_upgrade	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\mam	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\mercury_upgrade_wizard	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\cmdb	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\common	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\mercury_wde	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\data_marking	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\PlainJava	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\EJB	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\mercury_pm	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\Servlets	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\bus	100	0	0	good
Log Level for D:\HPBAC\conf\core\Tools\log4\mercury_db_loader	100	0	0	good
Out of Memory in log	100	0	0	good
Logged in Users	94.73	0	5.27	good

Chapter 9

How to Add Additional Monitors to System Health Using a Template

This task describes how to add monitors to System Health that are not deleted after a full synchronization.

1. Prerequisites

For template monitors to be displayed correctly in System Health, they must be created directly under a template entity, instead of in a template group (the default setting). In SiteScope, click **Preferences > Infrastructure Preferences > Template Settings**, select the **Allow creation of template monitors directly under template entity** check box, and then click **Restart SiteScope**.

2. Create a monitoring template

- a. In SiteScope, open the **Templates** context, and create a template container and a template in the template tree.

Note: It is not recommended to create the template in the System Health template container, since any template changes are lost if the System Health template needs to be redeployed.

- b. Select the monitor instances you want to add to the template, and enter values for the monitor properties. If you are using template variables, use the same System Health parameters that are supplied to the template deployment on runtime. For example, if the monitor requires a host name, you can enter `%%SH_MACHINE_NAME%%` in the **Server** box.
- c. Create monitor alerts if required.

3. Add the template to the templates.xml file

To prevent monitors and alerts being deleted from System Health after a Full Model Synchronization, perform the following:

- a. Open the `<SiteScope root directory>\conf\sh\templates.xml` file.
- b. Find the node and component type under which you want to deploy the template, and enter the template name. You can check in the SiteScope monitor tree for the group name mapped to the component type.

Example:

To deploy a template named `MyCPUTemplate` containing a CPU monitor to the Server monitors group, add the template name under the `SERVERS` node and component type name (`Physical` is the name of the group mapping in SiteScope).

```
<!-- SERVERS NODES -->
- <type name="physical">
  <template name="MyCPUTemplate" />
  <template name="PingMon" />
  <template name="NTBasicMachineRemoteMon" os_type="WINDOWS" />
  <template name="NTEExtraMachineRemoteMon" os_type="WINDOWS" />
  <template name="UNIXBasicMachineRemoteMon" os_type="SOLARIS" />
  <template name="UNIXExtraMachineRemoteMon" os_type="SOLARIS" />
</type>
```

c. Save the changes you make to the **templates.xml** file.

4. Perform a Hard Synchronization in System Health

In System Health, click the **Full Model Synchronization**  button to synchronize the status and model of the components. In the left pane, select the component to which the template was added. The template monitors and alerts are displayed in the Monitors table in the right pane.

Chapter 10

BSM Components

The System Health interface displays the following components:

- **Data Collectors.** Tools that collect availability and performance data. Data collectors include:
 - **BPMs.** Business Process Monitors, which run scripts simulating user actions and collect resulting data.
 - **RUM Engines.** Real User Monitors, which monitor actual user traffic and activity and collect resulting data.
 - **SiteScopes.** Monitor performance of IT infrastructure.
- **Discovery Probes.** Discovers the components of your IT infrastructure, creates CIs for them, and sends the data to the RTSM.
- **BSM Servers.** System Health displays the following types of BSM servers:
 - **Gateway Machines.** Servers on which BSM runs. Gateway Servers are responsible for:
 - Running BSM applications
 - Producing reports
 - Operating Platform Administration
 - Receiving data samples from the data collectors and distributing this data to the relevant BSM components
 - Supporting the bus
 - **Data Processing Machines.** Servers on which BSM runs. Data Processing Servers are responsible for:
 - Aggregating and partitioning data
 - Running the Business Logic Engines
 - Controlling the RTSM-related services

Server components are displayed on both the System Health Dashboard and the Inventory tab.

- **Load Balancing Machines.** Displayed only if deployed. Load balancers ensure that the data flow is evenly distributed among all BSM Gateway Servers so that no one particular server becomes overloaded.
- **Business Process Insight Machines.** Displayed only if deployed. A separate Business Process Insight (BPI) server (BPI Full) enables instance tracking and full BPI functionality. For details on the BPI machine, see the BSM User Guide in the BSM Help.
- **Databases.** Monitors the databases BSM is using.
- **Reverse Proxy Server.** Displayed only when System Health is configured in a secure

environment. For details on Reverse Proxies, see Using a Reverse Proxy in BSM in the BSM Hardening Guide.

Chapter 11

BSM Processes

The following table displays the processes that run on the BSM servers:

UI Element (A-Z)	Description
bpi_process_repository	Manages process definitions, which you create using the BPI Modeler, to monitor IT operational resources defined within the RTSM. Process name: BPI Process Repository
data_upgrade	Enables transferring of data from a previous version of BSM to a newer version. Process name: DataUpgrade
dbloader	Runs the component on the server which loads the data into the database. Process name: mercury_db_loader
domain_manager	Configures and monitors the bus process cluster in BSM machines. Process name: DomainManager
ldap	Runs queries and modifications for directory services. Process name: slapd
mercuryAS	Runs the JBoss application server, which provides access to all BSM applications. Process name: MercuryAS
message_broker	Enables the transference of a message from the formal messaging protocol of the sending machine to the formal messaging protocol of the receiving machine. Process name: MessageBroker
offline_engine	Runs the engine which controls the offline components of the BSM system. Process name: mercury_offline_engine
online_engine	Runs the engine which controls the online components of the BSM system. Process name: mercury_online_engine
pmanager	Runs the Partition Manager to create new or purge old partitions in the profile database, as necessary. Process name: mercury_pm

UI Element (A-Z)	Description
RTSM Process	Runs on the RTSM database that stores all the configuration item data. It does not always run, depending on your BSM deployment. Process name: RTSM
schedulergw	Enables scheduling tasks to be continually run on the Gateway Server. Process name: schedulergw
schedulerpr	Enables scheduling tasks to be continually run on the Data Processing. Process name: schedulerpr
WDE	Runs the Web Data Entry component of the Gateway Server, which receives data from all registered data collectors and publishes the data to all BSM engines. Process name: mercury_wde

Chapter 12

System Health Monitors

System Health uses SiteScope monitors to measure the performance of your components. Some of the monitors are monitors that are available in the SiteScope application and some are configured specifically for System Health.

Note: The documentation for SiteScope monitors is found in HP SiteScope Monitor Reference in the SiteScope Help. You can access the SiteScope Help from the directory where your System Health is installed (<System Health root directory>\sisdocs\doc_lib), or from a SiteScope server by selecting **Help > SiteScope Help**, and navigating to the Help page for the specific SiteScope monitor in the Monitor Reference guide.

Monitors are displayed in the **Monitors** table, located in the right pane of the System Health Dashboard. For details on the Monitors table, see "[Monitors Table](#)" on page 98.

This section describes the following groups of monitors:

- "[Machine Hardware Monitors](#)" below
- "[Database Monitors](#)" on page 36
- "[BSM Server Monitors](#)" on page 36
- "[Gateway Server Monitors](#)" on page 46
- "[Data Processing Server Monitors](#)" on page 65
- "[BPI Server Monitors](#)" on page 83
- "[Data Collectors](#)" on page 86

Machine Hardware Monitors

The following group of monitors monitor the hardware and databases (where indicated) on which the BSM applications run:

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Ping	<p>Checks the availability of the host using the network. Runs on BSM and Database servers. If BSM includes a proxy server or load balancer, this monitor runs on the mediator or load balancer.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Round Trip Time • Loss Percentage <p>Threshold Configured In: SiteScope (Ping monitor)</p>	<p>Effect on BSM: This monitor is in error when the host is inaccessible from the System Health server</p> <p>Troubleshooting: Check to see if:</p> <ul style="list-style-type: none"> • the host is down • the network is down • network security prevents System Health from accessing the host (which means no monitoring can be done on this server)
Server Virtual Memory	<p>Tracks how much virtual memory is currently in use on the server. Runs on BSM and Database servers.</p> <p>Threshold Configured In: SiteScope (Memory monitor)</p>	<p>Troubleshooting: If a server is running low on virtual memory, you can:</p> <ul style="list-style-type: none"> • Restart the server (this may provide a temporary fix) • Upgrade the server's memory (might be required for a long term solution)
Server CPU	<p>Tracks how much CPU is currently in use on the server. Runs on BSM and Database servers.</p> <p>Threshold Configured in: SiteScope (CPU monitor)</p>	<p>Troubleshooting: For high CPU usage:</p> <ul style="list-style-type: none"> • check which processes are running on the server • see if any of the processes can be removed or moved to another server
Server Disk Space	<p>Tracks how much disk space is currently in use on the hard disk drive where BSM is installed. Runs only on the server.</p> <p>Threshold Configured In: SiteScope (Disk Space monitor)</p>	<p>Troubleshooting: To free up disk space, you can:</p> <ul style="list-style-type: none"> • delete unnecessary files on the server • remove installed programs that require a lot of space • upgrade the server disk to a larger hard drive

Database Monitors

The following monitors run on the database servers. There can be multiple databases running on a server, and there is a monitor instance for each database:

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
DB Statistics	Verifies that database statistics have been collected for all tables created more than 24 hours ago.	Effect on BSM: Poor database engine performance, incorrect execution plans used by the database optimizer, or a connection pool timeout ending the transaction. Troubleshooting: Run statistics collection against BSM databases on a regular basis by creating a job, or have the product database administrator run it manually.
Database Connectivity	Verifies the connection between BSM and the database.	Effect on BSM: Failure in BSM to start up or run, no persistency data in the database, or the reports fail to run or contain no data. Troubleshooting: <ul style="list-style-type: none">• On the database side, check that the instance is up, and verify there are no database server errors such as running out of storage, database corruption, or running out of connections.• On the BSM side, check the network between the BSM client and the database server for issues such as network delays, firewall problems, IP/DNS resolution, packet loss, and so forth.

BSM Server Monitors

The following monitors run on the Gateway Server, the Data Processing server, or, if not otherwise indicated, both:

- "General Monitors" on next page
- "Process Monitors" on page 38
- "Bus" on page 41
- "UCMDB/RTSM" on page 42
- "Modeling/Viewing System" on page 45

General Monitors

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Out of Memory in Log	<p>Searches for unexpected behavior due to the server being out of memory, displayed as instances of <code>Out of Memory</code> in <code>topaz_all.ejb.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Some data might not be available in Service Health and in reports, and some of the applications might not work.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check for other monitors in error when trying to resolve out of memory issues • Verify the BSM deployment and expected load using the BSM Capacity calculator • Based on information found in the other monitors, you might need to restart the Gateway Server or upgrade your hardware
Nanny Manager Process	<p>Monitors whether BSM server processes are up and running.</p> <p>Threshold Configured In: SiteScope (Service monitor)</p>	<p>Effect on BSM: If a process is down, the Nanny Manager Process monitor tries to start it automatically.</p> <p>Troubleshooting: Contact HP Software Support if the monitor cannot start the process.</p>
Log Level for <configuration directory>	<p>Checks if any of the log files in the specified directory are configured to debug log level (i.e., searches for the string <code>loglevel=debug</code>).</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application.</p> <p>Troubleshooting: Change the configuration back to loglevel=ERROR.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
BSM Application Server Response	Checks that the BSM Application server is responsive. Information goes straight to the application server and does not travel by way of the web server. This monitor runs only on the Gateway Server. Threshold Configured In: SiteScope (URL monitor)	Effect on BSM: BSM is not accessible if the application server is not responsive. Responsiveness issues with the BSM Application server are usually a symptom of other problems. Troubleshooting: Check for monitors in error when trying to resolve application server response issues.
Logged In Users	Displays the percentage and number of total users logged into BSM.	Effect on BSM: This can result in responsiveness issues in a number of different applications. Troubleshooting: Make sure that the total number of logged in users does not exceed the recommended amount of users.
Web Server Status	Displays the current status of the Web server indicating its availability.	Effect on BSM: BSM is unable to accept samples from the data collector or communicate with other servers. Applications may be unavailable. Troubleshooting: <ul style="list-style-type: none"> • Try to find and resolve the problem on the Web server • Restart the Web server

Process Monitors

For descriptions of the processes, see "[Process Manager Dialog Box](#)" on page 115.

The two JVM monitors listed in the table below monitor only the Java processes, which include:

- analytics_loader
- DataUpgrade
- mercury_db_loader
- mercury_offline_engine
- mercury_online_engine
- mercury_wde
- MercuryAS

- MessageBroker
- pi_engine
- pmanager
- RTSM

The <process name> monitor monitors both the Java and non-Java processes. For details on the processes, see "BSM Processes " on page 32.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
<p><Process Name> JVM Statistics Memory Monitors</p>	<p>Monitors the memory measurements for a Java process.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Heap Free. Displays the amount of Heap Free space in JVM. • Permanent Heap Free Memory. Displays the amount of Permanent Heap Free space in JVM. 	<p>Effect on BSM: Some data might not be available in Service Health and in reports.</p> <p>Troubleshooting: Verify the BSMdeployment type, memory (RAM), and expected load (reported samples per second) using the BSM capacity calculator. This type of exception usually occurs if BSM is installed on hardware that has insufficient resources for the current load.</p>
<p><Process Name> JVM Statistics Threads Monitors</p>	<p>Monitors the threads measurements for a Java process. The process name is in the name of the monitor.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Current Thread Count. Current number of threads used by the process. • Dead Locked Threads. Number of deadlocked threads in the process. 	<p>Effect on BSM: Some data might not be available in Service Health and in reports.</p> <p>Troubleshooting: Verify the BSMdeployment type, memory (RAM), and expected load (reported samples per second) using the BSM capacity calculator. This type of exception usually occurs if BSM is installed on hardware that has insufficient resources for the current load.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
<process name>	<p>Verifies whether the <process name> process is running, its CPU, and virtual memory utilization.</p> <p>Uses the SiteScope Service monitor.</p>	<p>Effect on BSM: The effect on BSM depends on which process is running.</p> <p>Troubleshooting: Verify the BSM deployment type, memory (RAM), and expected load (reported samples per second) using the BSM capacity calculator. This type of exception usually occurs if BSM is installed on hardware that has insufficient resources for the current load.</p>
Baseline Engine Monitor	<p>Monitors the baseline engine to indicate if baseline data is available and accurate.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Delayed Tasks. Indicates whether there are baseline calculation tasks idle for 4 days or longer. • Failed Tasks. Indicates whether there are baseline calculation tasks that have failed. 	<p>Effect on BSM: Baseline data may be inaccurate (out of date) or not available at all; the consumers of baseline data (for example SHA) are therefore receiving inaccurate or insufficient data.</p> <p>Troubleshooting: Check for error messages in the baseline engine logs (log\baseline_engine) and try to resolve the problem from the information provided.</p>

Bus

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Subscriber Group	<p>Monitors the number and size of messages waiting for regular subscribers.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the number or size of messages waiting for processing is high, the bus may suffer from low performance. This may also cause out of memory exceptions.</p> <p>Troubleshooting: Contact your system administrator if the message threshold is met.</p>
Broker Group	<p>Monitors the overall measurements of the broker (bytes and number of messages).</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the number or size of messages waiting for processing is high, the bus may suffer from low performance. This may also cause out of memory exceptions.</p> <p>Troubleshooting: Contact your system administrator if the message threshold is met.</p>
Durable Subscriber Group	<p>Monitors the number and size of messages waiting for durable subscribers in the broker.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the number of messages waiting for durable subscribers is high, this affects the size and performance of the local database. The bus may suffer from low performance and may get stuck when the database files grow by more than a few gigabytes.</p> <p>Troubleshooting: Contact your system administrator if the message threshold is met.</p>

UCMDB/RTSM

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Model Objects Quota and Count	<p>Compares current CI count with the CI quota.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the quota is exceeded, no more CIs and links can be added.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Increase the CI quota • Delete unnecessary CIs • Refine the discovery process so it discovers less data
TQL Quota and Count	<p>Compares current TQL count with the TQL quota.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the quota is exceeded, no new active TQLs can be added.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Increase the quota • Delete unnecessary TQLs
Oversized TQLs	<p>Displays TQLs that are larger than the size permitted by the configured threshold.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the TQL result is larger than the threshold, the TQL is deactivated.</p> <p>Troubleshooting: Change the TQL definition.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Availability and Performance	<p>Checks system availability and response time.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Run AdHoc TQL. Checks how long the Run AdHoc TQL operation takes. • Load ClassModel. Checks how long the Load ClassModel operation takes. <p>If response time exceeds 2 seconds, monitor status changes to Warning. If response time exceeds 15 seconds, monitor status changes to Error.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: System availability issues and slow response time affect BSM performance.</p> <p>Troubleshooting: Check the log files, and try to resolve the problem from the information provided.</p>
DB - Could not reset timeout because the object is not monitored	<p>Searches for <code>Couldn't reset timeout because the object isn't monitored</code> in cmdb.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Troubleshooting: If this error is registered in the log file, there are problems in the database. Contact your database administrator for assistance.</p>
DB - Failed to borrow object from pool	<p>Searches for <code>Failed to borrow object from pool</code> in cmdb.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Troubleshooting: If this error is registered in the log file, there are problems in the database. Contact your database administrator for assistance.</p>
DB - Failed to create a connection	<p>Searches for <code>Failed to create a connection for</code> in cmdb.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Troubleshooting: If this error is registered in the log file, there are problems in the database. Contact your database administrator for assistance.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
<p>Notification - Cannot Publish</p>	<p>Searches for <code>cannot publish</code> in <code>cmdb.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>c There are no notifications about active TQLs or model updates, and BSM applications and Service Health are not notified about changes in topology (such as added hosts or business transactions).</p> <p>Troubleshooting: Check the bus log file to determine what caused the problem.</p>
<p>Notification - Cannot get notifications from the BUS</p>	<p>Searches for <code>error occurred during receive of JMS message</code> in <code>cmdb.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM if this error is registered in the log file: There are no notifications about active TQLs or model updates, and BSM applications and Service Health are not notified about changes in topology (such as added hosts or business transactions).</p> <p>Troubleshooting: Check the bus log file to determine what caused the problem.</p>
<p>Performance - Request Timeout</p>	<p>Searches for <code>Request Timeout</code> in <code>cmdb.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM if this error is registered in the log file: This error may indicate a general problem, or it may have been caused by a temporary issue such as running a large number of TQLs.</p> <p>Troubleshooting: Check the log file to determine what caused the problem.</p>

Modeling/Viewing System

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
All Symbols Quota and Count	<p>Compares current symbols count with symbols quota. You can create a view on top of a TQL. Each element in the view tree is called a symbol. The quota is determined in the settings.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the quota is exceeded, no new active views can be created.</p> <p>Troubleshooting: Deactivate unnecessary views or increase the quota.</p>
Views Quota and Count	<p>Compares current views count with views quota.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the quota is exceeded, no new views can be created.</p> <p>Troubleshooting: Deactivate unnecessary views or increase the quota.</p>
Oversized Views	<p>Checks for views that are larger than the threshold configured in Infrastructure Settings.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: Oversized views are deactivated.</p> <p>Troubleshooting: Change the view definition.</p>

Gateway Server Monitors

The following monitors run on the Gateway Server:

- "Data In/Web Data Entry" below
- "Data In/Loader" on page 48
- "Data In/Operations Management Gateway" on page 50
- "Data In/Analytics Loader" on page 53
- "Service Health Application" on page 58
- "Operations Management Application" on page 61
- "Portal Application" on page 64
- "Verticals Application" on page 64
- "System Availability Management Application" on page 65

Data In/Web Data Entry

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Web Data Entry Status	<p>Determines the overall status of the Web Data Entry component.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Bus Status. Determines Web Data Entry connection to the bus. • Gateway Status. Determines Gateway availability. • Failures to Publish. Indicates number of samples which failed to publish. • Output EPS. Determines the number of published samples per second. 	<p>Effect on BSM: Samples arriving to Web Data Entry are discarded or are not published to the bus. This means there is no sample data in BSM.</p> <ul style="list-style-type: none"> • Problems with the bus result in the Web Data Entry component rejecting samples arriving from data collectors • Samples are rejected if the Gateway Server is unavailable • Events per second (EPS) that exceed the bus capability result in locking Web Data Entry from receiving samples <p>Troubleshooting: Check the following logs in the <HPBSM root directory>\log\mercury_wde\ directory:</p> <ul style="list-style-type: none"> • wde.log • wdeIgnoredSamples.log • wdeStatistics.log • wde.all.log

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Baseline Cache Monitor	<p>Monitors the cache of the Baseline Engine, which determines whether or not baseline enrichment is available.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Late Arrivals. Indicates if any samples arrived late; samples that arrive more than 1 hour late might not be enriched with baseline data. • Cache Time-frame. Indicates if the cache contains enough historical data to enable baseline enrichment.. • Last Refresh Status. Indicates if the most recent baseline cache refresh was successful. 	<p>Effect on BSM: All or some of the incoming samples are not enriched with baseline data; the consumers of baseline data (for example SHA) are therefore receiving inaccurate or insufficient data.</p> <p>Troubleshooting: Check for error messages in the log files in the <HPBSM root directory>\log\mercury_wde\ directory.</p>
Out of Memory Exception in Log	<p>Searches for unexpected behavior, displayed as instances of the string <code>OutOfMemoryExceptionInLog</code> in the wde.log file. This is caused by samples or buffers arriving to WDE with too much data.</p> <p>Uses the SiteScope Log File monitor.</p>	<p>Effect on BSM: Some data might not be available in the Service Health and in reports.</p> <p>Troubleshooting: Verify the BSM deployment type, memory (RAM), and expected load (reported samples per second) using the BSM Capacity Calculator. This type of exception usually occurs if BSM is installed on hardware that has insufficient resources for the current load.</p>
Class Not Found Exception in Log	<p>Searches for unexpected behavior, displayed as instances of the string <code>ClassNotFoundException</code> in the wde.log file. This might be caused by a bug in the system or the incorrect probe version being connected to the BSM server.</p> <p>Uses the SiteScope Log File monitor.</p>	<p>Effect on BSM: Some data might not be available in the Service Health and in reports.</p> <p>Troubleshooting: Make sure that the correct version of the probe is connected to the BSM server. If the correct probe version is being used, contact HP Software Support.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Web Data Entry Availability	<p>Determines if Web Data Entry is up and running.</p> <p>Uses the SiteScope Log File monitor.</p>	<p>Effect on BSM: No data is arriving to BSM.</p> <p>Troubleshooting: Check the following logs in the <HPBSM root directory>\log\mercury_wdel directory:</p> <ul style="list-style-type: none"> • wde.log • wde.all.log

Data In/Loader

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Main Flow	<p>Measures flow of data in component.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Number of Samples in Queues. Used to control memory usage of the loader. • Bus Connection Status. Checks loader connectivity to the bus. 	<p>Effect on BSM: No data in the BSM database (the loader is unable to collect samples from the bus).</p> <ul style="list-style-type: none"> • Problems with the bus indicate no persistency data in the database, and the reports show no data • Too many samples in queues indicate a backlog, or unavailability of the profile database <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the status of the bus • Contact your database/network administrator for assistance on connectivity to the profile database and database load
EPS ratio in main flow	<p>Enables you to evaluate the ratio of the average insert rate to the loader with the average data insert rate to the database from the loader.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings > Foundations > Loader.</p>	<p>Effect on BSM: A high EPS value may cause a delay in the data being written to the database, and increase the disk space being used by recovery persistency data files.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Connection to DB	Checks connection to the database from loader process.	<p>Effect on BSM: Reports are displayed without data. This indicates that no data persisted in the database.</p> <p>Troubleshooting: Check dbloader logs for the connectivity error, and contact your database administrator for assistance.</p>
Average Insert Rate to DB (Recovery Flow)	<p>Monitors the average insert rate to the database from the recovery persistency folder. A long insert rate indicates database performance problems.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Troubleshooting: Contact your database administrator for assistance.</p>
Out of Memory Exception in Log	<p>Searches for the string <code>Out of Memory</code> in Loader.log.</p> <p>This is caused by samples or buffers arriving to the loader with too much data.</p> <p>Uses the SiteScope Log File monitor.</p>	<p>Effect on BSM: Some data might not be available in Service Health and reports.</p> <p>Troubleshooting: Verify the BSM deployment type, memory (RAM), and expected load (reported samples per second) using the BSM Capacity Calculator. This type of exception usually occurs if BSM is installed on hardware that has insufficient resources for the current load.</p>
Class Not Found Exception in Log	<p>Searches for errors in Loader.log. This might be caused by a bug in the system or the incorrect probe version being connected to the BSM server.</p> <p>Uses the SiteScope Log File monitor.</p>	<p>Effect on BSM: Some data might not be available in Service Health and reports.</p> <p>Troubleshooting: Make sure that the correct version of the probe is connected to the BSM server. If the correct probe version is being used, contact HP Software Support.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Max Files in Queue in Recovery Persister	<p>Displays the number of files in the longest queue in the recovery persister directory.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: No data is displayed in reports if too many files are in the recovery persistency queue.</p> <p>This can be caused by:</p> <ul style="list-style-type: none"> • A high number of EPS • Slow database insert rate • Limited database availability <p>Troubleshooting: Contact your database/network administrator for assistance on connectivity to the profile database and database load.</p>

Data In/Operations Management Gateway

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Common	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in opr-common.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Operations Management communication with data sources, for example, receiving and synchronizing events.</p> <p>Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.</p>
OPR Common.properties	<p>Scans the OPR Common.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application.</p> <p>Troubleshooting: Change the configuration back to loglevel=ERROR.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Event sync adapter.properties	Scans the OPR Event sync adapter.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .
OPR Flowtrace.Common	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-flowtrace-common.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Flow of Operations Management events through the gateway adapter might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR Gateway	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-common.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Forwarding, receiving and synchronizing events with thrid-party applications might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR Gateway Flowtrace	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-common.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Flow of events between Operations Management and hrid-party applications might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Gateway.properties	<p>Scans the OPR Gateway.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application.</p> <p>Troubleshooting: Change the configuration back to loglevel=ERROR.</p>
OPR SVCDiscServer	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in opr-common.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Dynamic topology synchronization might not function correctly.</p> <p>Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.</p>
OPR SVCDiscServer Flowtrace	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in opr-common.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Flow of dynamic topology information might not function correctly.</p> <p>Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.</p>
OPR SVCDiscServer.properties	<p>Scans the OPR SVCDiscServer.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application.</p> <p>Troubleshooting: Change the configuration back to loglevel=ERROR.</p>

Data In/Analytics Loader

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Main Flow	Measures flow of data in component. Included Measurements: <ul style="list-style-type: none"> • Number of Samples in Queues. Used to control memory usage of the loader. • Bus Connection Status. Checks loader connectivity to the bus. 	Effect on BSM: No data in the BSM database (the loader is unable to collect samples from the bus). <ul style="list-style-type: none"> • Problems with the bus indicate no persistency data in the database, and the reports show no data • Too many samples in queues indicate a backlog, or unavailability of the profile database Troubleshooting: <ul style="list-style-type: none"> • Check the status of the bus • Contact your database/network administrator for assistance on connectivity to the profile database and database load

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Baseline Cache Monitor	<p>Monitors the cache of the Baseline Engine, which determines whether or not baseline enrichment is available.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Late Arrivals. Indicates if any samples arrived late; samples that arrive more than 1 hour late might not be enriched with baseline data. • Cache Time-frame. Indicates if the cache contains enough historical data to enable baseline enrichment.. • Last Refresh Status. Indicates if the most recent baseline cache refresh was successful. 	<p>Effect on BSM: All or some of the incoming samples are not enriched with baseline data; the consumers of baseline data (for example SHA) are therefore receiving inaccurate or insufficient data.</p> <p>Troubleshooting: Check for error messages in the Analytics Loader log files. All or some of the incoming samples are not enriched with baseline data; the consumers of baseline data (for example SHA) are therefore receiving inaccurate or insufficient data.</p>
EPS ratio in main flow	<p>Enables you to evaluate the ratio of the average insert rate to the loader with the average data insert rate to the database from the loader.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings > Foundations > Loader.</p>	<p>Effect on BSM: A high EPS value may cause a delay in the data being written to the database, and increase the disk space being used by recovery persistency data files.</p>
Connection to DB	<p>Checks connection to the database from loader process.</p>	<p>Effect on BSM: Reports are displayed without data. This indicates that no data persisted in the database.</p> <p>Troubleshooting: Check dbloader logs for the connectivity error, and contact your database administrator for assistance.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Average Insert Rate to DB (Recovery Flow)	<p>Monitors the average insert rate to the database from the recovery persistency folder. A long insert rate indicates database performance problems.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Troubleshooting: Contact your database administrator for assistance.</p>
Out of Memory Exception in Log	<p>Searches for the string Out of Memory in Loader.log.</p> <p>This is caused by samples or buffers arriving to the loader with too much data.</p>	<p>Effect on BSM: Some data might not be available in Service Health and reports.</p> <p>Troubleshooting: Verify the BSM deployment type, memory (RAM), and expected load (reported samples per second) using the BSM Capacity Calculator. This type of exception usually occurs if BSM is installed on hardware that has insufficient resources for the current load.</p>
Class Not Found Exception in Log	<p>Searches for errors in Loader.log. This might be caused by a bug in the system or the incorrect probe version being connected to the BSM server.</p>	<p>Effect on BSM: Some data might not be available in Service Health and reports.</p> <p>Troubleshooting: Make sure that the correct version of the probe is connected to the BSM server. If the correct probe version is being used, contact HP Software Support.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Max Files in Queue in Recovery Persister	<p>Displays the number of files in the longest queue in the recovery persister directory.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: No data is displayed in reports if too many files are in the recovery persistency queue.</p> <p>This can be caused by:</p> <ul style="list-style-type: none"> • A high number of EPS Slow database insert rate • Limited database availability <p>Troubleshooting: Contact your database/network administrator for assistance on connectivity to the profile database and database load.</p>
Analytics Loader log monitor	Searches for unexpected behavior, displayed as instances of error.	<p>Effect on BSM: Process may not function correctly.</p> <p>Troubleshooting: Check the log file and try to resolve the problem from the error message provided.</p>
Analytics Loader General log monitor	Searches for unexpected behavior, displayed as instances of error.	<p>Effect on BSM: Process may not function correctly.</p> <p>Troubleshooting: Check the log file and try to resolve the problem from the error message provided.</p>
Loader log monitor	Searches for unexpected behavior, displayed as instances of error.	<p>Effect on BSM: Process may not function correctly.</p> <p>Troubleshooting: Check the log file and try to resolve the problem from the error message provided.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Analytics Loader Statistics log monitor	Monitors the statistics for the analytics_loader process.	<p>Effect on BSM: Some data might not be available in SHA.</p> <p>Troubleshooting: Verify the BSM deployment type, memory (RAM), and expected load (reported samples per second) using the BSM capacity calculator. This type of exception usually occurs if BSM is installed on hardware that has insufficient resources for the current load.</p>
Analytics CIs	Shows the amount of Analytics CIs	<p>Effect on BSM: Some data may not be inserted into the Analytics DB.</p> <p>Troubleshooting: Contact HP Software Support in case of error (99% occupied).</p>
SHA Plugin	Shows the amount of traced metrics.	For information only.

Service Health Application

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Service Health Admin	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bam.admin.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Service Health Administration may not function correctly. This could be caused by problems in Service Health Administration backend (for example, KPI administration, Geographical Map administration, RTSMService Health administration actions), if some administration configuration action failed or could not be performed.
Service Health Application	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bam.app.log</code> . The log reports problems in the Service Health application user interface. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: This may result in tabs not being available, or system logout. Troubleshooting: Try to resolve the problem from the error messages reported in the Service Health application.
Service Health Application Front-end	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bam.app.frontend.log</code> . The log reports problems in the Service Health application user interface. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: This may result in tabs not being available, or system logout. Troubleshooting: Try to resolve the problem from the error messages reported in the Service Health application.
Service Health Front-end Actions	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bam.actionbase.log</code> . This log reports problems that impact the Service Health application. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: This may result in tabs not being available, or system logout. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Service Health BLE Plug-in	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bam.ble.plugin.log</code> . This indicates a problem in the Business Logic Engine online loading. Threshold Configured In: SiteScope (Log File monitor)	Troubleshooting: Check Service Health for visual errors. If you find any, contact HP Software Support.
Service Health Rules	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bam.app.rules.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Some KPIs may not be calculated correctly. This could be caused by problems in Service Health Administration backend (for example, KPI administration, Geographical Map administration, RTSMService Health administration actions), if some administration configuration action failed or could not be performed.
Service Health Business Reports	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bzd.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Problems generating Service Health reports, such as KPI Summary Report and KPI Trend Report. Troubleshooting: Check the reports for visual errors. If you find any, contact HP Software Support.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Service Health Open API	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bam.open.api.log</code> . Threshold Configured In: SiteScope (Log File monitor)	<p>Effect on BSM: Errors in this log can impact the Service Health Ticker application and mobile console (handheld devices) users.</p> <p>Troubleshooting: Verify that you are able to use the mobile console. No other action is required. An error might indicate a Ticker client trying to retrieve a view or CI that is no longer in the RTSM.</p>
Service Health Context Menu UI	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>context.menu.log</code> . Threshold Configured In: SiteScope (Log File monitor)	<p>Effect on BSM: Problems in Service Health repositories context menu or menu items (for example, when creating new menu items, editing context menus, or cloning context menus). Problems may also occur while creating or editing the context menu or menu items.</p> <p>Troubleshooting: Check for visual errors. If you find any, contact HP Software Support.</p>
Center High Availability	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>bac.ha.centers.log</code> . This log is for sticky sessions. Threshold Configured In: SiteScope (Log File monitor)	<p>Effect on BSM: BSM goes down.</p> <p>Troubleshooting: When one BSM goes down, you can use your data with another center. Check the log file, and try to resolve the problem from the information provided.</p>

Operations Management Application

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Admin	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-admin.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Operations Management Administration UI might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR Admin. properties	Scans the OPR Admin.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .
OPR Common	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-common.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Operations Management Application and Administrations UIs might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR Common. properties	Scans the OPR Common.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Console	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>opr-console.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Operations Management Application UI might not function correctly.</p> <p>Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.</p>
OPR Console.properties	<p>Scans the OPR Console.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application.</p> <p>Troubleshooting: Change the configuration back to loglevel=ERROR.</p>
OPR Ctxm Server.properties	<p>Scans the OPR Ctxm server.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application.</p> <p>Troubleshooting: Change the configuration back to loglevel=ERROR.</p>
OPR Event	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>opr-event-ws.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Operations Management Event Web service might not function correctly.</p> <p>Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Event Sync Adapter.properties	Scans the OPR Event Sync Adapter.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .
OPR Event.properties	Scans the OPR Event.properties file. Log level with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .
OPR Flowtrace	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-flowtrace-common.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Operations Management Application and Administrations UIs might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.

Portal Application

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
MyBSM	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>portal.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: This may impact on MyBSM, and indicates problems in configuration or failed administration operations.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check for any error messages in MyBSM, or for any missing portlets • Check if the errors in the log reappear, or if this was a one time occurrence • If you do not notice an impact, take no further action

Verticals Application

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Verticals Core	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>vertical.ejb.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Troubleshooting: Verify that Verticals is working correctly. Check the log file, and try to resolve the problem from the error messages provided.</p>
BSM for Siebel	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>siebel.ejb.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Troubleshooting: Verify that the Siebel solution is working correctly. Check the log file, and try to resolve the problem from the error messages provided.</p>
BSM for SAP	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>sap.ejb.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Troubleshooting: Verify that the SAP solution is working correctly. Check the log file, and try to resolve the problem from the error messages provided.</p>

System Availability Management Application

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
SAM Admin Fatal	Searches for unexpected behavior, displayed as instances of <code>FATAL</code> , in <code>sam-admin.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Troubleshooting: Contact HP Software Support.
SAM Admin SiteScope Profiles on DB	Searches for unexpected behavior, displayed as instances of <code>ERROR-Unable to get SiteScope profiles from DB</code> , in <code>sam-admin.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Unable to see the SiteScope profile in SAM Admin. This is probably a problem with the database or the profile ID. Troubleshooting: Check database connectivity.
SAM Admin SiteScope Profiles List	Searches for unexpected behavior, displayed as instances of <code>Failed to retrieve SiteScope profiles list</code> , in <code>sam-admin.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Unable to see the SiteScope profile in SAM Admin. This is probably a problem with the database or the profile ID. Troubleshooting: Check database connectivity.

Data Processing Server Monitors

The following component monitors run on the Data Processing Server:

- "Alerts Engine" on next page
- "Bus" on page 67
- "Database Services/Partition Manager" on page 68
- "Application Engines/Service Level Management (SLM) Engine" on page 70
- "Application Engines/Reports DB Aggregator" on page 72
- "Application Engines/CDM" on page 73
- "Modeling/RTSM" on page 73
- "Modeling/Viewing System" on page 76
- "KPI Enrichment Service Monitors" on page 77
- "Operations Management Monitors" on page 78
- "Rapid Anomaly Detection Engine Monitors" on page 82

Alerts Engine

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
BLE-BUS Connection Monitor	Monitors connection between the Business Logic Engine offline engine and the bus. This monitor is displayed as red if alerts are not sent.	Troubleshooting: Check for problems in other bus monitors and bus logs, and try to resolve the problem from the information provided.
queue/alert_engine_alert	<p>Measures the size of the queue between the Business Logic Engine and the Alerts Listener. This indicates the extent to which alert delivery is being delayed.</p> <p>Threshold Configured In: Infrastructure Settings (context alerts).</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	Troubleshooting: Check the log\alerts\alerts.ejb.log and the bus logs, and try to resolve the problem from the information provided.
queue/alert_engine_notification	<p>Measures the size of the queue between the Alerts Listener and the Notification Listener. This indicates the extent to which alert delivery is being delayed.</p> <p>Threshold Configured In: Infrastructure Settings (context alerts).</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the SMTP/SNMP configuration in the Infrastructure Settings • Check the log\alerts\alerts.ejb.log file and the bus logs, and try to resolve the problem from the information provided

Bus

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Subscriber Group	<p>Monitors subscriber related measurements.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the number or size of messages waiting for processing is high, the bus may suffer from low performance. This may also cause out of memory exceptions.</p> <p>Troubleshooting: Contact your system administrator if the message threshold is met.</p>
Broker Group	<p>Monitors the overall measurements of the broker (bytes and number of messages).</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the number or size of messages waiting for processing is high, the bus may suffer from low performance. This may also cause out of memory exceptions.</p> <p>Troubleshooting: Contact your system administrator if the message threshold is met.</p>
Durable Subscriber Group	<p>Monitors the number and size of messages waiting for durable subscribers in the broker.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the number of messages waiting for durable subscribers is high, this affects the size and performance of the local database. The bus may suffer from low performance and may be stuck when the database files grow by more than a few gigabytes.</p> <p>Troubleshooting: Contact your system administrator if the message threshold is met.</p>

Database Services/Partition Manager

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Partition Timely Creation	<p>Verifies that partitions are created according to partitioning policy.</p> <p>Note: This monitor is displayed as red for two hours after being connected.</p>	<p>Effect on BSM: Missing partition means that there is no persistency data in the system and the reports will be empty.</p> <p>Troubleshooting: Check the following log files on the BSM Data Processing Server machine for the cause of the problem:</p> <ul style="list-style-type: none"> • pmanager.log • pm_statistics.log
Oversized Partitions	<p>Finds partitions with more than the allotted number of rows specified in threshold settings.</p> <p>Threshold Configured In:</p> <p><HPBSM root directory>\conf\pmanager.properties, located on the Gateway Server.</p> <p>You can edit these settings in the properties file:</p> <ul style="list-style-type: none"> • MAX_ROWS_PER_PARTITION. The optimal number of rows per partition that Partition Manager strives to create. • WARN_ROWS_PER_PARTITION. The number of rows in the partition that generates a warning. • ERROR_ROWS_PER_PARTITION. The number of rows in the partition that generates an error. 	<p>Effect on BSM: Low performance in the reports caused by too many rows in data tables.</p> <p>Troubleshooting:</p> <ol style="list-style-type: none"> 1. Change or tune the Partition Manager policy according to the EPS default values in <HPBSM root directory>\conf\pmanager.properties file. 2. Restart the Partition Manager.

Application Engines/Service Health Engine

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
BLE Online Monitor	<p>Monitors Business Logic Engine online calculations.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Size of Model. Percentage of model size relative to the maximum capacity. • DB Availability. Verifies connection to the database. • Bus Connectivity. Verifies connection to the bus. • Calculation Duration. Average calculation time. <p>Threshold Configured In: Infrastructure Settings. To configure threshold, navigate to Admin > Platform > Setup and Maintenance > Infrastructure Settings. Choose Foundations, select Distributed Online Business Logic Engine - Supervisor and modify Maximum interval between two consecutive model calculations.</p>	<ul style="list-style-type: none"> • Size of Model. If the model is too large, it causes performance problems, out of memory exceptions, and Service Health might not be available. Decrease the model to a supported size. You can also switch to a larger deployment (in case you are not using it already). • DB Availability. If there is no connection to the database, persistency, repositories, and settings are affected. Ask your database/network administrator to check the database connection and/or any network issues. • Bus Connectivity. If there is no connection to the bus, Business Logic Engine does not receive samples and is unable to send samples to the bus. Check the bus log file for the cause of the problem. • Calculation Duration. Service Health responsiveness is affected if the calculation takes too long, since no requests from Service Health are processed during the calculation. Slow calculation might be caused by a large model, very high EPS, or if the log level is set to DEBUG.
Service Health BLE Plug-in	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>bam.ble.plugin.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Service Health cannot get status information from the online engine.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Service Health Rules	<p>Searches for unexpected behavior during execution of Service Health rules, displayed as instances of <code>ERROR</code>, in <code>bam.app.rules.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Indicator statuses might not be calculated, or might be calculated incorrectly. This is visible in the System Health application.</p> <p>Troubleshooting: Check for the root cause of the problem in the log file.</p>

Application Engines/Service Level Management (SLM) Engine

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
BLE Offline Tasks	<p>Indicates whether the time taken to perform the SLM tasks took longer than the time allotted in Infrastructure Settings.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Delayed Tasks. Shows whether there are delayed or failed SLM calculation tasks. • Cycle Time. Shows the percentage of the overall measurement period used to complete calculation of ongoing SLM tasks. <p>Threshold Configured In: Infrastructure Settings. To configure threshold, navigate to Admin > Platform > Setup and Maintenance > Infrastructure Settings. Choose Foundations, select Offline Aggregator and modify Monitor Threshold for SLM Aggregator.</p>	<p>Effect on BSM: No data in the database for reports for the latest SLM calculation. This can result in slow database performance, task failure, invalid SLM configuration, database access problems, and RTSM access problems.</p> <p>Troubleshooting: Check the following log files for the cause of the problem:</p> <ul style="list-style-type: none"> • NOAScheduler.log • bambino.log • BambinoStatistics.log • offline.engine.all.log

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
BLE Offline Monitor	<p>Monitors Business Logic Engine offline calculations.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • DB Availability. Verifies connection to the database. • Bus Connectivity. Verifies connection to the bus. • Persistency. Indicates the number of failures in saving persistency data. • Max Task Duration. Displays the duration of the longest task over the time configured in Infrastructure Settings, indicating whether or not the SLM calculation is too slow. • Data Stream Fuse Violations. Indicates performance problems due to the amount of data queried for SLM calculations. <p>Threshold Configured In: Infrastructure Settings. To configure threshold, navigate to Admin > Platform > Setup and Maintenance > Infrastructure Settings. Choose Foundations, select Offline Business Logic Engine and modify Maximum number of rows that the Data Streamer can count.</p>	<p>Effect on BSM: No data in the database for reports for the latest SLM calculation. This can result in no connection to the database, failure to connect to the bus, low calculations performance, and no memory space to calculate the SLA.</p> <p>Troubleshooting: For low calculations performance, check the BambinoStatistics.log for bottlenecks.</p> <p>For no memory space to calculate the SLA:</p> <ul style="list-style-type: none"> • Check bambino.log and BambinoStatistics.log. • Increase memory for processes in the mercury_offline_engine_vm_params.ini file and the fuse setting (BSM Admin Infrastructure settings UI). • Limit the number of SLAs that are calculated simultaneously in Admin > Platform > Setup and Maintenance > Infrastructure Settings.

Application Engines/Reports DB Aggregator

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
DB Aggregator	<p>Indicates whether the time to perform the DB Aggregation task took longer than the time configured in Infrastructure Settings.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Delayed Tasks. Displays whether delayed or failed tasks are found. • Cycle Time. Shows the percentage of the overall measurement period used to complete aggregation calculations. <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: No data in the database for reports using aggregation data. This can result in slow database performance, task failure, invalid SLM configuration, database access problems, and RTSM access problems.</p> <p>Troubleshooting: Check the following log files for the cause of the problem:</p> <ul style="list-style-type: none"> • NOAScheduler.log • bambino.log • NOAStatistics.log • offline.engine.all.log
Validator	<p>Responsible for the creation of DB Aggregation and SLM tasks.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Validation Time. Checks whether validation ran within the time frame defined in the Offline Aggregation settings. <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: No data in the database for reports using aggregation data.</p> <p>Troubleshooting: Check the following log files for the cause of the problem:</p> <ul style="list-style-type: none"> • NOAValidator.log • offline.engine.all.log

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Scheduler	<p>Schedules when the DB Aggregator and SLM tasks are performed.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Threads Alive. Checks for active threads in the offline aggregation scheduler. 	<p>Effect on BSM: No data in the database for reports using aggregation data. This can result in database and RTSM access problems.</p> <p>Troubleshooting: Check the following log files for the cause of the problem:</p> <ul style="list-style-type: none"> • NOAScheduler.log • bambino.log • NOAStatistics.log • offline.engine.all.log

Application Engines/CDM

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Adapters Framework	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>bam.shared.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Not relevant for BSM 9.20, since all data collectors send their topology directly to RTSM (which previously was done by adapters).</p>

Modeling/RTSM

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Model Objects Quota and Count	<p>Compares current CI count with the CI quota.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the quota is exceeded, no more CIs and links can be added.</p> <p>Troubleshooting: Increase the quota, delete unnecessary CIs, or refine the discovery process so it discovers less data.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
TQL Quota and Count	<p>Compares current TQL count with the TQL quota.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the quota is exceeded, no new active TQLs can be added.</p> <p>Troubleshooting: Increase the quota or delete unnecessary TQLs.</p>
Oversized TQLs	<p>Displays TQLs that are larger than the size permitted by the configured threshold.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: If the TQL result is larger than the threshold, the TQL is deactivated.</p> <p>Troubleshooting: Change the TQL definition.</p>
Availability and Performance	<p>Checks system availability and response time. If response time exceeds 2 seconds, monitor status changes to Warning. If response time exceeds 15 seconds, monitor status changes to Error.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Run AdHoc TQL. Checks how long the Run AdHoc TQL operation takes. • Load ClassModel. Checks how long the Load ClassModel operation takes. <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: System availability issues and slow response time affect BSM performance.</p> <p>Troubleshooting: Check the log files for the cause of the problem.</p>
DB - Could not reset timeout because the object is not monitored	<p>Searches for <code>Couldn't reset timeout because the object isn't monitored in cmdb.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Troubleshooting: If this error is registered in the log file, it means there are problems in the database. Contact your database administrator for assistance.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
DB - Failed to borrow object from pool	Searches for <code>Failed to borrow object from pool</code> in cmdb.log . Threshold Configured In: SiteScope (Log File monitor)	Troubleshooting: If this error is registered in the log file, it means there are problems in the database. Contact your database administrator for assistance.
DB - Failed to create a connection	Searches for <code>Failed to create a connection for</code> in cmdb.log . Threshold Configured In: SiteScope (Log File monitor)	Troubleshooting: If this error is registered in the log file, it means there are problems in the database. Contact your database administrator for assistance.
Notification - Cannot Publish	Searches for <code>cannot publish</code> in cmdb.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM if this error is registered in the log file: There are no notifications about active TQLs or model updates, and BSM applications and Service Health are not notified about changes in topology (such as added hosts or business transactions). Troubleshooting: Check the bus log for problems.
Notification - Cannot get notifications from the BUS	Searches for <code>error occurred during receive of JMS message</code> in cmdb.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM if this error is registered in the log file: There are no notifications about active TQLs or model updates, and BSM applications and Service Health are not notified about changes in topology (such as added hosts or business transactions). Troubleshooting: Check the bus log for the cause of the problem.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Performance - Request Timeout	Searches for Request Timeout in <code>cmdb.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM if this error is registered in the log file: This error may indicate a general problem, or it may have been caused by a temporary issue such as running a large number of TQLs. Troubleshooting: Check the log file for the cause of the problem.

Modeling/Viewing System

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
All Symbols Quota and Count	Compares current symbols count with symbols quota. You can create a view on top of a TQL. Each element in the view tree is called a symbol. The quota is determined in the settings. Threshold Configured In: Infrastructure Settings. To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.	Effect on BSM: If the quota is exceeded, no new active views can be created. Troubleshooting: Deactivate views or increase the quota.
Views Quota and Count	Compares current views count with views quota. Threshold Configured In: Infrastructure Settings. To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.	Effect on BSM: If the quota is exceeded, no new views can be created. Troubleshooting: Deactivate views or increase the quota.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Oversized Views	<p>Checks for views that are larger than the threshold configured in Infrastructure Settings.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: Oversized views are deactivated.</p> <p>Troubleshooting: Change the view definition.</p>

KPI Enrichment Service Monitors

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
KES Availability	<p>Monitors that Assignment Mechanism is up and running for each customer. For details, see the section on Assignments in the BSM Application Administration Guide.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • KES Availability per customer <p>The monitor measurements list is dynamic and determined according to the number of customers running Assignment Mechanism service on this Data Processing Server.</p> <p>For example: If a Data Processing Server is running KES service for customers 1-3, the monitor will be deployed with three measurements:</p> <ul style="list-style-type: none"> • KES Availability for customer 1 • KES Availability for customer 2 • KES Availability for customer 3 	<p>Troubleshooting: Verify that KES service is running. Check the following log files in <HPBSM root directory>\log\EJBContainer for the cause of the problem:</p> <ul style="list-style-type: none"> • kes.server.log • kes.manager.log

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
KES Content	<p>Monitors that Assignment Mechanism content is valid: checks that there are no invalid SLM/Service Health KPI/HI assignments for each customer running Assignment Mechanism.</p> <p>Included Measurements</p> <ul style="list-style-type: none"> • SLM KES content per customer • DASHBOARD KES content per customer <p>The monitor measurements list is dynamic and determined according to the number of customers running KES service on this data processing server.</p> <p>For example: In a data processing server running KES service for customers 1-2, the monitor will be deployed with four measurements:</p> <ul style="list-style-type: none"> • SLM KES content for customer 1 • DASHBOARD KES content for customer 1 • SLM KES content for customer 2 • DASHBOARD KES content for customer 2 	<p>If there is an invalid assignment in the SLM or Service Health application for a customer, the KPI/HI assignment will be ignored by the assignment mechanism and KPIs/HIs may not be assigned for CIs. (In case of overriding invalid assignment, the overridden assignment HIs/KPIs will be assigned to CIs instead.)</p> <p>Locate the assignment and fix it according to validation error in the UI.</p>

Operations Management Monitors

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Backend	<p>Searches for unexpected behavior, displayed as instances of <code>ERROR</code>, in <code>opr-backend.log</code>.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: Operations Management event processing (such as Topology-base event correlation, ETI resolution, CI resolution) might not function correctly.</p> <p>Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.</p>

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Backend Boot	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>opr-backend-boot.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Startup of the Operations Management OPR-Backend process might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR Backend Shutdown	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>opr-backend_shutdown.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Shutdown of the Operations Management OPR-Backend process might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR Backend.properties	Scans the OPR Backend.properties file. Loglevel with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to <code>loglevel=ERROR</code> .
OPR CiResolver	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>opr-ciresolver.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Operations Management CI Resolver might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR Common	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in <code>opr-common.log</code> . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Operations Management event processing, RTSM connections and database transactions might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Common.properties	Scans the OPR Common.properties file. Loglevel with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .
OPR EPI Server	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-epi-server.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Operations Management Event Processing Interface might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR EPI Server.properties	Scans the OPR Server.properties file. Loglevel with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .
OPR Event Sync Adapter	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-event-sync-adapter.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Operations Management communication between the Data Processing Server and the Gateway Servers might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
OPR Event Sync Adapter.properties	Scans the OPR Event Sync Adapter.properties file. Loglevel with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .
OPR Flowtrace	Searches for unexpected behavior, displayed as instances of <code>ERROR</code> , in opr-flowtrace-common.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Flow of Operations Management events through the gateway adapter might not function correctly. Troubleshooting: Check the log file, and try to resolve the problem from the error messages provided.
OPR Topologysync.properties	Scans the OPR Topologysync.properties file. Loglevel with values of 'Debug', 'All' or 'Off' are considered inappropriate for production environments and therefor will report error. Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Debug log level affects the amount of output in the log which consumes more disk space and slows down the application. Troubleshooting: Change the configuration back to loglevel=ERROR .

Rapid Anomaly Detection Engine Monitors

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Service Health Analyzer Engine	Monitors SHA Engine. Included Measurements: <ul style="list-style-type: none"> • Cycle Time. Shows the percentage of the overall measurement period used to complete calculation. The default threshold is 66.7%. • Delayed Tasks. Shows if there are delayed tasks. • Worst Task Performance • Worst Method Performance • Open Anomalies (for information only) • Traced Metrics. Shows amount of traced metrics (for information only) 	Effect on BSM: Stronger server is needed.
SHA Engine log monitor	Searches for unexpected behavior, displayed as instances of error.	Effect on BSM: Process may not function correctly. Troubleshooting: Check the log file and try to resolve the problem from the error message provided.
SHA Engine General log monitor	Searches for unexpected behavior, displayed as instances of error.	Effect on BSM: Process may not function correctly. Troubleshooting: Check the log file and try to resolve the problem from the error message provided.
SHA Engine Statistics log monitor	Monitors the statistics for the pi_engine process.	Effect on BSM: Some data might not be available in SHA. Troubleshooting: Verify the BSM deployment type, memory (RAM), and expected load (reported samples per second) using the BSM capacity calculator. This type of exception usually occurs if BSM is installed on hardware that has insufficient resources for the current load.

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
SHA Application General log monitor	Searches for unexpected behavior, displayed as instances of error.	<p>Effect on BSM: Process may not function correctly.</p> <p>Troubleshooting: Check the log file and try to resolve the problem from the error message provided.</p>

BPI Server Monitors

The following component monitors run on the BPI Server:

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Data Samples Provider	<p>Searches for [SEVERE ERROR] in bia_bacdatasamples0_0.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: BPI data samples might not be sent to BSM. Information in the BPI health page and Service Health is not updated, and the current status of Health Indicators and KPIs might be incorrect.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Check that the Web data entry component of BSM is working correctly • Restart the BPI Server • If the problem persists, check with BSM Administrator
Notification Server	<p>Searches for [SEVERE ERROR] in bia_notify0_0.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: BPI business process threshold violation notifications might not be sent to the users specified using BPI notification administration in BSM.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Check that the BPI notification mail server is configured correctly • Restart the BPI Server • If the problem persists, check with BSM Administrator

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Servlet Engine	<p>Searches for [SEVERE ERROR] in bia_tomcat0_0.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: The BPI landing pages, monitor definer, process repository explorer, and BPI notification might not function properly in BSM.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Restart the BPI Server • If the problem persists, check with BSM Administrator
CI Status Poller	<p>Searches for [SEVERE ERROR] in bia_adaptor_framework0_0.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: The CI status poller component in BPI might not be able to obtain the current status of business activities, resulting in the current status not being visible in the BPI health page. The blocked and impeded process instances count might also be incorrect.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Restart the BPI Server • If the problem persists, check with BSM Administrator
JMS Business Event Handler	<p>Searches for ERROR in Rolling_Adaptor_BIAJMSEngineAdaptor.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: BPI events that are being delivered using a JMS queue are not being processed. The data shown in the BPI application and the statuses of BPI KPIs and Health Indicators might be incorrect.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Check the configuration properties of the JMS Business Event Handler and that the BPI Impact Engine is started • Restart the BPI Server • If the problem persists, check with BSM Administrator

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Process Repository	<p>Searches for [SEVERE ERROR] in bia_model_repository0_0.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: The BPI Modeler might fail to load or is unable to correctly modify BPI definitions. The BPI health pages might also fail to display process maps.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Check that the BPI database configured for BSM is running correctly • Restart the BPI Server • If the problem persists, check with BSM Administrator
Monitor Engine	<p>Searches for [SEVERE ERROR] in bia_metric_engine0_0.log.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Effect on BSM: BPI Monitor statistics and the current status KPIs might be incorrect.</p> <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Check that the BPI instance database is running correctly • Restart the BPI Server • If the problem persists, check with BSM Administrator
Business Event Handler	<p>Searches for ERROR in Rolling_Adaptor_BIAEngine Adaptor.log.</p> <p>Effect on BSM: BPI events might not be processed, and the data displayed in the BPI application and the statuses of BPI KPIs might be incorrect.</p> <p>Threshold Configured In: SiteScope (Log File monitor)</p>	<p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Check the configuration properties of the Business Event Handler and that the BPI Impact Engine is started • Restart the BPI Server • If the problem persists, check with BSM Administrator

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Web Services Provider	Searches for [SEVERE ERROR] in bia_webservices0_0.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: None
Business Impact Engine	Searches for [SEVERE ERROR] in bia_bce0_0.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Statistics for BPI processes and activities, and data shown in the BPI application and the statuses of BPI KPIs and health indicators might be incorrect. Troubleshooting: <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Check that the BPI instance database is running correctly • Restart the BPI Server • If the problem persists, check with BSM Administrator
Admin Server	Searches for [SEVERE ERROR] in bia_adminserver0_0.log . Threshold Configured In: SiteScope (Log File monitor)	Effect on BSM: Possibly unable to start or stop BPI components on the BPI server. Troubleshooting: <ul style="list-style-type: none"> • Check the error message, and try to resolve the problem from the information provided • Restart the BPI Server • If the problem persists, check with BSM Administrator

Data Collectors

Following are the data collectors that run as part of BSM:

- "BPM Data Collector" on next page
- "SiteScope Data Collector" on page 88
- "Discovery Probe Data Collector" on page 88
- "RUM Data Collector" on page 89

BPM Data Collector

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
<p>BPM Last Ping Time</p>	<p>Reports how much time has passed since the last time BPM data collectors requested job updates from BSM.</p> <p>If BPM last ping time exceeds 5 minutes, monitor status changes to Warning. If BPM last ping time exceeds 10 minutes, monitor status changes to Error.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: BPM does not get configuration updates.</p> <ul style="list-style-type: none"> • If the other BPM monitor is also red, this indicates that BPM is unable to connect to or send a request to BSM, or that BPM is down. • If this monitor is constantly red, the BPM is unable to retrieve configuration updates. • If this monitor is sometimes green and sometimes red, the job poll interval configuration (BPM configuration) may be higher than 5 minutes. <p>Troubleshooting:</p> <ul style="list-style-type: none"> • If this monitor is not constantly red: <ul style="list-style-type: none"> ▪ Check the job poll interval in BPM, and reduce it if necessary. ▪ Increase the Error and Warning thresholds for BPM Last Ping Time in Infrastructure Settings. • If this monitor is constantly red, check for connection errors in the BPM logs (<code>..\workspace\commcenter\commcenter.txt</code>).
<p>BPM Last Reported Data Time</p>	<p>Measures how much time has passed since the last time BPM data collectors sent samples to BSM. If this time exceeds 80 minutes, monitor status changes to Warning.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Effect on BSM: BPM samples are not entered into BSM.</p> <ul style="list-style-type: none"> • If the other BPM monitor is also red, this indicates that BPM is unable to connect to or send a request to BSM, or that BPM is down. • If this monitor is constantly red, the BPM is unable to send samples to BSM. <p>Troubleshooting:</p> <ul style="list-style-type: none"> • Check for connection errors in the BPM logs (<code>..\workspace\agent1\data\data_depot.txt</code>) • Increase the Warning threshold for BPM Last Reported Data Time in Infrastructure Settings.

SiteScope Data Collector

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
SiteScope status on <SiteScope instance>	<p>Measures the overall status of the SiteScope data collector.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Last Heartbeat. Indicates the time of the most recent sample received from SiteScope that indicates the basic availability (i.e., heartbeat) of the system. • Health Status. Indicates the status of the SiteScope Health group, and number of monitors in the group with error status. <p>Note: Both measurements are monitored only if using SiteScope version 9.0 or later. If a previous version is installed, only the Last Heartbeat measurement is monitored.</p> <p>Threshold Configured In: Infrastructure Settings.</p> <p>To access, go to Admin > Platform > Setup and Maintenance > Infrastructure Settings and search under System Health or the applicable component application.</p>	<p>Troubleshooting:</p> <ul style="list-style-type: none"> • Last Heartbeat. Check that SiteScope is up and running. In SAM Admin, check the connection between BSM and SiteScope. Check the BSM status and that BSM components are running. • Health Status. In SiteScope, check the SiteScope Health group, and check the SiteScope Progress Report (in SiteScope versions 10.00 or earlier) or the SiteScope progress pages (in Server Statistics > General/Running Monitors tabs in SiteScope 10.10 or later). Check the troubleshooting for SiteScope Health monitors in the Using SiteScope Guide in the SiteScope Help.

Discovery Probe Data Collector

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
Discovery Probe status on <Discovery Probe instance>	<p>Receives discovery tasks from the server, dispatches them, and sends the results back to the CMDB through the server.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • Last Report Time. The most recent report time. • Amount of Reported CIs. The number of CIs reported by the probe. • Last Access Time. The most recent time the probe was accessed. 	<p>Effect on BSM: No new discovery data is entered into BSM. There is an indication of a problem is if the last report time is earlier than the scheduled discovery time.</p> <p>Troubleshooting: Check that the discovery probe is running and connected to BSM.</p>

RUM Data Collector

Monitor Name	Description	Effect on BSM if there is a problem/Troubleshooting
RUM Status on <RUM Engine Instance Name>	<p>Displays the aggregated status of the Real User Monitor data collector.</p> <p>Included Measurements:</p> <ul style="list-style-type: none"> • RUM Engine. Aggregated status of the Real User Monitor engine monitors. • RUM Probe IP. Aggregated status of the Real User Monitor probe with the specified IP address. Each probe has its own entry. • Database. Aggregated status of Real User Monitor internal DB monitors. • Samples to Business Service Management server. Aggregated status of the Real User Monitor samples sent to BSM. <p>Threshold Configured In: Real User Monitor internal configuration.</p>	<p>Troubleshooting: If the Real User Monitor data collector's status is problematic, refer to the Real User Monitor web console for troubleshooting. For details, see Monitoring the Health of HP Real User Monitor Components in the Real User Monitor Administration Guide.</p>

Chapter 13

HP CLIP Integration

Closed Loop Incident Process (CLIP) is an integrated solution that brings together HP offerings for BSM, HP Service Manager, HP Universal CMDB, and HP Operations Orchestration. CLIP helps IT organizations achieve their goals of IT efficiency, increased automation levels and focus on the business.

To integrate System Health with CLIP:

1. In BSM, configure the System Health CLIP integration.

Select **Admin > Platform > Setup and Maintenance > Infrastructure Settings**, choose **Foundations**, select **System Health**, and locate the **System Health - CLIP Integration** entry in the System Health table.

Add the URL required to access the following (in the format `http://<fully qualified host name>:<port>`):

- **UCMDB Server login URL** (default port is `http://<ucmdb server >:8080`)
- **OO Server WSDL URL** (default port is `https://<oo server >:8443`)
- **Service Manager Server WSDL URL** (default port is `http://<sm web tier server >:13080`)

2. Configure the following System Health monitors for the CLIP integration.

The CMS WSDL Monitor, OO WSDL Monitor, and OPR event REST API URL Monitor appear in red until you enter the monitor's user name and password in SiteScope.

- a. Log in to your System Health machine. For details, see ["How to Deploy and Access System Health" on page 19](#).
- b. In System Health, click the **SiteScope** button in the System Health Dashboard toolbar to open the SiteScope application.
- c. In SiteScope, select **Templates** context > **SystemHealth > CLIP > CMSMonitors > CMS WSDL Monitor**. In the right pane, expand **URL Monitor Settings**.
- d. In the **Authentication Settings** area, select **User user name and password**, and enter a user name and password for the monitor. Click **Save**.
- e. Repeat steps 3c and 3d for the following CLIP monitors:
 - **OOMonitors > OO WSDL Monitor**
 - **OPRMonitors > OPR event REST API URL Monitor**

3. Perform a Hard Synchronization in System Health:

- a. In System Health, click the **Full Model Synchronization**  button to synchronize the status and model of the components.

- b. The Remote Servers Setup Wizard opens. For each server in the left pane, enter the remote connection information in order for System Health to run all of the server's available monitors. For details, see "[System Health Setup Wizard](#)" on page 105.

Chapter 14

Component and Monitor Status Indicators

The following table displays a colored icon and a description of its status, as displayed on both the Inventory tab and the Monitors table in the System Health Dashboard right pane:

Status	Description
	The component and all subcomponents are working properly (status is good).
	The component or a subcomponent has a critical problem (status is error). A red indicator is accompanied by an x symbol. It is recommended that you drill down in the component to identify its specific problematic monitors.
	The component or a subcomponent has a non-critical problem, or did not receive an answer from the server (status is warning). The yellow indicator is accompanied by a ! symbol.
	There is no data available for the monitors. Displayed if the monitors have not yet run. The gray indicator is accompanied by a - symbol.

Note: After deploying System Health, the monitor colors appear gradually as each monitor runs according to its schedule.

Chapter 15

System Health User Interface

This section includes (in alphabetical order):

- "Inventory Tab" below
- "Log Manager" on page 95
- "System Health Dashboard" on page 97
- "System Health Setup Wizard" on page 105
- "Toolbar" on page 110

Inventory Tab

This tab displays the status of the BSM servers and their respective components in table format. It enables you to compare the performance of servers of the same type and to view statuses in a flat view, versus the hierarchal view of the Dashboard.

To access	Click the Inventory tab on the System Health interface.
Important information	<p>In addition to fields representing the monitors and components displayed on the System Health Dashboard, the tables contain the following fields:</p> <ul style="list-style-type: none">• Name. The name of the server.• Type. The type of server (appears only for Gateway and Processing server tables).• Status. The overall status of the machine, indicated by a colored icon. For details on the colored icons, see "Component and Monitor Status Indicators" on page 92. <p>Descriptions of the monitors are displayed on the Monitor Details pane.</p>
See also	" System Health Monitors " on page 34

Gateway Machines Table

Displays information about the Gateway machines being monitored by System Health, and their subcomponents.

To access	Click the Inventory tab on the System Health interface.
------------------	--

Important information	<ul style="list-style-type: none"> Click the arrows in the header to expand or collapse the table. The subcomponents' status is indicated by a colored ball icon. For details on the status represented by each color, see "Component and Monitor Status Indicators" on page 92. Details on the selected subcomponent appear in the <Subcomponent Name> Details table. <p>Note: The cell names are identical to the corresponding component or subcomponent displayed on the System Health Dashboard.</p>
See also	<ul style="list-style-type: none"> "System Health Displays" on page 10 "BSM Components" on page 30 "System Health Monitors" on page 34

Processing Machines Table

Displays information about the Data Processing machines being monitored by System Health, and their subcomponents.

To access	Click the Inventory tab on the System Health interface.
Important information	<ul style="list-style-type: none"> Click the arrows in the header to expand or collapse the table. The subcomponents' status is indicated by a colored ball icon. Details on the selected subcomponent appear in the <Subcomponent Name> Details table. <p>Note: The cell names are identical to the corresponding component or subcomponent displayed on the System Health Dashboard.</p>
See also	<ul style="list-style-type: none"> "System Health Displays" on page 10 "BSM Components" on page 30 "System Health Monitors" on page 34

<Subcomponent Name> Details Table

Displays information about the specific component or subcomponent selected in the Gateway Machines table or the Processing Machines table.

To access	Click the Inventory tab on the System Health interface.
------------------	--

Important information	<ul style="list-style-type: none"> • The status of the subcomponent and its monitors are indicated by a either a colored icon, or, where applicable, a numerical value in the color indicating its status. For details on the colors' status, see "Component and Monitor Status Indicators" on page 92. • The cell headings correspond to the monitors running on the selected component. The Name and Status cell headings display the name of the machine and its overall status, respectively. • The Monitor Details pane provides additional information on the monitor selected in the <Subcomponent Name> Details table.
See also	<ul style="list-style-type: none"> • "System Health Monitors" on page 34 • "Monitors Table" on page 98

Log Manager

Displays the log file output associated with the various components being monitored by System Health.

To access	Click the Log Manager tab on the System Health interface.
Important information	<ul style="list-style-type: none"> • You can view a log file by selecting a component in the Log Bundles pane and performing one of the following actions: <ul style="list-style-type: none"> ▪ Double-click. ▪ Drag and drop it into the Main pane. ▪ Click the Retrieve Logs  button. • You can search for a string in the Main pane by selecting any point in the pane and typing the string you want to find. You can also search the content of a set of logs by saving the output to a .txt file and performing a search.
See also	" Log Manager Tab " on page 13

User interface elements are described below:

UI Element (A-Z)	Description
	<p>Retrieves logs for the specified entities. You can retrieve log files by selecting a specific file, a bundle, or a machine.</p> <p>Note:</p> <ul style="list-style-type: none"> You can also view log files by dragging the selected entity to the main frame. The Log Manager cannot display a log file larger than 1 MB. If you try to retrieve a log file larger than this, a message is displayed prompting you to download the file to your local machine.
	<p>Saves the selected log files.</p> <ul style="list-style-type: none"> When selecting this button in the main frame, the currently displayed logs are saved. When selecting this button on the Log Bundles pane, the selected entities are saved, without being displayed in the main frame. This option is useful if you are saving a large output of data, or if you want to perform a complex search on the data output.
	<p>Indicates a log bundle or machine whose content has been collapsed or not expanded in the Log Bundles hierarchical tree.</p> <p>Note: This is the default view in the Log Bundles pane.</p>
	<p>Indicates a log bundle or machine whose content has been expanded in the Log Bundles hierarchical tree.</p>
	<p>Indicates a log file. You can view a log file in one of the following ways:</p> <ul style="list-style-type: none"> Double-click the log file Drag and drop the log file into the main pane Select the log file and click the Retrieve Logs  button.
<tab #>	<p>Indicates a selection of any combination of bundles, machines, or log files. The tabs are numbered chronologically, according to the number of retrieval actions you have performed.</p> <p>Note: The specific logs displayed in the tab are listed at the top of the pane. If more than 5 logs have been retrieved, the message, Assorted logs (more than 5) is displayed in place of the log list.</p>
From	Select a date and time from which the log data is to begin being displayed.
To	Select a date and time until which the log data is to be displayed.

System Health Dashboard

Enables you to view BSM components and their status, including information on the properties and monitors associated with the components. This is the default display when you access System Health.

To access	Select Admin > Platform > Setup and Maintenance > System Health
Important information	<p>The System Health Dashboard consists of the following areas:</p> <ul style="list-style-type: none">• Left pane• Right pane• Monitors table• General table <p>You can perform actions on the System Health Dashboard using the toolbar above the left pane. For details, see "Toolbar" on page 110.</p>
See also	<ul style="list-style-type: none">• "How to Deploy and Access System Health" on page 19• "System Health Setup Wizard" on page 105• "System Health Displays" on page 10

Left Pane

Displays a map of the databases, servers, data collectors, and mediators and load balancers (if they exist in your deployment) deployed on BSM. For details, see ["Map of BSM System and Components" on page 100](#).

Important information	The status of the components is indicated by the color of the box surrounding the icon and the accompanying symbol. For details, see "Component Status and Description" on page 101 .
See also	"System Health Displays" on page 10

Right Pane

Displays information on components selected in the left pane.

Important information	<p>The right pane consists of the following tables:</p> <ul style="list-style-type: none">• Monitors. Displays information about the monitors and subcomponents on the highlighted component in the left pane.• General. Displays information about the properties of the highlighted server in the left pane.• Data Collector Details. Displays information about the data collector highlighted in the left pane.
See also	"System Health Displays" on page 10

Monitors Table

Displays information on the monitors running on the selected component in the System Health Dashboard.

Important information	Click the arrows in the header to expand or collapse the table.
See also	"BSM Components" on page 30

User interface elements are described below:

UI Element (A-Z)	Description
	Disables the selected monitor.
	Reactivates the selected monitor's schedule.
	Runs the selected monitor immediately. The monitor must first be enabled for you to use this option.
	Expands the list of monitors to list all monitors and measurements for that object. This is the default view.
	Collapses the list of monitors to display only the monitors and hide the monitor measurements.
	Refreshes the list of monitors to display the latest status for the monitors.
	An individual monitor that is running on the selected component.
	A group of monitors that are running on the selected component.
Last Updated	Indicates the last time that the monitor ran.
Monitor Details	<p>Contains the following fields:</p> <ul style="list-style-type: none"> • Description. Describes the selected monitor. • Additional Information. Displays a text string result of the selected monitor's output. • Value. Displays a numerical result of the selected monitor's output. <p>Note: Not all fields are displayed for every monitor.</p>
Monitor/Group Name	The name of the monitor or group of monitors running on the component selected in the left pane.
Status	Indicates the monitor or monitor group's status, displayed as a colored ball icon. For details on these icons, see "Component and Monitor Status Indicators" on page 92 .

General Table

Displays information about the properties associated with the selected server in the left pane.

Important information	<ul style="list-style-type: none"> • This table appears only when a server is selected in the System Health Dashboard. • Click the arrows in the header to collapse and expand the table. • Click the header name to sort by the header's value.
------------------------------	---

User interface elements are described below:

UI Element (A-Z)	Description
Property Name	Lists the properties associated with the selected component, such as: <ul style="list-style-type: none"> • IP Address • Build number • Operating system type
Value	Lists the value of the specified property.

Data Collector Details Table

Displays information, in tree form, about the data collector selected in the left pane.

Important information	<ul style="list-style-type: none"> • This table appears only when a data collector is selected in the System Health Dashboard. • Click the arrows in the header to collapse and expand the table.
------------------------------	---

User interface elements are described below:

UI Element (A-Z)	Description
	A Discovery Probe.
	A Business Process Monitor (BPM) data collector.
	A Real User Monitor (RUM) data collector.
	A SiteScope (SiS) data collector.
	Displayed next to the IP address of the machine on which the Discovery Probe is running.
	Displayed next to the IP address of the machine on which the Business Process Monitor (BPM) data collector is running.

UI Element (A-Z)	Description
	Displayed next to the IP address of the machine on which the Real User Monitor (RUM) data collector is running.
	Displayed next to the IP address of the machine on which the SiteScope (SiS) data collector is running.
	Denotes an instance of a Discovery Probe.
	Denotes an instance of a Business Process Monitor (BPM) data collector.
	Denotes an instance of a Real User Monitor (RUM) data collector.
	Denotes an instance of a SiteScope (SiS) data collector.
Property Name	Lists the properties associated with the selected data collector, such as: <ul style="list-style-type: none"> • Build number • Port number • Version number
Value	Lists the value of the specified property.

Map of BSM System and Components

Depicts the various BSM components measured by System Health.

To access	<p>Click the Dashboard tab on the System Health interface.</p> <ul style="list-style-type: none"> • Database components appear on the left side of the map. • Server components appear to the right of the database components. • Load Balancer components (if deployed) appear to the right of the BSM Server components. <p>Note: When System Health is deployed in a secured environment, Reverse Proxy components appear with the Load Balancer components.</p> <ul style="list-style-type: none"> • Data collector components appear on the right side of the map.
Important information	<p>You may also see obsolete hosts that are no longer running BSM. To disable these obsolete hosts, browse to the URL http://<Gateway Server machine name>.< domain_name>/topaz/systemConsole/displayBACHosts.do and disable all obsolete hosts.</p>
See also	<ul style="list-style-type: none"> • "System Health Displays" on page 10 • "Component and Monitor Status Indicators" on page 92 • "Monitors Table" on page 98

Component Status and Description

Displays the status of the components monitored by System Health.

Important information	The color of all component outlines reflects the lowest functioning level subcomponent or monitor contained in the component, known as the worst child rule . The exception to this rule is the gray outlined components, which do not automatically cause their parent components to be outlined in gray.
See also	<ul style="list-style-type: none"> • "System Health Displays" on page 10 • "Component and Monitor Status Indicators" on page 92 • "Monitors Table" on page 98

The following table displays a sample icon and a description of its outlined color and status, as displayed on the System Health Dashboard:

Status	Description
	A green outline indicates that the component and its subcomponents are working properly. The component's icon is accompanied by a check symbol inside a green square.
	A red outline indicates that a critical problem exists in the component, in one of its subcomponents, or both. The component's icon is accompanied by an x symbol inside a red square. It is recommended that you drill down in the component to identify its specific problematic monitors.
	A yellow outline indicates one of the following: <ul style="list-style-type: none"> • A non-critical problem exists either in the component, in one or more of its subcomponents, or both. • The component's monitors were unable to connect with the server. The component's icon is accompanied by a ! symbol inside a yellow square.
	A gray outline indicates that there are currently no monitors scheduled to run for the component. The component's icon is accompanied by a - sign inside a gray square.
	A jagged blue outline, together with the component's status color represents the currently highlighted component.

Icons and Buttons

Following are the component icons and buttons on the Map of BSM System and Components:

UI Element	Description
	Expands the component and displays its subcomponents. Important: You must select the cursor button  on the System Health Dashboard toolbar to operate the Expand button.
	Hides the subcomponents contained within the selected component. Important: You must select the cursor button  on the System Health Dashboard toolbar to operate the Hide button.
	A Database server
	A Database
	A Gateway Server
	A Data Processing Server
	A group of processes
	A group of server monitors
	A bus component
	A logical group Example: Alerts Engine
	An application Example: Service Health
	A group of applications
	A service Example: Service Level Management Engine
	A group of Business Process Monitor data collectors

UI Element	Description
	A group of SiteScopes
	A group of Discovery Probes
	group of Real User Monitor data collectors
	Indicates the flow of data. Note: Click the Navigation button  and then click anywhere on an arrow line to find the arrow's destination or origin.

Database Components

The databases that are deployed on BSM.

To access	Database components appear on the left side of the System Health Dashboard left pane.
Important information	You may also see obsolete hosts that are no longer running BSM. To disable these obsolete hosts, browse to the URL <a href="http://<Gateway Server machine name>.< domain_name>/topaz/systemConsole/displayBACHosts.do">http://<Gateway Server machine name>.< domain_name>/topaz/systemConsole/displayBACHosts.do and disable all obsolete hosts.
See also	<ul style="list-style-type: none"> • "System Health Displays" on page 10 • "Component and Monitor Status Indicators" on page 92 • "Monitors Table" on page 98

User interface elements are described below:

UI Element (A-Z)	Description
RTSM Database	A central repository for configuration information.
Foundation Database	Stores system-wide and management-related metadata for the BSM environment.
History Database	Used for storage of data, over time, of the RTSM configuration items (CIs).
Profile Database	Stores raw and aggregated measurement data obtained from the BSM data collectors.

Server Components and Processes

The Map of BSM System and Components includes the following server elements (listed alphabetically):

- Alerts Engine
- Applications (Service Health application, Service Level Management, System Availability Management, and Portal components)
- Applications Engines
- BPMs (Business Process Monitors)
- bus
- CDM
- Data Flow Probes
- modeling
- Portal application (MyBSM)
- Processes (for details, see "BSM Processes " on page 32)
- Real User Monitor Engines
- Reports database aggregator
- RTSM
- SAM (System Availability Management - Management of SiteScopes)
- Scheduler (NOA service scheduler)
- Service Health Engine
- Server monitors
- SiteScopes
- SLM (Service Level Management) Engine
- Validator (NOA service validator)
- Verticals (SAP service and Siebel service)

Data Collector Components

Depicts the data collector elements that are deployed on BSM.

To access	Data Collector components appear on the right side of the System Health Dashboard left pane.
Important information	You may also see obsolete hosts that are no longer running BSM. To disable these obsolete hosts, browse to the URL http://<Gateway Server machine name>.< domain_name>/topaz/systemConsole/displayBACHosts.do and disable all obsolete hosts.
See also	<ul style="list-style-type: none">• "System Health Displays" on page 10• "Component and Monitor Status Indicators" on page 92• "Monitors Table" on page 98

User interface elements are described below:

UI Element (A-Z)	Description
BPMs	<p>Displays the status of the Business Process Monitor (BPM) data collectors. Since BPM has the option to monitor different agents, all BPM instances are displayed as separate entities, with a separate status for each instance.</p> <p>If more than one Business Process Monitor data collector is connected, you can drill down on the BPM node to see how many BPM data collectors are connected and the health of each BPM.</p>
Discovery Probes	Displays the status of the Discovery Probes.
RUM Engines	Displays the status of the Real User Monitor engines.
SiteScopes	Displays the status of the SiteScopes.

System Health Setup Wizard

This wizard enables you to establish remote connectivity to the BSM and database servers for full monitoring.

To access	<p>Select Admin > Platform > Setup and Maintenance > System Health.</p> <p>Note:</p> <ul style="list-style-type: none"> To enable configuring the System Health application, the System Health Setup Wizard opens automatically the first time you access the application after installation. For subsequent users and user instances, the wizard does not open automatically. You can also access the System Health Setup Wizard by performing either Full Model Synchronization or Soft Synchronization. Soft Synchronization opens the wizard only if changes were made to the System Health model, and Full Model Synchronization opens the wizard only if no component is selected. The user whose remote connection information you enter into the System Health Setup Wizard can perform only those actions for which they have permissions.
Important information	<ul style="list-style-type: none"> If you do not enter remote connection details for the server, System Health retrieves information only for monitors that do not require credential authorization to access the BSM servers. The left pane of the System Health Setup Wizard indicates the page of the wizard on which you are currently working.
Wizard map	<p>This wizard contains:</p> <p>"Remote Servers Setup Page" on next page > "Remote Databases Setup Page" on page 107 > "Recipients Setup Page" on page 109</p>

See also	<ul style="list-style-type: none"> • "Using the System Health Setup Wizard" on page 8 • "How to Deploy and Access System Health" on page 19 • "System Health Monitors" on page 34
-----------------	--

Sample Status and Description

When creating remote connections through the System Health Setup Wizard, a colored icon indicates the connection status.

The following table describes each color and its status:

Status	Description
	A green icon indicates that the credentials entered are sufficient for all of the monitors to access the BSM servers.
	<p>A red icon indicates that remote connectivity to the selected server has failed, due to one of the following reasons:</p> <ul style="list-style-type: none"> • The permissions level of the user entered in the wizard are not sufficient for the monitors to retrieve information from the specified server. • The user entered in the wizard does not exist on the BSM machine running on the specified server. • A mistake has been made in the user credentials entered in the wizard. <p>A red icon is accompanied by an "x" symbol inside a red square.</p>
	<p>A gray icon indicates that no attempt was made to establish remote connectivity to the specified server.</p> <p>A gray icon is accompanied by a "-" symbol inside a gray square.</p>


Remote Servers Setup Page

This wizard page enables you to create a remote connection to BSM servers for System Health to monitor.

Important information	<ul style="list-style-type: none"> • General information about this wizard is available here: "System Health Setup Wizard" on previous page. • You can configure different settings for each server, or apply the same settings to all servers. • You must configure the remote connection details for the server in order for System Health to run all of the server's available monitors. If you do not enter remote connection details for the server, System Health retrieves information only for monitors that do not require credential authorization to access the BSM servers.
------------------------------	--

Wizard map	The "System Health Setup Wizard" on page 105 contains: "Remote Servers Setup Page" on previous page > "Remote Databases Setup Page" below > "Recipients Setup Page" on page 109
See also	"Using the System Health Setup Wizard" on page 8

User interface elements are described below:

UI Element (A-Z)	Description
	Displays descriptions of the Remote connection details fields. Click again to hide descriptions.
	Click to select all, clear all, or invert your selection in the server list.
Apply	Applies the remote connection configurations for the selected servers.
Encoding	The encoding used by the server. Example: Cp1252, UTF-8
Login	The login name to be used for establishing remote connectivity between the monitors and the specified servers. The user whose login name is entered must have the appropriate permission level for the monitors to run on the server. The format for entering information into this cell is DOMAINNAME\login .
Method	The method of communication for connecting to the BSM components. Example: NetBIOS, SSH
OS Type	The Operating System running on the server. Example: Windows, UNIX Note: This field is only visible if System Health does not identify an operating system on the server.
Password	The password of the login name to be used for establishing remote connectivity with the specified servers. The user whose password is entered must have the appropriate permission level for the monitors to run on the server.

Remote Databases Setup Page

This wizard page enables you to create a remote connection to databases for System Health to monitor.

Important information	<ul style="list-style-type: none"> • General information about this wizard is available here: "System Health Setup Wizard" on page 105. • You can configure different settings for each server, or apply the same settings to all servers. • You must configure the remote connection details for the database in order for System Health to run all of the database's available monitors. If you do not enter remote connection details for the database, System Health retrieves information only for monitors that do not require credential authorization to access the BSM servers.
Wizard map	The " System Health Setup Wizard " on page 105 contains: "Remote Servers Setup Page" on page 106 > " Remote Databases Setup Page " on previous page > " Recipients Setup Page " on next page
See also	" Using the System Health Setup Wizard " on page 8

User interface elements are described below:

UI Element (A-Z)	Description
	Displays descriptions of the Remote connection details fields. Click again to hide descriptions.
	Click to select all, clear all, or invert your selection in the server list.
Apply	Applies configurations for the selected database.
Encoding	Indicate the encoding used by the server running the database. Example: Cp1252, UTF-8
Initialize Shell Environment	Optionally, enter any shell commands to be executed at the beginning of the session. Separate multiple commands with a semicolon (;). This option specifies shell commands to be executed on the remote machine directly after a Telnet or SSH session has been initiated.
Login	The login name used to access the operating system running on the server on which the database is installed. Note: The format for entering information into this cell is DOMAINNAME\login .
Login Prompt	The prompt output when the system is waiting for the login to be entered. Default: login:
Method	The method of communication for System Health to speak to the database. Example: NetBIOS, SSH

UI Element (A-Z)	Description
Operating System	The Operating System running on the server. Example: Windows, UNIX Note: This field is only visible if System Health does not identify an operating system on the server.
Password	The password used to access the operating system running on the server on which the database is installed.
Password Prompt	The prompt output when the system is waiting for the password to be entered. Default: <code>password:</code>
Prompt	The prompt output when the remote system is ready to handle a command. Default: #
Secondary Prompt	The secondary prompts if the telnet connection to the remote server causes the remote server to prompt for more information about the connection. Separate multiple prompt string by commas (,).
Secondary Response	The responses to any secondary prompts required to establish connections with this remote server. Separate multiple responses with commas (,).

Recipients Setup Page

This wizard page enables you to configure recipients to receive predefined System Health alerts through email.

Important information	General information about this wizard is available here: " System Health Setup Wizard " on page 105.
Wizard map	The " System Health Setup Wizard " on page 105 contains: " Remote Servers Setup Page " on page 106 > " Remote Databases Setup Page " on page 107 > " Recipients Setup Page " above
See also	" Using the System Health Setup Wizard " on page 8

User interface elements are described below:

UI Element (A-Z)	Description
	Displays descriptions of the Recipient Details fields. Click again to hide descriptions.

UI Element (A-Z)	Description
<Recipients Pane>	Displays a list of recipients configured to receive predefined System Health alerts through email. Click the recipient's name to edit their details. Click Add new recipient to configure a new recipient.
BSM Databases	Select to receive alerts on the status of BSM Databases.
BSM servers, services, and applications	Select to receive alerts on status of BSM servers, services, and applications.
Create	Adds the configured recipient to the recipient list pane.
Email	The recipient's email address.
Mediators	Select to receive alerts on status of BSM Mediators and Load Balancers.
Name	The recipient's name.

Toolbar

The Toolbar enables you to customize the display of the BSM components on the System Health Dashboard, perform actions on the components, perform management operations on the components, and synchronize the status and model of the components.

To access	The Toolbar is located at the top of the System Health Dashboard and the Inventory tab.
Important information	Buttons that customize the display of the BSM components (Dashboard Customization Buttons) appear only on the System Health Dashboard. All other buttons appear on both the System Health Dashboard and the Inventory tab.
See also	<ul style="list-style-type: none"> • "System Health Displays" on page 10 • "Service Manager Dialog Box" on page 113 • "Backup Server Setup Window" on page 114 • "Process Manager Dialog Box" on page 115 • "Quick Report Screen" on page 116

Dashboard Customization Buttons

These buttons enable you to customize the appearance of the components on the System Health Dashboard.

Important information	The buttons that customize the display of the BSM components appear only on the System Health Dashboard, and do not appear on the Inventory tab.
------------------------------	--

User interface elements are described below:

UI Element	Description
	<p>Select. Enables selecting a component on the System Health Dashboard left pane.</p> <p>Note: This button is selected by default upon entering the System Health Dashboard.</p>
	<p>Pan. Pans the System Health Dashboard left pane.</p>
	<p>Zoom. Zooms on a specific area of the System Health Dashboard left pane.</p> <p>You zoom by holding down the left click button on your pointer. Move the pointer down to zoom in; move the pointer up to zoom out.</p>
	<p>Navigation. Enables navigating between components of the dashboard.</p> <p>You click the Navigation button and then click a line connecting two components or subcomponents. Depending on where on the line you click, the cursor navigates to either the original or endpoint component, whichever is further.</p>
	<p>Fit. Fits all open components and subcomponents into the visible area.</p>
	<p>Undo. Undoes your previous action and goes back to the previous display on the System Health Dashboard left pane.</p> <p>Note: This button is enabled only if you have generated more than one view on the System Health Dashboard left pane.</p>
	<p>Redo. Redoes an action that has been undone with the Undo button .</p> <p>Note: This button is enabled only if you have generated more than one view on the System Health Dashboard, and are not currently resting on the most recent view.</p>
	<p>Realign. Realigns System Health Dashboard left pane components, so that the components are aligned in their original order, which is (left to right):</p> <ul style="list-style-type: none"> • Databases • Servers • Load Balancers (if deployed) • Data Collectors
	<p>Rearrange. Returns the System Health Dashboard left pane to its default view. This includes closing open components and realigning component boxes to their original state.</p>

UI	
Element	Description
	<p>Overview. Displays an overview map of all the component boxes on the System Health Dashboard left pane.</p> <p>The Overview Map appears in a separate window, with blue lines denoting the boundaries of the System Health Dashboard left pane.</p> <p>Note: You cannot perform other functions on the System Health Dashboard while the Overview Map is open.</p>

Action Buttons

These buttons enable you to perform actions on the BSM components monitored by System Health.

User interface elements are described below:

UI	
Element	Description
	<p>Service Manager. Opens the Service Manager dialog box. This option enables you to move backend services from one server to another of the same type if the server machine is not functioning properly, requires downtime for servicing, or is overloaded. For details on the Service Manager dialog box, see "Service Manager Dialog Box" on next page.</p> <p>Note: You must have more than one server of the same type configured in your BSM environment for this button to be enabled.</p>
	<p>Backup Server Configuration. Used to define a backup server, in case the current server is not functioning properly or requires downtime for servicing.</p> <p>Note: You must have more than one server of the same type configured in your BSM environment for this button to be enabled.</p>
	<p>Process Manager. Stops or starts processes on selected servers, for maintenance purposes or in case these processes display a problematic status on the System Health Dashboard or the Inventory tab.</p>

Information Buttons

These buttons enable you to retrieve information on the BSM components monitored by System Health.

User interface elements are described below:

UI	
Element	Description
	Quick Report. Receives a Quick Report on data collected over the past 24 hours for the selected component. For details on Quick Reports, see " Quick Report Screen " on page 116.
	Export to CSV. Exports a report containing of the System Health monitors' and BSM components' current status to a .csv file.
	Export to PDF. Generates a .zip file containing the log files of a specific server. Note: You must select a server component on the System Health Dashboard left pane for this button to be enabled.

Synchronization Buttons

These buttons enable you to synchronize the status and model of the BSM components monitored by System Health.

Important information	If an BSM component was down while Soft or Full Model Synchronization was performed, System Health may not have configured the full monitoring solution onto these components. To prevent this from happening, ensure that all components are up and running during the System Health Setup Wizard configuration, and while performing Soft or Full Model Synchronization.
------------------------------	--

User interface elements are described below:

UI	
Element	Description
	Refresh Statuses. Refreshes the selected component and retrieves its current status, without running the component's monitors.
	Soft Synchronization. Updates System Health with any changes to the System Health model. If required, the System Health Setup Wizard is opened for the area of System Health in which the changes were applied.
	Full Model Synchronization. Resets the configuration of the selected component, including resetting of all monitors and their status. If no specific component is selected, the entire System Health configuration is reset, and the System Health Setup Wizard is opened, where you must reconfigure the connection of all system monitors to the servers. For details, see " System Health Setup Wizard " on page 105.

Service Manager Dialog Box

Enables you to move backend services from one server to another of the same type, in case the server machine is not functioning properly, requires downtime for servicing, or is overloaded.

To access	Click the Service Manager button  on the Toolbar on either the System Health Dashboard or the Inventory tab.
------------------	--

Important information	<ul style="list-style-type: none"> You can move services from a server only to another server of the same BSM type. You cannot move services (such as RTSM) from or to an external machine. When automatic failover moves processes to the backup machine, it may move only part of a service group, causing System Health to display the same service group on two different servers.
See also	"Understanding Service Reassignment" on page 16

User interface elements are described below:

UI Element (A-Z)	Description
Execute	Moves the indicated customer services from one server to another.
Operation Status	Displays the status of the performed operation.
Select Operation	Select the type of service you want to move.
Select Source Machine	Select the machine from which you want to move the services.
Select Target Machine	Select the machine to which you want to move the services.

Backup Server Setup Window

Enables you to define a backup server to run the BSM server components, in case the server machine is not functioning properly or requires downtime for servicing.

To access	Click the Backup Server Setup button  on the Toolbar.
Important information	<ul style="list-style-type: none"> This button is enabled only if you have configured more than one Processing server. You must click the Enable Automatic Failover box for the backup server to be enabled. External machines, such as CMDB, cannot be defined as a backup server. By default, services are reassigned to the backup server after a timeout of 20 minutes has been reached. The timeout value can be configured in Admin > Platform > Setup and Maintenance > Infrastructure Settings > Foundations > High Availability Controller. You can monitor the task assignments using System Health, or in the hac-manager JMX. The relevant logs are: <ul style="list-style-type: none"> <HPBSM root directory>\log\EJBContainerhac-locator.log. Contains the location changes for each service. <HPBSM root directory>\log\<process-name>hac-launcher.log. Contains information about the relevant services for the process, and errors in case the service fails to start.
See also	"Move Backend Services" on page 24

User interface elements are described below:

UI Element (A-Z)	Description
Enable Automatic Failover	Select to activate the selected server as the backup server.
Execute	Defines the selected server as the backup server.
Operation Status	Displays the status of the performed operation.
Select Backed-up Servers	Select the servers to be backed up.
Select Backup Server	Select the backup server.

Process Manager Dialog Box

Enables you to stop or start processes on specific servers, in case these processes display a problematic status on the System Health Dashboard or Inventory tab, or the processes require maintenance.

To access	Click the Process Manager button  on the Toolbar.
Important information	You can select multiple processes to start or stop in the Process Manager dialog box.
See also	<ul style="list-style-type: none"> • "Manage BSM Processes" on page 26 • "BSM Processes " on page 32

User interface elements are described below:

UI Element (A-Z)	Description
	Indicates the selected process is running.
	Indicates the selected process was started and is not yet running.
	Indicates the selected process was stopped.
	Indicates the selected process is currently being stopped.
	Indicates the selected process was launched.
	Indicates the selected process' status is unknown.
Operation Status	Displays the status of the performed operation.
Refresh	Refreshes process statuses. Note: A stopped process appears in red.
Select Process(es)	Select the process you want to stop or start.

UI Element (A-Z)	Description
Select Server	Select the server on which you want to start or stop processes.
Start	Starts the selected processes.
Start All	Starts all of the processes in the Select Process(es) window.
Stop	Stops the selected processes.
Stop All	Stops all of the processes in the Select Process(es) window.

Quick Report Screen

Displays a report on data gathered from the past 24 hours on the selected component's monitors.

To access	Click the Quick Report button  on the Toolbar.
Important information	<p>The following links appear on the Quick Report screen, which enable you to view specific information on the monitors:</p> <ul style="list-style-type: none"> • Table Format: • Error List: • Warning List: • Good List: <p>For details on the information each of these links displays, see below.</p>
See also	<ul style="list-style-type: none"> • The section on Reports in Using SiteScope in the SiteScope Help. • "Display a Quick Report" on page 26

User interface elements are described below:

UI Element (A-Z)	Description
<Graphs>	Displays the monitor groups' output in graph format.
Error List	Displays the monitor runs that retrieved an error status, based on the thresholds configured for the monitor.
Good List	Displays the monitor runs that retrieved a good status, based on the thresholds configured for the monitor.
Measurement Summary Table	Displays measurement data for each of the BSM monitors.
Table Format	Displays the monitor groups' output in table format.
Uptime Summary Table	Displays the percentage of uptime each BSM monitor experienced over the indicated time period.
Warning List	Displays the monitor runs that retrieved a warning status, based on the thresholds configured for the monitor.

Chapter 16

Troubleshooting and Limitations

The following table illustrates potential problems that can occur on the System Health interface, and suggested solutions:

Problem	Solution
Interface does not display any BSM components	Click the Refresh button on your browser. Note: This problem is most common when first logging into System Health on Microsoft Internet Explorer 7.0.
All components and monitors are displayed in gray	Click the Full Model Synchronization  button in the Toolbar on either the System Health Dashboard or the Inventory tab. The Full Model Synchronization button resets the System Health configuration and erases all of the monitors' history in BSM. You then reconfigure System Health to create remote connections to the servers which System Health monitors, using the System Health Setup Wizard. For details, see " System Health Setup Wizard " on page 105 .
Monitors are not displayed on a component	

