

HP Business Service Management

Software Version: 9.23

HP NNMi - HP BSM Topology Integration Best Practices

Document Release Date: December 2013
Software Release Date: December 2013



Legal Notices

Warranty

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

Restricted Rights Legend

Confidential computer software. Valid license from HP required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notice

© Copyright 2005 - 2015 Hewlett-Packard Development Company, L.P.

Trademark Notices

Adobe® and Acrobat® are trademarks of Adobe Systems Incorporated.

AMD and the AMD Arrow symbol are trademarks of Advanced Micro Devices, Inc.

Google™ and Google Maps™ are trademarks of Google Inc.

Intel®, Itanium®, Pentium®, and Intel® Xeon® are trademarks of Intel Corporation in the U.S. and other countries.

iPod is a trademark of Apple Computer, Inc.

Java is a registered trademark of Oracle and/or its affiliates.

Microsoft®, Windows®, Windows NT®, Windows® XP, and Windows Vista® are U.S. registered trademarks of Microsoft Corporation.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates.

UNIX® is a registered trademark of The Open Group.

Adobe® and Acrobat® are trademarks of Adobe Systems Incorporated.

Intel®, Pentium®, and Intel® Xeon® are trademarks of Intel Corporation in the U.S. and other countries.

iPod is a trademark of Apple Computer, Inc.

Java is a registered trademark of Oracle and/or its affiliates.

Microsoft®, Windows®, Windows NT®, and Windows® XP are U.S. registered trademarks of Microsoft Corporation.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates.

UNIX® is a registered trademark of The Open Group.

Documentation Updates

The title page of this document contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.
- Software Release Date, which indicates the release date of this version of the software.

To check for recent updates or to verify that you are using the most recent edition of a document, go to: <https://softwaresupport.hp.com/group/softwaresupport/search-result?keyword=>.

This site requires an HP Passport account. If you do not have one, click the **Create an account** button on the HP Passport Sign in page.

Support

Visit the HP Software Support web site at: <https://softwaresupport.hp.com>

This web site provides contact information and details about the products, services, and support that HP Software offers.

HP Software Support provides customer self-solve capabilities. It provides a fast and efficient way to access interactive technical support tools needed to manage your business. As a valued support customer, you can benefit by using the support web site to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Download software patches
- Manage support contracts
- Look up HP support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and sign in. Many also require a support contract. To register for an HP Passport ID, go to <https://softwaresupport.hp.com> and click **Register**.

To find more information about access levels, go to: <https://softwaresupport.hp.com/web/softwaresupport/access-levels>

HP Software Integrations, Solutions and Best Practices

Visit the Integrations and Solutions Catalog at <https://softwaresupport.hp.com/group/softwaresupport/search-result/-/facetsearch/document/KM01702710> to explore how the products in the HP Software catalog work together, exchange information, and solve business needs.

Visit the Cross Portfolio Best Practices Library at <https://hpin.hp.com/group/best-practices-hpsw> to access a wide variety of best practice documents and materials.

Contents

Chapter 1: Executive Summary	5
Chapter 2: NNMi Integration to BSM: Which Method to Use?	6
Chapter 3: Configuring the NNMi - BSM Topology Integration	7
Chapter 4: BSM Topology Created by NNMi	9
Chapter 5: Network Topology Views	11
Layer 2 Topology View	11
Service Health Views	16
OMi Health Perspectives	17
Chapter 6: CI Lifecycle	18
Appendix A: Comparing Methods of Integrating NNMi with BSM/UMCDB	19
Appendix B: Creating a New RTSM User	21
Appendix C: NNMi - CI Attribute Mapping	22
Send Documentation Feedback	28

Chapter 1: Executive Summary

The purpose of this document is to provide details about topology integration between NNMi and BSM, beyond what is documented in the product manuals. This document focuses on BSM 9.10 and higher, and NNMi 9.10.

Note: If you are integrating BSM 9.25 with NNMi 10.00 or later, use the best practice information that is now included in the [HP Network Node Manager i Software—HP Business Service Management/Universal CMDB Topology Integration Guide](#) and not this document.

There are two ways to populate BSM with Layer 2 network topology from NNMi: the historical UCMDDB Probe-based "pull" integration method, and the newer NNMi - BSM topology "push" integration method. This best practices document compares these two methods, and then focuses on the NNMi - BSM topology integration method, while addressing the following:

- How to configure the integration.
- The topology that NNMi creates in BSM.
- Configuring views to consume the network topology within BSM.
- How the CIs in BSM are maintained when NNMi objects are added, updated and removed.

Chapter 2: NNMi Integration to BSM: Which Method to Use?

NNMi is the authoritative source for Layer 2 network topology. There are two methods for integrating NNMi topology into BSM/UCMDB:

- NNMi – BSM topology integration ("push" to BSM).
- NNMi – UCMDB integration ("pull" from NNMi).

This document focuses on the NNMi - BSM topology "push" integration method. Each method has advantages and disadvantages, as described in ["Appendix A: Comparing Methods of Integrating NNMi with BSM/UCMDB" on page 19](#).

Note that if your environment does not have other data collectors to refine the NNMi data, all CIs will be of type Node. In this case the Data Flow Probe "pull" integration method is more useful for BSM, where functionality is based on more specific "strong type" CITs - sub-types of the Node CIT.

- The NNMi - BSM topology "push" integration method is documented in the NNMi Deployment Reference.
- The Probe-based "pull" integration method is documented in the HP Universal CMDB Discovery and Integration Content Guide.

Chapter 3: Configuring the NNMi – BSM Topology Integration

This section summarises how to configure the NNMi – BSM topology integration and expands on some key points. Refer to the NNMi 9.10 Deployment Reference for details.

In the NNMi console, open the HP NNMi – HP BSM Topology Integration Configuration form (**Integration Module Configuration > HP BSM Topology**). Select the **Enable Integration** check box and complete the form.

When connecting NNMi to a multi-server BSM deployment, the **BSM Host** field needs to point to the BSM Gateway server.

Please note that although the fields in the form are labelled **BSM User** and **BSM Password**, these fields are actually the **RTSM User** and **RTSM Password**. RTSM users are different from BSM users; the RTSM user and password are used for RTSM integrations. By default, installing BSM 9.1x creates an RTSM user called admin, with the password set to admin.

To perform the NNMi – BSM topology integration, create and use a new RTSM user for better accountability and auditing. For details, see "[Appendix B: Creating a New RTSM User](#)" on page 21.

The CIs that are created or updated by this integration set the attributes `Created By` and `Updated By`. By using a different user for the integration, these attributes will be set to `UCMDB: User:<integration_user>` instead of the more generic `UCMDB: User:admin`, making it easier to discern the source responsible for the CI.

The NNMi 9.10 Deployment Reference suggests setting the Interface CI display label to prefer `interface_name` over `mac_address`. This results in a more user friendly display. To make this change, open the CI Type Manager in RTSM Administration, and select the Interface CI Type. Select the Default Label tab and set the format to:

```
interface_name | mac_address
```

Note: Although the NNMi 9.10 Deployment Reference suggests changing the Node Name Resolution order to `First Choice = Full DNS Name` and `Second Choice = Short DNS Name`, this cannot be done in NNMi 9.10 (see QCCR1B90169). You can use the default Node Name Resolution order.

<http://wynand.rose.hp.com/> - HP NNMi-HP BSM Topology Integration Configuration

HP NNMi-HP BSM Topology Integration Configuration

Enable Integration: Help

NNMi SSL Enabled:

NNMi Host:

NNMi User:

NNMi Password:

BSM SSL Enabled:

BSM Host:

BSM Port:

BSM User:

BSM Password:

Topology Filter Node Group:

Additional Connections Node Group:

Topology Synchronization Interval (hrs):

Submit Cancel

Chapter 4: BSM Topology Created by NNMi

The NNMi - BSM topology integration creates the following CIs:

- Node
- Interface
- IpAddress
- IpSubnet
- Layer2Connection
- HardwareBoard
- PhysicalPort

Devices such as switches, routers, and servers are all defined as Node CI Types. The device type is identified by the Node CI's **NodeRole** attribute. In NNMi 9.10, the **NodeRole array** attribute is set to one or more of these values: hub, load_balancer, printer, router, server, lan_switch, voice_gateway and/or desktop. This is because it is possible for a network device to change its role (such as from a switch to a switch-router), and this method provides simple tracking via the CI's **NodeRole** attribute.

A single node can have multiple node roles. NNMi decides, based on the node's Device Category and the node's capabilities as discovered by NNMi, which NodeRole(s) to set. The following table shows the mapping of NNMi Device Category to **NodeRole** attribute.

NNMi Device Category	NodeRole Attribute
Hub	hub
LoadBalancer	load_balancer
Printer	printer
Router	router
Server	server
Switch	lan_switch
Switch_Router	router, lan_switch
Voice Gateway	voice_gateway
Workstation	desktop

In addition to the Device Category mapping, if a node has IP forwarding capability (`com.hp.nnm.capability.node.ipforwarding`), the `NodeRole router` is applied. If a node has switching capability (`com.hp.nnm.capability.node.lan_switching`), the `NodeRole lan_switch` is applied.

The NNMi - BSM topology integration creates the following relationships:

- Membership: `IpSubnet` -> `IpAddress`
- Membership: `Layer2Connection` -> `Interface`
- Composition: `Node` -> `Interface`
- Containment: `Node` -> `IpAddress`
- Composition: `Node` -> `HardwareBoard`
- Composition: `HardwareBoard` -> `HardwareBoard`
- Composition: `HardwareBoard` -> `PhysicalPort`
- Realization: `PhysicalPort` -> `Interface`

Refer to "[Appendix C: NNMi - CI Attribute Mapping](#)" on page 22 for the mapping of NNMi attributes to the equivalent CI attributes for each CI type.

Chapter 5: Network Topology Views

The network topology views in BSM 9.1x are designed to work with the historical NNMi – UCMDB integration method. This is because the TQLs includes a Net Device CI type or a Computer CI type, whereas the NNMi - BSM topology integration creates nodes as Node CIs only, setting the **NodeRole** attribute to identify the device types as servers, switches, and so forth.

Until the views are updated in the product, you can easily modify them to work with the NNMi populated network topology. The following sections describe how to modify views to suit modeling with RTSM, Service Health and Operations Management (OMi).


Layer 2 Topology View

The **Layer 2 by NNMi** view in BSM 9.1x can be easily modified to work with the topology created by the BSM – NNMi topology integration. One way to do this is as follows:


- Open the **Layer 2 by NNMi** view and save it as **Layer 2 by NNMi 9.10**.
- Modify the **Layer 2 by NNMi 9.10** view as follows:
 - Delete the Net Device CI Type, and in its place add another Node CI Type.
 - Add a Composition relationship between this new Node CI and its Interface CI.
 - Re-establish the folding rule (fold Interface under Node).
 - For the Node CI, specify that the **NodeRole** attribute must contain `lan_switch` or `router` to restrict the results to network devices.
 - (Optional) You can further restrict the results by specifying the Node CI name(s) to match in order to view the equivalent of a **Layer 2 Neighbor** view.

The following two screenshots show the results, comparing an NNMi 9.10 **Layer 2 Neighbor View** with the equivalent **Layer 2 by NNMi 9.10** view in BSM. The third screenshot shows the **Layer 2 by NNMi** view in UCMDB using the historical NNMi – UCMDB integration method, to show that the results are equivalent.

NNMi Layer 2 neighbor view:

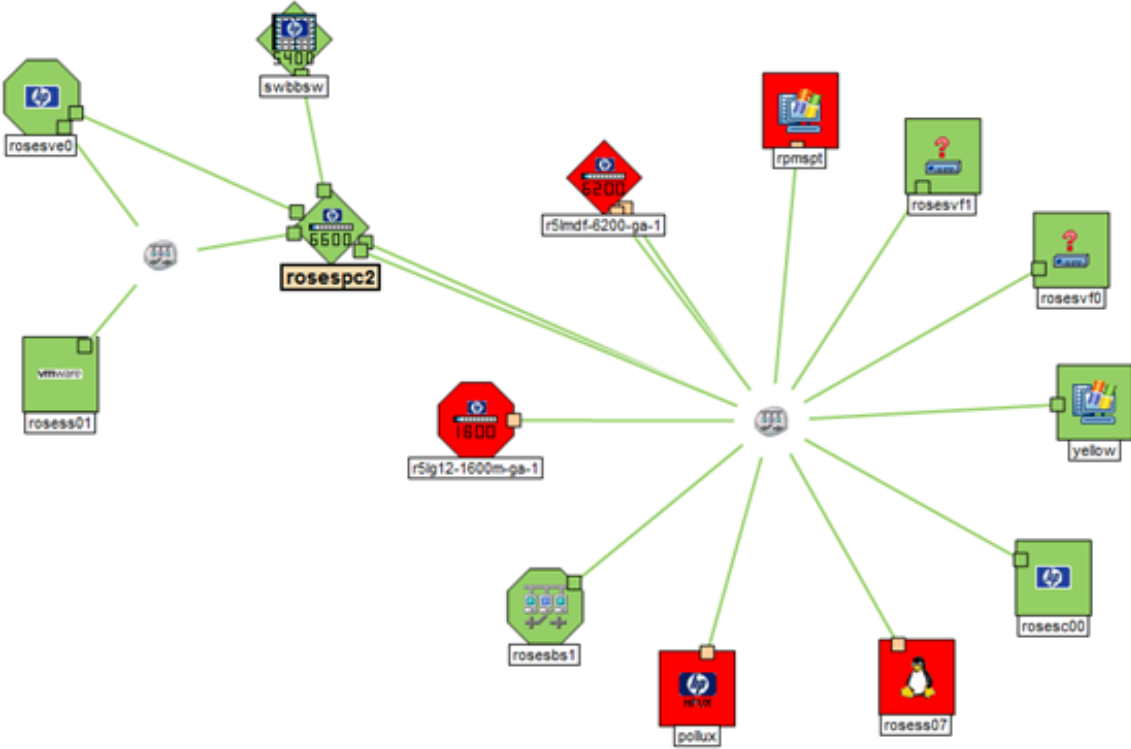


UCMDB 9.03 Layer 2 by NNMi view:

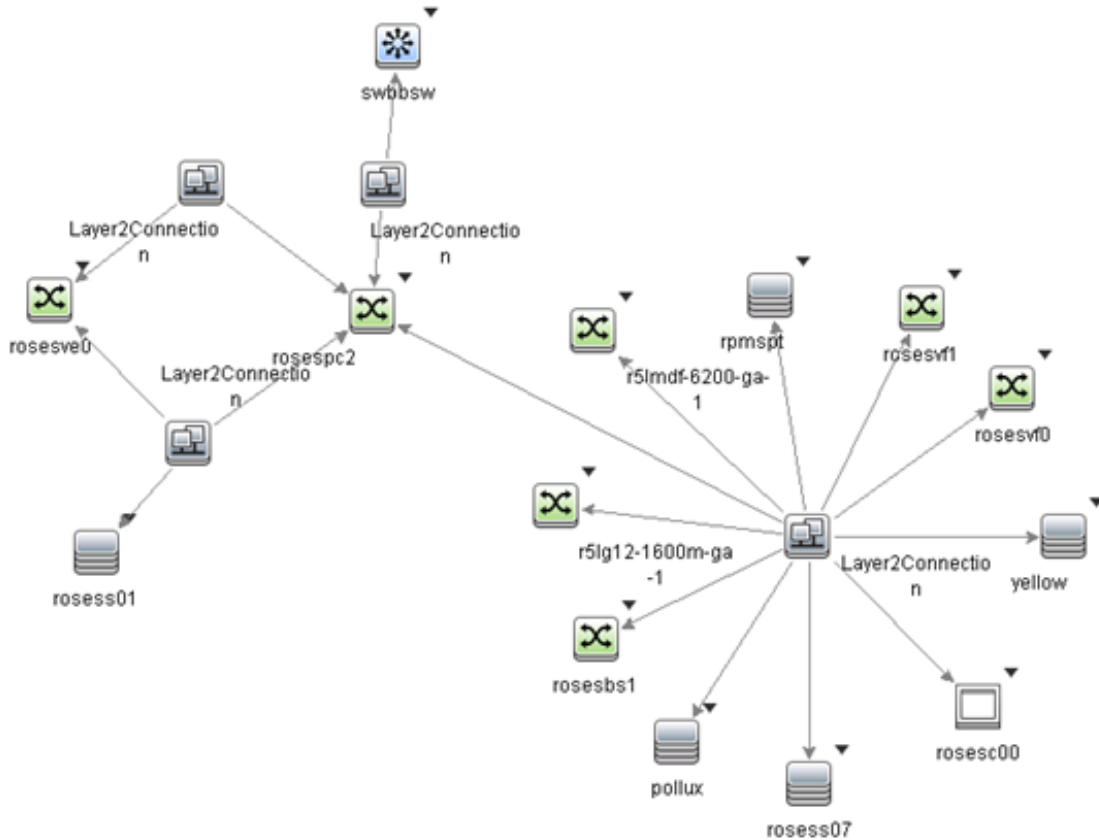


This type of view (**Layer 2 by NNMi 9.10**) is primarily useful as a basis for a TBEC rule, or to filter OMi events in View Selector. It is not optimal for use in Service Health; refer to the Service Health Views section for recommendations on creating views that include network devices. However, if you do want to display this view in Service Health, you need to modify the View Definition Properties and set the Bundles to `Service_Health`.

For a view that is used in the View Selector to filter OMi events, you might want to include all CIs that may have network events associated with them. NNMi events resolve to Node, Interface, Layer 2 Connection or IP Address CI Types; you therefore might add IP Address to the view. The following two screenshots show an example view containing the network elements associated with the "OBA1" business application.

Example of Layer 2 topology applied to a business application:

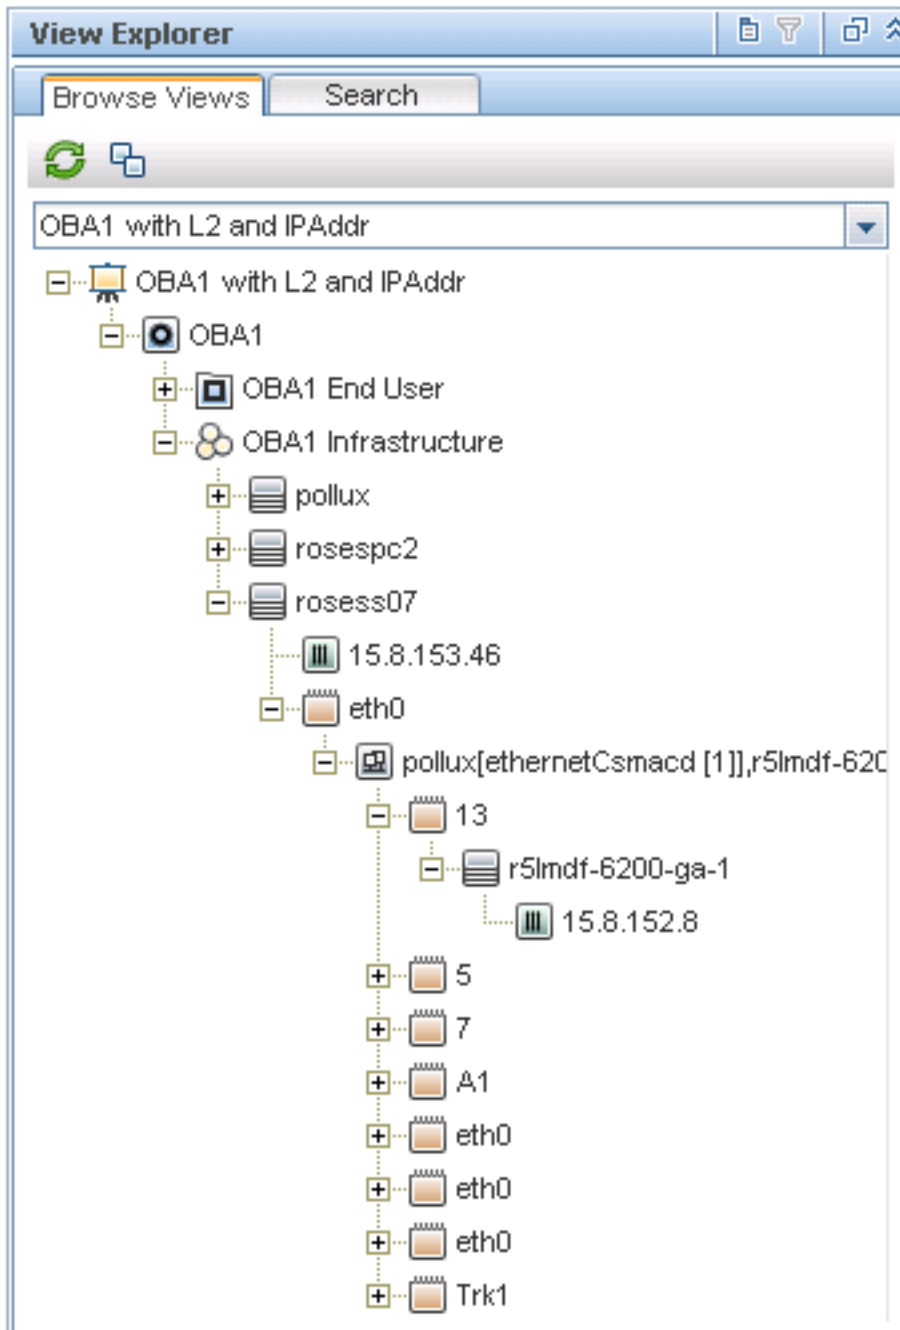

View definition:

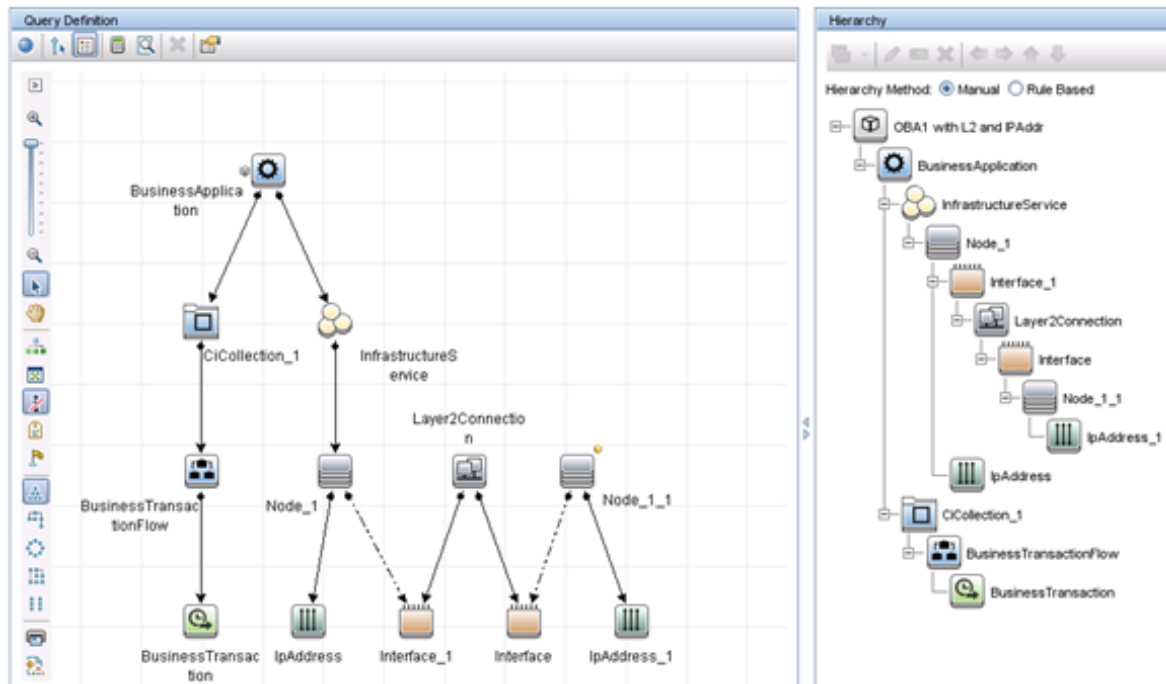


Service Health Views

It is difficult to display traditional network topology within Service Health. A relationship of **Node -> Interface -> Layer2Connection -> Interface -> Node** is meaningless, since (for example) there is no impact relationship (that is, KPI status propagation) between Layer2Connection and Interface.

If you need to include network devices in a Service Health view, it is therefore best to show them in a flat structure rather than to attempt to reproduce a traditional network topology. Since there is an impact relationship between Interface and Node, one approach is to create a view that contains Node -> Interface, possibly grouped together as "Network"; refer to the screenshot below.

Top view:

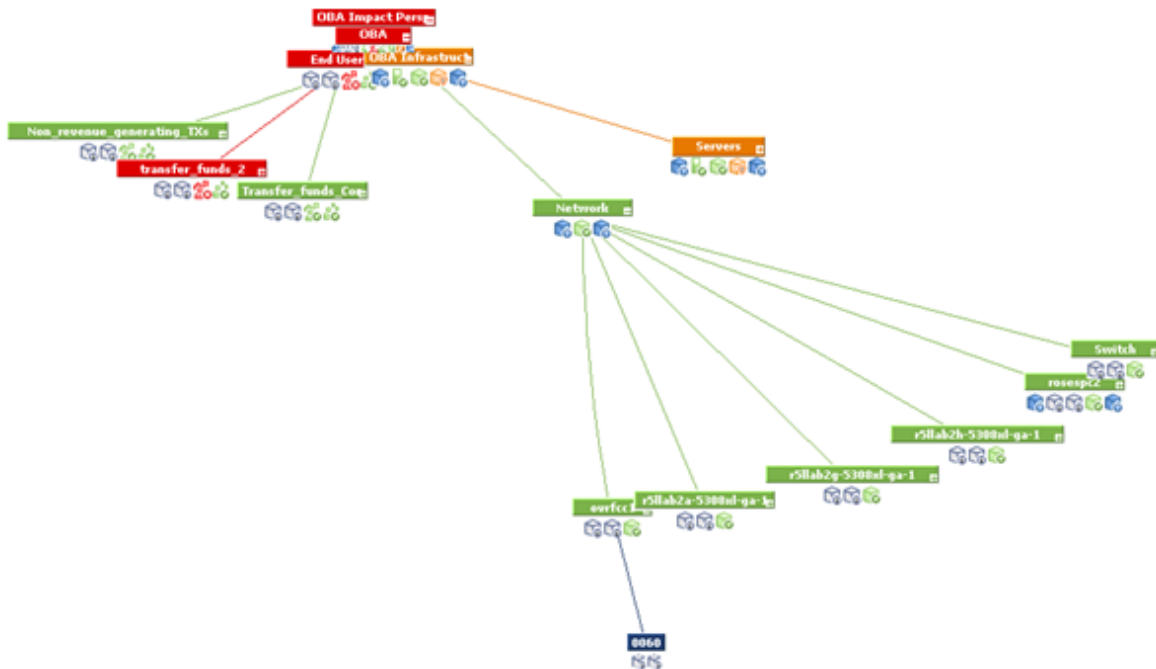

OMi Health Perspectives

In OMi Health Perspectives, the Health Top View displays a view based on the Related CI of the selected event. The default view is determined by View Mappings for the CIT.

The default View Mappings used in Health Perspectives do not work for the Node CIT and Interface CIT.

For the Node CIT, there is no default View Mapping. If you use OMi Health Perspectives, you may want to define such a view.

For the Interface CIT, the default View Mappings of **NetworkInterface_Infrastructure** and **Systems_Infrastructure** depend on a Computer CIT. Thus, for nodes that are populated from NNMi, these views will fail. You may want to modify the **NetworkInterface_Infrastructure** view to use Node CIT instead of Computer CIT.

Chapter 6: CI Lifecycle

When NNMI objects (Node, Interface, IP Address, IP Subnet, Layer 2 Connection, Card and Port) are added or changed, they are dynamically updated in BSM. In addition, the full topology is re-synchronised periodically, as specified in the user-defined **Topology Synchronization Interval (hrs)** setting in the **HP NNMI - HP BSM Topology Integration Configuration** screen. NNMI ensures that the data is processed in manageable chunks, to avoid a negative impact on the performance of NNMI or BSM.

Periodic topology synchronization has the effect of updating the **Last Access Time** attribute for CIs that already exist in BSM, and prevents them from becoming candidates for deletion. If an object no longer exists in NNMI, the aging mechanism in BSM deletes the corresponding CI when its **Last Access Time** exceeds the time threshold (default is 40 days).

Note: The CI may also be monitored by another application such as HP SiteScope or HP Operations Management, in which case **Last Access Time** may continue to be updated if the object remains monitored by another application.

Appendix A: Comparing Methods of Integrating NNMi with BSM/UMCDB

The following table provides a summary comparison of the two methods.

NNMi-BSM Topology "Push" Integration	Probe-based "Pull" Integration ("Layer 2 by NNM" Discovery Job)
Can filter objects to sync from NNMi to BSM based on NNMi Node Group.	Currently no ability to filter NNMi objects to sync into BSM.
Performs incremental discovery and scheduled full topology sync.	Performs full topology sync only.
Creates all NNMi nodes as Node CIs *.	Creates NNMi nodes as various CI types (Router, Switch, Switch Router, Chassis, Computer, ATM Switch, Firewall, Load Balancer, and Printer).
Creates these other CIs: Interface, IpAddress, IpSubnet, Layer2Connection, HardwareBoard, and PhysicalPort.	Creates these other CIs: Interface, IpAddress, IpSubnet, Layer2Connection, HardwareBoard+, PhysicalPort+, and VLAN †.
<p>Node CI attributes populated by BSM but not by Probe method:</p> <ul style="list-style-type: none"> • Host is Route. • Host is Virtual. • NodeModel. • PrimaryDnsName. 	<p>Node CI attributes populated by Probe but not by BSM method:</p> <ul style="list-style-type: none"> • Description (populated from Device Profile Description) <p>Node CI attributes with different values from BSM method:</p> <ul style="list-style-type: none"> • DiscoveredVendor (more user-friendly format in BSM method; for example "Hewlett-Packard" rather than "hewlettpackard"). • NodeFamily (more user-friendly format in BSM method). • Host NNM UID. • Host Key.

NNMi-BSM Topology "Push" Integration	Probe-based "Pull" Integration ("Layer 2 by NNM" Discovery Job)
Layer 2 Connection CI attribute Display Label is set to the Layer 2 Connection Name as shown in NNMi.	Layer 2 Connection CI attribute Display Label is hard-coded to "Layer2Connection". Other CIs with different attributes when populated by Probe: <ul style="list-style-type: none"> • HardwareBoard CI includes SoftwareVersion attribute. • PhysicalPort CI includes DuplexSetting and Port Name (same value as Name) attributes.
Can easily adapt the out-of-the-box Layer 2 Network view.	Out-of-the-box Layer 2 Network view.

+ NNMi 9 is required for these CIs to be created.

* Nodes are identified by the **NodeRole** attribute.

Note: UCMDB Content Pack 9 enhances NNMi integration support of large NNMi environments, allowing you to control the number of Layer2Connections, VLANs and Nodes to get from NNMi per query.

Appendix B: Creating a New RTSM User

The following steps show how to create a new RTSM user for the NNMi – BSM topology integration.

1. Log in to the RTSM JMX Console.
2. Access **UCMDB:service=Security Services > createIntegrationUser**.

createIntegrationUser

Create integration user

Name	Type	Value	Description
customerID	java.lang.Integer	<input type="text"/>	Customer ID
userName	java.lang.String	<input type="text"/>	User Name
password	java.lang.String	<input type="text"/>	Password
dataStoreOrigin	java.lang.String	<input type="text"/>	Data Store Origin - Unique identifier of the application integrating with CMDB

3. Enter the user name and password.


Use the user and password by which the integration user was created in the NNM integration configuration page.

Note: The dataStoreOrigin field is not mandatory; it is only needed if a priority must be specifically defined for this integration under reconciliation priorities.

Appendix C: NNMi - CI Attribute Mapping

The following diagrams show the mapping of NNMi object attributes to the equivalent CI attributes in BSM. Note that the **Monitored By** attribute is set to include NNM for each of the CI types.

NNMi Node - Node CI Attribute Mapping

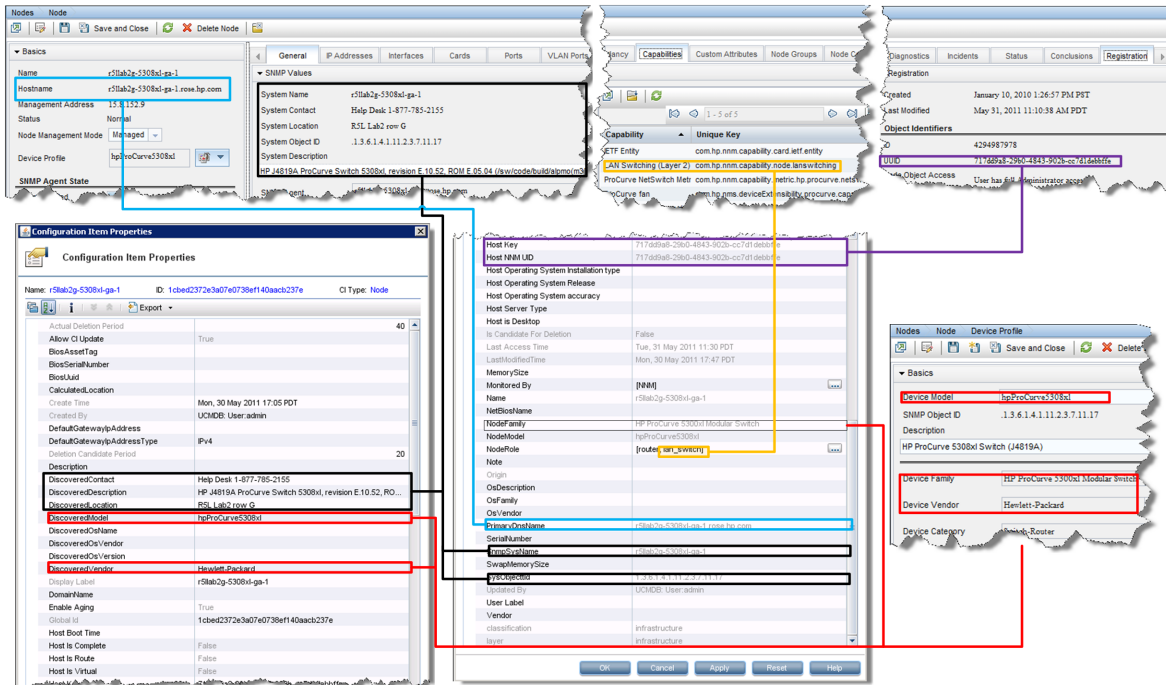

NNMi Interface - Interface CI Attribute Mapping

The image shows two windows from the HP NNMi interface. The left window is the 'Interface' configuration page for 'ethernet_9'. The right window is the 'Configuration Item Properties' dialog for the same interface.

Interface Configuration (Left Window):

- Name: ethernet_9
- Status: No Status
- Management Mode: Managed
- Direct Management Mode: Inherited
- Hosted On Node: ovresx4-ilo
- Physical Address: 0010182477D6
- SNMP Values:
 - ifName: ethernet_9
 - ifAlias: Local Area Connection 2
 - ifDescr: Broadcom NetXtreme Gigabit Ethernet #2
 - ifIndex: 12
 - ifSpeed: 0 bps
 - ifType: ethernetCsmacd

Configuration Item Properties (Right Window):

Name: ethernet_9 ID: 376c7da443bac3348fe899e69959f1aa CI Type: Interface

Actual Deletion Period	40
AdminStatus	
Allow CI Update	True
Create Time	Mon, 30 May 2011 17:12 PDT
Created By	UCMDB: User:admin
Deletion Candidate Period	20
Description	
Display Label	ethernet_9
Enable Aging	True
Global ID	376c7da443bac3348fe899e69959f1aa
InterfaceAlias	Local Area Connection 2
InterfaceDescription	Broadcom NetXtreme Gigabit Ethernet #2
InterfaceIndex	12
InterfaceName	ethernet_9
InterfaceRole	
InterfaceSpeed	0
InterfaceType	ethernetCsmacd
Is Candidate For Deletion	False
Is Pseudo Interface	False
Is Virtual	False
Last Access Time	Tue, 31 May 2011 11:35 PDT
Last Modified Time	Mon, 30 May 2011 17:51 PDT
MacAddress	0010182477D6
Monitored By	[NNMi]
Name	
Note	
OperationalStatus	
Origin	
SerialNumber	
Updated By	UCMDB: User:admin
User Label	
classification	infrastructure
layer	infrastructure

NNMi IP Address - IpAddress CI Attribute Mapping

The image shows two screenshots from the HP NNMi interface. The left screenshot shows the 'IP Address' configuration page with various fields. The right screenshot shows the 'Configuration Item Properties' dialog box for the same IP address, displaying a list of attributes and their values.

IP Address Configuration (Left Screenshot):

- Address: 15.8.153.12
- Prefix Length: 21
- Status: No Status
- Management Mode: Managed
- Direct Management Mode: Inherited
- IP Address State:
 - State: Not Polled
 - State Last Modified: January 10, 2010 1:26:16 PM PST
- In Interface: DEFAULT_VLAN
- Hosted On Node: r3-ga-hpsm-05
- In Subnet: 15.8.152.0/21

Configuration Item Properties (Right Screenshot):

Name: 15.8.153.12 ID: dcl9fec2c3ef3438c202d49c5261af9f CI Type: IpAddress

Actual Deletion Period	40
Allow CI Update	True
AuthoritativeDnsName	
Create Time	Mon, 30 May 2011 17:13 PDT
Created By	UCMDB: User:admin
Deletion Candidate Period	20
Description	
Display Label	15.8.153.12
Enable Aging	True
Global Id	dcl9fec2c3ef3438c202d49c5261af9f
IP Address	15.8.153.12
IP DHCP Domain Name	
IP Is Broadcast	
IP Network Address	
IP Network Class	
IP Network Mask	
IP Network Type	
IP Probe Name	
IpAddressProperty	
IpAddressType	IPv4
IpAddressValue	0000:0000:0000:0000:0000:ffff:0f08:990c
Is Candidate For Deletion	False
Is Managed	True
Is Virtual	False
Last Access Time	Tue, 31 May 2011 11:44 PDT
LastModifiedTime	Mon, 30 May 2011 17:52 PDT
Monitored By	[NNMi]
Name	15.8.153.12
Note	
Origin	
RoutingDomain	DefaultDomain
Updated By	UCMDB: User:admin
User Label	
classification	network
layer	infrastructure

NNMi IP Subnet - IpSubnet CI Attribute Mapping

The image illustrates the attribute mapping between an IP Subnet Configuration Item (CI) and its properties in NNMi. On the left, the 'IP Subnets' window shows the 'Basics' tab for an IP Subnet with the following attributes:

Attribute	Value
Name	15.8.152.0/21
Prefix	15.8.152.0
Prefix Length	21

On the right, the 'Configuration Item Properties' window shows the corresponding fields for this CI:

Property	Value
Name	15.8.152.0
IpAddressType	IPv4
IpAddressValue	0000:0000:0000:0000:ffff:0f08:9800
IpPrefixLength	21
Monitored By	[NNMi]

Arrows indicate the mapping from the IP Subnet CI attributes to the Configuration Item Properties fields.

NNMi Card - HardwareBoard CI Attribute Mapping

The screenshot illustrates the mapping of attributes between the main console and the Configuration Item Properties dialog for a HardwareBoard CI. The main console shows the 'Basics' tab with the following attributes:

- Name: C
- Hosted On Node: swbbsw
- Status: Normal
- Management Mode: Managed
- Direct Management Mode: Inherited
- Hosted On Card: [Empty]
- Redundant Group: [Empty]
- Card State: Administrative State: Up

The 'General' tab in the main console shows the following attributes:


- Model Name: [Empty]
- Type: hpSwitch.ModuleJ8702A
- Serial Number: SG915AT0WH
- Firmware Version: K.11.12
- Hardware Version: 1
- Software Version: K.12.62
- Index: C
- Physical Index: 39
- Description: PreCurve J8702A 24p Gig-T zl Module

The Configuration Item Properties dialog shows the following attributes:


- Name: C
- ID: 0afb09afe12d8605e7ff7495cfb03479
- CI Type: HardwareBoard
- Actual Deletion Period: 40
- Allow CI Update: True
- BoardIndex: C
- Create Time: Mon, 30 May 2011 17:41 PDT
- Created By: UCMDB: User:admin
- Deletion Candidate Period: 20
- Description: [Empty]
- Display Label: C
- Enable Aging: True
- FirmwareVersion: K.11.12
- Global Id: 0afb09afe12d8605e7ff7495cfb03479
- HardwareBoardIndex: [Empty]
- HardwareVersion: 1
- Is Candidate For Deletion: False
- Is Virtual: False
- Last Access Time: Tue, 31 May 2011 11:28 PDT
- LastModifiedTime: Tue, 31 May 2011 11:28 PDT
- Monitored By: [NNMi]
- Name: C
- Note: [Empty]
- Origin: [Empty]
- SerialNumber: SG915AT0WH
- SoftwareVersion: [Empty]
- Updated By: UCMDB: User:admin
- User Label: [Empty]
- classification: infrastructure
- layer: infrastructure

Lines connect the attribute values in the main console to their corresponding values in the Configuration Item Properties dialog, demonstrating the mapping.

NNMi Port - PhysicalPort CI Attribute Mapping

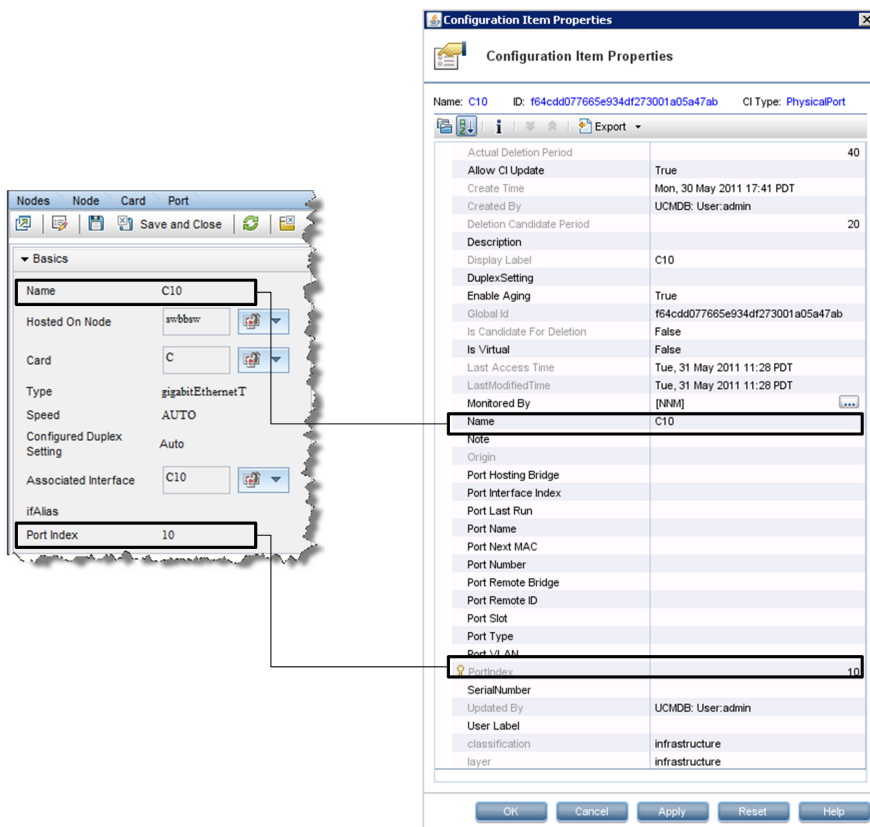

NNMi Layer 2 Connection - Layer2Connection CI Attribute Mapping

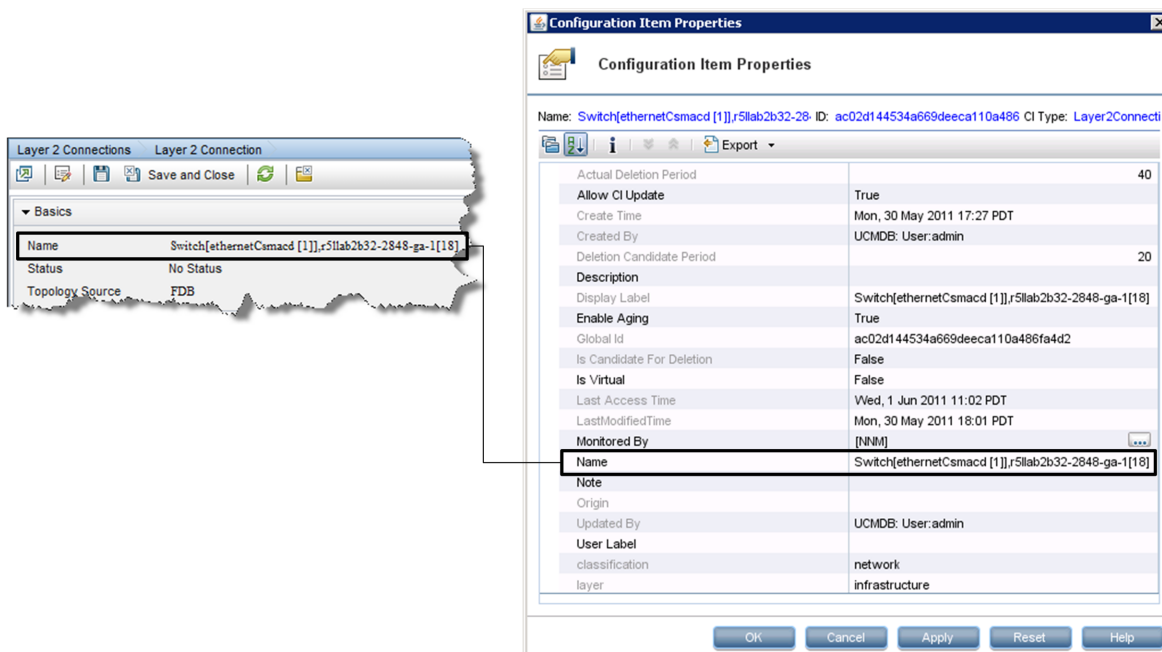

Send Documentation Feedback

If you have comments about this document, you can [contact the documentation team](#) by email. If an email client is configured on this system, click the link above and an email window opens with the following information in the subject line:

Feedback on HP NNMi - HP BSM Topology Integration Best Practices (Business Service Management 9.23)

Just add your feedback to the email and click send.

If no email client is available, copy the information above to a new message in a web mail client, and send your feedback to Sw-doc@hp.com.

We appreciate your feedback!