

HP OpenView Performance Agent

For AlphaServer Systems

Software Version: C.04.50

Installation and Configuration Guide

Manufacturing Part Number: B7491-90070
October 2005



Legal Notices

Warranty

Hewlett-Packard makes no warranty of any kind with regard to this document, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Hewlett-Packard shall not be held liable for errors contained herein or direct, indirect, special, incidental or consequential damages in connection with the furnishing, performance, or use of this material.

A copy of the specific warranty terms applicable to your Hewlett-Packard product can be obtained from your local Sales and Service Office.

Restricted Rights Legend

Use, duplication, or disclosure by the U.S. Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause in DFARS 252.227-7013.

Hewlett-Packard Company
United States of America

Rights for non-DOD U.S. Government Departments and Agencies are as set forth in FAR 52.227-19(c)(1,2).

Copyright Notices

© Copyright 1983-2005 Hewlett-Packard Development Company, L.P.

No part of this document may be copied, reproduced, or translated into another language without the prior written consent of Hewlett-Packard Company. The information contained in this material is subject to change without notice.

Trademark Notices

UNIX® is a registered trademark of The Open Group.

Adobe® and Acrobat® are trademarks of Adobe Systems Incorporated.

Windows® and MS Windows ® are U.S. registered trademarks of Microsoft Corporation.

Microsoft® is a U.S. registered trademark of Microsoft Corporation.

All other product names are the property of their respective trademark or service mark holders and are hereby acknowledged.

Support

Please visit the HP OpenView support web site at:

<http://www.hp.com/managementsoftware/support>

This web site provides contact information and details about the products, services, and support that HP OpenView offers.

HP OpenView online software support provides customer self-solve capabilities. It provides a fast and efficient way to access interactive technical support tools needed to manage your business. As a valuable support customer, you can benefit by using the support site to:

- Search for knowledge documents of interest
- Submit enhancement requests online
- Download software patches
- Submit and track progress on support cases
- Manage a support contract
- Look up HP support contacts
- Review information about available services
- Enter discussions with other software customers
- Research and register for software training

Most of the support areas require that you register as an HP Passport user and log in. Many also require a support contract.

To find more information about access levels, go to:

http://www.hp.com/managementsoftware/access_level

To register for an HP Passport ID, go to:

<http://www.managementsoftware.hp.com/passport-registration.html>

Contents

1	Installing OpenView Performance Agent	7
	Introducing OV Performance Agent	7
	Installation Requirements	9
	Supported Architecture and Operating Systems	9
	Hardware	9
	Software	10
	Communication Protocols	10
	Disk Space	11
	Installation Procedures	12
	To Install OV Performance Agent	14
	Installing OV Performance Agent on Symbolic Links	17
	Installing OV Performance Agent with OV Operations Agent Installed on Your System	17
	Deploying OV Performance Agent Using OV Operations	18
	The install.ovpa Script	19
	Removing OV Performance Agent	20
2	Starting and Running OV Performance Agent	21
	Introduction	21
	Starting and Stopping OV Performance Agent	22
	Using the ovpa script	23
	Using the mwa script	24
	Changing Protocols	25
	Starting and Stopping Automatically	26
	The /etc/default/ovpa File	26
	Status Checking	29
	Communicating Across a Firewall	30
	Communicating in the HTTP Environment	31

Communicating in the DCE Environment	36
Configuring Secure Communication	44
Using Certificates	44
Using Client Authentication	44
Configuring Data Sources	48
Datasources Configuration File Format	49
Parm File	50
Defining Alarms	51
Viewing and Printing Documents	52
Glossary	55
Index	63

1 Installing OpenView Performance Agent

Introducing OV Performance Agent

HP OpenView Performance Agent (OVPA) captures performance, resource, and transaction data from your AlphaServer system. Using minimal system resources, the software continuously collects, summarizes, time stamps, and detects alarm conditions in current and historical resource data across your system. You can analyze the data using spreadsheet programs, Hewlett-Packard analysis products such as OV Performance Manager (OVPM), or third-party analysis products. Also, OV Performance Agent provides data access to OV Performance Manager and sends alarm notifications to HP OpenView Network Node Manager (NNM) and OpenView Operations (OVO).



OV Performance Manager (OVPM) in this document refers only to versions 4.0 and later. The name OVPM 3.x is used throughout this document to refer to the product that was formerly known as PerfView.

OV Performance Agent uses data source integration (DSI) technology to receive, alarm on, and log data from external data sources such as applications, databases, networks, and other operating systems.

The comprehensive data logged and stored by OV Performance Agent allows you to:

- Characterize the workloads in the environment.
- Analyze resource usage and load balance.
- Perform trend analyses on historical data to isolate and identify bottlenecks.
- Respond to error conditions.
- Perform service-level management based on transaction response time.
- Perform capacity planning.

- Solve system management problems before they arise.

For a comprehensive description of OV Performance Agent, see the *HP OpenView Performance Agent for UNIX User's Manual*.

Installation Requirements

Before installing OV Performance Agent, make sure that your system meets the requirements described in this section. Certain system and configuration prerequisites are necessary for OV Performance Agent to operate properly on your system.

Supported Architecture and Operating Systems

The table below lists the supported architecture and operating system versions, as well as the data communication protocols supported by each combination.

Table 1 Supported Architecture and operating system versions

Architecture	Operating System	Protocol
AlphaServer	Tru64 UNIX 5.1A	HTTP(S), DCE, NCS
AlphaServer	Tru64 UNIX 5.1B2	HTTP(S), DCE, NCS
AlphaServer	Tru64 UNIX 5.1B3	HTTP(S), DCE, NCS

Hardware

OV Performance Agent generally runs on hardware platforms supporting the operating system, including:

- AlphaServer DS10
- AlphaServer DS10L
- AlphaServer DS20E
- AlphaServer ES40
- AlphaServer ES45
- AlphaServer GS140
- AlphaServer GS160
- AlphaServer GS320

Software

- AlphaServer DS10
- AlphaServer DS10L
- AlphaServer DS20E
- AlphaServer ES40
- AlphaServer ES45
- AlphaServer GS140
- AlphaServer GS160
- AlphaServer GS320

Communication Protocols

OV Performance Agent supports the following communication protocols:

- HTTP(S) 1.1
- NCS 1.5.1
- Following is a table listing the compatibility between Tru64 UNIX operating system versions and DCE software versions.

Table 2 Supported Tru64 UNIX versions and DCE Runtime Services

Tru64 UNIX Version	DCE Runtime Services
5.1A	4.2
5.1B	4.3

Disk Space

OV Performance Agent installs in the `/usr/opt/perf/` and `/usr/opt/OV/` directories and creates its log and status files in the `/var/opt/OV/` and `/var/opt/perf/` directories.

- For first time installation of OV Performance Agent, 50 MB of disk space is required in the `/usr/opt/perf/` and `/usr/opt/OV/` directories.
- For OVPA databases and status files, allow for 125 MB of disk space in the `/var/opt/OV/` and `/var/opt/perf/` directories.



If you do *not* have enough space in your `/usr/opt/perf` and/or `/var/opt/perf` directories, you must install OV Performance Agent on symbolic links. See [Installing OV Performance Agent on Symbolic Links](#) on page 17.

For a description of how the `parm` file is used to limit and configure log file data storage, see the “`parm` File” section in Chapter 2 of your *HP OpenView Performance Agent for UNIX User’s Manual*.

Installation Procedures

OV Performance Agent comes on a CD installation media. The size of the product is approximately 70 MB, including the product documentation.

OV Performance Agent can run in HTTP, native NCS, and native DCE mode, as well as in emulated NCS mode via DCE, depending on the communication protocol and fileset selected.

OV Performance Agent is by default installed in HTTP mode if you are installing OVPA for the first time. The CD-ROM contains three installation filesets in tar archive files:

- `tarfile` consists of common OV Performance Agent files.
This fileset is needed regardless of the communication protocol used by OV Performance Agent. The fileset includes files needed to run in HTTP mode.
- `tarncs` consists of files specific for OV Performance Agent using `libbd` to run in NCS mode.
- `tardce` consists of files specific for OV Performance Agent using `dced` to run in:
 - DCE mode
 - emulated NCS mode using the `libdce.so` library.

Files from `tarfile` are always installed, as well as files from either `tarncs` or `tardce`, depending on the type of installation you choose.

Depending on which fileset is installed on the system, `perfstat -v` output lists major OV Performance Agent executable components along with the appropriate suffix which is either NCS or DCE.

The following example is an excerpt from output of `perfstat -v` and shows that NCS version of `scopeux` and `perflbd` are installed:

```
scopeux  C.03.61.00 NCS  05/13/02 OSF 4.0+
perflbd  C.03.61.00 NCS  05/13/02 OSF 4.0+
```

When running the installation script, you can choose a protocol and the fileset to install. For more information on installation options, see [The `install.ovpa` Script](#) on page 19.

To install the DCE fileset, you must have the DCE Runtime Services installed. Check for the correct packages by running `ls1pp -L | grep dce` to verify that the `dce.client` filesets are installed. If the filesets are *not* installed, install them, as they are a prerequisite for OV Performance Agent to run properly. If `dced` was *not* already running before installation, you have to start the `dced` daemon and OV Performance Agent manually. For more information on how to install DCE refer to your DCE-specific documentation. You can start OV Performance Agent using the `mwa` script.

By installing the DCE fileset, you have the capability of `dced` daemon to use either the DCE communication protocol or to emulate the NCS communication protocol.



The installation script checks the version of your DCE software. If your DCE software is not compatible with the OV Performance Agent version, a warning is displayed. Exit the OV Performance Agent installation process and install the compatible DCE version.

For information on compatibility between Tru64 UNIX operating system versions and DCE software versions, see [Table 2](#) on page 10.

The NCS fileset installation uses the `11bd` (Local Location Broker Daemon) for NCS communication.



The `dced` and `11bd` daemons cannot run at the same time. Make sure the `dced` daemon is *not* already running on your system by using `ps -ef | grep dced`. If you are sure no other programs are using the `dced`, you can use `/usr/bin/stop.dce` to stop it. See [Starting and Stopping Automatically](#) on page 26 for information about starting the daemons automatically.

If you have HP OpenView Operations agent installed on your system, see [Installing OV Performance Agent with OV Operations Agent Installed on Your System](#) on page 17.

During the process of installation a `/var/opt/perf/.ovpa_binaryset` file is created and the information about which fileset has been installed is written to it. It contains the text `Selected Binary= tarncs` if NCS fileset is installed, or the text `Selected Binary= tardce` if DCE fileset is installed. This information is used by the installation and removal scripts. The `ovpa_binaryset` file must *not* be edited manually.

To Install OV Performance Agent

While installing OV Performance Agent, you can specify the data communication protocol to be used and the fileset to be installed.

If you are installing OV Performance Agent for the first time, by default, the data communication protocol is set to HTTP and the set of files from `tarncs` is installed, if no additional option is specified at installation time.

If you are upgrading OV Performance Agent to the current version, the previously used protocol and corresponding fileset are retained. For a detailed description of the `install.ovpa` options, see [The `install.ovpa` Script](#) on page 19.



The HTTP communication protocol is always enabled, irrespective of the protocol or fileset you have selected for installation. The daemons used for HTTP data communication are always installed and active on your system.

The table below lists the protocol used and the fileset installed with different installation options of OV Performance Agent.

Table 3 OV Performance Agent installation options

Options	OVPA Standalone (No OVO 7.x)	OVPA on OVO 7.x installation in DCE mode	OVPA on OVO 7.x installation in NCS mode
Protocol			
<code>-p http</code>	HTTP	HTTP	HTTP
<code>-p dce</code>	DCE	DCE	NCS
<code>-p ncs</code>	NCS	DCE	NCS
No protocol specified	HTTP on a first time installation of OVPA and the previously used protocol on upgrade to the current version of OVPA		

Table 3 OV Performance Agent installation options

Options	OVPA Standalone (No OVO 7.x)	OVPA on OVO 7.x installation in DCE mode	OVPA on OVO 7.x installation in NCS mode
Fileset			
-b dce	tarfile, tardce	tarfile, tardce	tarfile, tarncs
-b ncs	tarfile, tarncs	tarfile, tardce	tarfile, tarncs
No fileset specified	tarfile and tarncs in a first time installation of OVPA and, tarfile and the previously installed fileset on upgrade to the current version of OVPA		

To install:

- 1 Make sure you are logged in as user **root**.
- 2 Mount the CD-ROM to a file system (using the **mount** command).
- 3 Change to the CD-ROM directory by typing:

```
cd /<directory>/ovpa
```

 where *<directory>* is your CD-ROM directory.
- 4 Type **ls** to verify that you are in the correct directory. The directory contains the `install.ovpa` script.
- 5 In case you intend to install OV Performance Agent in the cluster environment, check if `/usr/opt` and `/var/opt` are shared among cluster nodes. If they represent shared file systems, you should perform the following steps before you run the installation script:
 - a Create the following directories:


```
mkdir /usr/opt/perf
mkdir /var/opt/perf
```
 - b Make content-dependent symbolic links (CDSL):


```
mkcdsl -a /usr/opt/perf
mkcdsl -a /var/opt/perf
```
- 6 Run the installation script.

To install using the HTTP communication protocol, type:

```
./install.ovpa -p http -b ncs
```

To install using the DCE communication protocol, type:

```
./install.ovpa -p dce -b dce
```

To install using the NCS communication protocol in the emulated mode, type:

```
./install.ovpa -p ncs -b dce
```

To install using the NCS communication protocol, type:

```
./install.ovpa -p ncs -b ncs
```

For details on changing the communication protocol after installation, see [Changing Protocols](#) on page 25 in Chapter 2.

The installation script automatically starts all OV Performance Agent processes. If you do *not* want OV Performance Agent to start after installation, run the installation script with the option `-R`.



If you have HP OpenView Operations agent installed on your system, see [Installing OV Performance Agent with OV Operations Agent Installed on Your System](#) on page 17

The OV Performance Agent processes are also started or stopped automatically if you restart or shutdown. See [Starting and Stopping OV Performance Agent](#) on page 22 in Chapter 2.

7 Exit the CD-ROM directory by typing:

```
cd /
```

Unmount the CD-ROM.

OV Performance Agent installation is now complete. Go to [Chapter 2, Starting and Running OV Performance Agent](#) for details on other tasks you need to perform to get OV Performance Agent up and running.



For more information and late-breaking news about OV Performance Agent, see your Release Notes. You can find them in the file `/usr/opt/perf/ReleaseNotes/OVPA`.



If you are also running the Glance product on your system, be sure to update Glance to the same release version as OV Performance Agent. Both OV Performance Agent and Glance must always be the same version.

Installing OV Performance Agent on Symbolic Links

If you do *not* have enough space in `/usr/opt/perf` and/or `/var/opt/perf` directories, select an alternative directory (or directories) and symbolically link your `/usr/opt/perf` and/or `/var/opt/perf` to these directories.

For example:

```
ln -s /<dir>/var/opt/perf /var/opt/perf  
and/or
```

```
ln -s /<dir>/usr/opt/perf /usr/opt/perf
```

where `<dir>` stands for directory of your choice.

During the installation process, the `install.ovpa` script finds symbolic link(s) and will continue with the installation, showing on-screen message(s):

```
NOTE: Found symbolic link for /usr/opt/perf -> /<dir>/usr/opt/  
perf  
Installation will continue on this symbolic link  
and/or
```

```
NOTE: Found symbolic link for /var/opt/perf -> /<dir>/var/opt/  
perf  
Installation will continue on this symbolic link
```



For more information and late-breaking news about OV Performance Agent, see your Release Notes. You can find them in `/usr/opt/perf/ReleaseNotes/OVPA`.

Installing OV Performance Agent with OV Operations Agent Installed on Your System

If you are installing OV Performance agent for the first time, and if no communication protocol is specified, the default data communication mode is HTTP.

When `install.ovpa` is executed, the installation script automatically detects whether the OV Operations Agent 7.x is installed on your system and which communication protocol it is using. This information is gathered by checking for the existence and reading the contents of the `/var/opt/OV/conf/OpC/nodeinfo` file.

While upgrading OV Performance Agent, if OVO Agent 7.x is found, the `install.ovpa` script overrides any options you may have specified and notifies you of the options that will be used for installation:

- If NCS service is detected, the `install.ovpa` script is started with the `-p ncs -b ncs` options, enforcing the deployment of the NCS communication protocol and the NCS set of files. The following message is displayed:

```
OVO or OVO subagent has been found on your system.  
Installation will continue with -p ncs -b ncs option.
```

- If DCE service is detected, the `install.ovpa` script is started with the `-p dce -b dce` options, enforcing the deployment of the DCE communication protocol and the DCE set of files. The following message is displayed:

```
OVO or OVO subagent has been found on your system.  
Installation will continue with -p dce -b dce option.
```

The presence of OV Operations 8.x agent on your system does not affect the default installation behavior of OV Performance Agent. During first time installation of OV Performance Agent on systems that have OV Operations 8.x agent installed, the HTTP communication protocol and the NCS set of files are installed by default. If you are upgrading OV Performance Agent, the existing communication protocol is used, and the corresponding set of files is installed. For more information on how OV Performance Agent is installed, see [To Install OV Performance Agent](#) on page 14.

Deploying OV Performance Agent Using OV Operations

If you are using HP OpenView Operations for UNIX 8.x, you can install HP OpenView Performance Agent from the management server to a Tru64 UNIX managed node.

For installation instructions from an HP OpenView Operations for UNIX 8.x management server, refer to the chapter “HP OpenView Performance Agent” in the *HP OpenView Operations for UNIX Administrator's Reference*.

The install.ovpa Script

If you do not want to automatically start OV Performance Agent after installation, use the following command line option:

```
install.ovpa [-R] [-p dce | ncs | http] [-b dce | ncs]
```

The command line options have the following meaning:

- R Do *not* start OV Performance Agent upon successful installation. By default, OV Performance Agent is automatically started.
- p Enforce the deployment of the selected communication protocol.
 - http Use HTTP communication protocol
 - dce Use DCE communication protocol
 - ncs Use NCS communication protocol
- b Enforce the installation of the selected fileset.
 - dce Install the DCE fileset
 - ncs Install the NCS fileset

When no options are specified, and you are installing OV Performance Agent for the first time, the default is to install the NCS fileset and use the HTTP communication protocol. The option `-p dce -b ncs` is *not* allowed, since the NCS fileset does *not* support the DCE communication protocol.

Removing OV Performance Agent

If you need to remove OV Performance Agent from a system, use the `ovpa.remove` script that is in the `/usr/opt/perf/bin/` directory. However, before removing OV Performance Agent, make sure you archive any log files that were created. These files contain performance data for that system and can be used to extract or view data at a later time.

During the removal process, you will be asked if you want to remove the OV Performance Agent configuration and logfiles:

```
"Do you want to remove OVPA configuration and logfiles in the /
var/opt/perf/datafiles and /var/opt/perf directory?"
```

Answer **N** (no) if you want to keep the configuration and log files at the original location.



Note that these files will *not* be overwritten by a new OV Performance Agent installation. The new configuration files are uploaded to the `/opt/perf/newconfig` directory.

It is possible that some product packages may remain installed on the system, if those packages are shared across other OpenView products and are required by other tools. They will be removed only when the last tool requiring them is also removed.

2 Starting and Running OV Performance Agent

Introduction

This chapter describes the tasks involved in starting up and running OV Performance Agent after it has been installed on your AlphaServer system. The following topics are discussed:

- Starting and Stopping OV Performance Agent
- Communicating Across a Firewall
- Configuring Secure Communication
- Configuring Data Sources
- Defining Alarms



If you are planning to log data from other sources using data source integration (DSI), and have *not* yet done so, read the *HP OpenView Performance Agent for UNIX Data Source Integration Guide*.

Starting and Stopping OV Performance Agent

When installation is complete, you can start OV Performance Agent. The OV Performance Agent scripts, `ovpa` and `mwa`, let you start all or some processes and stop or restart currently running processes.

If you are installing OV Performance Agent for the first time, the default data communication mode is HTTP. If you are upgrading OV Performance Agent, the previously used DCE or NCS data communication mode is enabled by default. For information on changing the data communication protocol, see [Changing Protocols](#) on page 25.

Depending on the data communication protocol you want to enable, you can use the `ovpa` or `mwa` script to start or stop OVPA.



It is recommended that you use the `ovpa` script to start OVPA and enable OVPA to use the HTTP data communication protocol. However, if you want to use the legacy DCE or NCS data communication protocol, the `mwa` script is provided for backward compatibility.

The following table lists the different services that are started for the different protocols.

Table 4 OVPA services started for different protocols

Services started for HTTP protocol	Services started for DCE or NCS protocol
<code>scopeux</code>	<code>scopeux</code>
<code>coda</code>	<code>coda</code>
<code>perfalarm</code>	<code>perfalarm</code>
<code>ovc</code>	<code>ovc</code>
<code>ovbbccb</code>	<code>ovbbccb</code>
	<code>llbd (NCS mode)</code>
	<code>perflbd</code>
	<code>rep_server</code>
	<code>alarmgen (if perfalarm is not present)</code>



The `perflbd`, `rep_server`, and `alarmgen` processes are used for DCE communication

Before you start OV Performance Agent, check to see if any processes are running by typing:

```
/usr/opt/perf/bin/perfstat
```

Using the `ovpa` script

To start OV Performance Agent and its processes using `ovpa`:

- 1 Log in as user **root**.
- 2 Type: **`/usr/opt/perf/bin/ovpa start`**

The `ovpa start` script starts OV Performance Agent and all its processes, including the `scopeux` (data collector), `coda`, `ovc`, `ovbbccb` and the alarm generator. As the script executes, the status of the processes that are started is displayed on the screen.

You can stop OV Performance Agent processes while they are running and restart them using the `ovpa` script and appropriate options.

- `ovpa stop` stops all OV Performance Agent processes except `ovc` and `ovbbccb`. These processes must always be left running. If OpenView Operations agent is running on the system, `ovpa stop` does not stop the `coda` daemon.

Individual components can be reinitialized as well with the `ovpa restart` option. Changes to configuration files will *not* take effect on your system unless the corresponding process is restarted.

- `ovpa restart server` causes `coda` to stop and then start, temporarily disabling alarming and access for clients such as OV Performance Manager, and rereads the `datasources` file. It also stops and starts the `perfalarm` process and rereads the `alarmdef` file.
- `ovpa restart` causes `scopeux` and the server processes to temporarily stop and then start. It also rereads the `parm` file.
- `ovpa restart alarm` causes the `perfalarm` process to temporarily stop and then start and reread the `alarmdef` file, so that if you have made changes to the file, the new alarm definitions will take effect without restarting all OVPA processes. This action does not disrupt other services.

Using the mwa script

To start OV Performance Agent and its processes:

1 Log in as user **root**.

2 Type:

```
/usr/opt/perf/bin/mwa [-ncs | -dce] start
```



You can start OV Performance Agent using DCE communication protocol only if you have the DCE set of binaries installed.

If you are running OV Performance Agent supporting a DCE communication protocol and you want to change to NCS (NCS fileset must be installed on your system), you have to edit the `/etc/default/ovpa` file and set the `MWA_PROTOCOL` variable to `ncs` and the `MWA_LLBD_COMMAND` to `/usr/opt/perf/bin/llbd`. Otherwise, you will get OV Performance Agent running the `dced` daemon that emulates the NCS local location broker. You may also need to stop the `dced` daemon before running the `./ovpa start` script. To confirm that `llbd` is running, run:

```
ps -ef | grep llbd
```

If OV Performance Agent is started in the normal boot sequence, all client applications using NCS (`llbd`) must be started after the startup of all HP OpenView products (OV Performance Manager, OV Operations, OV Performance Agent, and so on), to ensure that proper communication services have been enabled.

The `mwa` script starts OV Performance Agent and all its processes, including the `scopeux` data collector, `coda`, `ovc`, `ovbbccb`, `perflbd`, `rep_server`, and the alarm generator. As the script executes, the status of the processes that are started is displayed on the screen.

You can stop OV Performance Agent processes while they are running and restart them using the `mwa` script and its appropriate options.

- `mwa stop` stops all OV Performance Agent processes. If OpenView Operations agent is running on the system, `mwa stop` does not stop the `coda` daemon.

Individual components can be reinitialized as well with the `mwa restart` option. Changes to configuration files will *not* take effect on your system unless the corresponding process is restarted.

- `mwa restart server` rereads the `perflbd.rc` file. This action causes `coda` and the repository servers to stop and then start, temporarily disabling alarming and access for clients such as OV Performance Manager. The HTTP based alarm generator, `perfalarm`, is enabled by default¹.
- `mwa restart scope` rereads the `parm` file. This action causes the `scopeux` collector to temporarily stop and then start.
- `mwa restart alarm` causes the `alarmdef` file to be reprocessed. This action does not disrupt other services.

Changing Protocols

During first time installation of OV Performance Agent, the protocol selected is written to the `/etc/default/ovpa` file as an addition to the environment variable `MWA_PROTOCOL` (for example, `MWA_PROTOCOL=http`). See [The `/etc/default/ovpa` File](#) on page 26, for more information on the `ovpa` configuration file.

To switch to DCE or NCS mode:

You cannot use the `ovpa` script to start or stop DCE or NCS data communication components. You must set the `MWA_PROTOCOL` parameter in the `/etc/default/ovpa` file to **dce** or **ncs**, and start OVPA using the `mwa` script.

To switch to HTTP mode:

If you want to switch to the HTTP protocol, you must set the `MWA_PROTOCOL` parameter in the `/etc/default/ovpa` file to **http** and restart OVPA. To start OVPA using the HTTP data communication mode, you can use either the `ovpa` or `mwa` script.

If `MWA_PROTOCOL` is set to **http**, both the `ovpa` and `mwa` scripts start the same components.

1. To enable the DCE based alarm generator, `alarmgen`, stop OV Performance Agent, rename the `perfalarm` executable to `perfalarm.old`, and restart OV Performance Agent using the `mwa` script.

The `mwa` script starts the HTTP, DCE, or NCS data communication components depending on the value set for `MWA_PROTOCOL`.

- ▶ The HTTP communication protocol is always enabled, irrespective of the protocol or fileset you have selected for installation. The daemons used for HTTP data communication are always installed and active on your system.

Starting and Stopping Automatically

The file `/etc/init.d/ovpa` causes OV Performance Agent to start automatically when your system restarts and to stop automatically if your system shuts down.

If you do not want OV Performance Agent either to start or to stop automatically, edit the file `/etc/default/ovpa` and change the line `MWA_START=1` to `MWA_START=0`. For more information about the `/etc/default/ovpa` file see [The `/etc/default/ovpa` File](#) on page 26.

- ▶ The files `/etc/init.d/ovpa` as well as `/etc/default/ovpa` are removed when OV Performance Agent is removed from a system and are *not* overwritten when OV Performance Agent is patched or updated.



The `dced` and `llbd` daemons cannot run at the same time. Make sure the `/etc/inittab` file starts only the daemon you need.

The `/etc/default/ovpa` File

The `/etc/default/ovpa` file is available with OV Performance Agent. The file contains various environment variables that control the behavior of OV Performance Agent when starting it. The file is a source file for the following scripts:

- `/usr/opt/perf/bin/ovpa` OV Performance Agent control script

- `/sbin/init.d/ovpa` OV Performance Agent auto-start script



The file is removed only when OV Performance Agent is removed from a system and is *not* overwritten when OV Performance Agent is updated. When OV Performance Agent is updated, a copy of the default `/etc/default/ovpa` file is left in the `/usr/opt/perf/newconfig` directory under the name `ovpa.default` so that your customized copy does *not* get affected.

The environment and shell variables that can be modified to change the default behavior of OV Performance Agent are listed below.

- `MWA_START` controls the auto-start of OV Performance Agent whenever your system restarts. The variable can have one of the following values:

- 0 do *not* start OV Performance Agent at system startup
- 1 start OV Performance Agent at system startup

- `MWA_PROTOCOL` determines whether OV Performance Agent servers register their interfaces as NCS or DCE in addition to HTTP. By default, in a first time installation, the variable is set to `http`, and can be changed to one of the following values:

- `ncs` run OV Performance Agent as an NCS service
 - `dce` run OV Performance Agent as a DCE service (only possible if the DCE set of binaries is installed)
- Use only lower case letters to designate `ncs` or `dce`.

- The `MWA_START_COMMAND` contains a variable that is used to start OV Performance Agent whenever your system restarts. Normally, the variable is set to `/usr/opt/perf/bin/mwa start`.
- The `MWA_LLBD_COMMAND` contains the command string to start the NCS local location broker daemon. The `dced` daemon is capable of emulating the NCS local location broker. However, if you still want to run the genuine NCS `llbd` you can set the command to:

`MWA_LLBD_COMMAND="/usr/opt/perf/bin/llbd"`



The variable only applies when OV Performance Agent operates in NCS mode if `llbd` or `dced` are *not* already running.

- `MWA_RPC_INETADDR` defines the network interface that has to be used, on multi-homed systems running in the NCS mode, for communication with client products, such as OV Performance Manager. NCS does *not* support registration to multiple interfaces, therefore this environment variable must explicitly be set if the default network interface cannot be reached by the client products. The variable's value, *which must be exported*, is the IP address in dotted format. For example:

```
MWA_RPC_INETADDR=127.0.0.1
export MWA_RPC_INETADDR
```

The following variables are DCE environment variables that affect only the behavior of DCE runtime and DCE based servers. Note that some environment variables must be set in the appropriate startup script of the existing DCE product in order to work correctly. Such environment variables are marked with "Yes" in the DCE runtime line.



If a DCE installation has been detected and is not running, OV Performance Agent will not start and will generate an error message.

- `RPC_RESTRICTED_PORTS` restricts the range from which the DCE runtime selects the communication ports to the listed range. This behavior is useful when a client and server must communicate through a port filtering firewall. Note that the range must *not* be too small or else the runtime will run out of resources. The `RPC_RESTRICTED_PORTS` environment variable affects the entire DCE runtime and thus all applications that use DCE. Note that OV Performance Agent services require one communication port for each registered data source plus additional five ports. For example:

```
RPC_RESTRICTED_PORTS=ncadg_ip_udp [xxxx-yyy]
:ncacn_ip_tcp [xxxx-yyy]
export RPC_RESTRICTED_PORTS
```

For more information about Firewall support, see [Communicating Across a Firewall](#) on page 30.

- The `RPC_SUPPORTED_NETADDRESSES` environment variable is used to enable the binding of DCE services to the interfaces listed in the variable string. On multi-homed systems it is sometimes desired to enable the use of only certain networks for DCE based services. If you want to include network addresses to the DCE binding list, replace the 127.0.0.1 and 127.0.0.2 IP addresses from the example below with a list of real addresses, separated by a colon (:).

```
RPC_SUPPORTEDED_NETADDRS=127.0.0.1:127.0.0.2
export RPC_SUPPORTEDED_NETADDRS
```



You will have to set the `RPC_SUPPORTEDED_NETADDRS` variable in your DCE runtime script before running the `dced` daemon.

- The `RPC_UNsupported_NETIFs` environment variable prevent binding DCE services to the network interfaces listed in the variable string. On multi-homed systems you may sometimes need to prevent the usage of certain networks for DCE based services.

```
RPC_UNsupported_NETIFs="100:et02"
export RPC_UNsupported_NETIFs
```

Status Checking

Several status files are created in the `/var/opt/perf/` and `/var/opt/OV/` directories when OV Performance Agent is started. You can check the status of all or some OV Performance Agent processes using the `perfstat` command.

The following status files contain diagnostic information you can use to troubleshoot problems that may arise with the OV Performance Agent processes.

```
/var/opt/perf/status.alarmgen
/var/opt/perf/status.perflbd
/var/opt/perf/status.rep_server
/var/opt/perf/status.scope
/var/opt/perf/status.perfalarm
/var/opt/OV/log/coda.txt
```



Every time an OV Performance Agent process writes a message to its status file, it checks to see if the file is larger than one MB. If it is, the file is renamed to `status.filename.old` and a new status file is created.

Communicating Across a Firewall

In general, a firewall may be defined as a method for filtering the flow of data between one network and another. OV Performance Agent (OVPA) now supports HTTP 1.1 based communications interface for data access between client and server applications, in addition to the previously supported communication mechanism through a packet-filtering network firewall.




OV Performance Agent supports certificate-based secure (HTTPS) data communication only in the HP OpenView Operations environment. For more information, see [Configuring Secure Communication](#) on page 44.

The HTTP based interface is flexible, since it can use proxies, requires fewer ports and is firewall friendly. The `perflbd` and `rep_server` daemons, and their dependency on the DCE subsystem can still be used.

If a network firewall exists between two systems, OV Performance Manager and OV Reporter can get data from the OV Performance Agent system.

Figure 1 Communicating with OVPA in a Firewall Environment

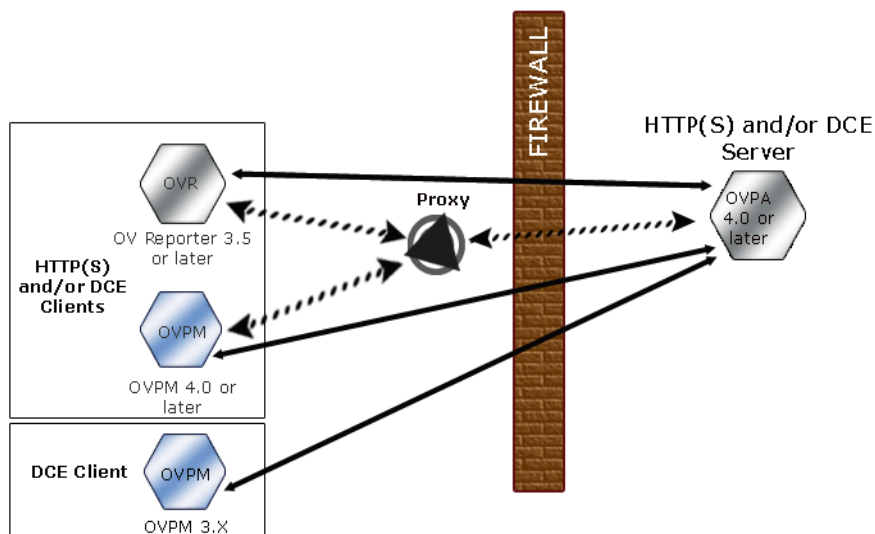

- ▶ The name OV Performance Manager 3.x is used throughout this document to refer to the product that was formerly known as PerfView.

Communicating in the HTTP Environment

There are different ways to configure HTTP communication in a firewall environment. The recommended way is to use HTTP proxies for OVPA data communication through a firewall. This simplifies the configuration by using proxies that are often already in use in your environment. The firewall must be open for exactly one port if proxies are to be used in both directions.

In a typical remote communication, a client, using the source port, connects to a server that is listening on the destination port on a remote system. For firewall configuration it is important to know which system initiates the

communication (**client**) and which receives communication requests (**server**), so that the firewall rules can be set up accordingly. [Figure 1](#) on page 31 shows how OVPA communicates with Reporter (version 3.5 or later) and OV Performance Manager (OVPM version 4.0 or later) through a firewall. OVPA is an HTTP or HTTPS server. Reporter and OVPM 4.x are HTTP clients. OVPM 5.0 can be an HTTP or HTTPS client. If an HTTP proxy is used, Reporter and OVPM communicate with OVPA via the proxy.

OVPM version 3.x uses the PerfView technology. PerfView does not use the HTTP datacomm components, but it will connect to OV Performance Agent 4.5 when the DCE data communication mode is enabled.

Ports Used for Communication

To access data collected by OVPA, ports for the HTTP server (OVPA) and the HTTP client (Reporter and OVPM) must be opened. There are two ways to configure HTTP clients in a firewall environment: with an HTTP proxy and without. In both cases, to access data from OVPA nodes, only one port needs to be opened on the HTTP server (OVPA) side.

With HTTP Proxy

The recommended way is to use HTTP proxies when communicating through a firewall. This simplifies the configuration because proxies are often in use and the firewall needs to be opened only for the proxy system and for a smaller number of ports. It is recommended that you do not change the default 383 port.

Default Ports for OVPA (with proxies) are shown in [Table 5](#).

Table 5 OVPA Default Ports

Source	Destination	Protocol	Source Port	Destination Port	Description
PROXY	MGD NODE	HTTP	Defined by the proxy	383	Communication Broker

To configure the proxy, run the following command;

```
ovconfchg -ns bbc.http -set PROXY proxy:port+(a)-(b)
```


The variables *a* and *b* are comma separated lists of hostnames, networks, and IP addresses that apply to the proxy. Multiple proxies may be defined for one PROXY key using the “;” or “,” delimiter. “-” before the list indicates that those entities do not use this proxy, “+” before the list indicates that those entities do use this proxy. The first matching proxy is used.

For example:

```
ovconfchg -ns bbc.http -set PROXY srv1.abc.com:8088+*
```

Without HTTP Proxy

If HTTP proxies are not available, additional configuration settings are required on the Reporter and OVPM system. See the section, [Configure Reporter/OVPM without HTTP Proxy](#) on page 35.

Configuring Ports Across Firewall

To configure communications with OVPA in a firewall environment, follow these guidelines:

- Understand your firewall environment including the client and server data flow.
- Check the port usage in your environment.
- Refer to the following sections for details on configuring communication across firewalls, when proxies are used:
 - [Configure OVPA Ports](#)
 - [Configure Reporter and/or OVPM](#)
 - [Other Considerations](#)
- Test the communication across the firewall.

Configure OVPA Ports

On an OVPA system, by default, the BBC communication broker uses port 383 and coda uses a dynamically allocated port.

Configuring the Default Communication Broker Port:

Use the `ovconfchg` tool to change the port settings on the OV Performance Agent system. Type the commands:

```
ovconfchg -ns bbc.cb.ports -set SERVER_PORT <port number>
```

```
ovc -restart
```

Configuring OVPA for Single Port Communication:

On the OV Performance Agent system, `codā` uses a port that is dynamically allocated. To change the port setting to use the communication broker's port specified above, type the following commands:

```
ovconfchg -ns coda.comm -set SERVER_BIND_ADDR localhost  
ovc -restart
```

Configure Reporter and/or OVPM

You can configure the HTTP clients (Reporter or OVPM for Windows or UNIX) in a firewall environment in one of two ways:

- With HTTP Proxy – This is the recommended way. See the section [Configure Reporter/OVPM with HTTP Proxy](#).
- Without HTTP Proxy – This is *not* the recommended way. See the section [Configure Reporter/OVPM without HTTP Proxy](#).

Configure Reporter/OVPM with HTTP Proxy

When an HTTP proxy is used, Reporter and/or OVPM for Windows and UNIX need to be configured to specify the proxy to be used to contact OVPA.

Configure OVPM 5.0 as follows:

Type the following command,

```
ovconfchg -ns bbc.http -set PROXY proxy:port+(a)-(b)
```

The variables *a* and *b* are comma separated lists of hostnames, networks, and IP addresses that apply to the proxy. Multiple proxies may be defined for one PROXY key using the “;” or “,” delimiter. “-” before the list indicates that those entities do not use this proxy, “+” before the list indicates that those entities do use this proxy. The first matching proxy is used.

Configure Reporter/OVPM 4.x as follows:

Edit the `/var/opt/OV/conf/BBC/default.txt` configuration file.

In the [DEFAULT] section of the `default.txt` file, locate the lines that relate to the PROXY and set the PROXY parameter as follows:

```
PROXY web-proxy.hp.com:8088-(localhost, *.hp.com) + (*)
```

In this example, the proxy `web-proxy` will be used with port 8088 for every server (*) except requests for the local machine (localhost) and requests internal to HP (matching *.hp.com, for example **www.hp.com.**)

Configure Reporter/OVPM without HTTP Proxy

If your firewall environment does not have proxies then you may want to specify the HTTP client ports directly if you want to filter based on both source and destination.

If Reporter and OVPM for Windows are installed on the same system and both access OVPA in parallel, you would specify a port range as described in this section. If they are running on different systems, you can instead specify a single port for each.

Configure OVPM 5.0 as follows:

Type the following command,

```
ovconfchg -ns bbc.http -set CLIENT_PORT <port range>
```

Where *<port range>* is the range of ports you want to use.

For example:

```
ovconfchg -ns bbc.http -set CLIENT_PORT 14000-14003
```

Configure Reporter/OVPM 4.x as follows:

Edit the `/var/opt/OV/conf/BBC/default.txt` file as follows:

- 1 Locate the lines that apply to `CLIENT_PORT` and uncomment the line
`;CLIENT_PORT =.`
- 2 Specify the port range for the `CLIENT_PORT` parameter. For example:
`CLIENT_PORT = <port range>`

Where *<port range>* is the range of ports you want to use. For example:

```
CLIENT_PORT = 14000-14003
```

Other Considerations

About Systems with Multiple IP Addresses

If your environment includes systems with multiple network interfaces and IP addresses and you want to use a dedicated interface for the HTTP-based communication, then you can use the `nodeinfo` parameter `CLIENT_BIND_ADDR` and `SERVER_BIND_ADDR` to specify the IP address that should be used.

On the OVPA system, specify the `SERVER_BIND_ADDR` parameter as follows:

```
ovconfchg -ns bbc.http -set SERVER_BIND_ADDR <IP Address>
```

On the OVPM 5.0 system, specify the `CLIENT_BIND_ADDR` parameter as follows:

```
ovconfchg -ns bbc.http -set CLIENT_BIND_ADDR <IP Address>
```

On the Reporter/OVPM 4.x system, specify the `CLIENT_BIND_ADDR` parameter.

Edit the `/var/opt/OV/conf/BBC/default.txt` file as follows:

- 1 Locate the lines that apply to `CLIENT_BIND_ADDR` and uncomment the line

```
    ;CLIENT_BIND_ADDR =
```
- 2 Specify the IP address for the `CLIENT_BIND_ADDR` parameter.

Communicating in the DCE Environment

In the DCE environment, OV Performance Agent uses dynamically allocated socket port numbers for interprocess communication. To communicate through a packet-filtering network firewall, you must configure the OV Performance Agent servers to use statically defined port numbers.



This section is applicable only if you are using the DCE communication protocol. NCS communication protocol uses different port ranges and cannot be used with a firewall.

Configuring OV Performance Manager and OV Performance Agent Communication


The method of configuring the socket port numbers for OV Performance Agent depends on the version of OV Performance Manager that will be communicating with OV Performance Agent. To configure the socket port numbers, follow the instructions in [Configuring OV Performance Manager C.03.00 and Later with OV Performance Agent Communication](#).

Configuring OV Performance Manager C.03.00 and Later with OV Performance Agent Communication

The way to configure OV Performance Agent and OV Performance Manager firewall communication depends on which of these two programs is the source of the communication.

Configuring OVPM C.03.00 and Later (Source) with OVPA Communication

When OV Performance Manager is the source, it communicates with OV Performance Agent using the TCP protocol with the TCP socket port numbers shown in the following figure.

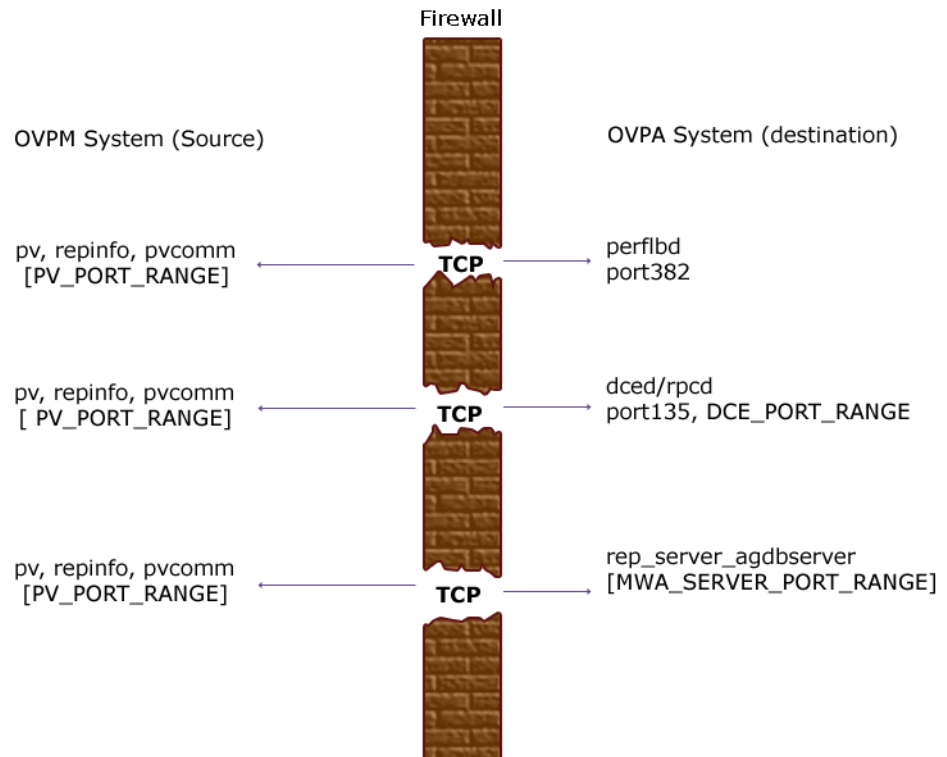

To configure the `MWA_SERVER_PORT_RANGE` as statically defined TCP socket port numbers, add the following entries to the `/etc/services` file:

```
agdbserver    xxxx/tcp
rep_server    yyyy/tcp
```

where *xxxx* and *yyyy* specify unused port numbers. `agdbserver` and `rep_server` register at the specified port numbers. If there are multiple data sources configured in the `perflbd.rc` file, the first `rep_server` uses the *yyyy* port number specified above. All other `rep_servers` add one to the last used port number.

For example, if you include the following lines in the `/etc/services` file:

```
agdbserver    20001/tcp
rep_server    20002/tcp
```


and there are three data sources configured in the `perflbd.rc` file, OV Performance Agent will use the following TCP port numbers:

```
agdbserver    20001
rep_server    20002
rep_server    20003
rep_server    20004
```

Based on the `/etc/services` example above, the `MWA_RANGE` will be 20001-20004.

Configuring OVPA (Source) with OVPM C.03.00 and Later Communication

When OV Performance Agent is the source, it communicates with OV Performance Manager using the TCP protocol with the TCP socket port numbers shown in the following figure.

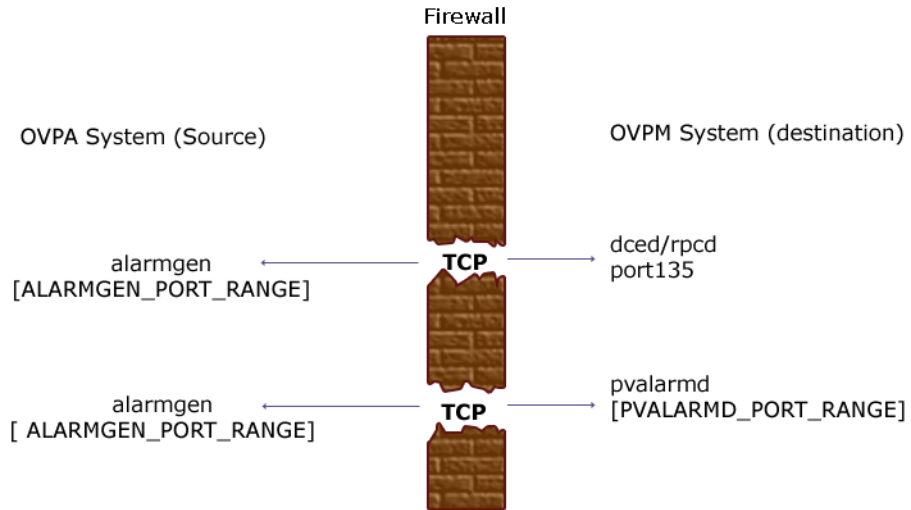

If you previously had OV Performance Agent communicating to OV Performance Manager through a firewall, port 135/UDP was open in the firewall. The firewall configuration must now be changed to open port 135/TCP. This is because the protocol used to connect to port 135 on the OV Performance Manager system was changed from UDP to TCP, regardless of the version of OV Performance Manager.

To configure the `ALARMGEN_PORT_RANGE` for the `alarmgen` process, edit the file `/var/opt/perf/vppa.env` and set the `RPC_RESTRICTED_PORTS` to the following:

```
RPC_RESTRICTED_PORTS=ncacn_ip_tcp[xxxx-yyy]
```

where `xxxx-yyy` is a range of unused port numbers. The formula for calculating the port range is:

$$2 * (\# \text{ of OVPM systems receiving alarms from the OV Performance Agent system})$$

For example, if the OV Performance Agent system was sending alarms to two OV Performance Manager systems, set `RPC_RESTRICTED_PORTS` to the following range in the `vppa.env` file:

RPC_RESTRICTED_PORTS=ncacn_ip_tcp[30001-30004]

- ▶ This environment variable affects only the ports that are used for communication outside the localhost. Ports that are used internal to the local host, such as local communication between `alarmgen` and `rep_server`, are not affected by this variable.

Restart the OV Performance Agent servers using `/usr/opt/perf/bin/mwa restart server` to make the port restriction take effect.

Refer to the *HP OpenView Performance Manager Installation Guide* to determine the `PV_PORT_RANGE`.


- ▶ Sending alarms from OV Performance Agent to OV Performance Manager through firewalls that use Network Address Translation (NAT) IP addresses is not supported.

Configuring OV Reporter and OV Performance Agent Communication

The configuration of the socket port numbers for OV Performance Agent depends on the version of OV Reporter that will be communicating with OV Performance Agent. To configure the socket port numbers, follow the instructions in [Configuring OV Reporter A.03.50 and Later with OV Performance Agent Communication](#).

Configuring OV Reporter A.03.50 and Later with OV Performance Agent Communication

OV Reporter communicates with OV Performance Agent using the TCP protocol with the TCP socket port numbers shown in the following figure.

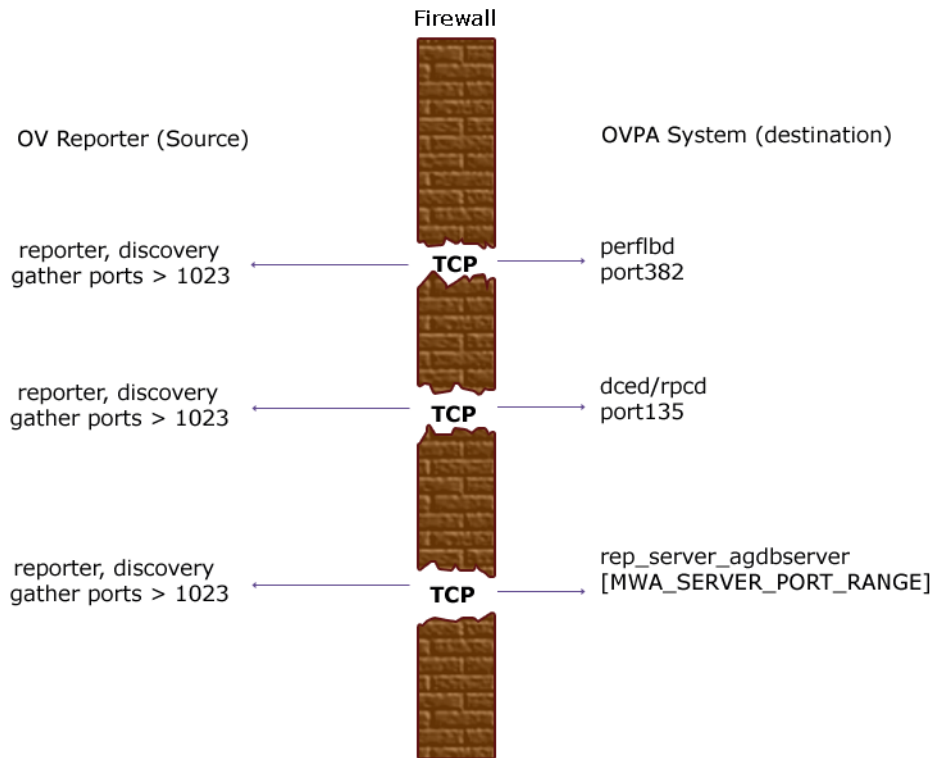

For instructions on configuring the `MWA_SERVER_PORT_RANGE` as statically defined TCP socket port numbers, see [Configuring OV Performance Manager C.03.00 and Later with OV Performance Agent Communication](#) on page 37.

Restricting RPC Addresses

The `RPC_SUPPORTED_NETADDRES` environment variable is used to force the DCE/RPC service to bind to specific LAN cards in a multi-homed environment. If this environment variable is set, only addresses in the list are advertised in the endpoint map; addresses not found on the list are excluded from the server's list of available addresses.

To restrict the servers to using only a specified set of IP addresses, set the `RPC_SUPPORTED_NETADDRS` environment variable before starting the servers.

The syntax is:

```
RPC_SUPPORTED_NETADDRS=protocol:ip_address[,protocol:ip_address]
```

To set the environment variable for the OV Performance Agent servers, add the lines:

```
RPC_SUPPORTED_NETADDRS=ncadg_udp:192.1.1.1  
export RPC_SUPPORTED_NETADDRS
```

to the `/var/opt/perf/vppa.env` file and then restart the servers using `mwa restart server`.

If you still have problems connecting, the problem may be with the endpoint map (`dced/rpcd`). Try setting the environment variable *before* starting `dced/rpcd`. Then restart the system to make the IP address restriction take effect.

Configuring Port Ranges for OV Performance Agent

Set the `RPC_RESTRICTED_PORTS` environment variable as follows:

- Stop the OV Performance Agent server.

```
/usr/opt/perf/bin/mwa stop server
```

- Stop the `dced` daemon.

```
/etc/init.d/hplwdce stop
```

- Determine a suitable port range. To do so use the following formula:

```
MWA_PORT_RANGE=(# rep_server)*7 + (# pvalarmd)*2+10
```

- Edit the DCE startup script. Depending on the DCE software version installed on your system, the DCE startup script is located as follows:

```
— /sbin/init.d/dcestartup with DCE V3.1, V3.2, V4.0, V4.1 and V4.1.4
```

Add the following lines:

```
RPC_RESTRICTED_PORTS=ncadg_ip_udp[xxxx-yyy] \  
:ncacn_ip_tcp[xxxx-yyy]  
export RPC_RESTRICTED_PORTS
```

```
— /usr/sbin/dcesetup with DCE V4.2
```

```
Replace the line RPC_RESTRICTED_PORTS="" with
RPC_RESTRICTED_PORTS=ncadg_ip_udp[xxxx-yyy] \
:ncan_ip_tcp[xxxx-yyy]
export RPC_RESTRICTED_PORTS
```

[xxxx-yyy] represents the range of addresses you have chosen. The default recommended range is [10500-10540].

- Start the dced daemon.
- Start OV Performance Agent, run:

```
/usr/opt/perf/bin/mwa start server
```

Refer to the *HP OpenView Performance Manager (PerfView) Installation Guide* to determine the PV_PORT_RANGE.

Configuring Secure Communication

OV Performance Agent supports certificate-based secure communication and client authentication based communication.

Using Certificates

OV Performance Agent supports certificate-based secure data communication only in the HP OpenView Operations 8.x environment.

To configure secure communication on your OVO setup, refer to the *HP OpenView Operations for UNIX Firewall Concepts and Configuration Guide*. For more information on OVO 8.x HTTPS agent, refer to the *HP OpenView Operations HTTPS Agent Concepts and Configuration Guide*.

If you have already configured HTTPS communication in the OVO 8.x environment, make the following changes to configure secure communication between OV Performance Agent and OVPM 5.0.



OV Reporter and OVPM 4.x do not support certificate-based secure communication.

On the OV Performance Agent system, set `SSL_SECURITY` to `REMOTE` for `coda`. Type the following commands:

```
ovconfchg -ns coda -set SSL_SECURITY REMOTE
ovcodautl -config
```

Using Client Authentication

OV Performance Agent enables optional authentication of client connections from products such as, OV Performance Manager or Reporter (Service Reporter). The authentication capability allows you to specify, for a given OV Performance Agent instance, which hosts are allowed to make client connections to that instance.

The Client Authentication feature enables/disables connections from any version of the OV Performance Manager and Reporter clients. Your client software does *not* need to be updated for you to take advantage of this feature.

For authorized clients the authentication process is transparent, their client connection proceeds as it has with previous versions of OV Performance Agent. Unauthorized clients receive a message indicating denial of service, for example:

```
Could not connect to OV Performance Agent data source on host
<hostname>.
```

The unauthorized connection attempt is logged in the `status.rep_server` file as the following message:

```
UNAUTHORIZED CONNECTION ATTEMPT:<IP address of connecting host
in dotted quad format> (MWA201-16)
```

Enabling Authentication with the `authip` File

Authentication is enabled by the presence of a file called `authip`. On systems where HTTP communication is enabled, the `authip` file exists in the `/var/opt/OV/conf/perf/` directory. On systems where DCE communication is enabled, the `authip` file exists in the `/var/opt/perf/` directory. The `authip` file lists hosts from which client connections are to be permitted.

- If the `authip` file exists in the default directory, then its contents determine which hosts are permitted client connections. Clients running on the same host as the OV Performance Agent instance are automatically authenticated, which means the clients do *not* need an entry. A zero-length `authip` file dictates that only clients running on the OV Performance Agent host can connect.
- If the `authip` file does *not* exist in the default directory, then no authentication is performed and any client will be allowed to connect, as was the case with prior OV Performance Agent versions.

The `authip` file is checked each time a client attempts to register for service with OV Performance Agent. OV Performance Agent does *not* need to be restarted for changes to the `authip` file to become effective.

Note, however, that an existing authorized client session can continue its current connection despite a subsequent change in the server's `authip` file, which would otherwise disqualify it, until the client takes an action that requires re-registration with OV Performance Agent. Thus, an authorized OV Performance Manager connection continues to be permitted, regardless of changes in the OV Performance Agent `authip` file, until the data source to the OV Performance Agent host has been closed. If there is then an attempt to reopen the data source, the `authip` file is reread and the connection is denied.

In the case of OV Performance Manager registration for alarms, a previously authorized client will continue to receive alarms until the data source has been removed (not just closed) by the client. If you want to force removal of a client from the server's alarm generator database from the OV Performance Agent side, use the command:

```
agsysdb -delpv <host>
```

The OV Performance Agent client authentication capability requires that your network be able to resolve the client entries in the `authip` file. Depending upon the nature of the entries, this may require name services such as those provided by DNS, NIS, or `/etc/hosts` files.

A good test is to ensure that you can successfully “ping” each `authip` entry from the OV Performance Agent host. Client authentication works through a firewall with the same proviso that the client entries in the `authip` file be pingable from the OV Performance Agent host.

Formatting the `authip` File

The `authip` file must conform to the following format:

- One client host may be listed per line.
- Client entries can be in any one of the following formats:
 - Fully qualified domain name
 - Alias
 - IP address (must be in IPv4 dotted quad format)
- Client entries can have no embedded spaces.
- A line containing a # in the first column is taken as a comment, and is ignored.
- Blank or zero-length lines are ignored.
- The IP address may *not* have a leading zero. For example, the IP address 23.10.10.10 cannot be represented as 023.10.10.10.

Thus, given an `/etc/hosts` entry as follows:

```
123.456.789.1 testbox testbox.group1.thecompany.com
```

any one of the following entries in the `authip` file would enable clients from the `testbox` host to connect:

```
#===== Examples of authip file entries =====  
#  
# Use of an IP address  
123.456.789.1  
  
#  
# Use of an alias  
testbox  
  
#  
# Use of a fully qualified domain name  
testbox.group1.thecompany.com  
  
#===== End of examples of authip file entries =====
```

Configuring Data Sources

OV Performance Agent uses the `coda` daemon or a set of repository servers that provide previously collected data to the alarm generator and the OV Performance Manager analysis product. The `coda` daemon uses the HTTP data communication mechanism, and the repository servers use the DCE mechanism. If both HTTP and DCE data communication mechanisms are enabled, OVPA uses both the `coda` daemon and the set of repository servers. Each data source consists of a single log file set.

The data source list that `coda` accesses is maintained in the `datasources` configuration file that resides in the `/var/opt/OV/conf/perf/` directory. The data source list that the repository servers access is maintained in the `perflbd.rc` file that resides in the `/var/opt/perf/` directory. The `perflbd.rc` file is maintained as a symbolic link to the `datasources` file.

There is a repository server for each specific data source such as `scopeux` log files or DSI log files. When you first start up OV Performance Agent after installation, a default data source named SCOPE is already configured and provides a `scopeux` log file set.

If you want to add other data sources, you can configure them in the `datasources` file. If you no longer want to view the OVPA or DSI log file data from OV Performance Manager, or process alarms for the log file, you can modify the `datasources` file to remove the data source and the path to the log file set. When you restart the `coda` daemon or the repository server, it reads the `datasources` file and makes the data available over `datacomm` linkages to analysis tools for each data source it finds. Restart `coda` or the repository server as described in [Datasources Configuration File Format](#) on page 49.

You can also remove the log file set if you no longer need the data. If you remove the log file set but do not remove the data source from `datasources`, `coda` or the repository server will skip the data source.

You might also choose to stop logging DSI data to a log file set but keep the `coda` daemon or the repository server open so you can view the historical data in OV Performance Manager. In this case, stop the `dsilog` process but do not delete the data source from the `datasources` file.

Datasources Configuration File Format

Each entry you place into the `datasources` configuration file represents a data source consisting of a single log file set. The entry specifies the data source name and location. Fields are case-insensitive except for the log file path name. The syntax is:

datasource=datasource_name logfile=logfile_set

- **datasource** is a keyword. **datasource_name** is the name used to identify the data source. For example, the data source name used in alarm definitions or by analysis software. Data source names must be unique. They are translated into upper case. The maximum length for a data source name is 64 characters.
- **logfile** is a keyword. **logfile_set** is the fully-qualified name identifying the DSI log file (created by the `dsilog` process, ending in `.log`), and is case-sensitive.

Following are two examples of the `datasources` file's data source entries:

```
datasource=SCOPE logfile=/var/opt/perf/datafiles/logglob
datasource=ASTEX logfile=/tmp/dsidemo/log/astex/ASTEX_SDL
```

After updating `datasources`, run the following command to make the new data sources available through `coda`:

```
/usr/lpp/perf/bin/ovpa restart server
```

If you are also running repository servers, run the following command to make the new `datasources` available through repository servers (`rep_server`):

```
/usr/opt/perf/bin/mwa restart server
```

Note that stopping repository server processes results in any connection to OV Performance Manager being lost. For example, if you are drawing a graph on a data source and try to draw another graph, you will need to reselect the data source in OV Performance Manager and re-establish the connection when the repository server is started again.

Examine the contents of the `/var/opt/OV/log/coda.txt` file to check if the `coda` daemon was activated or for error messages.

For specific examples of configuring DSI data sources, see “Configuring Data Sources” in Chapter 4 of the *HP OpenView Performance Agent for UNIX Data Source Integration Guide*.

Parm File

The `parm` file is a text file that specifies configuration of the `scopeux` data collector including log file maximum sizes, interesting process threshold definitions, and application definitions. Comments in the file provide an overview of the various settings.

The `parm` file is provided with OV Performance Agent in the `/usr/opt/perf/newconfig/` directory and is copied into the `/var/opt/perf/` directory during installation, if there is not an existing `/var/opt/perf/parm` file. For a complete description of the `parm` file and its parameters, see the “Parm File” section in Chapter 2 of the *HP OpenView Performance Agent for UNIX User’s Manual*.

Defining Alarms

If you plan to use alarms to monitor performance, you need to specify the conditions that generate alarms in a set of alarm definitions in the OV Performance Agent `alarmdef` file. When OV Performance Agent is first installed, the `alarmdef` file contains a set of default alarm definitions. You can use these default definitions or customize them to suit your needs.

For instructions on defining alarms, see Chapter “Performance Alarms,” in your *HP OpenView Performance Agent for UNIX User’s Manual*. This chapter also describes the alarm definition syntax, how alarms work, and how alarms can be used to monitor performance.

Viewing and Printing Documents

OV Performance Agent software includes the standard OV Performance Agent documentation set in viewable and printable file formats. You can view the Adobe Acrobat format (*.pdf) documents online and print as needed. ASCII text (*.txt) documents are printable. However, you can view a text file on your screen using any UNIX text editor such as vi.

The documents are listed in the following table along with their file names and online locations.

Table 6 Printables

Document	File Name	Format
<i>HP OpenView Performance Agent for AlphaServer Systems Installation & Configuration Guide</i>	ovpainst.pdf	Acrobat file
<i>HP OpenView Performance Agent for UNIX User's Manual</i>	ovpausers.pdf	Acrobat file
<i>HP OpenView Performance Agent for UNIX Data Source Integration Guide</i>	ovpadsi.pdf	Acrobat file
<i>HP OpenView Performance Agent for AlphaServer Systems Metrics Definition</i>	metdec.txt	ASCII file
Platform independent listing of metrics	mettable.txt	ASCII file

Viewing Documents on the Web

The listed documents can also be viewed on the HP OpenView Manuals web site at:

http://ovweb.external.hp.com/lpe/doc_serv

Select **Performance Agent** from the product list box, select the release version, select the OS, and select the manual title. Click **[Open]** to view the document online, or click **[Download]** to place the file on your computer.

Adobe Acrobat Files

The Adobe Acrobat files were created with Acrobat 7.0 and are viewed with the Adobe Acrobat Reader versions 4.0 and later. If the Acrobat Reader is *not* in your Web browser, you can download it from Adobe's web site:

<http://www.adobe.com>

While viewing a document in the Acrobat Reader, you can print a single page, a group of pages, or the entire document.

You can read a .PDF using the `acroread` command, if you have installed the Adobe Acrobat Reader on your system. Enter the following command where *<path>* is the location of the `acroread` command.

```
<path>/acroread <filename>.pdf
```

ASCII Text Files

To print a .txt file, type:

```
lp -dprintername filename
```

For example,

```
lp -dros1234 metdec.txt
```

Glossary

A

alarm

An indication of a period of time in which performance meets or exceeds user-specified alarm criteria. Alarm information can be sent to an analysis system (such as OV Performance Manager) and to OV Operations. Alarms can be identified in historical data log files using the `utility` program.

alarm generator

Handles the communication of alarm information. It consists of `perfalarm` and the `agdb` database. The `agdb` database contains a list of OV Performance Manager analysis nodes (if any) to which alarms are communicated, and various on/off flags that you set to define when and where the alarm information is sent.

alarmdef file

The file containing the alarm definitions in which alarm conditions are specified.

application

A user-defined group of related processes or program files. Applications are defined so that performance software can collect performance metrics for and report on the combined activities of the processes and programs.

application log file

See `logappl`.

C

coda daemon

A daemon that provides collected data to the alarm generator and analysis product data sources including `scopeux` log files or DSI log files. `coda` reads the data from the data sources listed in the `datasources` configuration file.

D

data source

Consists of one or more classes of data in a single `scopeux` or DSI log file set. For example, the OV Performance Agent SCOPE data source is a `scopeux` log file set consisting of global data. See also **datasources file**.

datasources file

A configuration file residing in the `/var/opt/OV/conf/perf/` directory. Each entry in the file represents a `scopeux` or DSI data source consisting of a single log file set. See also **perflbd.rc**, **coda** and **data source**.

data source integration (DSI)

The technology that enables OV Performance Agent to receive, log, and detect alarms on data from external sources such as applications, databases, networks, and other operating systems.

default.txt

A communications configuration file used to customize communication parameters for HP OpenView applications.

device

A device is an input and/or output device connected to a system. Common devices include disk drives, tape drives, CD-ROM drives, printers, and user terminals.

device log file

See **logdev**.

DSI

See **data source integration**.

DSI log files

Log files containing self-describing data that are created by OV Performance Agent's DSI programs.

E

extract

An OV Performance Agent program that allows you to extract (copy) data from raw or previously extracted log files and write it to extracted log files. It also lets you export data for use by analysis programs.

extracted log file

A log file created by the `extract` program. It contains user-selected data ranges and types of data. An extracted log file is formatted for optimal access by the workstation analysis tool, OV Performance Manager. This file format is suitable for input to the `extract` and `utility` programs and is the preferred method for archiving performance data.

G

global

A qualifier that implies the whole system.

global log file

*See **logglob**.*

L

log file set

A collection of files that contain data collected from one source.

logappl

The raw log file that contains measurements of the processes in each user-defined application.

logdev

The raw log file that contains measurements of individual device (such as disk and `netif`) performance.

logglob

The raw log file that contains measurements of the system-wide, or global, workload.

logindx

The raw log file that contains additional information required for accessing data in the other log files.

logproc

The raw log file that contains measurements of selected “interesting” processes. A process becomes interesting when it is first created, when it ends, and when it exceeds user-defined thresholds for CPU use, disk use, response time, and so on.

M**mwa script**

The OV Performance Agent script that has options for starting, stopping and restarting OV Performance Agent processes such as the `scopeux` data collector, `coda`, `ovc`, `ovbbccb`, `perflbd`, `rep_server`, and the alarm generator. See also the `mwa` man page.

O**ovbbccb**

The OpenView Operations Communication Broker for HTTP(S) based communication controlled by `ovc`. See also **`coda`** and **`ovc`**.

ovc

The OpenView Operations controlling and monitoring process. In a standalone OVPA installation, `ovc` monitors and controls `coda` and `ovbbccb`. If OVPA is installed on a system with OpenView Operations for UNIX 8.x agent installed, `ovc` also monitors and controls OpenView Operations for UNIX 8.x processes. See also **`coda`** and **`ovbbccb`**.

ovpa script

The OV Performance Agent script that has options for starting, stopping and restarting OV Performance Agent processes such as the `scopeux` data

collector, alarm generator, ovc, ovbbccb, and coda. See also the ovpa man page.

OV Performance Manager

Provides integrated performance management for multi-vendor distributed networks. It uses a single workstation to monitor environment performance on networks that range in size from tens to thousands of nodes.

P

parm file

An OV Performance Agent file containing the parameters used by scopeux to customize data collection.

perflbd.rc

A configuration file residing in the `/var/opt/perf/` directory. This file is maintained as a symbolic link to the `datasources` file. See also **datasources file**.

perfstat

A program that displays the status of all performance processes in your system.

PerfView

See **OV Performance Manager**.

process

Execution of a program file. It can represent an interactive user (processes running at normal, nice, or real-time priorities) or an operating system processes.

process log file

See **logproc**.

R

raw log file

Summarized measurements of system data collected by `scopeux`. See **logappl**, **logproc**, **logdev**, **logtran**, and **logindx**.

real time

The actual time in which an event takes place.

repository server

A server that provides data to the alarm generator and the OV Performance Manager analysis product. There is one repository server for each data source configured in the `perflbd.rc` configuration file. *See also* **data source**.

resize

Changes the overall size of a log file using the utility program's `resize` command.

run file

Created by the `scopeux` collector to indicate that the `scopeux` process is running. Removing the run file causes `scopeux` to terminate.

S

scopeux

The OV Performance Agent data collector program that collects performance data and writes (logs) it to raw log files for later analysis or archiving. *See also* **raw log files**.

scopeux log files

See **raw log files**.

status.scope file

Created by the `scopeux` collector to record status, data inconsistencies, and errors.

system ID

The string of characters that identifies your system. The default is the host name as returned by `uname -n`.

U**utility**

An OV Performance Agent program that allows you to open, resize, scan, and generate reports on raw and extracted log files. You can also use it to check `parm` file and `alarmdef` file syntax, and obtain alarm information from historical log file data.

Index

A

- alarmdef file, 23, 24, 51
- alarm generator, starting, 22
- alarms, 51
- authip file, 45
 - examples, 46
 - formatting, 46

C

- client, firewall, 31
- client authentication, 45
- coda.log file, 49
- communicating across a firewall, 36
- communication protocols, 10
- configuring
 - data sources, 48
 - OVPM and OVPA firewall communication, 36
 - OVPM C.03.00 and later with OVPA firewall communication, 37
 - OV Reporter and OVPA firewall communication, 40
- configuring data sources, 48

D

- data sources
 - configuring, 48
 - deleting, 48
 - DSI, 48
 - SCOPE, 48
 - scopeux, 48
- defining alarms, 51
- deleting data sources, 48
- disk space requirements, 11
- documentation
 - viewing on AIX, 52
 - viewing on the web, 52
- DSI data sources, 48

E

- environment variables, 26, 27
- extract program, 49

F

- files
 - /etc/default/mwa, 26
 - alarmdef, 51
 - ASCII, 53
 - coda.log, 49
 - parm, 50
 - perflbd.rc, 23, 24, 48
 - status.scope, 29

- firewall
 - client, 31
 - communicating across, 30
 - configure OVPA server port, 33
 - configure Reporter/OVPM with HTTP proxy, 34
 - configure Reporter/OVPM without HTTP proxy, 35
 - default ports for communication with OVPA, 32
 - overview of OVPA communications configuration, 33
 - server, 31
 - systems with multiple IP addresses, 35
- firewalls, 36
 - communicating across, 36
 - configuring OV Reporter and OVPA communication, 40
 - configuring with OVPM C.03.00 and later, 37
 - configuring with OV Reporter A.02.00 and later, 40

H

- hardware requirements, 9
- HTTP
 - client, 32
 - clients, 32
 - proxies, 32

I

- install.mwa script, 19
- installation procedures, 12
 - installing from CD-ROM, 14
 - installing on symbolic links, 17
 - installing with OV Operations installed on your system, 17

- installation requirements, 9
 - disk space, 11
 - hardware, 9

M

- metric definitions, printing, 52
- mwa.remove script, 20
- mwa script, 22

O

- ovpa scripts
 - ovpa start, 23
- OV Performance Agent
 - alarms, 51
 - documentation set, 52
 - how it works, 7
 - removing, 20
 - starting, 22
 - status files, 29
- OV Performance Manager
 - configuring OVPM C.03.00 and later with OVPA firewall communication, 37
 - firewall configuration with OVPA, 36
- OVPM
 - configure with HTTP proxy for firewall communication, 34
 - configure without HTTP proxy for firewall communication, 35
- OV Reporter
 - firewall configuration, 40

P

- parm file, 50
 - configuration, 50
 - restarting, 23, 24
- perflbd, 48

- perflbd.rc file, 23, 24, 48
- printable files, 52
- printing documents, 52, 53
- proxies, HTTP, 32

R

- removing OV Performance Agent, 20

Reporter

- configure with HTTP proxy for firewall communication, 34, 35
- see OV Reporter, 40

- repository servers, 48
 - restarting, 23, 24

- restricting RPC addresses, 41

- RPC_SUPPORTED_NETADDRS
 - environment variable, 41

S

- SCOPE default data source, 48

scopeux

- data sources, 48
- starting, 22

- server, firewall, 31

starting

- alarm generator, 22
- OV Performance Agent, 22
- scopeux, 22
- using mwa, 24
- using ovpa, 23

- status.scope file, 29

status files

- coda.txt, 29
- status.alarmgen, 29
- status.perfalarm, 29
- status.perflbd, 29
- status.rep_server, 29
- status.scope, 29

- status files, OV Performance Agent, 29

- symbolic links, 17

T

target

- nodes, 56

V

- variables, 27

- MWA_LLBD_COMMAND, 27
- MWA_PROTOCOL, 27
- MWA_RPC_INETADDR, 27
- MWA_START, 27
- MWA_START_COMMAND, 27
- RPC_RESTRICTED_PORTS, 28
- RPC_SUPPORTED_NETADDRS, 28
- RPC_UNSUPPORTED_NETIFS, 29

